


# TLE4966L

High Precision Hall-Effect Switch with  
Direction Detection

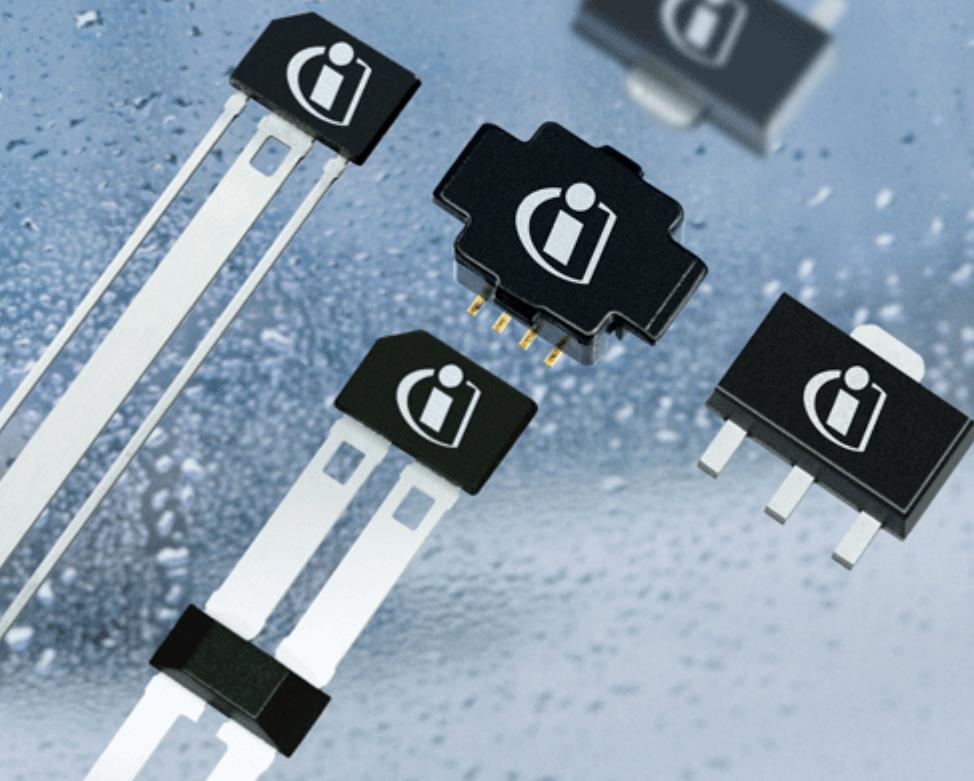

Sensors

infineon

Never stop thinking

**Edition 2009-02**

**Published by**

**Infineon Technologies AG  
81726 München, Germany**

**© 2007 Infineon Technologies AG  
All Rights Reserved.**

#### **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

#### **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

#### **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

---

**Revision History:** **2009-02**

V 2.0

Previous Version: V 1.2

Page	Subjects (major changes since last revision)
	TLE4966H removed

**We Listen to Your Comments**

Any information within this document that you feel is wrong, unclear or missing at all?  
Your feedback will help us to continuously improve the quality of this document.

Please send your proposal (including a reference to this document) to:

**[sensors@infineon.com](mailto:sensors@infineon.com)**



---

<b>1</b>	<b>Overview</b>	5
1.1	Features	5
1.2	Functional Description	5
1.3	Pin Configuration (top view)	6
<b>2</b>	<b>General</b>	7
2.1	Block Diagram	7
2.2	Circuit Description	7
<b>3</b>	<b>Maximum Ratings</b>	8
<b>4</b>	<b>Operating Range</b>	9
<b>5</b>	<b>Electrical and Magnetic Parameters</b>	10
	Field Direction Definition	11
<b>6</b>	<b>Timing Diagrams for the Speed and Direction Outputs</b>	12
<b>7</b>	<b>Package Information</b>	14
7.1	Package Marking	14
7.2	Distance between Chip and Package Surface	14
7.3	Package Outlines	15


## High Precision Hall-Effect Switch with Direction Detection

TLE4966L

## 1 Overview

### 1.1 Features

- 2.7 V to 24 V supply voltage operation
- Operation from unregulated power supply
- High sensitivity and high stability of the magnetic switching points
- High resistance to mechanical stress by Active Error Compensation
- Reverse battery protection (-18 V)
- Superior temperature stability
- Peak temperatures up to 195°C without damage
- Low jitter (typ. 1 µs)
- Digital output signals
- Bipolar version
- Excellent matching between the 2 Hall probes
- Hall plate distance 1.45 mm
- Direction & speed information
- Direction signal switches before the speed signal



### 1.2 Functional Description

The TLE4966L is an integrated circuit double Hall-effect sensor designed specifically for highly accurate applications. Precise magnetic switching points and high temperature stability are achieved by active compensation circuits and chopper techniques on chip. The IC provides a speed signal at Q2 for every magnetic pole pair and a direction information at Q1, which is provided before the speed signal.

Type	Package
TLE4966L	PG-SSO-4-1

## Overview

## 1.3 Pin Configuration (top view)

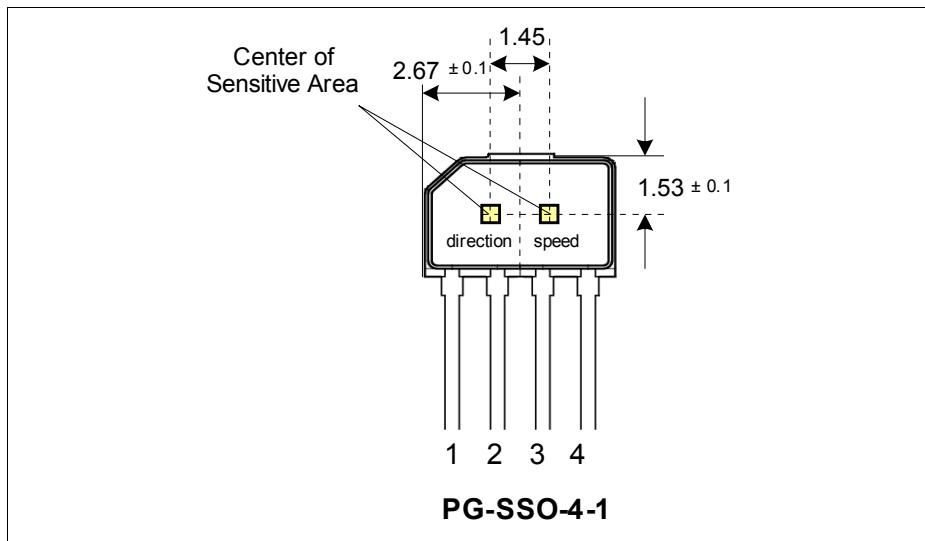



Figure 1 Pin Definition and Center of Sensitive Area

Table 1 Pin Definitions and Functions

Pin No.	Symbol	Function
1	$V_S$	Supply voltage
2	Q1	Direction
3	Q2	Speed
4	GND	Ground

## 2 General

### 2.1 Block Diagram

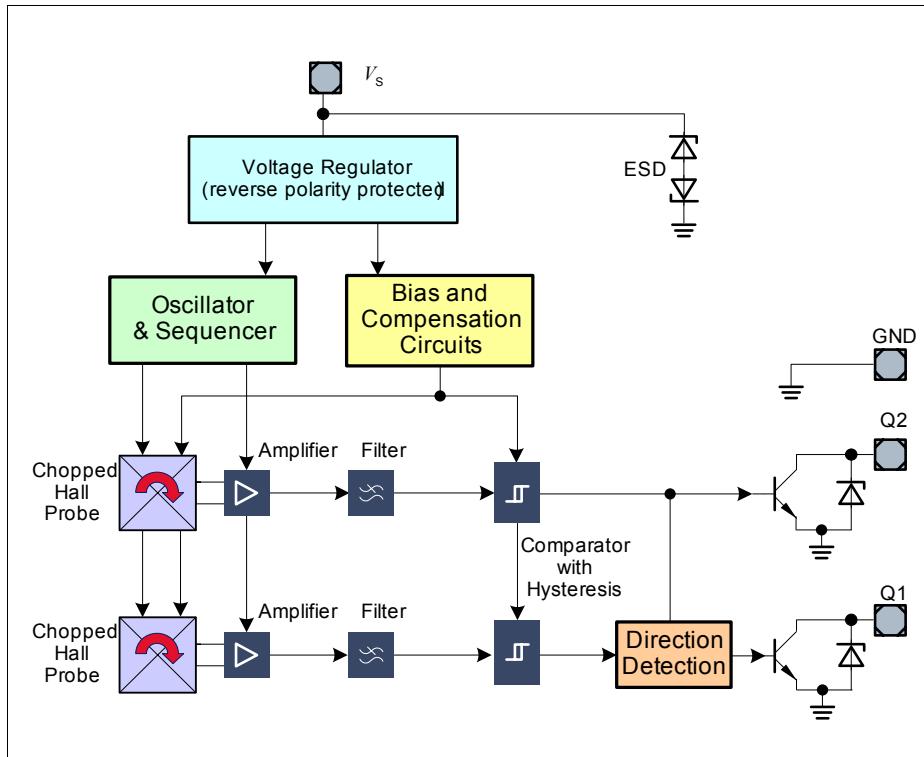

**Figure 2** Block Diagram

### 2.2 Circuit Description

The chopped Double Hall Switch comprises two Hall probes, bias generator, compensation circuits, oscillator, and output transistors.

The bias generator provides currents for the Hall probes and the active circuits. Compensation circuits stabilize the temperature behavior and reduce technology variations.

The Active Error Compensation rejects offsets in signal stages and the influence of mechanical stress to the Hall probes caused by molding and soldering processes and other thermal stresses in the package. This chopper technique together with the threshold generator and the comparator ensures high accurate magnetic switching points.

## Maximum Ratings

### 3 Maximum Ratings

**Table 2 Absolute Maximum Ratings** $T_j = -40^\circ\text{C}$  to  $150^\circ\text{C}$ 

Parameter	Symbol	Limit Values		Unit	Conditions
		min.	max.		
Supply voltage	$V_S$	-18	18	V	for 1 h, $R_S \geq 200 \Omega$ for 5 min, $R_S \geq 200 \Omega$
		-18	24		
		-18	26		
Supply current through protection device	$I_S$	-50	50	mA	
Output voltage	$V_Q$	-0.7	18	V	for 5 min @ 1.2 k $\Omega$ pull up
		-0.7	26		
Continuous output current	$I_Q$	-50	50	mA	
Junction temperature	$T_j$	–	155	°C	for 2000 h (not additive) for 1000 h (not additive) for 168 h (not additive) for 3 x 1 h (additive)
		–	165		
		–	175		
		–	195		
Storage temperature	$T_S$	-40	150	°C	
Magnetic flux density	$B$	–	unlimited	mT	

*Note: Stresses above those listed here may cause permanent damage to the device.  
Exposure to absolute maximum rating conditions for extended periods may affect device reliability.*

**Table 3 ESD Protection<sup>1)</sup>**

Parameter	Symbol	Limit Values		Unit	Notes
		min.	max.		
ESD voltage	$V_{ESD}$	–	±4	kV	HBM, $R = 1.5 \text{ k}\Omega$ , $C = 100 \text{ pF}$ $T_A = 25^\circ\text{C}$

1) Human Body Model (HBM) tests according to: EOS/ESD Association Standard S5.1-1993 and Mil. Std. 883D method 3015.7

---

**Operating Range****4 Operating Range****Table 4 Operating Range**

Parameter	Symbol	Limit Values			Unit	Conditions
		min.	typ.	max.		
Supply voltage	$V_S$	2.7	—	18	V	1 h with $R_S \geq 200 \Omega$ for 5 min $R_S \geq 200 \Omega$
		—	—	24		
		—	—	26		
Output voltage	$V_Q$	-0.7	—	18	V	
Junction temperature	$T_j$	-40	—	150	°C	for 168 h
		—	—	175		
Output current	$I_Q$	0	—	10	mA	

## Electrical and Magnetic Parameters

## 5 Electrical and Magnetic Parameters

**Table 5 Electrical Characteristics<sup>1)</sup>**

Parameter	Symbol	Limit Values			Unit	Conditions
		min.	typ.	max.		
Supply current	$I_S$	4	5.2	7	mA	$V_S = 2.7 \text{ V} \dots 18 \text{ V}$
Reverse current	$I_{SR}$	0	0.2	1	mA	$V_S = -18 \text{ V}$
Output saturation voltage	$V_{QSAT}$	—	0.3	0.6	V	$I_Q = 10 \text{ mA}$
Output leakage current	$I_{QLEAK}$	—	0.05	10	$\mu\text{A}$	for $V_Q = 18 \text{ V}$
Output fall time	$t_f$	—	0.2	1	$\mu\text{s}$	$R_L = 1.2 \text{ k}\Omega; C_L < 50 \text{ pF}$
Output rise time	$t_r$	—	0.2	1	$\mu\text{s}$	see: <a href="#">Figure 3 on Page 12</a>
Chopper frequency	$f_{osc}$	—	320	—	kHz	
Switching frequency	$f_{sw}$	0	—	15 <sup>2)</sup>	kHz	
Delay time <sup>3)</sup>	$t_d$	—	13	—	$\mu\text{s}$	
Count Signal Delay	$t_{dc}$	50	200	1000	ns	
Output jitter <sup>4)</sup>	$t_{QJ}$	—	1	—	$\mu\text{s}_{RMS}$	Typ. value for square-wave signal 1 kHz
Repeatability of magnetic thresholds <sup>5)</sup>	$B_{REP}$	—	40	—	$\mu\text{T}_{RMS}$	Typ. value for $\Delta B/\Delta t > 12 \text{ mT/ms}$
Power-on time <sup>6)</sup>	$t_{PON}$	—	13	—	$\mu\text{s}$	$V_S \geq 2.7 \text{ V}$
Distance of hall plates	$d_{HALL}$	—	1.45	—	mm	
Thermal resistance <sup>7)</sup>	$R_{thJA}$	--	-	-190	K/W	PG-SSO-4-1

1) over operating range, unless otherwise specified. Typical values correspond to  $V_S = 12 \text{ V}$  and  $T_A = 25^\circ\text{C}$

2) To operate the sensor at the max. switching frequency, the magnetic signal amplitude must be 1.4 times higher than for static fields. This is due to the -3 dB corner frequency of the low pass filter in the signal path.

3) Systematic delay between magnetic threshold reached and output switching

4) Jitter is the unpredictable deviation of the output switching delay

5)  $B_{REP}$  is equivalent to the noise constant

6) Time from applying  $V_S \geq 2.7 \text{ V}$  to the sensor until the output state is valid

7) Thermal resistance from junction to ambient

---

## Electrical and Magnetic Parameters

### Calculation of the ambient temperature:

e.g. for  $V_S = 12.0$  V,  $I_{Styp} = 5.5$  mA,  $V_{QSATtyp} = 0.3$  V and  $2 \times I_Q = 10$  mA :

Power Dissipation:  $P_{DIS} = 72.0$  mW.

$$\ln T_A = T_j - (R_{thJA} \times P_{DIS}) = 175^\circ\text{C} - (190 \text{ K/W} \times 0.072 \text{ W})$$

Resulting max. ambient temperature:  $T_A = 161.3^\circ\text{C}$

**Table 6 Magnetic Characteristics<sup>1)</sup>.**

Parameter	Symbol	$T_j$ [°C]	Limit Values			Unit	Conditions
			min.	typ.	max.		
Operate point	$B_{OP}$	-40	5.2	7.7	10.3	mT	
		25	5.0	7.5	10.0		
		150	4.7	7.1	9.5		
Release point	$B_{RP}$	-40	-10.3	-7.7	-5.2	mT	
		25	-10.0	-7.5	-5.0		
		150	-9.5	-7.1	-4.7		
Hysteresis	$B_{HYS}$	-40	—	—	—	mT	
		25	10.0	15.0	20.0		
		150	—	—	—		
Magnetic matching	$B_{MATCH}$	-40	—	—	—	mT	Valid for $B_{OP1} - B_{OP2}$ and $B_{RP1} - B_{RP2}$
		25	-2.0	0	2.0		
		150	—	—	—		
Magnetic offset	$B_{OFF}$	-40	—	—	—	mT	$(B_{OP} + B_{RP})/2$
		25	-2.0	0	2.0		
		150	—	—	—		
Temperature compensation of magnetic thresholds	$TC$	—	—	-350	—	ppm/°C	

1) over operating range, unless otherwise specified. Typical values correspond to  $V_S = 12$  V

*Note: Typical characteristics specify mean values expected over the production spread.*

### Field Direction Definition

Positive magnetic fields related with south pole of magnet to the branded side of package.

## Timing Diagrams for the Speed and Direction Outputs

## 6 Timing Diagrams for the Speed and Direction Outputs

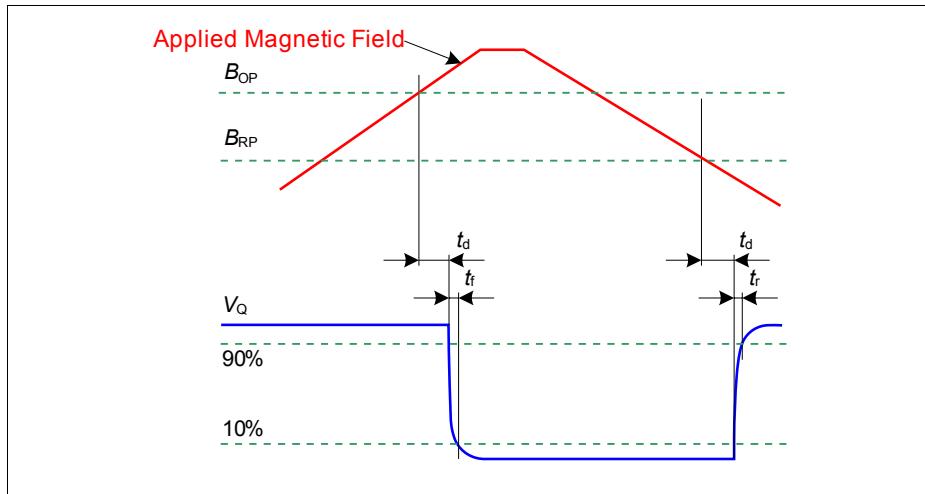


Figure 3 Timing Definition of the Speed Signal


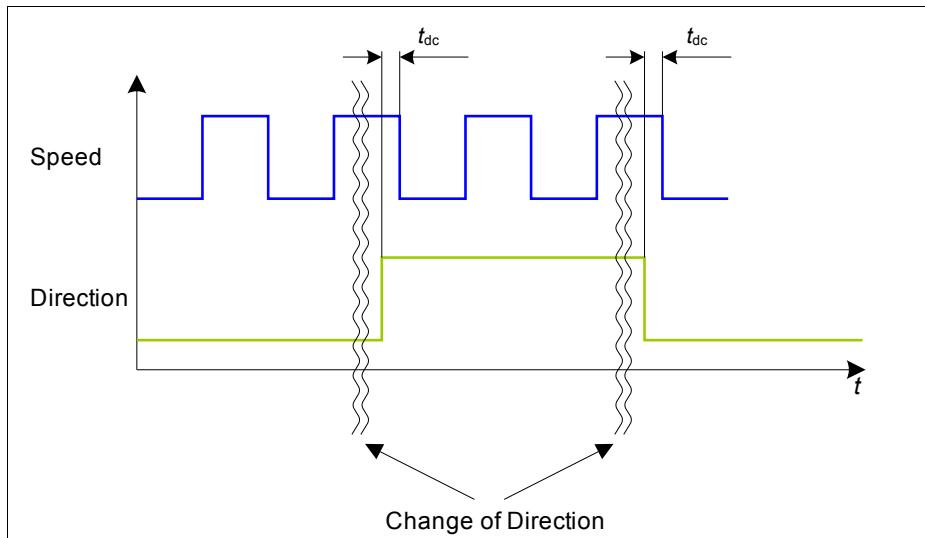


Figure 4 Timing Definition of the Direction Signal

## Timing Diagrams for the Speed and Direction Outputs

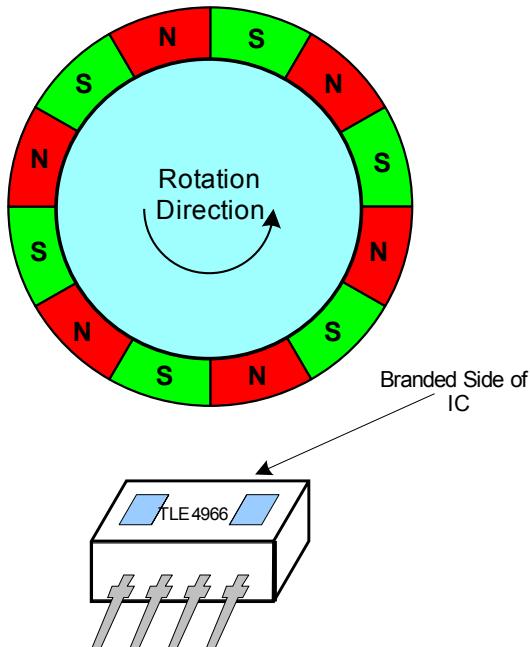

**Figure 5** Definition of the Direction Signal

Rotation Direction	State of Direction Output $V_{Q1}$
Left to right	Low
Right to left	High


---

**Package Information**

## 7      Package Information


### 7.1      Package Marking

**Figure 6      Marking PG-SSO-4-1**

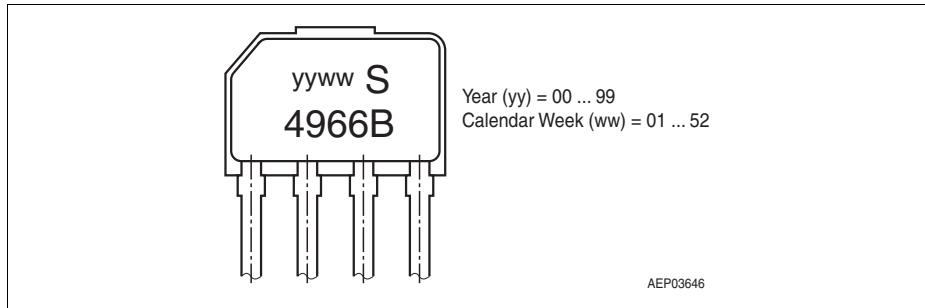

**Figure 7      Marking**

### 7.2      Distance between Chip and Package Surface

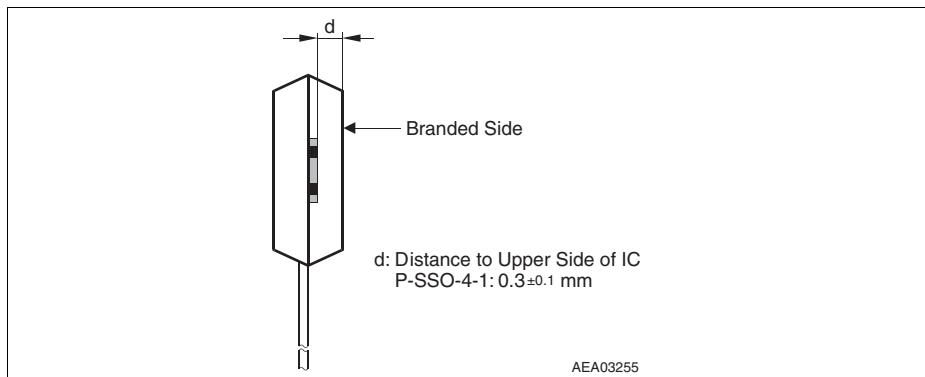


**Figure 8      Distance Chip to Upper Side of IC**

## Package Information

## 7.3 Package Outlines

Figure 9 PG-SSO-4-1

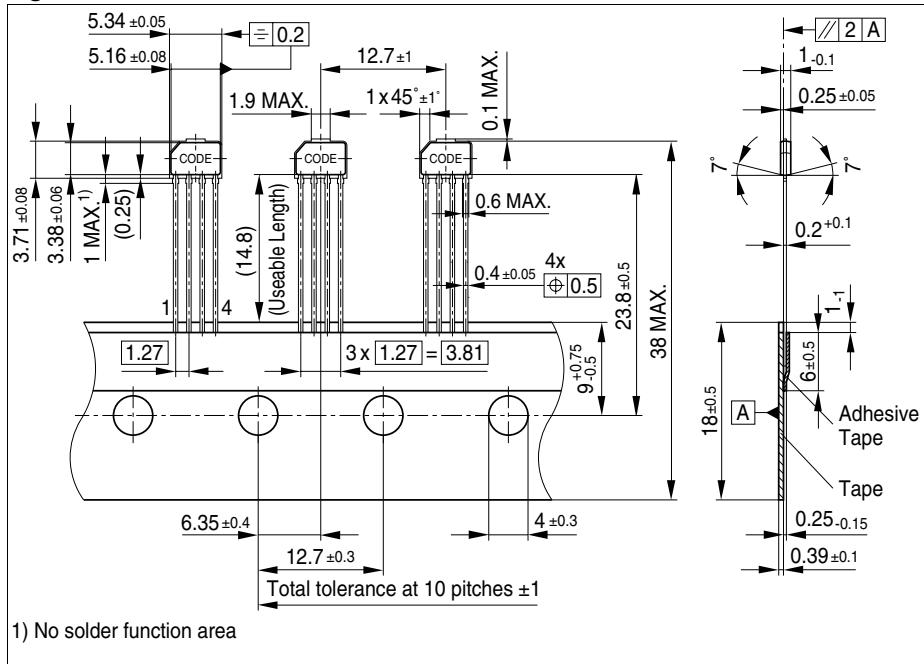

You can find all of our packages, sorts of packing and others in our Infineon Internet Page "Products": <http://www.infineon.com/products>.

Dimensions in mm

[www.infineon.com](http://www.infineon.com)

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru