

Analog Devices Welcomes Hittite Microwave Corporation

NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK

1dB LSB GaAs MMIC 3-BIT DIGITAL POSITIVE CONTROL ATTENUATOR, DC - 6GHz

Typical Applications


The HMC468ALP3E is ideal for:

- Cellular; UMTS/3G Infrastructure
- Fixed Wireless & WLL
- Microwave Radio & VSAT
- Test Equipment

Features

- 1 dB LSB Steps to 7 dB
- High IP3: +55 dBm
- ± 0.25 dB Typical Bit Error
- Single Control Line Per Bit
- Single +5V Supply
- 16 Lead 3x3 mm SMT Package: 9 mm²

Functional Diagram

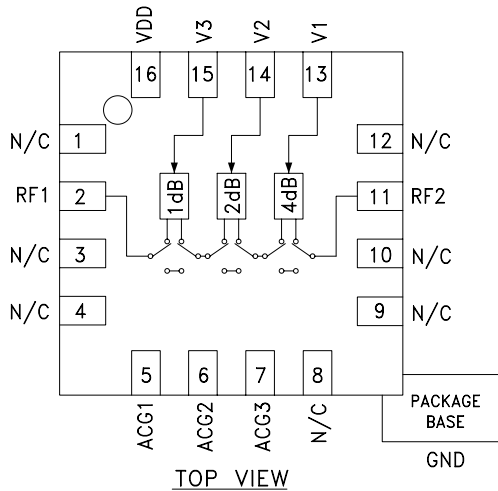

General Description

The HMC468ALP3E is a broadband 3-bit GaAs IC digital attenuators in a low cost leadless surface mount package. Covering DC to 6.0 GHz, the insertion loss is less than 1 dB typical up to 4 GHz. The attenuator bit values are 1 (LSB), 2 and 4 dB for a total attenuation of 7 dB. Attenuation accuracy is excellent at ±0.4 dB typical step error with an IIP3 of +55 dBm. Three control voltage inputs, toggled between 0 and +5V, are used to select each attenuation state. A single Vdd bias of +5V is required.

Electrical Specifications, $T_A = +25^\circ C$, With Vdd = +5V & Vctl = 0/+5V

| Parameter | Frequency (GHz) | Min. | Typ. | Max. | Units |
|--|-----------------|----------------------------------|-----------------------------------|------|-------|
| Insertion Loss | DC - 2.5 GHz | | 0.5 | 1.0 | dB |
| | 2.5 - 4.5 GHz | | 0.7 | 1.2 | dB |
| | 4.5 - 6.0 GHz | | 0.9 | 1.4 | dB |
| Attenuation Range | DC - 6 GHz | | 7 | | dB |
| Return Loss (RF1 & RF2, All Atten. States) | DC - 6 GHz | | 20 | | dB |
| Attenuation Accuracy: (Referenced to Insertion Loss) | All States | DC - 2.5 GHz | ± 0.2 + 2% of Atten. Setting Max. | | dB |
| | 1 - 4 dB States | 2.5 - 6.0 GHz | ± 0.3 + 3% of Atten. Setting Max. | | dB |
| | 5 - 7 dB States | 2.5 - 6.0 GHz | ± 0.4 + 4% of Atten. Setting Max. | | dB |
| Input Power for 0.1 dB Compression | 0.25 - 6.0 GHz | | 26 | | dBm |
| Input Third Order Intercept Point (Two-Tone Input Power= 0 dBm Each Tone) | 0.25 - 6.0 GHz | | 55 | | dBm |
| Switching Characteristics | DC - 6 GHz | | | | |
| | | tRISE, tFALL (10/90% RF) | | 60 | ns |
| | | tON, tOFF (50% CTL to 10/90% RF) | | 80 | ns |

* Bypass capacitor connecting ACG1, ACG2 & ACG3 to RF ground required per pin description herein.

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support: Phone: 978-250-3343 or apps@hittite.com




1dB LSB GaAs MMIC 3-BIT DIGITAL POSITIVE CONTROL ATTENUATOR, DC - 6GHz


Insertion Loss

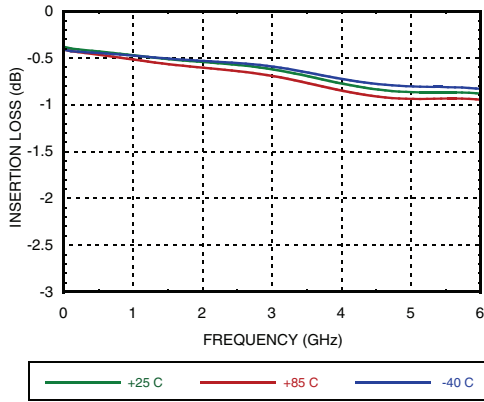


Return Loss RF1, RF2 (Only Major States are Shown)

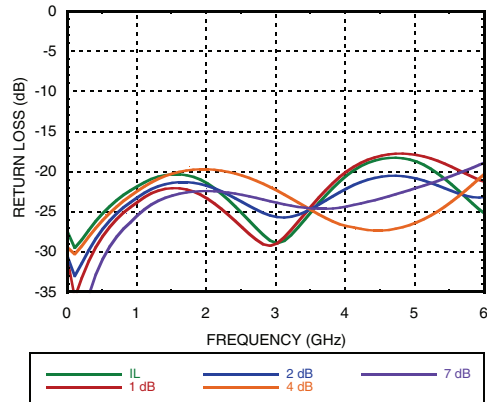


Normalized Attenuation (Only Major States are Shown)

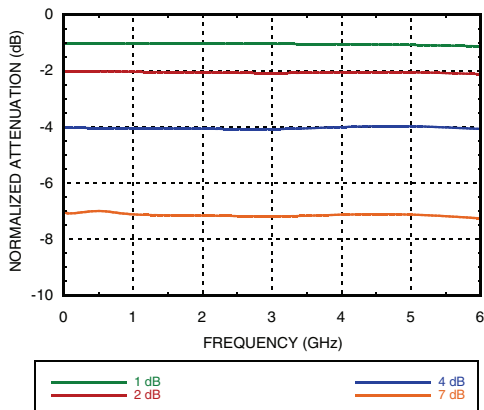


Bit Error vs. Attenuation State

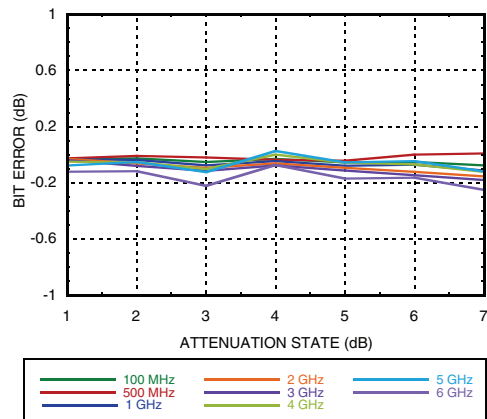

Bit Error vs. Frequency (Only Major States are Shown)

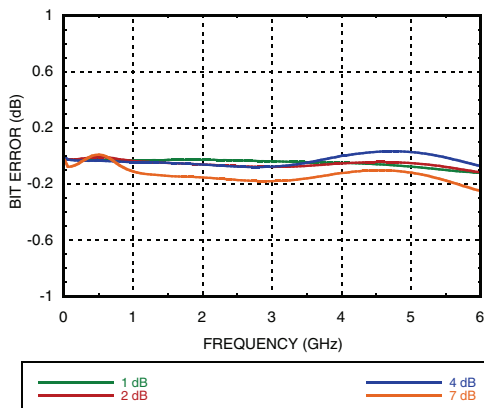


Relative Phase vs. Frequency (Only Major States are Shown)

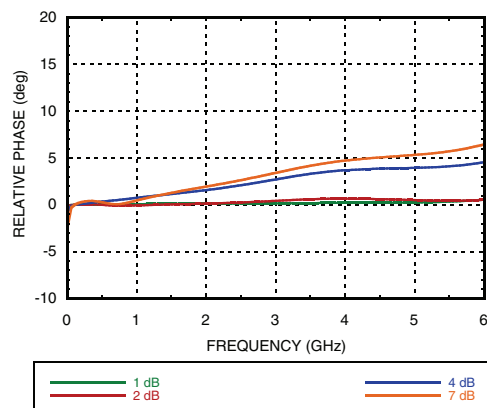



1dB LSB GaAs MMIC 3-BIT DIGITAL POSITIVE CONTROL ATTENUATOR, DC - 6GHz

Step Error Between Successive Attenuation States

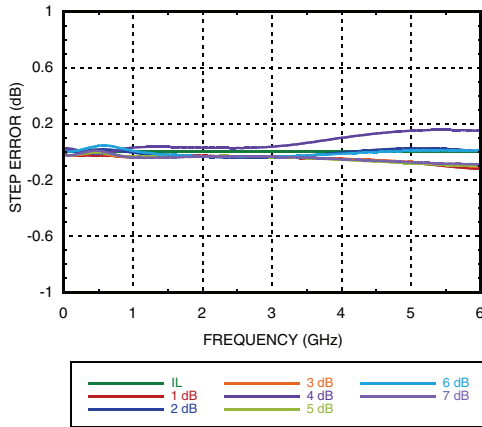

Truth Table

| Control Voltage Input | | | Attenuation Setting RF1 - RF2 |
|-----------------------|------------|------------|----------------------------------|
| V1 4 dB | V2 2 dB | V3 1 dB | |
| High | High | High | Reference I.L. |
| High | High | Low | 1 dB |
| High | Low | High | 2 dB |
| Low | High | High | 4 dB |
| Low | Low | Low | 7 dB |

Any combination of the above states will provide an attenuation approximately equal to the sum of the bits selected.

Bias Voltage & Current



| Vdd Range= +5.0 Vdc ± 10% | | |
|---------------------------|-----------------|-----------------|
| Vdd (Vdc) | Idd (Typ.) (mA) | Idd (Max.) (mA) |
| +5.0 | 1.05 | 1.8 |

TTL/CMOS Control Voltages

| State | Bias Condition |
|-------|-------------------------------|
| Low | 0 to 0.8 Vdc @ -0.05 uA Typ. |
| High | +2.0 to +5.0 Vdc @ 40 uA Typ. |

**1dB LSB GaAs MMIC 3-BIT DIGITAL
POSITIVE CONTROL ATTENUATOR, DC - 6GHz**
Absolute Maximum Ratings

| | |
|--|------------------------|
| RF Input Power | +30 dBm |
| Control Voltage (V1 to V3) | -0.5 Vdc to Vdd +1 Vdc |
| Bias Voltage (Vdd) | +7 Vdc |
| Channel Temperature | 150 °C |
| Continuous Pdiss (T = 85 °C) (derate 10. 1mW/ °C above 85 °C) | 0.657 W |
| Thermal Resistance | 99 °C/W |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |
| ESD Sensitivity (HBM) | Class 1A |

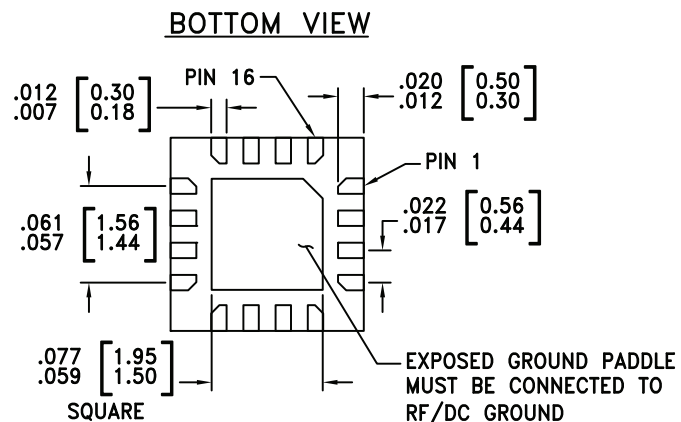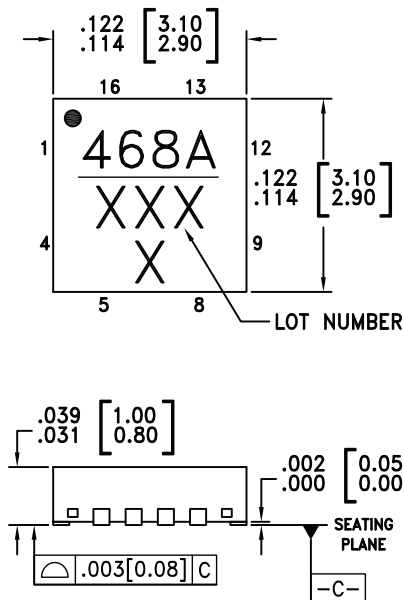
**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**
Outline Drawing

NOTES:

- LEADFRAME MATERIAL: COPPER ALLOY
- DIMENSIONS ARE IN INCHES [MILLIMETERS]
- LEAD SPACING TOLERANCE IS NON-CUMULATIVE
- PAD BURR LENGTH SHALL BE 0.15mm MAXIMUM.
PAD BURR HEIGHT SHALL BE 0.05mm MAXIMUM.
- PACKAGE WARP SHALL NOT EXCEED 0.05mm.
- ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.
- REFER TO HITTITE APPLICATION NOTE FOR SUGGESTED LAND PATTERN.

Package Information

| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[1] |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC468ALP3E | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 ^[2] | 468A XXXX |

[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C




1dB LSB GaAs MMIC 3-BIT DIGITAL POSITIVE CONTROL ATTENUATOR, DC - 6GHz

Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|-----------------------|-------------|---|---------------------|
| 1, 3, 4, 8, 9, 10, 12 | N/C | These pins should be connected to PCB RF ground to maximize performance. | |
| 2, 11 | RF1, RF2 | This pin is DC coupled and matched to 50 Ohm. Blocking capacitors are required | |
| 13 - 15 | V1 - V3 | See truth table and control voltage table. | |
| 5 - 7 | ACG1 - ACG3 | External capacitor to ground is required. Select value for lowest frequency of operation. Place capacitor as close to pins as possible. | |
| 16 | Vdd | Supply Voltage | |
| | GND | Package bottom has an exposed metal paddle that must be connected to RF/DC ground. | |


Application Circuit

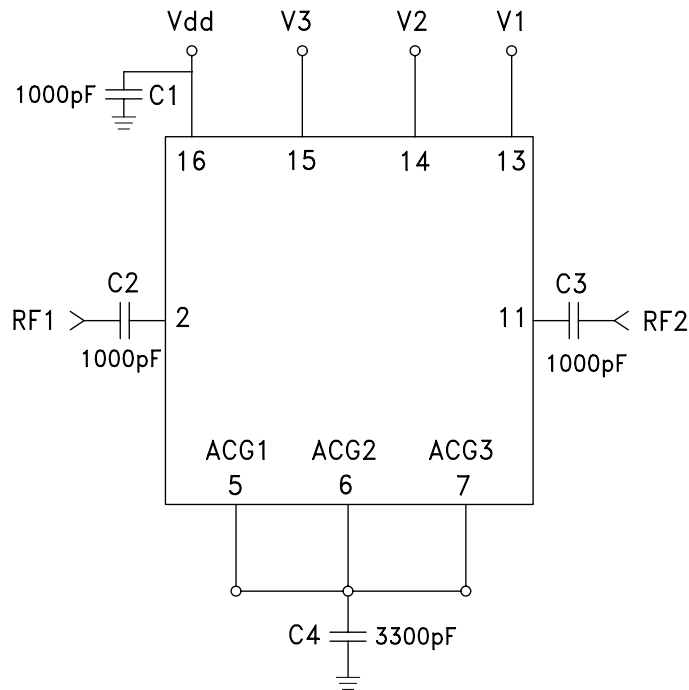



1dB LSB GaAs MMIC 3-BIT DIGITAL POSITIVE CONTROL ATTENUATOR, DC - 6GHz

Evaluation PCB

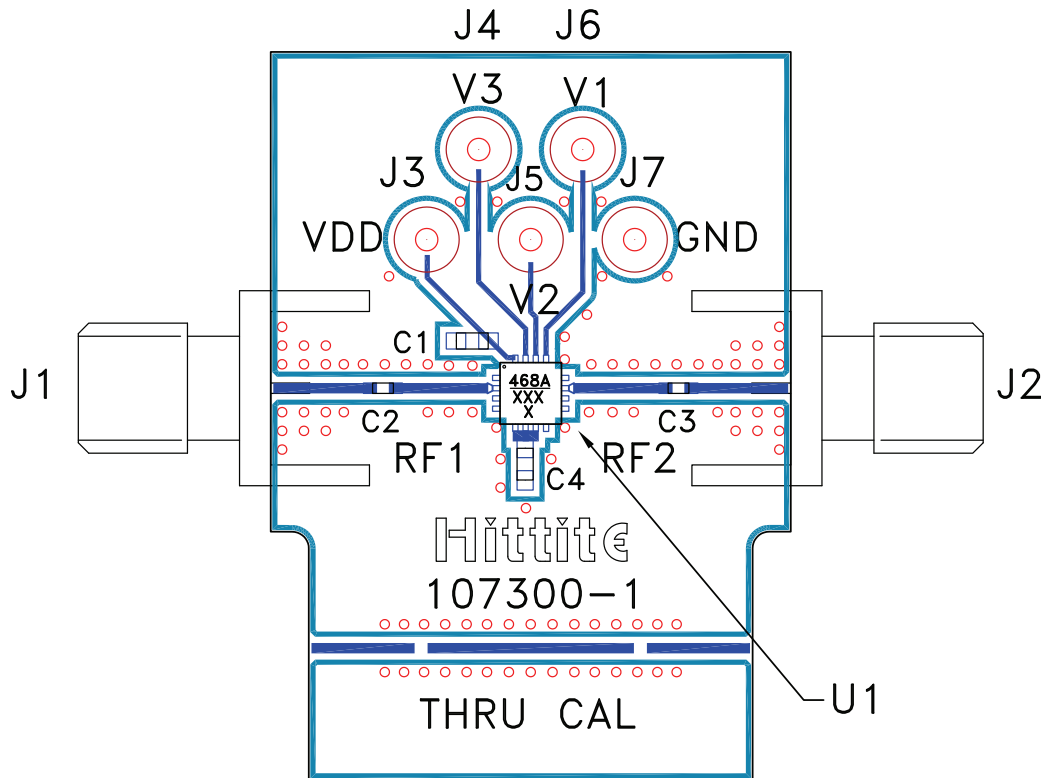

List of Materials for Evaluation PCB 107302 - HMC468ALP3 [1]

| Item | Description |
|---------|--------------------------------|
| J1 - J2 | PCB Mount SMA Connector |
| J3 - J7 | DC Pin |
| C1 | 1000 pF Capacitor, 0603 Pkg. |
| C2, C3 | 100 pF Capacitor, 0402 Pkg. |
| C4 | 3300 pF Capacitor, 0603 Pkg. |
| U1 | HMC468ALP3E Digital Attenuator |
| PCB [2] | 107300 Evaluation PCB |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru