

1 Features

- GPS antenna designed for embedded applications
- Designed for use with the ground plane extended beneath the antenna
- Good efficiency to size ratio
- Near omni-directional characteristics enable good performance for any device orientation
- Good resistance to de-tuning
- Intended for SMD mounting
- Supplied in tape on reel
- Low profile, small footprint, light weight

2 Description


The A10204 GPS antenna is intended for reception of GPS signals at 1575 MHz.

The antenna uses a ground plane in order to radiate efficiently. It should be noted that the radiation patterns and efficiency will change with the size of the ground plan, and optimized efficiency is achieved with appropriate matching.

The antenna has RHCP characteristics suitable for reception of GPS signals.

3 Applications

- Small mobile and handheld devices with embedded GPS systems
- Application specific tracking modules
- GPS accessories: USB dongle, SDIO cards, PCMCIA card

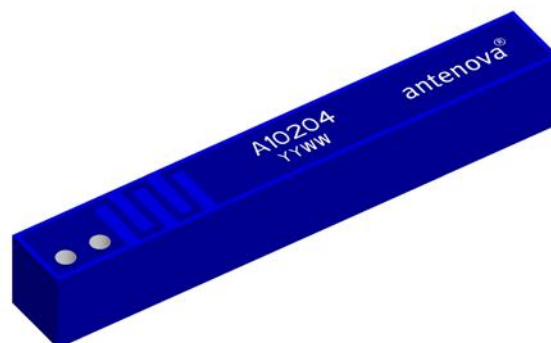

4 Part number

Brevis: A10204



5 General data


| | |
|-------------------------|------------------|
| Product name | Brevis GPS |
| Part Number | A10204 |
| Frequency | GPS - 1575 MHz |
| Polarization | Linear |
| Operating temperature | -40 °C to +85 °C |
| Impedance with matching | 50 Ω |
| Weight | <0.2 g |
| Antenna type | SMD |
| Dimensions | 3 x 22 x 3 [mm] |

6 Electrical characteristics

| | Typical performance | Conditions |
|-----------------------------|-------------------------------|--|
| Bandwidth | >50 MHz at -10 dB Return Loss | All data measured on Antenova's reference boards, part numbers A10204-U1 |
| Peak gain (Linear) | 0 dBi | |
| Average gain (Linear) | -2.4 dBi | |
| Average efficiency (Linear) | >50% | |
| Peak gain (RHCP) | -2.8 dBi | |
| Average gain (RHCP) | -5 dBi | |
| Average efficiency (RHCP) | >30% | |
| Maximum Return Loss | -17 dB | |
| Maximum VSWR | 1.4:1 | |


7 Electrical performance

7-1 Return Loss

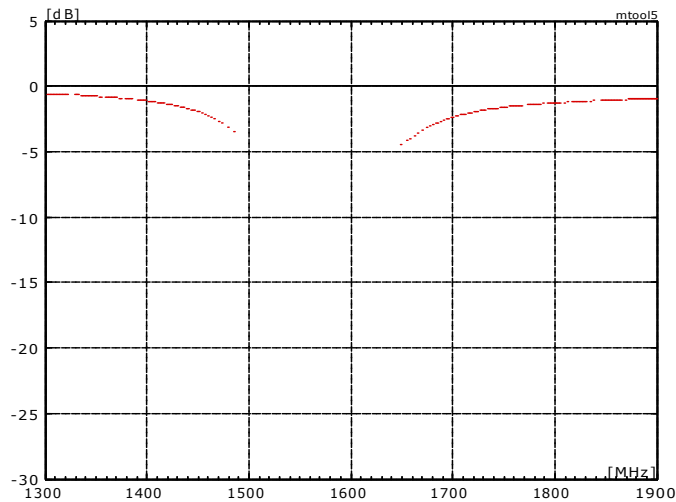

Reference Board A10204-U1




7-2 VSWR

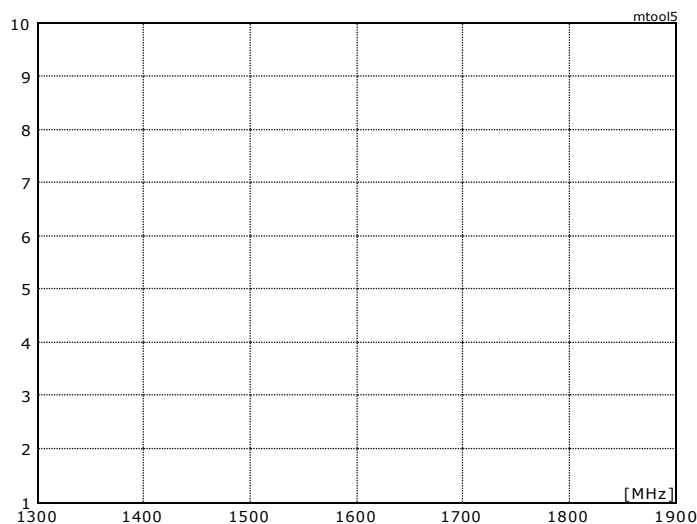



Reference Board A10204-U1

7-3 Antenna patterns



7.3.1. Reference Board A10204-U1 [Linear Polarization]

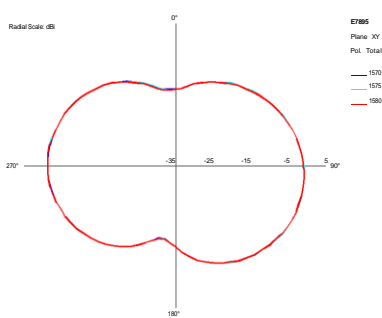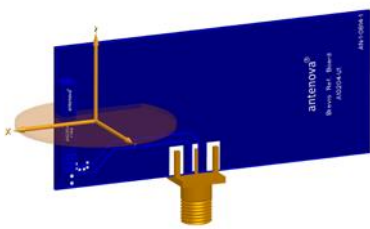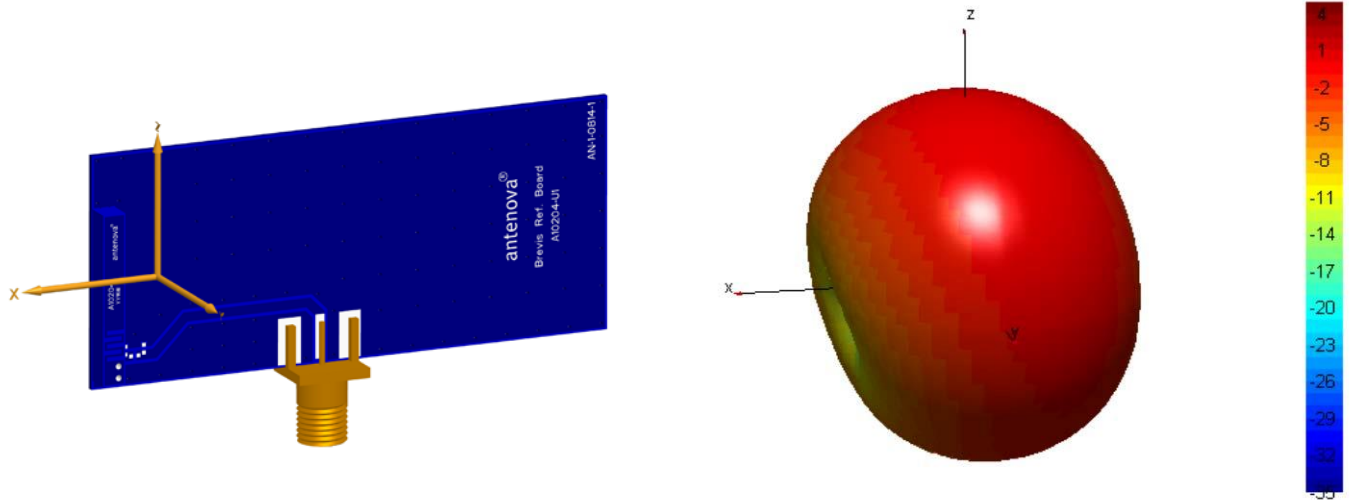

XY plane

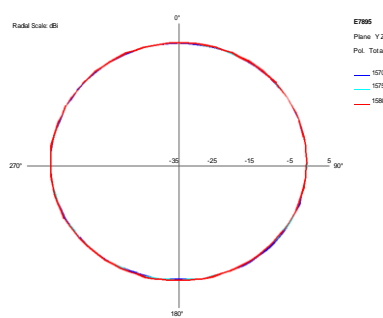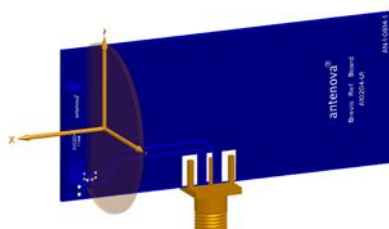

YZ plane


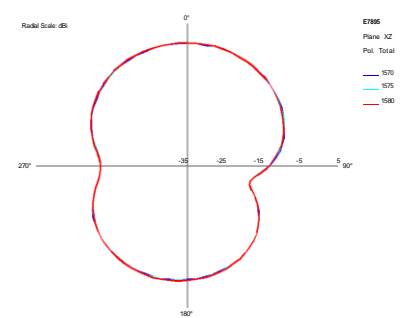
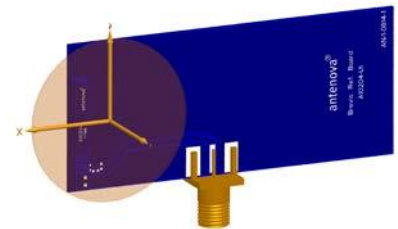


XZ plane



Patterns show combined polarisations
measured on reference board A10204-U1

7.3.2. Active Test Patterns



The typical radiation pattern of the Brevis A10204 GPS antenna has been measured in Antenova's "Active GPS" chamber, using Antenova's standard RF module based on SiRFstarIII™ GSC3LT IC combined with two stages of Saw Filters.

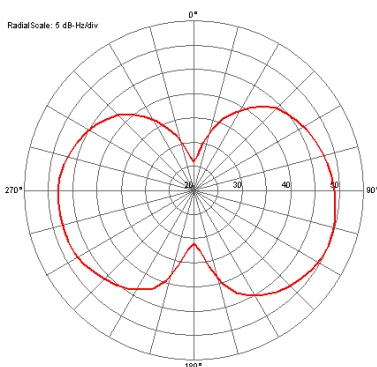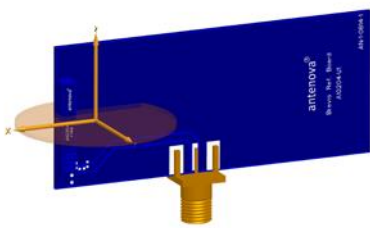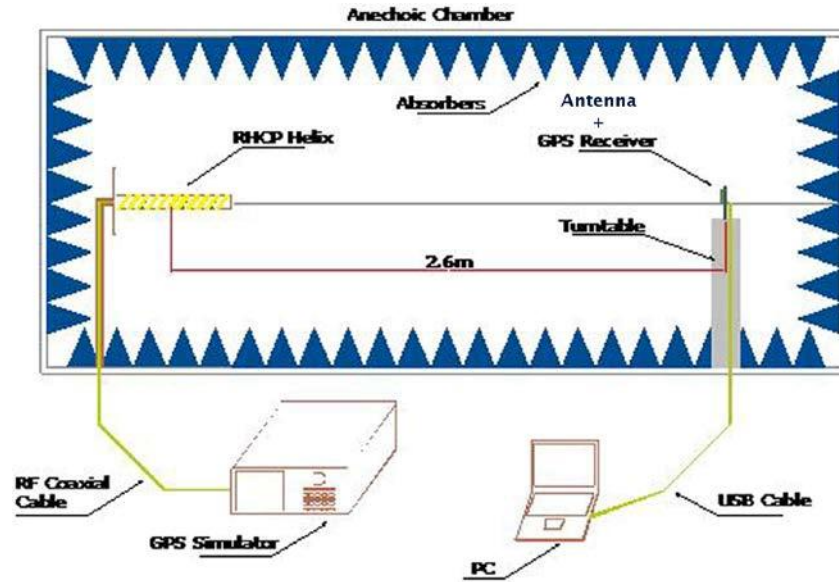

XY plane

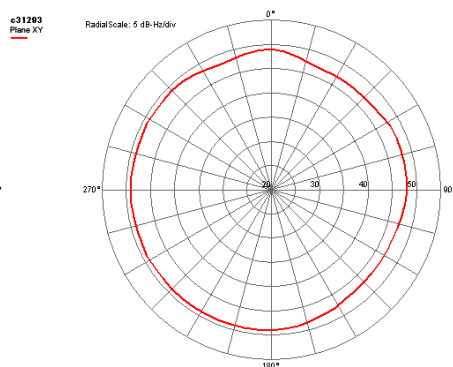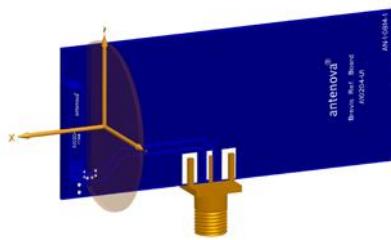


YZ plane

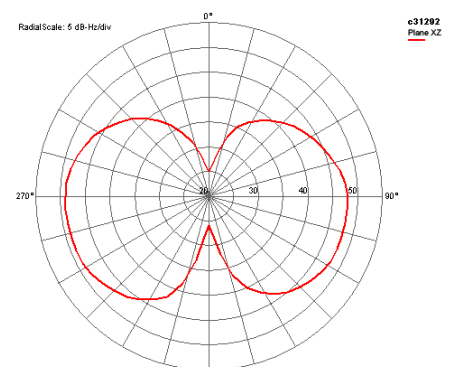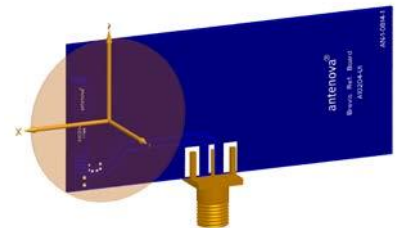

XZ plane

The above plots are CN number in dB.Hz on a scale of 20-50 dB.Hz.

8 Antenna dimensions

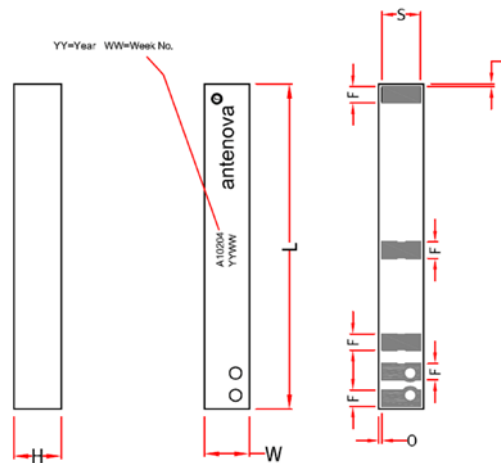


| L | W | H | F | S | O | L |
|--------------|-------------|--------------|--------------|--------------|--------------|---------------|
| Length | Width | Height | | | | |
| 22.0 +/- 0.2 | 3.0 +/- 0.2 | 3.2 +/- 0.15 | 1.1 +/- 0.15 | 2.6 +/- 0.15 | 0.2 +/- 0.15 | 0.35 +/- 0.15 |

Dimensions in mm

9 Antenna footprint

Brevis (Part No: A10204)

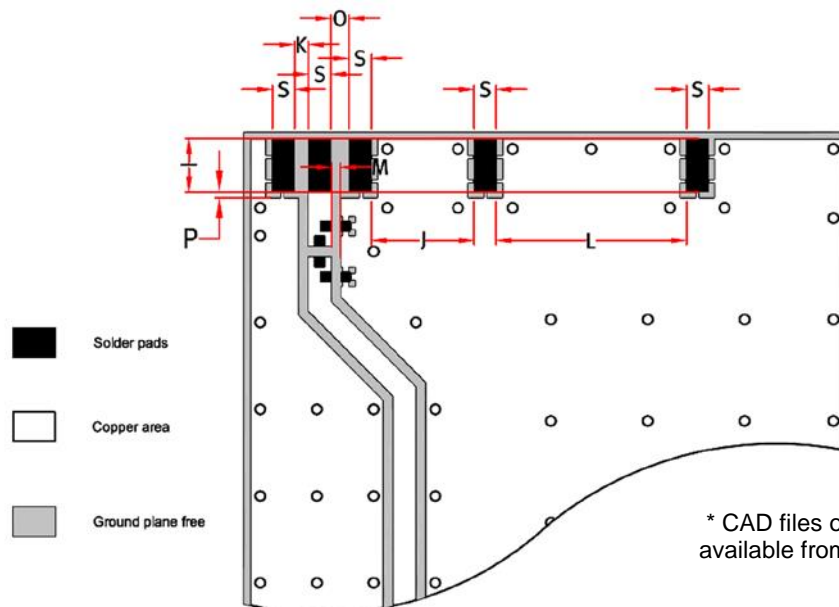

* CAD files of the antenna footprint are available from www.antenova-m2m.com

| I | S | K | J | L | O | M | P |
|-------------|-------------|-------------|-------------|-------------|-------------|--------------|--------------|
| 2.6 +/- 0.1 | 1.1 +/- 0.1 | 0.7 +/- 0.1 | 5.1 +/- 0.1 | 9.4 +/- 0.1 | 0.9 +/- 0.1 | 0.43 +/- 0.1 | 0.30 +/- 0.1 |

Dimensions in mm

10 Electrical interface


10-1 Transmission lines

- All transmission lines should be designed to have a characteristic impedance of 50Ω
- The length of the transmission lines should be kept to a minimum
- Any other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have an impedance of 50Ω

Once the material for the PCB has been chosen (PCB thickness and dielectric constant), a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the track so the characteristic impedance of the coplanar transmission line is 50Ω .

10-2 Matching circuit

The antenna requires a matching circuit that must be optimized for each customer's product. The matching circuit will require up to three components and the following pad layout should be designed into the device so the correct circuit can be installed:

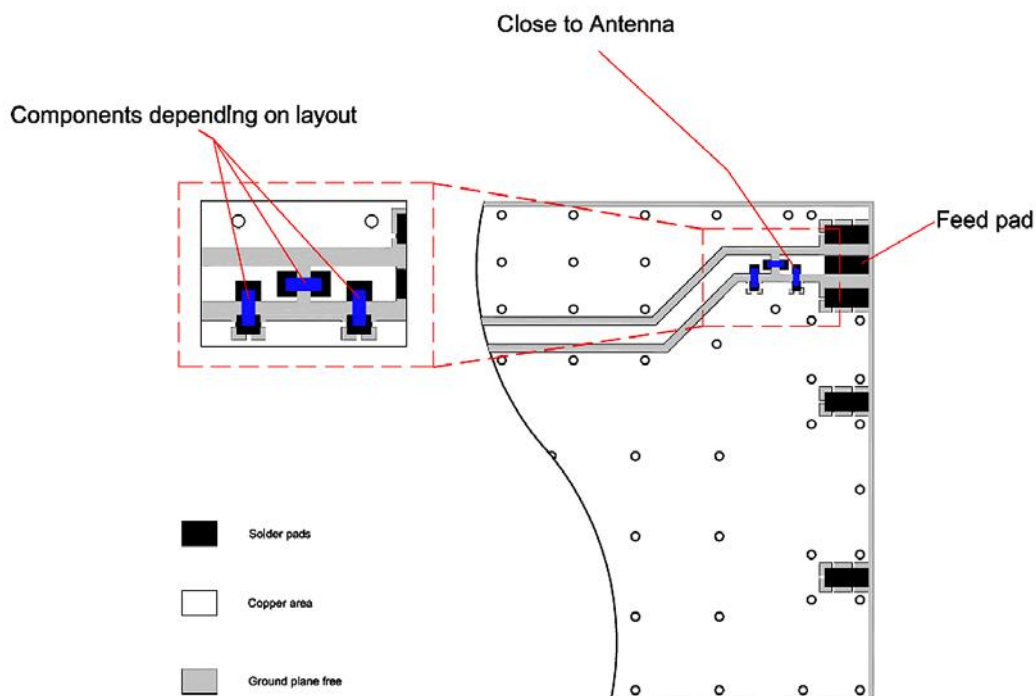

The antenna feed pad and the antenna ground pads are indicated in the drawing above. Additional pads are for mechanical attachment only and should not be grounded.

In addition to the matching circuit, a separate DC blocking capacitor will also be required between the radio and the antenna matching circuit.

Note: The component values for the matching circuit will vary depending on the size of the PCB and surrounding components. The impedance of the antenna should be measured before selecting suitable matching components. Antenova M2M offers this service on request. Contact sales@antenova-m2m.com for further information.


10-3 Antenna placement

Antenna placement locations and orientations are critical for achieving optimal system performance. Antenova strongly recommends placing the antenna near the edge of the board. Maximum antenna performance is achieved by placing the antenna towards one of the corners of the PCB, with the feed point of the antenna as close to the corner of the PCB as possible.

Antenova M2M offers a full range of development support to ensure efficient implementation of the antenna into the specific design. To overcome RF design issues, matching circuits, transmission lines, layout and other components, please contact Antenova M2M (sales@antenova-m2m.com) for design and placement recommendations.

10-4 Reference board

The reference board has been designed for evaluation purposes of the Brevis A10204 antenna and it includes a SMA female connector

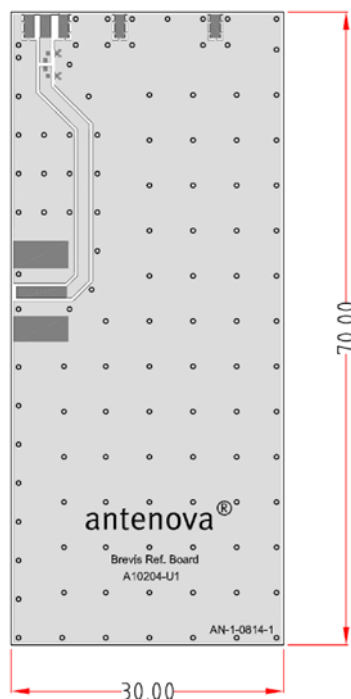

Dimensions in mm

Contact sales@antenova-m2m.com for further details

11 Soldering

This antenna is suitable for lead free soldering.

The reflow profile should be adjusted to suit the PCBA, oven and solder paste, while observing the following conditions:

- The maximum temperature should not exceed 240 °C
- However for lead free soldering, a maximum temperature of 255 °C for no more than 20 seconds is permitted.
- The antenna should not be exposed to temperatures exceeding 120 °C more than 3 times during the soldering process.

12 Hazardous material regulation conformance

The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenova M2M's website.


13 Packaging

13-1 Optimal storage conditions for packaged reels

| | |
|----------------------|---|
| Temperature | -10°C to 40°C |
| Humidity | Less than 75% RH |
| Shelf Life | 18 Months |
| Storage place | Away from corrosive gas and direct sunlight |
| Packaging | Reels should be stored in unopened sealed manufacturer's plastic packaging. |

Note: Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in like storage conditions as in above table.

13-2 Tape characteristics

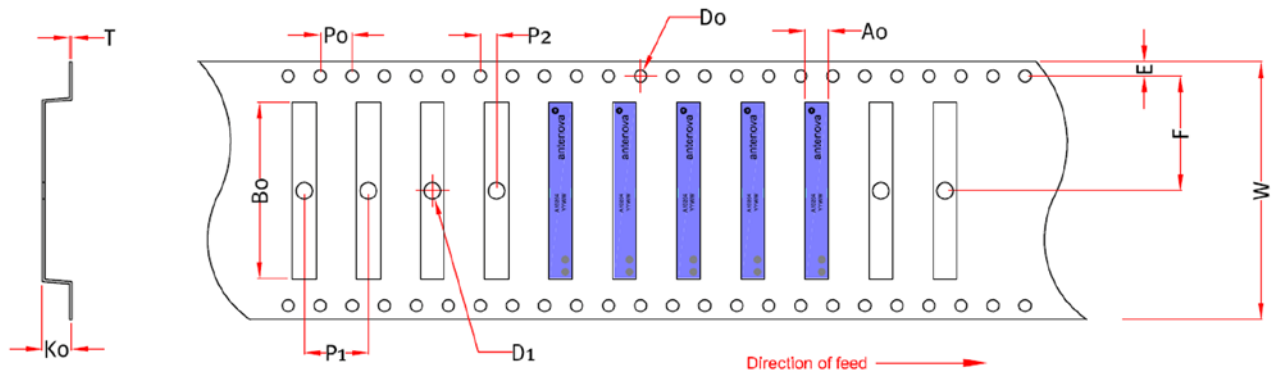


| W | F | E | P0 | P1 | P2 | B0 | K0 | T | D0 | D1 | A0 |
|--------------|--------------|--------------|-------------|-------------|-------------|---------------|--------------|-------------|-------------|--------------|--------------|
| 32.0 +/- 0.3 | 26.2 +/- 0.1 | 1.75 +/- 0.1 | 4.0 +/- 0.1 | 8.0 +/- 0.1 | 2.0 +/- 0.1 | 22.35 +/- 0.1 | 3.55 +/- 0.1 | 0.3 +/- 0.1 | 1.5 +/- 0.1 | 2.05 +/- 0.1 | 3.3 +/- 0.05 |

Dimensions in mm


| Quantity | Leading Space | Trailing Space |
|-----------------|--------------------------|--------------------------|
| 2000 pcs / reel | 50 blank antenna holders | 37 blank antenna holders |

13-3 Reel dimensions

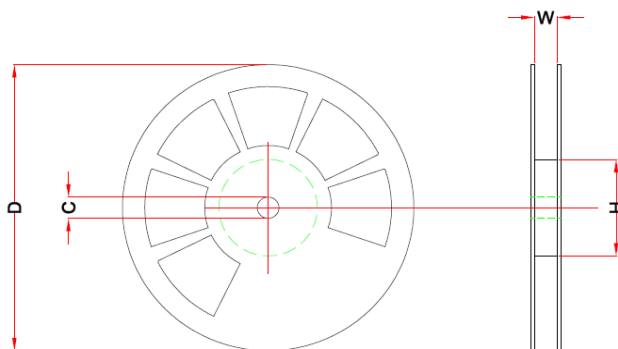

| Width (W) | Reel Diameter (D) | Hub Diameter (H) | Shaft Diameter (C) |
|-----------|-------------------|------------------|--------------------|
| 57.5 | 330 +/- 2.0 | 80 | 13 +/- 0.5 |

13-4 Box dimensions

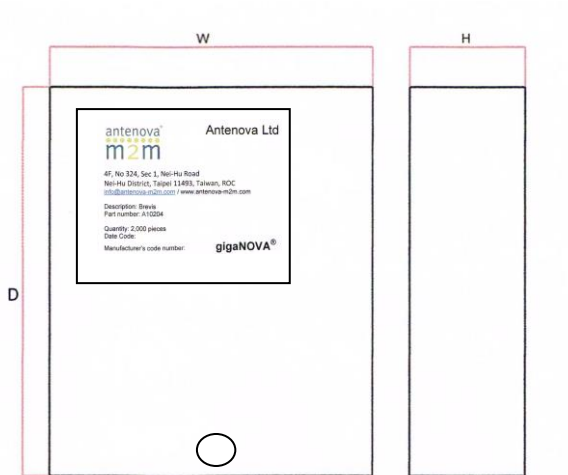


| Width (W) | Breadth (B) | Thickness (H) |
|-----------|-------------|---------------|
| 345 mm | 354 mm | 45 mm |

13-5 Bag properties

Reels are supplied in protective plastic packaging

13-6 Reel label information

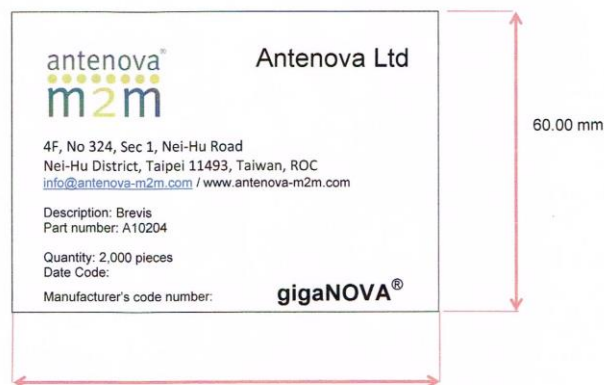

90.00 mm
Dimensions in mm



www.antenova-m2m.com

Corporate Headquarters

Antenova Ltd.
2nd Floor, Titan Court
3 Bishop Square
Hatfield
AL10 9NA

North America Headquarters

Antenova Ltd.
100 Brush Creek Road, Suite 103
Santa Rosa,
California, 95404
USA

Asia Headquarters

Antenova Asia Ltd.
4F, No. 324, Sec. 1, Nei-Hu Road
Nei-Hu District
Taipei 11493
Taiwan, ROC

Tel: +44 1223 810600
Email: sales@antenova-m2m.com

Tel: +1 707 890 5202
Email: sales@antenova-m2m.com

Tel: +886 (0) 2 8797 8630
Fax: +886 (0) 2 8797 6890
Email: sales@antenova-m2m.com

Copyright® Antenova Ltd. All Rights Reserved. Antenova®, Antenova M2M®, gigaNOVA®, the Antenova product family names, and the Antenova and Antenova M2M logos are trademarks and/or registered trademarks of Antenova Ltd. Any other names and/or trademarks belong to their respective companies.

The materials provided herein are believed to be reliable and correct at the time of print. Antenova does not warrant the accuracy or completeness of the information, text, graphics or other items contained within this information. Antenova further assumes no responsibility for the use of this information, and all such information shall be entirely at the user's risk.



Certificate No: 4598

Antennas for Wireless M2M Applications

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru