



**NPN Silicon Germanium RF Transistor\***

- High gain low noise RF transistor
- Small package 1.4 x 0.8 x 0.59 mm
- Outstanding noise figure  $F = 0.7$  dB at 1.8 GHz  
Outstanding noise figure  $F = 1.3$  dB at 6 GHz
- Maximum stable gain  
 $G_{ms} = 21$  dB at 1.8 GHz  
 $G_{ma} = 10$  dB at 6 GHz
- Gold metallization for extra high reliability
- Pb-free (RoHS compliant) package<sup>1)</sup>
- Qualified according AEC Q101

\* Short term description

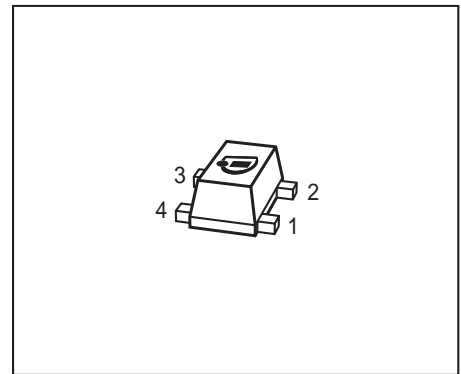

**ESD (Electrostatic discharge) sensitive device, observe handling precaution!**

| Type    | Marking | Pin Configuration |     |     |     |   |   | Package |
|---------|---------|-------------------|-----|-----|-----|---|---|---------|
| BFP620F | R2s     | 1=B               | 2=E | 3=C | 4=E | - | - | TSFP-4  |

**Maximum Ratings**

| Parameter                             | Symbol    | Value       | Unit |
|---------------------------------------|-----------|-------------|------|
| Collector-emitter voltage             | $V_{CEO}$ |             | V    |
| $T_A > 0$ °C                          |           | 2.3         |      |
| $T_A \leq 0$ °C                       |           | 2.1         |      |
| Collector-emitter voltage             | $V_{CES}$ | 7.5         |      |
| Collector-base voltage                | $V_{CBO}$ | 7.5         |      |
| Emitter-base voltage                  | $V_{EBO}$ | 1.2         |      |
| Collector current                     | $I_C$     | 80          | mA   |
| Base current                          | $I_B$     | 3           |      |
| Total power dissipation <sup>2)</sup> | $P_{tot}$ | 185         | mW   |
| $T_S \leq 96$ °C                      |           |             |      |
| Junction temperature                  | $T_j$     | 150         | °C   |
| Ambient temperature                   | $T_A$     | -65 ... 150 |      |
| Storage temperature                   | $T_{stg}$ | -65 ... 150 |      |

<sup>1)</sup>Pb-containing package may be available upon special request

<sup>2)</sup> $T_S$  is measured on the collector lead at the soldering point to the pcb

**Thermal Resistance**

| Parameter                                | Symbol     | Value      | Unit |
|--|------------|------------|------|
| Junction - soldering point <sup>1)</sup> | $R_{thJS}$ | $\leq 290$ | K/W  |

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter | Symbol | Values |      |      | Unit |
|-----------|--------|--------|------|------|------|
|           |        | min.   | typ. | max. |      |

**DC Characteristics**

|   |               |     |     |     |               |
|---|---------------|-----|-----|-----|---------------|
| Collector-emitter breakdown voltage<br>$I_C = 1 \text{ mA}, I_B = 0$              | $V_{(BR)CEO}$ | 2.3 | 2.8 | -   | V             |
| Collector-emitter cutoff current<br>$V_{CE} = 7.5 \text{ V}, V_{BE} = 0$          | $I_{CES}$     | -   | -   | 10  | $\mu\text{A}$ |
| Collector-base cutoff current<br>$V_{CB} = 5 \text{ V}, I_E = 0$                  | $I_{CBO}$     | -   | -   | 100 | nA            |
| Emitter-base cutoff current<br>$V_{EB} = 0.5 \text{ V}, I_C = 0$                  | $I_{EBO}$     | -   | -   | 3   | $\mu\text{A}$ |
| DC current gain<br>$I_C = 50 \text{ mA}, V_{CE} = 1.5 \text{ V}$ , pulse measured | $h_{FE}$      | 110 | 180 | 270 | -             |

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**


| Parameter  | Symbol        | Values |             |      | Unit |
|--|---------------|--------|-------------|------|------|
|  |               | min.   | typ.        | max. |      |
| <b>AC Characteristics (verified by random sampling)</b>  |               |        |             |      |      |
| Transition frequency<br>$I_C = 50\text{ mA}$ , $V_{CE} = 1.5\text{ V}$ , $f = 1\text{ GHz}$  | $f_T$         | -      | 65          | -    | GHz  |
| Collector-base capacitance<br>$V_{CB} = 2\text{ V}$ , $f = 1\text{ MHz}$ , $V_{BE} = 0$ ,<br>emitter grounded  | $C_{cb}$      | -      | 0.12        | 0.2  | pF   |
| Collector emitter capacitance<br>$V_{CE} = 2\text{ V}$ , $f = 1\text{ MHz}$ , $V_{BE} = 0$ ,<br>base grounded  | $C_{ce}$      | -      | 0.2         | -    |      |
| Emitter-base capacitance<br>$V_{EB} = 0.5\text{ V}$ , $f = 1\text{ MHz}$ , $V_{CB} = 0$ ,<br>collector grounded  | $C_{eb}$      | -      | 0.45        | -    |      |
| Noise figure<br>$I_C = 5\text{ mA}$ , $V_{CE} = 1.5\text{ V}$ , $f = 1.8\text{ GHz}$ , $Z_S = Z_{Sopt}$<br>$I_C = 5\text{ mA}$ , $V_{CE} = 1.5\text{ V}$ , $f = 6\text{ GHz}$ , $Z_S = Z_{Sopt}$ | $F$           | -      | 0.7<br>1.3  | -    | dB   |
| Power gain, maximum stable <sup>1)</sup><br>$I_C = 50\text{ mA}$ , $V_{CE} = 1.5\text{ V}$ , $Z_S = Z_{Sopt}$ ,<br>$Z_L = Z_{Lopt}$ , $f = 1.8\text{ GHz}$                                       | $G_{ms}$      | -      | 21          | -    | dB   |
| Power gain, maximum available <sup>1)</sup><br>$I_C = 50\text{ mA}$ , $V_{CE} = 1.5\text{ V}$ , $Z_S = Z_{Sopt}$ ,<br>$Z_L = Z_{Lopt}$ , $f = 6\text{ GHz}$                                      | $G_{ma}$      | -      | 10          | -    | dB   |
| Transducer gain<br>$I_C = 50\text{ mA}$ , $V_{CE} = 1.5\text{ V}$ , $Z_S = Z_L = 50\ \Omega$ ,<br>$f = 1.8\text{ GHz}$<br>$f = 6\text{ GHz}$   | $ S_{21e} ^2$ | -      | 19.5<br>9.5 | -    | dB   |
| Third order intercept point at output <sup>2)</sup><br>$V_{CE} = 2\text{ V}$ , $I_C = 50\text{ mA}$ , $Z_S = Z_L = 50\ \Omega$ , $f = 1.8\text{ GHz}$  | $IP_3$        | -      | 25          | -    | dBm  |
| 1dB Compression point at output<br>$I_C = 50\text{ mA}$ , $V_{CE} = 2\text{ V}$ , $Z_S = Z_L = 50\ \Omega$ , $f = 1.8\text{ GHz}$  | $P_{-1dB}$    | -      | 14          | -    |      |

<sup>1)</sup>  $G_{ma} = |S_{21e} / S_{12e}| (k - (k^2 - 1)^{1/2})$ ,  $G_{ms} = |S_{21e} / S_{12e}|$ 
<sup>2)</sup>  $IP_3$  value depends on termination of all intermodulation frequency components.  
Termination used for this measurement is  $50\ \Omega$  from 0.1 MHz to 6 GHz

**SPICE Parameter (Gummel-Poon Model, Berkley-SPICE 2G.6 Syntax):**
**Transistor Chip Data:**

|       |         |          |       |           |          |        |       |          |
|-------|---------|----------|-------|-----------|----------|--------|-------|----------|
| IS =  | 0.22    | fA       | BF =  | 425       | -        | NF =   | 1.025 | -        |
| VAF = | 1000    | V        | IKF = | 0.25      | A        | ISE =  | 21    | fA       |
| NE =  | 2       | -        | BR =  | 50        | -        | NR =   | 1     | -        |
| VAR = | 2       | V        | IKR = | 10        | mA       | ISC =  | 18    | pA       |
| NC =  | 2       | -        | RB =  | 3.129     | $\Omega$ | IRB =  | 1.522 | mA       |
| RBM = | 2.707   | $\Omega$ | RE =  | 0.6       | -        | RC =   | 2.364 | $\Omega$ |
| CJE = | 250.7   | fF       | VJE = | 0.75      | V        | MJE =  | 0.3   | -        |
| TF =  | 1.43    | ps       | XTF = | 10        | -        | VTF =  | 1.5   | V        |
| ITF = | 2.4     | A        | PTF = | 0         | deg      | CJC =  | 124.9 | fF       |
| VJC = | 0.6     | V        | MJC = | 0.5       | -        | XCJC = | 1     | -        |
| TR =  | 0.2     | ns       | CJS = | 128.1     | fF       | VJS =  | 0.52  | V        |
| MJS = | 0.5     | -        | NK =  | -1.42     | -        | EG =   | 1.078 | eV       |
| XTI = | 3       | -        | FC =  | 0.8       | -        | TNOM   | 298   | K        |
| AF =  | 2       | -        | KF =  | 7.291E-11 | -        |        |       |          |
| TITF1 | -0.0065 | -        | TITF2 | 1.0E-5    | -        |        |       |          |

All parameters are ready to use, no scaling is necessary.

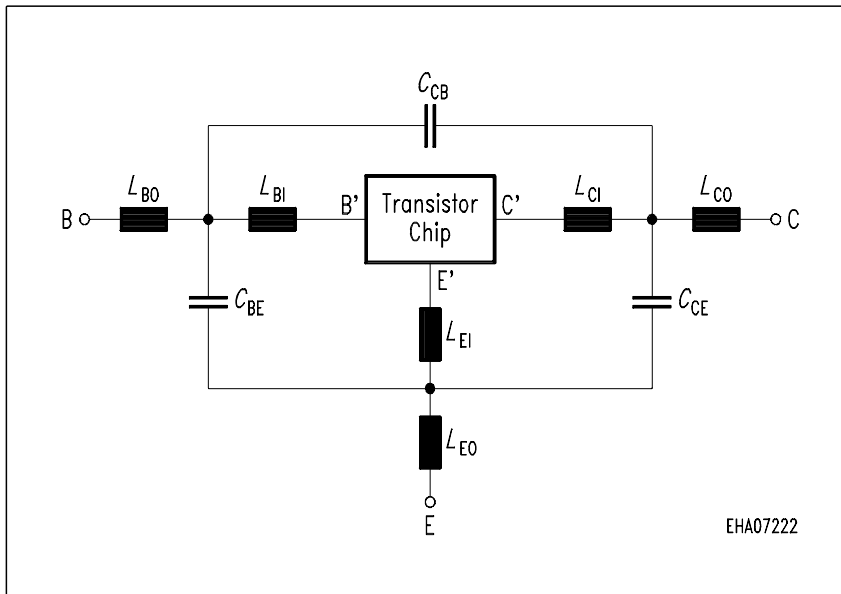
**Package Equivalent Circuit:**


To avoid high complexity of the package equivalent circuit, both emitter leads of TSFP-4 are combined in one electrical connection.  $R_{Lx}$  are series resistors for the inductances  $L_{xI}$  and  $K_{xa-yb}$  are the coupling coefficients between the inductances  $L_{xa}$  and  $L_{yb}$ .


|               |       |          |
|---------------|-------|----------|
| $L_{B0}$ =    | 0.22  | nH       |
| $L_{E0}$ =    | 0.28  | nH       |
| $L_{C0}$ =    | 0.22  | nH       |
| $K_{B0-E0}$ = | 0.1   | -        |
| $K_{B0-C0}$ = | 0.01  | -        |
| $K_{E0-C0}$ = | 0.11  | -        |
| $C_{BE}$ =    | 34    | fF       |
| $C_{BC}$ =    | 2     | fF       |
| $C_{CE}$ =    | 33    | fF       |
| $L_{BI}$ =    | 0.42  | nH       |
| $R_{LBI}$ =   | 0.15  | $\Omega$ |
| $L_{EI}$ =    | 0.26  | nH       |
| $R_{LEI}$ =   | 0.11  | $\Omega$ |
| $L_{CI}$ =    | 0.35  | nH       |
| $R_{LI}$ =    | 0.13  | $\Omega$ |
| $K_{BI-EI}$ = | -0.05 | -        |
| $K_{BI-CI}$ = | -0.08 | -        |
| $K_{EI-CI}$ = | 0.2   | -        |

Valid up to 6GHz

**Total power dissipation  $P_{tot} = f(T_S)$**

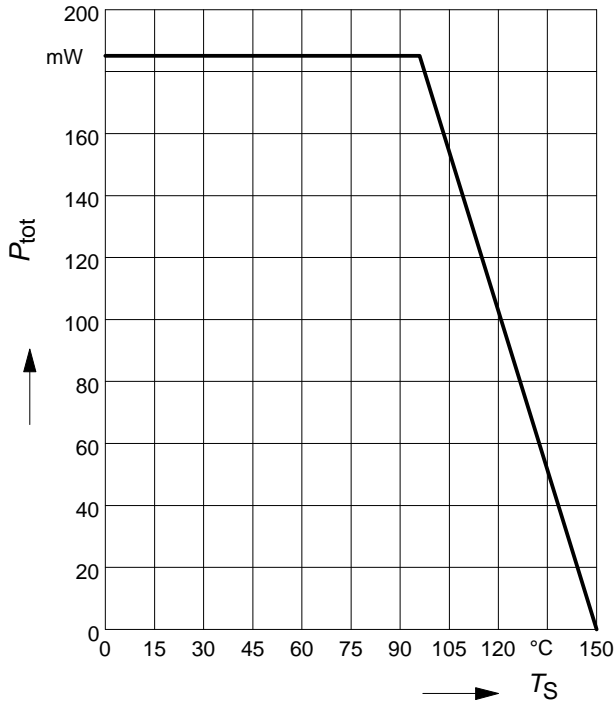


**Permissible Pulse Load  $R_{thJS} = f(t_p)$**

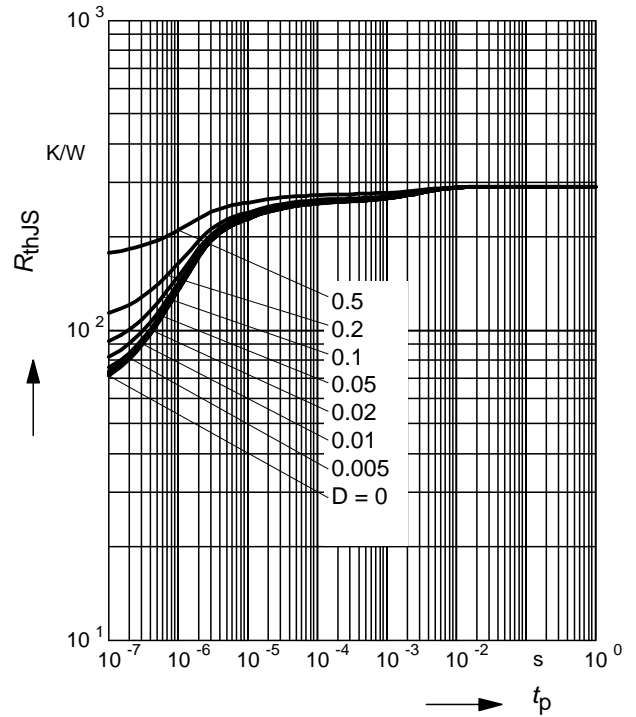


**Permissible Pulse Load**

$P_{totmax}/P_{totDC} = f(t_p)$

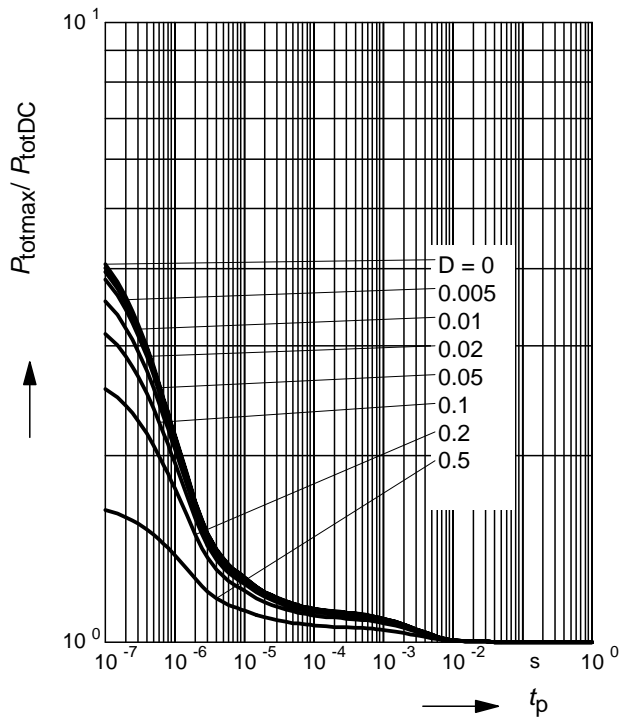

**Collector-base capacitance  $C_{cb} = f(V_{CB})$**


$f = 1\text{MHz}$

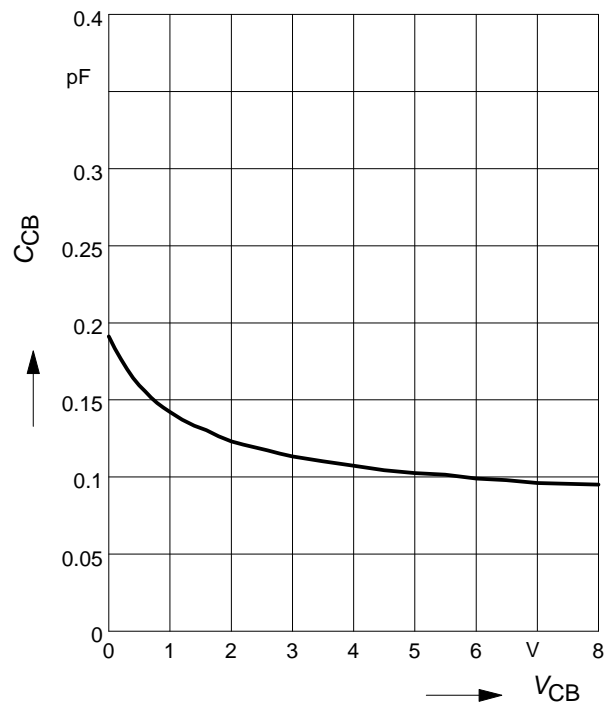

**Third order Intercept Point  $IP_3=f(I_C)$**

(Output,  $Z_S=Z_L=50\Omega$ )


$V_{CE}$  = parameter,  $f=1.8\text{GHz}$

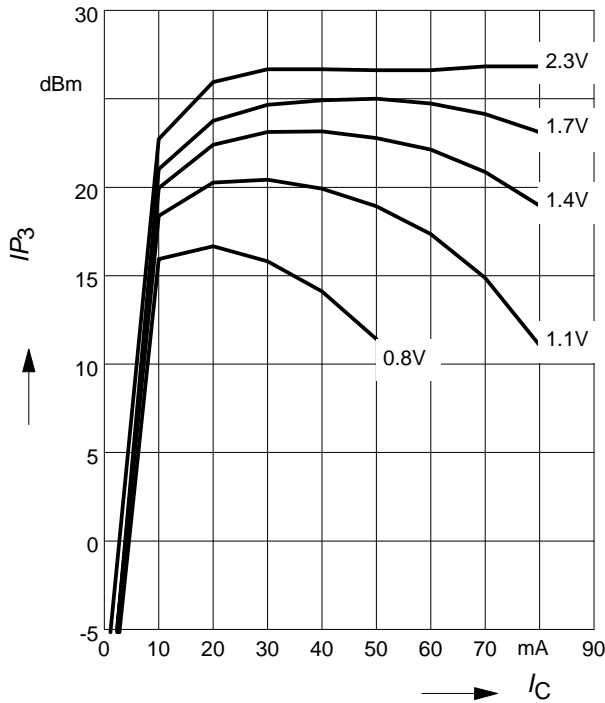

**Transition frequency  $f_T=f(I_C)$**

$f = 1\text{GHz}$


$V_{CE}$  = Parameter in V

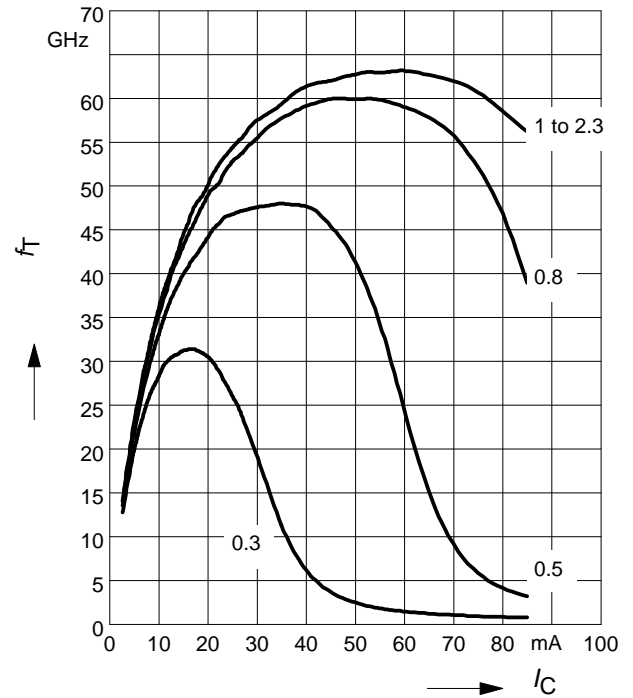

**Power gain  $G_{ma}, G_{ms} = f(I_C)$**

$V_{CE} = 1.5\text{V}$


$f$  = Parameter in GHz

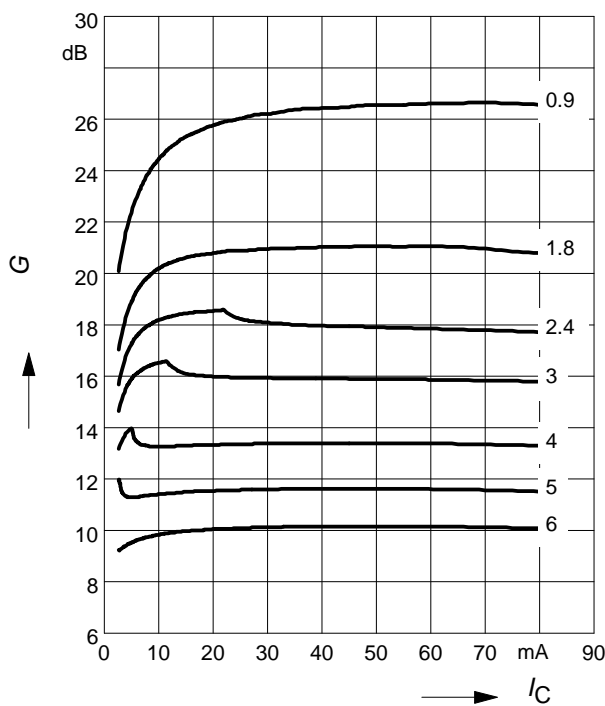

**Power Gain  $G_{ma}, G_{ms} = f(f)$**

$|S_{21}|^2 = f(f)$


$V_{CE} = 1.5\text{V}, I_C = 50\text{mA}$

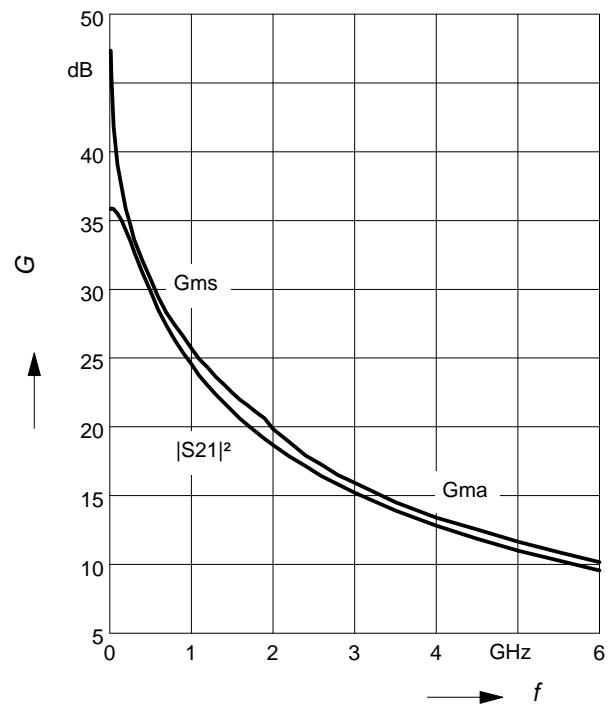

**Power gain  $G_{ma}$ ,  $G_{ms} = f(V_{CE})$**


$I_C = 50\text{mA}$

$f = \text{Parameter in GHz}$

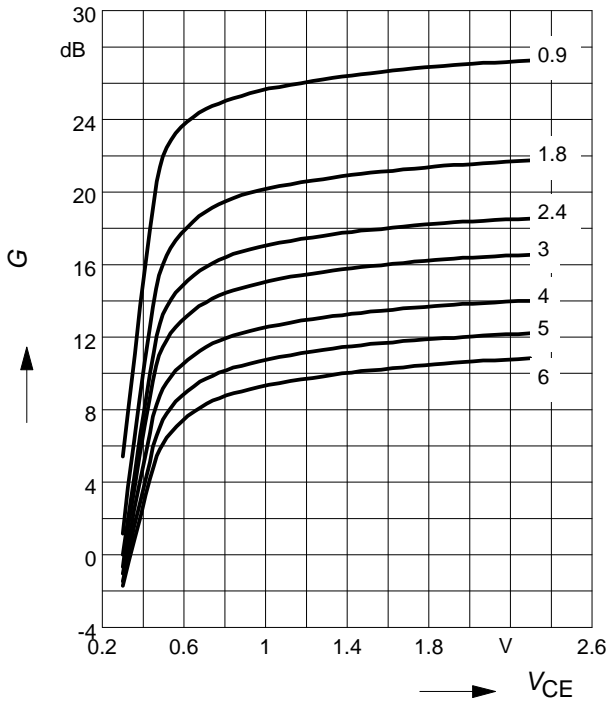


**Noise figure  $F = f(I_C)$**

$V_{CE} = 1.5\text{V}$ ,  $Z_S = Z_{Sopt}$

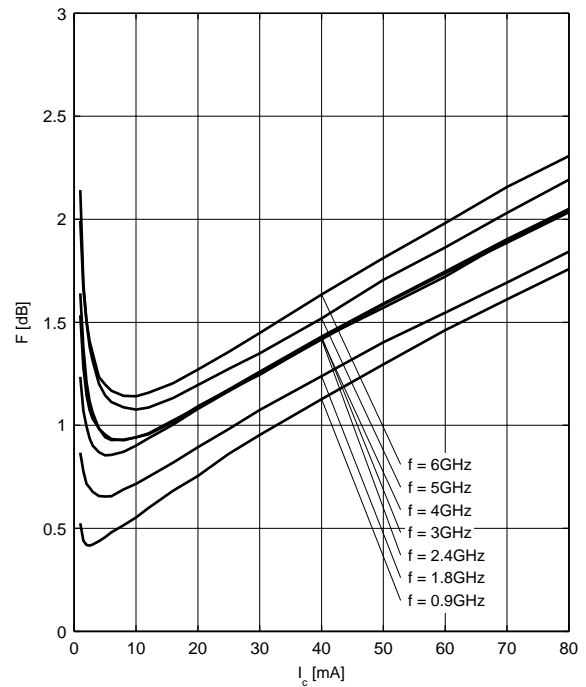


**Noise figure  $F = f(I_C)$**

$V_{CE} = 1.5\text{V}$ ,  $f = 1.8\text{ GHz}$

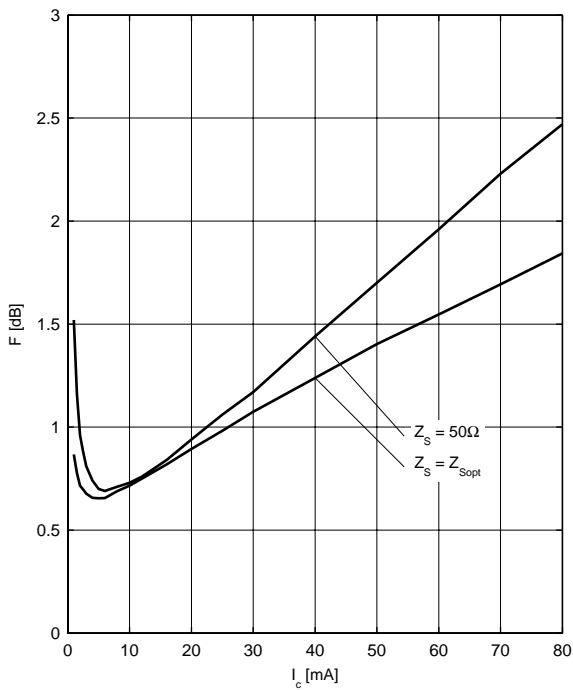

**Noise figure  $F = f(f)$**


$V_{CE} = 1.5\text{V}$ ,  $Z_S = Z_{Sopt}$

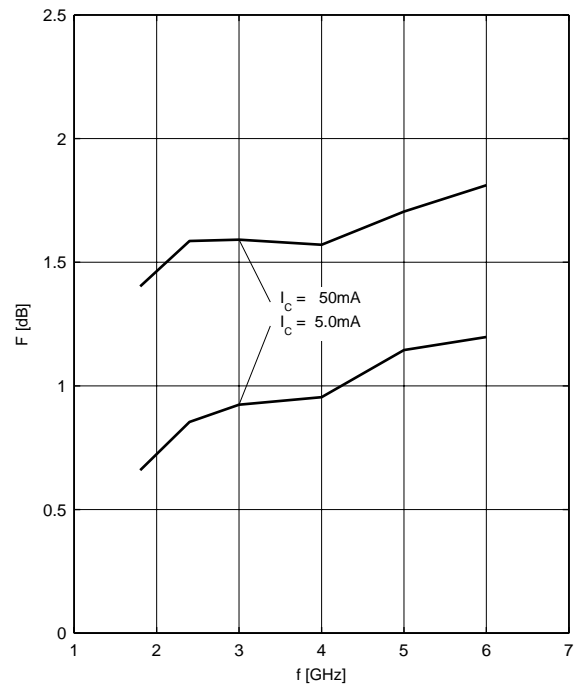

Source impedance for min.


noise figure vs. frequency

$V_{CE} = 1.5V, I_C = 5.0mA/50.0mA$

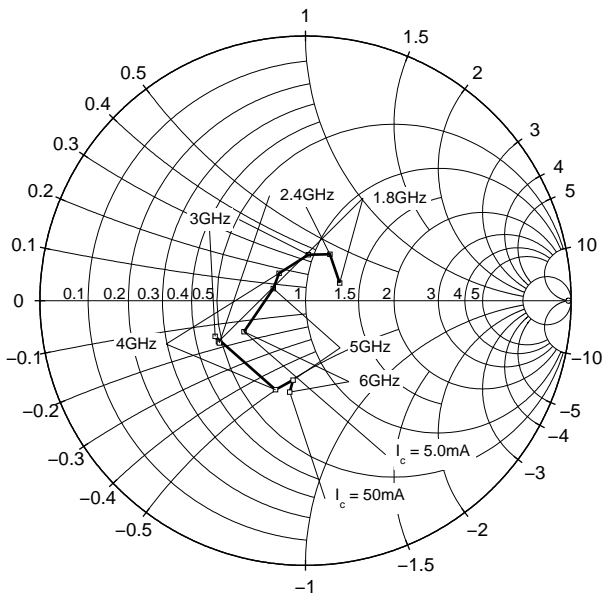





Package Outline

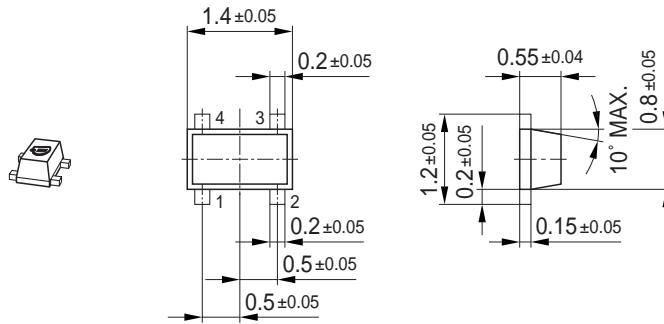

Foot Print




Marking Layout (Example)

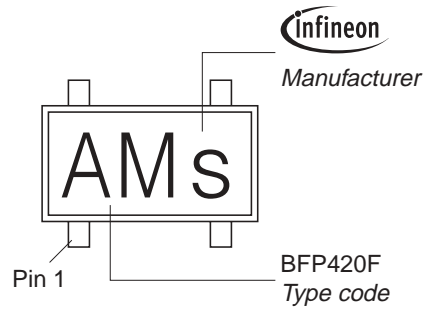

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
 Reel ø330 mm = 10.000 Pieces/Reel

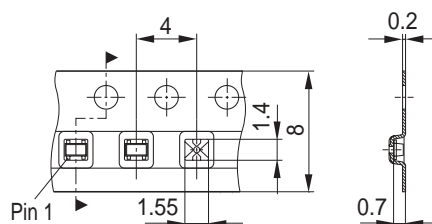

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

### **Attention please!**

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)