


# MEMS nano pressure sensor: 260-1260 hPa absolute digital output barometer

Datasheet - production data



#### **Features**

- 260 to 1260 hPa absolute pressure range
- Current consumption down to 3 μA
- High overpressure capability: 20x full-scale
- Embedded temperature compensation
- · 24-bit pressure data output
- 16-bit temperature data output
- ODR from 1 Hz to 75 Hz
- SPI and I<sup>2</sup>C interfaces
- Embedded FIFO
- Interrupt functions: Data Ready, FIFO flags, pressure thresholds
- Supply voltage: 1.7 to 3.6 V
- High shock survivability: 22,000 g
- · Small and thin package
- ECOPACK<sup>®</sup> lead-free compliant

#### **Applications**

- Altimeters especially suitable for drones
- Estimations of speed of ascent and descent
- Altimeters and barometers for portable devices
- GPS applications
- Weather station equipment
- · Sport watches

#### **Description**

The LPS22HD is an ultra-compact piezoresistive absolute pressure sensor which functions as a digital output barometer. The device comprises a sensing element and an IC interface which communicates through I<sup>2</sup>C or SPI from the sensing element to the application.

The sensing element, which detects absolute pressure, consists of a suspended membrane manufactured using a dedicated process developed by ST.

The LPS22HD is available in a full-mold, holed LGA package (HLGA). It is guaranteed to operate over a temperature range extending from -40 °C to +85 °C. The package is holed to allow external pressure to reach the sensing element.

Table 1. Device summary

Order code	Temperature range [°C]	Package	Packing
LPS22HDTR	-40 to +85°C	HLGA-10L	Tape and reel

Contents LPS22HD

### **Contents**

1	Block	diagrams	. 7
2	Pin d	escription	. 8
3	Mech	anical and electrical specifications	10
	3.1	Mechanical characteristics	10
	3.2	Electrical characteristics	. 11
	3.3	Communication interface characteristics	12
		3.3.1 SPI - serial peripheral interface	. 12
		3.3.2 I <sup>2</sup> C - inter-IC control interface	. 13
	3.4	Absolute maximum ratings	14
4	Funct	tionality	15
	4.1	Sensing element	15
	4.2	IC interface	. 15
	4.3	Factory calibration	. 15
	4.4	Interpreting pressure readings	. 16
	4.5	One-shot mode	16
5	FIFO		17
	5.1	Bypass mode	. 17
	5.2	FIFO mode	. 18
	5.3	Stream mode	. 19
	5.4	Dynamic-Stream mode	20
	5.5	Stream-to-FIFO mode	21
	5.6	Bypass-to-Stream mode	22
	5.7	Bypass-to-FIFO mode	23
	5.8	Retrieving data from FIFO	
6	Appli	cation hints	24
	6.1	Soldering information	24
7	Digita	al interfaces	25



7.2.1 I <sup>2</sup> C operation 7.3 SPI bus interface 7.3.1 SPI read 7.3.2 SPI write 7.3.3 SPI read in 3-wire mode  8 Register mapping  9 Register description 9.1 INTERRUPT_CFG (0Bh) 9.2 THS_P_L (0Ch) 9.3 THS_P_H (0Dh) 9.4 WHO_AM_I (0Fh) 9.5 CTRL_REG1 (10h) 9.6 CTRL_REG2 (11h) 9.7 CTRL_REG3 (12h) 9.8 FIFO_CTRL (14h) 9.9 REF_P_XL (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		7.1	Serial interfaces	25
7.3 SPI bus interface 7.3.1 SPI read 7.3.2 SPI write 7.3.3 SPI read in 3-wire mode  8 Register mapping  9 Register description 9.1 INTERRUPT_CFG (0Bh) 9.2 THS_P_L (0Ch) 9.3 THS_P_H (0Dh) 9.4 WHO_AM_I (0Fh) 9.5 CTRL_REG1 (10h) 9.6 CTRL_REG2 (11h) 9.7 CTRL_REG3 (12h) 9.8 FIFO_CTRL (14h) 9.9 REF_P_X (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		7.2	I <sup>2</sup> C serial interface (CS = High)	25
7.3.1 SPI read 7.3.2 SPI write 7.3.3 SPI read in 3-wire mode  8 Register mapping  9 Register description 9.1 INTERRUPT_CFG (0Bh) 9.2 THS_P_L (0Ch) 9.3 THS_P_H (0Dh) 9.4 WHO_AM_I (0Fh) 9.5 CTRL_REG1 (10h) 9.6 CTRL_REG2 (11h) 9.7 CTRL_REG3 (12h) 9.8 FIFO_CTRL (14h) 9.9 REF_P_XL (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_L (29h) 9.21 TEMP_OUT_L (2Bh) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)			7.2.1 I <sup>2</sup> C operation	26
7.3.2 SPI write 7.3.3 SPI read in 3-wire mode  8 Register mapping  9 Register description  9.1 INTERRUPT_CFG (0Bh)  9.2 THS_P_L (0Ch)  9.3 THS_P_H (0Dh)  9.4 WHO_AM_I (0Fh)  9.5 CTRL_REG1 (10h)  9.6 CTRL_REG2 (11h)  9.7 CTRL_REG3 (12h)  9.8 FIFO_CTRL (14h)  9.9 REF_P_XL (15h)  9.10 REF_P_L (16h)  9.11 REF_P_H (17h)  9.12 RPDS_L (18h)  9.13 RPDS_H (19h)  9.14 RES_CONF (1Ah)  9.15 INT_SOURCE (25h)  9.16 FIFO_STATUS (26h)  9.17 STATUS (27h)  9.18 PRESS_OUT_XL (28h)  9.19 PRESS_OUT_L (29h)  9.20 PRESS_OUT_H (2Ah)  9.21 TEMP_OUT_L (2Bh)  9.22 TEMP_OUT_H (2Ch)		7.3	SPI bus interface	28
7.3.3 SPI read in 3-wire mode  Register mapping  9 Register description  9.1 INTERRUPT_CFG (0Bh)  9.2 THS_P_L (0Ch)  9.3 THS_P_H (0Dh)  9.4 WHO_AM_I (0Fh)  9.5 CTRL_REG1 (10h)  9.6 CTRL_REG2 (11h)  9.7 CTRL_REG3 (12h)  9.8 FIFO_CTRL (14h)  9.9 REF_P_XL (15h)  9.10 REF_P_L (16h)  9.11 REF_P_H (17h)  9.12 RPDS_L (18h)  9.13 RPDS_H (19h)  9.14 RES_CONF (1Ah)  9.15 INT_SOURCE (25h)  9.16 FIFO_STATUS (26h)  9.17 STATUS (27h)  9.18 PRESS_OUT_XL (28h)  9.19 PRESS_OUT_L (29h)  9.20 PRESS_OUT_H (2Ah)  9.21 TEMP_OUT_L (2Bh)  9.22 TEMP_OUT_H (2Ch)				
Register description  9.1 INTERRUPT_CFG (0Bh)  9.2 THS_P_L (0Ch)  9.3 THS_P_H (0Dh)  9.4 WHO_AM_I (0Fh)  9.5 CTRL_REG1 (10h)  9.6 CTRL_REG2 (11h)  9.7 CTRL_REG3 (12h)  9.8 FIFO_CTRL (14h)  9.9 REF_P_XL (15h)  9.10 REF_P_L (16h)  9.11 REF_P_H (17h)  9.12 RPDS_L (18h)  9.13 RPDS_H (19h)  9.14 RES_CONF (1Ah)  9.15 INT_SOURCE (25h)  9.16 FIFO_STATUS (26h)  9.17 STATUS (27h)  9.18 PRESS_OUT_L (28h)  9.20 PRESS_OUT_L (29h)  9.21 TEMP_OUT_L (2Bh)  9.21 TEMP_OUT_L (2Bh)  9.22 TEMP_OUT_H (2Ch)				
9 Register description  9.1 INTERRUPT_CFG (0Bh)  9.2 THS_P_L (0Ch)  9.3 THS_P_H (0Dh)  9.4 WHO_AM_I (0Fh)  9.5 CTRL_REG1 (10h)  9.6 CTRL_REG2 (11h)  9.7 CTRL_REG3 (12h)  9.8 FIFO_CTRL (14h)  9.9 REF_P_XL (15h)  9.10 REF_P_L (16h)  9.11 REF_P_H (17h)  9.12 RPDS_L (18h)  9.13 RPDS_H (19h)  9.14 RES_CONF (1Ah)  9.15 INT_SOURCE (25h)  9.16 FIFO_STATUS (26h)  9.17 STATUS (27h)  9.18 PRESS_OUT_XL (28h)  9.19 PRESS_OUT_L (29h)  9.20 PRESS_OUT_L (29h)  9.21 TEMP_OUT_L (2Bh)  9.22 TEMP_OUT_L (2Ch)			7.3.3 SPI read in 3-wire mode	31
9.1 INTERRUPT_CFG (0Bh) 9.2 THS_P_L (0Ch) 9.3 THS_P_H (0Dh) 9.4 WHO_AM_I (0Fh) 9.5 CTRL_REG1 (10h) 9.6 CTRL_REG2 (11h) 9.7 CTRL_REG3 (12h) 9.8 FIFO_CTRL (14h) 9.9 REF_P_XL (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_H (2Ch)		Regis	ster mapping	32
9.2 THS_P_L (0Ch) 9.3 THS_P_H (0Dh) 9.4 WHO_AM_I (0Fh). 9.5 CTRL_REG1 (10h) 9.6 CTRL_REG2 (11h) 9.7 CTRL_REG3 (12h) 9.8 FIFO_CTRL (14h) 9.9 REF_P_XL (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		Regis	ster description	34
9.3 THS_P_H (0Dh) 9.4 WHO_AM_I (0Fh) 9.5 CTRL_REG1 (10h) 9.6 CTRL_REG2 (11h) 9.7 CTRL_REG3 (12h) 9.8 FIFO_CTRL (14h) 9.9 REF_P_XL (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.1	INTERRUPT_CFG (0Bh)	34
9.4 WHO_AM_I (0Fh) 9.5 CTRL_REG1 (10h) 9.6 CTRL_REG2 (11h) 9.7 CTRL_REG3 (12h) 9.8 FIFO_CTRL (14h) 9.9 REF_P_XL (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)	1	9.2	THS_P_L (0Ch)	36
9.5 CTRL_REG1 (10h) 9.6 CTRL_REG2 (11h) 9.7 CTRL_REG3 (12h) 9.8 FIFO_CTRL (14h) 9.9 REF_P_XL (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_L (29h) 9.21 TEMP_OUT_L (28h) 9.22 TEMP_OUT_H (2Ch)		9.3	THS_P_H (0Dh)	36
9.6 CTRL_REG2 (11h) 9.7 CTRL_REG3 (12h) 9.8 FIFO_CTRL (14h) 9.9 REF_P_XL (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.4	WHO_AM_I (0Fh)	36
9.7 CTRL_REG3 (12h) 9.8 FIFO_CTRL (14h) 9.9 REF_P_XL (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.5	CTRL_REG1 (10h)	37
9.8 FIFO_CTRL (14h) 9.9 REF_P_XL (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.6	CTRL_REG2 (11h)	38
9.9 REF_P_XL (15h) 9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_H (2Ch)		9.7	CTRL_REG3 (12h)	39
9.10 REF_P_L (16h) 9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.8	FIFO_CTRL (14h)	41
9.11 REF_P_H (17h) 9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.9	REF_P_XL (15h)	41
9.12 RPDS_L (18h) 9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.10	REF_P_L (16h)	42
9.13 RPDS_H (19h) 9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.11	REF_P_H (17h)	42
9.14 RES_CONF (1Ah) 9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.12	RPDS_L (18h)	42
9.15 INT_SOURCE (25h) 9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.13	RPDS_H (19h)	42
9.16 FIFO_STATUS (26h) 9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.14	RES_CONF (1Ah)	43
9.17 STATUS (27h) 9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.15	INT_SOURCE (25h)	43
9.18 PRESS_OUT_XL (28h) 9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.16	FIFO_STATUS (26h)	44
9.19 PRESS_OUT_L (29h) 9.20 PRESS_OUT_H (2Ah) 9.21 TEMP_OUT_L (2Bh) 9.22 TEMP_OUT_H (2Ch)		9.17	STATUS (27h)	45
9.20 PRESS_OUT_H (2Ah)		9.18	PRESS_OUT_XL (28h)	45
9.21 TEMP_OUT_L (2Bh)		9.19	PRESS_OUT_L (29h)	46
9.22 TEMP_OUT_H (2Ch)		9.20	PRESS_OUT_H (2Ah)	46
		9.21	TEMP_OUT_L (2Bh)	46
9.23 LPFP RES (33h)		9.22	TEMP_OUT_H (2Ch)	46
(00.1)		9.23	LPFP_RES (33h)	46

Contents			LPS	22HD
10	Pack	kage mechanical data	 	. 47
	10.1	HLGA-10L package information	 	. 47
11	Revi	ision history	 	. 48

LPS22HD List of tables

## List of tables

Table 1.	Device summary	1
Table 2.	Pin description	9
Table 3.	Pressure and temperature sensor characteristics	. 10
Table 4.	Electrical characteristics	. 11
Table 5.	DC characteristics	. 11
Table 6.	SPI slave timing values	. 12
Table 7.	I <sup>2</sup> C slave timing values	13
Table 8.	Absolute maximum ratings	. 14
Table 9.	Serial interface pin description	. 25
Table 10.	I <sup>2</sup> C terminology	. 25
Table 11.	SAD+Read/Write patterns	. 26
Table 12.	Transfer when master is writing one byte to slave	. 26
Table 13.	Transfer when master is writing multiple bytes to slave	27
Table 14.	Transfer when master is receiving (reading) one byte of data from slave	27
Table 15.	Transfer when master is receiving (reading) multiple bytes of data from slave	27
Table 16.	Registers address map	. 32
Table 17.	Output data rate bit configurations	37
Table 18.	Low-pass filter configurations	
Table 19.	Interrupt configurations	. 40
Table 20.	FIFO mode selection	. 41
Table 21.	FIFO_STATUS example: OVR/FSS details	
Table 22.	Document revision history	. 48



List of figures LPS22HD

## List of figures

Figure 1.	Device architecture block diagram	/
Figure 2.	Digital logic	
Figure 3.	Pin connections (bottom view)	8
Figure 4.	SPI slave timing diagram	
Figure 5.	I <sup>2</sup> C slave timing diagram	13
Figure 6.	Pressure readings	16
Figure 7.	Bypass mode	17
Figure 8.	FIFO mode	18
Figure 9.	Stream mode	19
Figure 10.	Dynamic-Stream mode	20
Figure 11.	Stream-to-FIFO mode	21
Figure 12.	Bypass-to-Stream mode	22
Figure 13.	Bypass-to-FIFO mode	23
Figure 14.	LPS22HD electrical connections (top view)	24
Figure 15.	Read and write protocol	28
Figure 16.	SPI read protocol	29
Figure 17.	Multiple byte SPI read protocol (2-byte example)	29
Figure 18.	SPI write protocol	30
Figure 19.	Multiple byte SPI write protocol (2-byte example)	
Figure 20.	SPI read protocol in 3-wire mode	31
Figure 21.	"Threshold-based" interrupt event	
Figure 22.	Interrupt events on the INT_DRDY pin	
Figure 23.	HLGA-10L (2.0 x 2.0 x 0.76 mm typ.) package outline and mechanical dimensions	47



LPS22HD Block diagrams

## 1 Block diagrams

Figure 1. Device architecture block diagram


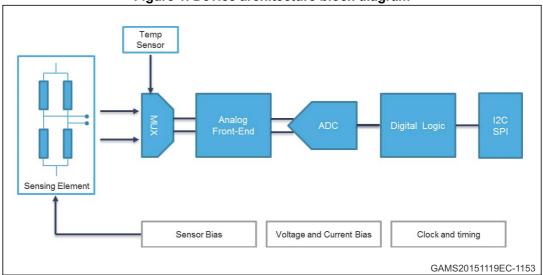



Figure 2. Digital logic

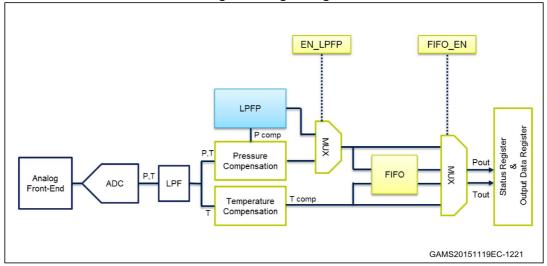

Pin description LPS22HD

## 2 Pin description

Figure 3. Pin connections (bottom view)

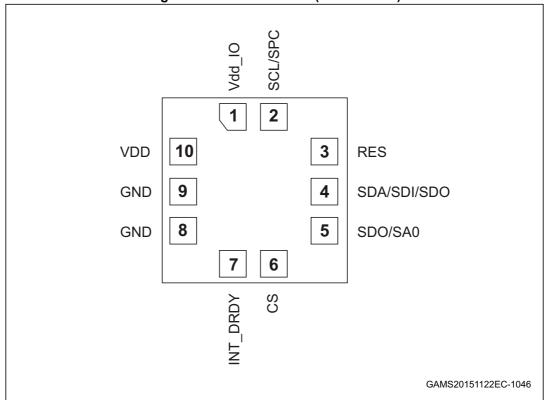

LPS22HD Pin description

Table 2. Pin description

Pin number	Name	Function
1	Vdd_IO	Power supply for I/O pins
2	SCL SPC	I <sup>2</sup> C serial clock (SCL) SPI serial port clock (SPC)
3	Reserved	Connect to GND
4	SDA SDI SDI/SDO	I <sup>2</sup> C serial data (SDA) 4-wire SPI serial data input (SDI) 3-wire serial data input/output (SDI/SDO)
5	SDO SA0	4-wire SPI serial data output (SDO) I <sup>2</sup> C less significant bit of the device address (SA0)
6	CS	SPI enable I <sup>2</sup> C/SPI mode selection (1: SPI idle mode / I <sup>2</sup> C communication enabled; 0: SPI communication mode / I <sup>2</sup> C disabled)
7	INT_DRDY	Interrupt or Data Ready
8	GND	0 V supply
9	GND	0 V supply
10	VDD	Power supply

### 3 Mechanical and electrical specifications

#### 3.1 Mechanical characteristics

VDD = 1.8 V, T = 25 °C, unless otherwise noted.

Table 3. Pressure and temperature sensor characteristics

Symbol	Parameter	Test condition	Min.	Typ. <sup>(1)</sup>	Max.	Unit
Pressure se	ensor characteristics		l			
PT <sub>op</sub>	Operating temperature range		-40		+85	°C
PT <sub>full</sub>	Full accuracy temperature range		0		+65	°C
P <sub>op</sub>	Operating pressure range		260		1260	hPa
P <sub>bits</sub>	Pressure output data			24		bits
P <sub>sens</sub>	Pressure sensitivity			4096		LSB/ hPa
P <sub>AccRel</sub>	Relative accuracy over pressure	P = 800 - 1100 hPa T = 25 °C		±0.1		hPa
D	Absolute a course y over temperature	P <sub>op</sub> T = 0 to 65 °C After OPC <sup>(2)</sup>		±0.1		- hPa
P <sub>AccT</sub>	Absolute accuracy over temperature	P <sub>op</sub> T = 0 to 65 °C no OPC <sup>(2)</sup>		±1		- IIPa
P <sub>noise</sub>	RMS pressure sensing noise <sup>(3)</sup>	with embedded filtering		0.0075		hPa RMS
ODR <sub>Pres</sub>	Pressure output data rate <sup>(4)</sup>			1 10 25 50 75 200 <sup>(5)</sup>		Hz
Temperatur	e sensor characteristics					•
T <sub>op</sub>	Operating temperature range		-40		+85	°C
T <sub>sens</sub>	Temperature sensitivity			100		LSB/°C
T <sub>acc</sub>	Temperature absolute accuracy	T = 0 to 65 °C		±1.5		°C
ODR <sub>T</sub>	Output temperature data rate <sup>(4)</sup>			1 10 25 50 75		Hz

<sup>1.</sup> Typical specifications are not guaranteed.



<sup>2.</sup> OPC: One Point Calibration, see RPDS\_L (18h), RPDS\_H (19h).

<sup>3.</sup> Pressure noise RMS evaluated in a controlled environment, based on the average standard deviation of 50 measurements at highest ODR and with LC\_EN bit = 0, EN\_LPFP = 1, LPFP\_CFG = 1.

<sup>4.</sup> Output data rate is configured acting on ODR[2:0] in CTRL\_REG1 (10h).

<sup>5.</sup> Equivalent ODR in one-shot mode see CTRL\_REG1 (10h), CTRL\_REG2 (11h) for details.

#### 3.2 Electrical characteristics

VDD = 1.8 V, T = 25 °C, unless otherwise noted.

**Table 4. Electrical characteristics** 

Symbol	Parameter	Test condition	Min.	Typ. <sup>(1)</sup>	Max.	Unit	
VDD	Supply voltage		1.7		3.6	V	
Vdd_IO	IO supply voltage		1.7		Vdd+0.1	V	
ldd	Supply current	@ ODR 1 Hz LC_EN bit = 0		12			
luu		@ ODR 1 Hz LC_EN bit = 1		3		μΑ	
IddPdn	Supply current in power-down mode			1		μΑ	

<sup>1.</sup> Typical specifications are not guaranteed.

**Table 5. DC characteristics** 

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit	
DC input	DC input characteristics						
Vil	Low-level input voltage (Schmitt buffer)	-	-	-	0.2 * Vdd_IO	V	
Vih	High-level input voltage (Schmitt buffer)	-	0.8 * Vdd_IO	-	-	V	
DC outpu	ut characteristics						
Vol	Low-level output voltage		0.2	-	-	V	
Voh	High-level output voltage		-	-	Vdd_IO- 0.2	٧	

#### 3.3 Communication interface characteristics

#### 3.3.1 SPI - serial peripheral interface

Subject to general operating conditions for Vdd and TOP.

Table 6. SPI slave timing values

Symbol	Parameter	Valu	Value <sup>(1)</sup>		
Symbol	Parameter	Min	Max	Unit	
t <sub>c(SPC)</sub>	SPI clock cycle	100		ns	
f <sub>c(SPC)</sub>	SPI clock frequency		10	MHz	
t <sub>su(CS)</sub>	CS setup time	6			
t <sub>h(CS)</sub>	CS hold time	8			
t <sub>su(SI)</sub>	SDI input setup time	5			
t <sub>h(SI)</sub>	SDI input hold time	15		ns	
t <sub>v(SO)</sub>	SDO valid output time		50		
t <sub>h(SO)</sub>	SDO output hold time	9		]	
t <sub>dis(SO)</sub>	SDO output disable time		50		

<sup>1.</sup> Values are guaranteed at 10 MHz clock frequency for SPI with both 4 and 3 wires, based on characterization results, not tested in production.

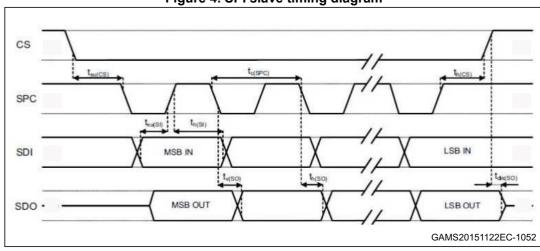


Figure 4. SPI slave timing diagram

Note: Measurement points are done at 0.2·Vdd\_IO and 0.8·Vdd\_IO, for both ports.

#### I<sup>2</sup>C - inter-IC control interface 3.3.2

Subject to general operating conditions for Vdd and  $\rm T_{\rm OP}$ 

Table 7. I<sup>2</sup>C slave timing values

Cumbal	Dorometer (1)	I <sup>2</sup> C standard mode <sup>(1)</sup>		I <sup>2</sup> C fast mode <sup>(1)</sup>		
Symbol	Parameter (1)	Min	Max	Min	Max	Unit
f <sub>(SCL)</sub>	SCL clock frequency	0	100	0	400	kHz
t <sub>w(SCLL)</sub>	SCL clock low time	4.7		1.3		116
t <sub>w(SCLH)</sub>	SCL clock high time	4.0		0.6		- µs
t <sub>su(SDA)</sub>	SDA setup time	250		100		ns
t <sub>h(SDA)</sub>	SDA data hold time	0.01	3.45	0	0.9	μs
t <sub>r(SDA)</sub> t <sub>r(SCL)</sub>	SDA and SCL rise time		1000	20 + 0.1C <sub>b</sub> <sup>(2)</sup>	300	200
t <sub>f(SDA)</sub> t <sub>f(SCL)</sub>	SDA and SCL fall time		300	20 + 0.1C <sub>b</sub> <sup>(2)</sup>	300	ns
t <sub>h(ST)</sub>	START condition hold time	4		0.6		
t <sub>su(SR)</sub>	Repeated START condition setup time	4.7		0.6		
t <sub>su(SP)</sub>	STOP condition setup time	4		0.6		- µs
t <sub>w(SP:SR)</sub>	Bus free time between STOP and START condition	4.7		1.3		

- 1. Data based on standard I<sup>2</sup>C protocol requirement, not tested in production.
- 2. C<sub>b</sub> = total capacitance of one bus line, in pF.

Figure 5. I<sup>2</sup>C slave timing diagram REPEATED START START SDA STOP SCL GAMS20151122EC-1100

Note: Measurement points are done at 0.2·Vdd\_IO and 0.8·Vdd\_IO, for both ports.

#### 3.4 **Absolute maximum ratings**

Stress above those listed as "Absolute maximum ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device under these conditions is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

Table 8. Absolute maximum ratings

Symbol	Ratings	Maximum value	Unit
Vdd	Supply voltage	-0.3 to 4.8	V
Vdd_IO	I/O pins supply voltage	-0.3 to 4.8	V
Vin	Input voltage on any control pin	-0.3 to Vdd_IO +0.3	V
Р	Overpressure	2	MPa
T <sub>STG</sub>	Storage temperature range	-40 to +125	°C
ESD	Electrostatic discharge protection	2 (HBM)	kV

Note: Supply voltage on any pin should never exceed 4.8 V.



This device is sensitive to mechanical shock, improper handling can cause permanent damage to the part.



This device is sensitive to electrostatic discharge (ESD), improper handling can cause permanent damage to the part.

DocID029987 Rev 1 14/49

LPS22HD Functionality

### 4 Functionality

The LPS22HD is a high-resolution, digital output pressure sensor packaged in an HLGA full-mold package. The complete device includes a sensing element based on a piezoresistive Wheatstone bridge approach, and an IC interface which communicates a digital signal from the sensing element to the application.

#### 4.1 Sensing element

An ST proprietary process is used to obtain a silicon membrane for MEMS pressure sensors. When pressure is applied, the membrane deflection induces an imbalance in the Wheatstone bridge piezoresistances whose output signal is converted by the IC interface.

#### 4.2 IC interface

The complete measurement chain is composed of a low-noise amplifier which converts the resistance unbalance of the MEMS sensors (pressure and temperature) into an analog voltage using an analog-to-digital converter.

The pressure and temperature data may be accessed through an I<sup>2</sup>C/SPI interface thus making the device particularly suitable for direct interfacing with a microcontroller.

The LPS22HD features a Data-Ready signal which indicates when a new set of measured pressure and temperature data are available, thus simplifying data synchronization in the digital system that uses the device.

#### 4.3 Factory calibration

The trimming values are stored inside the device in a non-volatile structure. When the device is turned on, the trimming parameters are downloaded into the registers to be employed during normal operation which allows the device to be used without requiring any further calibration.


**Functionality** LPS22HD

#### Interpreting pressure readings 4.4

The pressure data are stored in 3 registers: PRESS\_OUT\_H (2Ah), PRESS\_OUT\_L (29h), and PRESS\_OUT\_XL (28h). The values are expressed as 2's complement.

To obtain the pressure in hPa, take the two's complement of the complete word and then divide by 4096 LSB/hPa.

Figure 6. Pressure readings

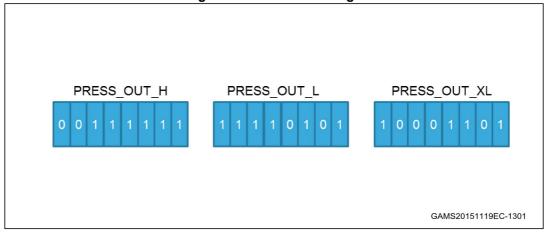

#### **Equation 1**

Pressure Value (LSB) = PRESS\_OUT\_H (2Ah) & PRESS\_OUT\_L (29h) & PRESS\_OUT\_XL (28h) = 3FF58Dh = 4191629 LSB (decimal signed)

#### **Equation 2**

Pressure (hPa) = 
$$\frac{\text{Pressure Value (LSB)}}{\text{Scaling Factor}} = \frac{4191629 \text{ LSB}}{4096 \text{ LSB/hPa}} = 1023.3 \text{hPa}$$

#### 4.5 **One-shot mode**

Using one-shot mode CTRL\_REG1 (10h), CTRL\_REG2 (11h) and low-current mode (LC EN bit set to '1' in RES CONF (1Ah)) it is possible to reach an equivalent ODR up to 200 Hz, allowing a simple evaluation of the speed of a drone's ascent and descent. This, combined with high vertical resolution, gives an accuracy unreachable with other similar devices.

DocID029987 Rev 1 16/49

LPS22HD FIFO

#### 5 FIFO

The LPS22HD embeds 32-slots of 40-bit data FIFO to store the pressure and temperature output values. This allows consistent power saving for the system, since the host processor does not need to continuously poll data from the sensor, but it can wake up only when needed and burst the significant data out from the FIFO. This buffer can work according to seven different modes: Bypass mode, FIFO mode, Stream mode, Dynamic-Stream mode, Stream-to-FIFO mode, Bypass-to-Stream and Bypass-to-FIFO mode. The FIFO buffer is enabled when the FIFO\_EN bit in CTRL\_REG2 (11h) is set to '1' and each mode is selected by the FIFO\_MODE[2:0] bits in FIFO\_CTRL (14h). Programmable FIFO threshold status, FIFO overrun events and the number of unread samples stored are available in the FIFO\_STATUS (26h) register and can be set to generate dedicated interrupts on the INT\_DRDY pad using the CTRL\_REG3 (12h) register.

FIFO\_STATUS (26h)(FTH\_FIFO) goes to '1' when the number of unread samples (FIFO\_STATUS (26h)(FSS5:0)) is greater than or equal to WTM[4:0] in FIFO\_CTRL (14h). If FIFO\_CTRL (14h)(WTM4:0) is equal to 0, FIFO\_STATUS (26h)(FTH\_FIFO) goes to '0'.

FIFO\_STATUS (26h)(OVRN) is equal to '1' if a FIFO slot is overwritten.

FIFO\_STATUS (26h)(FSS5:0) contains stored data levels of unread samples; when FSS[5:0] is equal to '000000' FIFO is empty, when FSS[5:0] is equal to '100000' FIFO is full and the unread samples are 32.

To guarantee the switching into and out of FIFO mode, discard the first sample acquired.

#### 5.1 Bypass mode

In Bypass mode (*FIFO\_CTRL (14h)*(FMODE2:0)=000), the FIFO is not operational and it remains empty.

Bypass mode is also used to reset the FIFO when in FIFO mode.

As described in the next figure, for each channel only the first address is used. When new data is available, the older data is overwritten.

Figure 7. Bypass mode

FIFO LPS22HD

#### 5.2 FIFO mode

In FIFO mode (*FIFO\_CTRL* (14h)(FMODE2:0) = 001) data from the output *PRESS\_OUT\_XL* (28h), *PRESS\_OUT\_L* (29h), *PRESS\_OUT\_H* (2Ah) and *TEMP\_OUT\_L* (2Bh), *TEMP\_OUT\_H* (2Ch) are stored in the FIFO until it is overwritten.

To reset FIFO content, in Bypass mode the value '000' must be written in *FIFO\_CTRL* (14h)(FMODE2:0). After this reset command, it is possible to restart FIFO mode, writing the value '001' in *FIFO\_CTRL* (14h)(FMODE2:0).

The FIFO buffer memorizes 32 levels of data but the depth of the FIFO can be resized by setting the *CTRL\_REG2* (11h)(STOP\_ON\_FTH) bit. If the STOP\_ON\_FTH bit is set to '1', FIFO depth is limited to *FIFO CTRL* (14h)(WTM4:0) + 1 data.

A FIFO threshold interrupt can be enabled (F\_OVR bit in CTRL\_REG3 (12h) in order to be raised when the FIFO is filled to the level specified by the WTM4:0 bits of FIFO\_CTRL (14h). When a FIFO threshold interrupt occurs, the first data has been overwritten and the FIFO stops collecting data from the input pressure and temperature.

Figure 8. FIFO mode

LPS22HD FIFO

#### 5.3 Stream mode

Stream mode (*FIFO\_CTRL (14h)*(FMODE2:0) = 010) provides a continuous FIFO update: as new data arrive, the older is discarded.

Once the entire FIFO has been read, the last data read remains in the FIFO and hence once a new sample is acquired, the *FIFO\_STATUS* (26h)(FSS5:0) value rises from 0 to 2.

An overrun interrupt can be enabled,  $CTRL\_REG3$  (12h)(F\_OVR) = '1', in order to inform when the FIFO is full and eventually read its content all at once. If an overrun occurs, the oldest sample in FIFO is overwritten, so if the FIFO was empty, the lost sample has already been read.

P<sub>1</sub>, T<sub>1</sub>
P<sub>0</sub> T<sub>0</sub>
P<sub>1</sub> T<sub>1</sub>
P<sub>2</sub> T<sub>2</sub>
P<sub>30</sub> T<sub>30</sub>
P<sub>31</sub> T<sub>31</sub>

GAMS20150414EC-1010

In the latter case reading all FIFO content before an overrun interrupt has occurred, the first data read is equal to the last already read in the previous burst, so the number of new data available in FIFO depends on the previous reading.

FIFO LPS22HD

#### 5.4 Dynamic-Stream mode

In Dynamic-Stream mode (*FIFO\_CTRL (14h)*(FMODE2:0) = 110) after emptying the FIFO, the first new sample that arrives becomes the first to be read in a subsequent read burst. In this way, the number of new data available in FIFO does not depend on the previous reading.

In Dynamic-Stream mode *FIFO\_STATUS* (26h)(FSS5:0) is the number of new pressure and temperature samples available in the FIFO buffer.

Stream Mode is intended to be used to read all 32 samples of FIFO within an ODR after receiving an overrun signal.

Dynamic-Stream is intended to be used to read *FIFO\_STATUS* (26h)(FSS5:0) samples when it is not possible to guarantee reading data within an ODR.

Also, a FIFO threshold interrupt on the INT\_DRDY pad through *CTRL\_REG3* (12h)(F\_FTH) can be enabled in order to read data from the FIFO and leave free memory slots for incoming data.

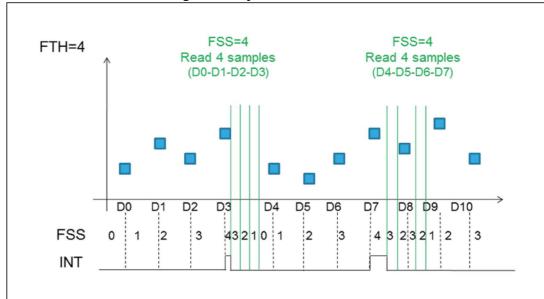


Figure 10. Dynamic-Stream mode

LPS22HD FIFO

#### 5.5 Stream-to-FIFO mode

In Stream-to-FIFO mode (*FIFO\_CTRL* (14h)(FMODE2:0) = 011), FIFO behavior changes according to the *INT\_SOURCE* (25h)(IA) bit. When the *INT\_SOURCE* (25h)(IA) bit is equal to '1', FIFO operates in FIFO mode. When the *INT\_SOURCE* (25h)(IA) bit is equal to '0', FIFO operates in Stream mode.

An interrupt generator can be set to the desired configuration through *INTERRUPT\_CFG (0Bh)*.

The INTERRUPT\_CFG (0Bh)(LIR) bit should be set to '1' in order to have latched interrupt.

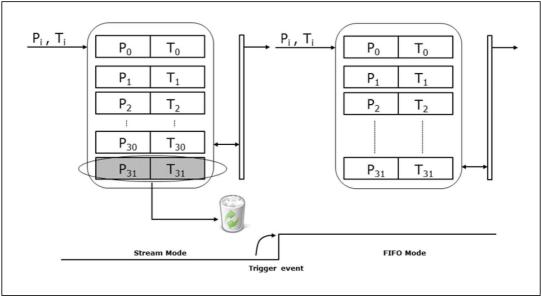


Figure 11. Stream-to-FIFO mode

FIFO LPS22HD

#### 5.6 Bypass-to-Stream mode

In Bypass-to-Stream mode (*FIFO\_CTRL (14h)*(FMODE2:0) = '100'), data measurement storage inside FIFO operates in Stream mode when *INT\_SOURCE (25h)*(IA) is equal to '1', otherwise FIFO content is reset (Bypass mode).

An interrupt generator can be set to the desired configuration through *INTERRUPT\_CFG* (0Bh).

The INTERRUPT\_CFG (0Bh)(LIR) bit should be set to '1' in order to have latched interrupt.

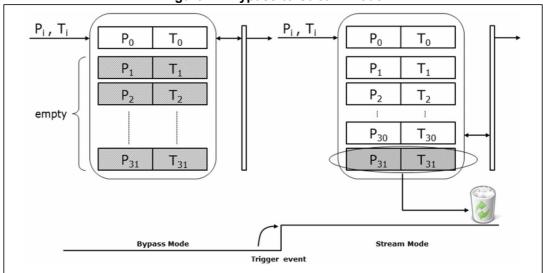


Figure 12. Bypass-to-Stream mode

4

LPS22HD FIFO

#### 5.7 Bypass-to-FIFO mode

In Bypass-to-FIFO mode (*FIFO\_CTRL (14h)*(FMODE2:0) = '111'), data measurement storage inside FIFO operates in FIFO mode when *INT\_SOURCE (25h)*(IA) is equal to '1', otherwise FIFO content is reset (Bypass mode).

An interrupt generator can be set to the desired configuration through *INTERRUPT\_CFG* (0Bh).

The INTERRUPT\_CFG (0Bh)(LIR) bit should be set to '1' in order to have latched interrupt.

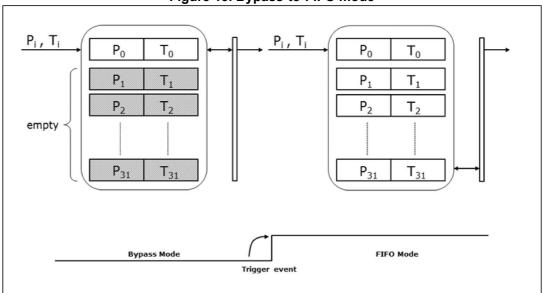


Figure 13. Bypass-to-FIFO mode

#### 5.8 Retrieving data from FIFO

FIFO data is read from PRESS\_OUT (Addr. reg 28h, 29h, 2Ah) and TEMP\_OUT (Addr. reg 28h, 2Ch).

Each time data is read from the FIFO, the oldest data are placed in the *PRESS\_OUT\_XL* (28h), *PRESS\_OUT\_L* (29h), *PRESS\_OUT\_H* (2Ah), *TEMP\_OUT\_L* (2Bh) and *TEMP\_OUT\_H* (2Ch) registers and both single-read and read-burst operations can be used.

The device automatically updates the reading address and it rolls back to 28h when register 2Ch is reached. In order to read all FIFO levels in multiple byte reading, 160 bytes (5 output registers by 32 levels) must be read.

Application hints LPS22HD

### 6 Application hints

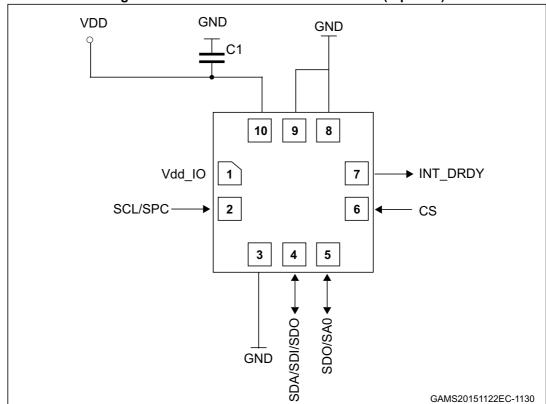


Figure 14. LPS22HD electrical connections (top view)

The device power supply must be provided through the VDD line; a power supply decoupling capacitor C1 (100 nF) must be placed as near as possible to the supply pads of the device. Depending on the application, an additional capacitor of 4.7  $\mu$ F could be placed on the VDD line.

The functionality of the device and the measured data outputs are selectable and accessible through the  $I^2C/SPI$  interface. When using the  $I^2C$ , CS must be tied to Vdd IO.

All the voltage and ground supplies must be present at the same time to have proper behavior of the IC (refer to *Figure 14*). It is possible to remove VDD while maintaining Vdd\_IO without blocking the communication bus, in this condition the measurement chain is powered off.

### 6.1 Soldering information

The HLGA package is compliant with the ECOPACK® standard, and it is qualified for soldering heat resistance according to JEDEC J-STD-020.

LPS22HD Digital interfaces

### 7 Digital interfaces

#### 7.1 Serial interfaces

The registers embedded in the LPS22HD may be accessed through both the I<sup>2</sup>C and SPI serial interfaces. The latter may be SW configured to operate either in 3-wire or 4-wire interface mode.

The serial interfaces are mapped onto the same pads. To select/exploit the I<sup>2</sup>C interface, the CS line must be tied high (i.e. connected to Vdd\_IO).

Pin name	Pin description
cs	SPI enable I²C/SPI mode selection (1: SPI idle mode / I²C communication enabled; 0: SPI communication mode / I²C disabled)
SCL/SPC	I²C serial clock (SCL) SPI serial port clock (SPC)
SDA SDI SDI/SDO	I <sup>2</sup> C serial data (SDA) 4-wire SPI serial data input (SDI) 3-wire serial data input /output (SDI/SDO)
SDO SAO	SPI serial data output (SDO)  l²C less significant bit of the device address (SA0)

Table 9. Serial interface pin description

### 7.2 $I^2C$ serial interface (CS = High)

The LPS22HD I<sup>2</sup>C is a bus slave. The I<sup>2</sup>C is employed to write data into registers whose content can also be read back.

The relevant I<sup>2</sup>C terminology is given in *Table 10*.

Term Description

Transmitter The device which sends data to the bus

Receiver The device which receives data from the bus

Master The device which initiates a transfer, generates clock signals and terminates a transfer

Slave The device addressed by the master

Table 10. I<sup>2</sup>C terminology

There are two signals associated with the I<sup>2</sup>C bus: the serial clock line (SCL) and the serial data line (SDA). The latter is a bidirectional line used for sending and receiving the data to/from the interface. Both lines have to be connected to Vdd\_IO through pull-up resistors.

The I<sup>2</sup>C interface is compliant with fast mode (400 kHz) I<sup>2</sup>C standards as well as with the normal mode.

Digital interfaces LPS22HD

#### 7.2.1 I<sup>2</sup>C operation

The transaction on the bus is started through a START (ST) signal. A start condition is defined as a HIGH-to-LOW transition on the data line while the SCL line is held HIGH. After the master has transmitted this, the bus is considered busy. The next data byte transmitted after the start condition contains the address of the slave in the first 7 bits and the eighth bit tells whether the master is receiving data from the slave or transmitting data to the slave. When an address is sent, each device in the system compares the first seven bits after a start condition with its address. If they match, the device considers itself addressed by the master.

The slave address (SAD) associated to the LPS22HD is 101110xb. The **SDO/SA0** pad can be used to modify the less significant bit of the device address. If the SA0 pad is connected to voltage supply, LSb is '1' (address 1011101b), otherwise if the SA0 pad is connected to ground, the LSb value is '0' (address 1011100b). This solution permits connecting and addressing two different LPS22HD devices to the same I<sup>2</sup>C lines.

Data transfer with acknowledge is mandatory. The transmitter must release the SDA line during the acknowledge pulse. The receiver must then pull the data line LOW so that it remains stable low during the HIGH period of the acknowledge clock pulse. A receiver which has been addressed is obliged to generate an acknowledge after each byte of data received.

The I<sup>2</sup>C embedded inside the ASIC behaves like a slave device and the following protocol must be adhered to. After the start condition (ST) a slave address is sent, once a slave acknowledge has been returned (SAK), an 8-bit sub-address will be transmitted (SUB): the 7 LSB represent the actual register address while the MSB has no meaning. The IF\_ADD\_INC bit in CTRL\_REG2 (11h) enables sub-address auto increment (IF\_ADD\_INC is '1' by default), so if IF\_ADD\_INC = '1' the SUB (sub-address) will be automatically increased to allow multiple data read/write.

The slave address is completed with a Read/Write bit. If the bit is '1' (Read), a repeated START (SR) condition must be issued after the two sub-address bytes; if the bit is '0' (Write) the master will transmit to the slave with direction unchanged. *Table 11* explains how the SAD+read/write bit pattern is composed, listing all the possible configurations.

Command	SAD[6:1]	SAD[0] = SA0	R/W	SAD+R/W
Read	101110	0	1	10111001 (B9h)
Write	101110	0	0	10111000 (B8h)
Read	101110	1	1	10111011 (BBh)
Write	101110	1	0	10111010 (BAh)

Table 11. SAD+Read/Write patterns

Table 12. Transfer when master is writing one byte to slave

Master	ST	SAD + W		SUB		DATA		SP
Slave			SAK		SAK		SAK	

LPS22HD Digital interfaces

#### Table 13. Transfer when master is writing multiple bytes to slave

Master	ST	SAD + W		SUB		DATA		DATA		SP
Slave			SAK		SAK		SAK		SAK	

#### Table 14. Transfer when master is receiving (reading) one byte of data from slave

Master	ST	SAD + W		SUB		SR	SAD + R			NMAK	SP
Slave			SAK		SAK			SAK	DATA		

#### Table 15. Transfer when master is receiving (reading) multiple bytes of data from slave

Master	ST	SAD+W		SUB		SR	SAD+R			MAK		MAK		NMAK	SP	
Slave			SAK		SAK			SAK	DATA		DATA		DATA			

Data are transmitted in byte format (DATA). Each data transfer contains 8 bits. The number of bytes transferred per transfer is unlimited. Data is transferred with the most significant bit (MSb) first. If a receiver cannot receive another complete byte of data until it has performed some other functions, it can hold the clock line, SCL LOW to force the transmitter into a wait state. Data transfer only continues when the receiver is ready for another byte and releases the data line. If a slave receiver does not acknowledge the slave address (i.e. it is not able to receive because it is performing some real-time function), the data line must be kept HIGH by the slave. The master can then abort the transfer. A LOW-to-HIGH transition on the SDA line while the SCL line is HIGH is defined as a STOP condition. Each data transfer must be terminated by the generation of a STOP (SP) condition.

In order to read multiple bytes incrementing the register address, it is necessary to assert the most significant bit of the sub-address field. In other words, SUB(7) must be equal to 1 while SUB(6-0) represents the address of the first register to be read.

In the presented communication format MAK is Master acknowledge and NMAK is no master acknowledge.

Digital interfaces LPS22HD

#### 7.3 SPI bus interface

The LPS22HD SPI is a bus slave. The SPI allows writing to and reading from the registers of the device.

The serial interface interacts with the application using 4 wires: CS, SPC, SDI and SDO.

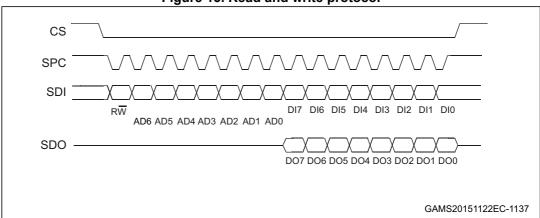


Figure 15. Read and write protocol

**CS** is the serial port enable and it is controlled by the SPI master. It goes low at the start of the transmission and returns to high at the end. **SPC** is the serial port clock and it is controlled by the SPI master. It is stopped high when **CS** is high (no transmission). **SDI** and **SDO** are respectively the serial port data input and output. Those lines are driven at the falling edge of **SPC** and should be captured at the rising edge of **SPC**.

Both the read register and write register commands are completed in 16 clock pulses or multiples of 8 in the case of multiple read/write bytes. Bit duration is the time between two falling edges of **SPC**. The first bit (bit 0) starts at the first falling edge of **SPC** after the falling edge of **CS** while the last bit (bit 15, bit 23,...) starts at the last falling edge of SPC just before the rising edge of **CS**.

**bit 0**:  $R\overline{W}$  bit. When 0, the data DI(7:0) is written into the device. When 1, the data DO(7:0) from the device is read. In the latter case, the chip will drive **SDO** at the start of bit 8.

bit 1-7: address AD(6:0). This is the address field of the indexed register.


bit 8-15: data DI(7:0) (write mode). This is the data that is written into the device (MSb first). bit 8-15: data DO(7:0) (read mode). This is the data that is read from the device (MSb first). In multiple read/write commands further blocks of 8 clock periods are added. When the IF\_ADD\_INC bit is 0, the address used to read/write data remains the same for every block. When the IF\_ADD\_INC bit is 1, the address used to read/write data is incremented at every block.

The function and the behavior of **SDI** and **SDO** remain unchanged.

LPS22HD Digital interfaces

#### 7.3.1 SPI read

Figure 16. SPI read protocol

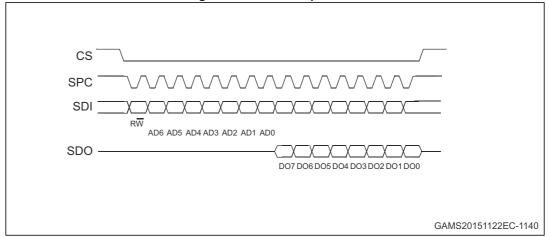

The SPI read command is performed with 16 clock pulses. The multiple byte read command is performed by adding blocks of 8 clock pulses to the previous one.


bit 0: READ bit. The value is 1.

bit 1-7: address AD(6:0). This is the address field of the indexed register.

bit 8-15: data DO(7:0) (read mode). This is the data that is read from the device (MSb first).

bit 16-...: data DO(...-8). Further data in multiple byte reads.


Figure 17. Multiple byte SPI read protocol (2-byte example)

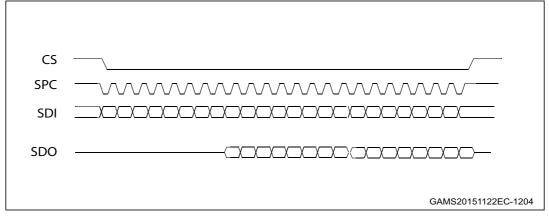

Digital interfaces LPS22HD

#### 7.3.2 SPI write

Figure 18. SPI write protocol

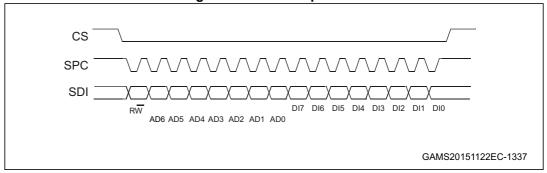

The SPI write command is performed with 16 clock pulses. The multiple byte write command is performed by adding blocks of 8 clock pulses to the previous one.


bit 0: WRITE bit. The value is 0.

bit 1-7: address AD(6:0). This is the address field of the indexed register.

bit 8-15: data DI(7:0) (write mode). This is the data that is written in the device (MSb first).

bit 16-...: data DI(...-8). Further data in multiple byte writes.

Figure 19. Multiple byte SPI write protocol (2-byte example)

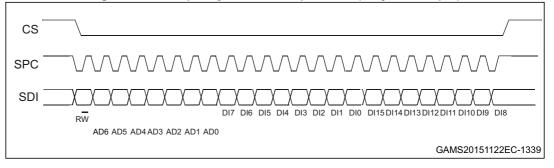


LPS22HD Digital interfaces

#### 7.3.3 SPI read in 3-wire mode

A 3-wire mode is entered by setting bit SIM to '1' (SPI serial interface mode selection) in CTRL\_REG1 (10h).

Figure 20. SPI read protocol in 3-wire mode

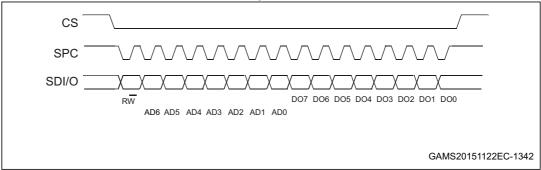

The SPI read command is performed with 16 clock pulses:

bit 0: READ bit. The value is 1.

bit 1-7: address AD(6:0). This is the address field of the indexed register.

*bit 8-15*: data DO(7:0) (read mode). This is the data that is read from the device (MSb first). A multiple read command is also available in 3-wire mode.

Register mapping LPS22HD

## 8 Register mapping

*Table 16* provides a quick overview of the 8-bit registers embedded in the device.

Table 16. Registers address map

Name	Туре	Register Address	Default	Function and comment
		Hex	Binary	comment
Reserved		00 - 0A	-	Reserved
INTERRUPT_CFG	R/W	0B	00000000	
THS_P_L	R/W	0C	00000000	
THS_P_H	R/W	0D	00000000	
Reserved		0E	-	Reserved
WHO_AM_I	R	0F	10110001	Who am I
CTRL_REG1	R/W	10	00000000	
CTRL_REG2	R/W	11	00010000	
CTRL_REG3	R/W	12	00000000	Interrupt control
Reserved		13	-	Reserved
FIFO_CTRL	R/W	14	00000000	
REF_P_XL	R/W	15	00000000	
REF_P_L	R/W	16	00000000	
REF_P_H	R/W	17	00000000	
RPDS_L	R/W	18	00000000	
RPDS_H	R/W	19	00000000	
RES_CONF	R/W	1A	00000000	
Reserved		1B - 24	-	Reserved
INT_SOURCE	R	25	-	
FIFO_STATUS	R	26	-	
STATUS	R	27	-	
PRESS_OUT_XL	R	28	-	
PRESS_OUT_L	R	29	-	
PRESS_OUT_H	R	2A	-	
TEMP_OUT_L	R	2B	-	
TEMP_OUT_H	R	2C	-	
Reserved		2D - 32	-	Reserved
LPFP_RES	R	33		

LPS22HD Register mapping

Registers marked as Reserved must not be changed. Writing to those registers may cause permanent damage to the device.

To guarantee the proper behavior of the device, all register addresses not listed in the above table must not be accessed and the content stored in those registers must not be changed.

The content of the registers that are loaded at boot should not be changed. They contain the factory calibration values. Their content is automatically restored when the device is powered up.



Register description LPS22HD

### 9 Register description

The device contains a set of registers which are used to control its behavior and to retrieve pressure and temperature data. The register address, made up of 7 bits, is used to identify them and to read/write the data through the serial interface.

#### 9.1 INTERRUPT\_CFG (0Bh)

Interrupt mode for pressure acquisition configuration.

7	6	5	4	3	2	1	0
AUTORIFP	RESET_ARP	AUTOZERO	RESET_AZ	DIFF_EN	LIR	PLE	PHE

AUTORIFP	Enable AutoRifP function. Default value: 0 (0: normal mode; 1: AutoRifP enabled)
RESET_ARP	Reset AutoRifP function. Default value: 0 (0: normal mode; 1: reset AutoRifP function)
AUTOZERO	Enable Autozero function. Default value: 0 (0: normal mode; 1: Autozero enabled)
RESET_AZ	Reset Autozero function. Default value: 0 (0: normal mode; 1: reset Autozero function)
DIFF_EN	Enable interrupt generation. Default value: 0 (0: interrupt generation disabled; 1: interrupt generation enabled)
LIR	Latch interrupt request to the <i>INT_SOURCE (25h)</i> register. Default value: 0 (0: interrupt request not latched; 1: interrupt request latched)
PLE	Enable interrupt generation on pressure low event. Default value: 0 (0: disable interrupt request; 1: enable interrupt request on pressure value lower than preset threshold)
PHE	Enable interrupt generation on pressure high event. Default value: 0 (0: disable interrupt request; 1: enable interrupt request on pressure value higher than preset threshold)

To generate an interrupt event based on a user-defined threshold, the **DIFF\_EN** bit must be set to '1' and the threshold values stored in *THS\_P\_L* (*0Ch*) and *THS\_P\_H* (*0Dh*).

When DIFF EN = '1', the **PHE bit or PLE bit (or both bits)** have to be enabled.

When DIFF\_EN is enabled and AUTOZERO or AUTORIFP is enabled, the defined pressure threshold values in THS\_P (0Ch, 0Dh) is compared with:

P\_DIFF\_IN = measured pressure - REF\_P

Threshold positive value

P\_DIFF\_IN

Threshold negative value

Positive

Negative

GAMS20151203EC-1512

Figure 21. "Threshold-based" interrupt event

If **the AUTOZERO** bit is set to '1', the measured pressure is used as the reference in the register REF\_P (15h, 16h and 17h). From that point on, the output pressure registers **PRESS\_OUT (28h, 29h and 2Ah)** are updated and the same value is also used for the interrupt generation:

- PRESS\_OUT = measured pressure REF\_P
- P\_DIFF\_IN = measured pressure REF\_P

After the first conversion, the AUTOZERO bit is automatically set to '0'. To return back to normal mode, the **RESET\_AZ** bit has to be set to '1'. This resets also the content of the REF\_P registers.

If the **AUTORIFP** bit is set to '1', the measured pressure is used as the reference in the register REF\_P (15h, 16h and 17h). From that point on, the value used for the interrupt generation is the following:

P\_DIFF\_IN = measured pressure - REF\_P

The output registers PRESS\_OUT (28h, 29h and 2Ah) show the difference between the measured pressure and the content of the RPDS registers (18h and 19h):

PRESS\_OUT = measured pressure - RPDS

After the first conversion, the AUTORIFP bit is automatically set to '0'. To return back to normal mode, the **RESET\_ARP** bit has to be set to '1'.

Register description LPS22HD

#### 9.2 THS\_P\_L (0Ch)

User-defined threshold value for pressure interrupt event (Least Significant bits).

7	6	5	4	3	2	1	0
THS7	THS6	THS5	THS4	THS3	THS2	THS1	THS0

THS[7:0] This register contains the low part of threshold value for pressure interrupt generation. Refer to *THS\_P\_H (0Dh)* for the high part.

The threshold value for pressure interrupt generation is a 16-bit unsigned, right-justified value composed of  $THS\_P\_H$  (ODh) and  $THS\_P\_L$  (OCh). The value is expressed as:

Interrupt threshold (hPa) = ±THS\_P / 16

To enable the interrupt event based on this user-defined threshold, the DIFF\_EN bit in INTERRUPT\_CFG (0Bh) must be set to '1', and the PHE bit or PLE bit (or both bits) in INTERRUPT\_CFG (0Bh) has to be enabled.

#### 9.3 THS\_P\_H (0Dh)

User-defined threshold value for a pressure interrupt event (Most Significant bits).

7	6	5	4	3	2	1	0
THS15	THS14	THS13	THS12	THS11	THS10	THS9	THS8

THS[15:8] This register contains the high part of threshold value for pressure interrupt generation. Refer to *THS\_P\_L (0Ch)* for the low part.

### 9.4 WHO AM I (0Fh)

Device Who am I

7	6	5	4	3	2	1	0
1	0	1	1	0	0	0	1

#### 9.5 CTRL\_REG1 (10h)

Control register 1

7	6	5	4	3	2	1	0
0 <sup>(1)</sup>	ODR2	ODR1	ODR0	EN_LPFP	LPFP_CFG	BDU	SIM

<sup>1.</sup> This bit must be set to '0' for proper operation of the device.

ODR [2:0]	Output data rate selection. Default value: 000 Refer to <i>Table 17</i> .
EN_LPFP	Enable low-pass filter on pressure data when Continuous mode is used.  Default value: 0 (0: Low-pass filter disabled; 1: Low-pass filter enabled)
LPFP_CFG	LPFP_CFG: Low-pass configuration register. Default value: 0 Refer to <i>Table 18</i> .
BDU <sup>(1)</sup>	Block data update. Default value: 0 (0: continuous update; 1: output registers not updated until MSB and LSB have been read <sup>(2)</sup> )
SIM	SPI Serial Interface Mode selection. Default value: 0 (0: 4-wire interface; 1: 3-wire interface)

To guarantee the correct behavior of the BDU feature, PRESS\_OUT\_H (2Ah) must be the last address read

<sup>2.</sup> When I<sup>2</sup>C is used with BDU=1, the IF\_ADD\_INC bit has to be set to '0' in CTRL\_REG2 (11h) and only a single-byte read of the output registers is allowed.

ODR2	ODR1	ODR0	Pressure (Hz)	Temperature (Hz)			
0	0	0	Power-down / one-	shot mode enabled			
0	0	1	1 Hz	1 Hz			
0	1	0	10 Hz	10 Hz			
0	1	1	25 Hz	25 Hz			
1	0	0	50 Hz	50 Hz			
1	0	1	75 Hz	75 Hz			

Table 17. Output data rate bit configurations

When the ODR bits are set to '000', the device is in **Power-down mode**. When the device is in power-down mode, almost all internal blocks of the device are switched off to minimize power consumption. The I<sup>2</sup>C interface is still active to allow communication with the device. The content of the configuration registers is preserved and the output data registers are not updated, therefore keeping the last data sampled in memory before going into power-down mode.

If the ONE\_SHOT bit in *CTRL\_REG2 (11h)* is set to '1', **One-shot mode** is triggered and a new acquisition starts when it is required. Enabling this mode is possible only if the device was previously in power-down mode (ODR bits set to '000'). Once the acquisition is completed and the output registers updated, the device automatically enters in power-down mode. The ONE\_SHOT bit self-clears itself. In ONE\_SHOT mode it is possible to obtain an ODR equivalent up to 200 Hz.



When the ODR bits are set to a value different than '000', the device is in **Continuous mode** and automatically acquires a set of data (pressure and temperature) at the frequency selected through the ODR[2:0] bits.

Once the additional low-pass filter has been enabled through the EN\_LPFP bit, it is possible to configure the device bandwidth acting on the LPFP\_CFG bit. See *Table 18* for low-pass filter configurations.

EN_LPFP	LPFP_CFG	Additional low-pass filter status	Device bandwidth			
0	x	Disabled	ODR/2			
1	0	Enabled	ODR/9			
1	1	Enabled	ODR/20			

Table 18. Low-pass filter configurations

The **BDU** bit is used to inhibit the update of the output registers between the reading of the upper, middle and lower register parts. In default mode (BDU = '0'), the lower and upper register parts are updated continuously. When the BDU is activated (BDU = '1'), the content of the output registers is not updated until *PRESS\_OUT\_H* (2Ah) is read, avoiding the reading of values related to different samples.

#### 9.6 CTRL\_REG2 (11h)

Control register 2

7	6	5	4	3	2	1	0
воот	FIFO_EN	STOP_ON_FTH	IF_ADD_INC	I2C_DIS	SWRESET	0 <sup>(1)</sup>	ONE_SHOT

<sup>1.</sup> This bit must be set to '0' for proper operation of the device

BOOT	Reboot memory content. Default value: 0. (0: normal mode; 1: reboot memory content). The bit is self-cleared when the BOOT is completed.			
FIFO_EN	FIFO enable. Default value: 0 (0: disable; 1: enable)			
STOP_ON_FTH	Stop on FIFO watermark. Enable FIFO watermark level use. Default value: 0 (0: disable; 1: enable)			
IF_ADD_INC	Register address automatically incremented during a multiple byte access with a serial interface (I <sup>2</sup> C or SPI). Default value: 1 (0: disable; 1: enable)			
I2C_DIS	Disable I <sup>2</sup> C interface. Default value: 0 (0: I <sup>2</sup> C enabled; 1: I <sup>2</sup> C disabled)			
SWRESET	Software reset. Default value: 0 (0: normal mode; 1: software reset) The bit is self-cleared when the reset is completed.			
ONE_SHOT	One-shot enable. Default value: 0. (0: idle mode; 1: a new dataset is acquired)			

The **BOOT** bit is used to refresh the content of the internal registers stored in the Flash memory block. At device power-up, the content of the Flash memory block is transferred to the internal registers related to the trimming functions to allow correct behavior of the device itself. If for any reason the content of the trimming registers is modified, it is sufficient to use this bit to restore the correct values. When the BOOT bit is set to '1', the content of the internal Flash is copied into the corresponding internal registers and is used to calibrate the device. These values are factory trimmed and they are different for every device. They allow the correct behavior of the device and normally they should not be changed. At the end of the boot process, the BOOT bit is set again to '0' by hardware. The BOOT bit takes effect after one ODR clock cycle.

**SWRESET** is the software reset bit. The following device registers (*INTERRUPT\_CFG* (0Bh), THS\_P\_L (0Ch), THS\_P\_H (0Dh), CTRL\_REG1 (10h), CTRL\_REG2 (11h), CTRL\_REG3 (12h), FIFO\_CTRL (14h), REF\_P\_XL (15h), REF\_P\_L (16h), REF\_P\_H (17h)) are reset to the default value if the SWRESET bit is set to '1'. The SWRESET bit returns to '0' by hardware.

The **ONE\_SHOT** bit is used to start a new conversion when the ODR[2:0] bits in *CTRL\_REG1* (10h) are set to '000'. Writing a '1' in ONE\_SHOT triggers a single measurement of pressure and temperature. Once the measurement is done, the ONE\_SHOT bit will self-clear, the new data are available in the output registers, and the *STATUS* (27h) bits are updated.

#### 9.7 CTRL\_REG3 (12h)

Control register 3 - INT\_DRDY pin control register

7	6	5	4	3	2	1	0
INT_H_L	PP_OD	F_FSS5	F_FTH	F_OVR	DRDY	INT_S2	INT_S1


INT_H_L	Interrupt active-high/low. Default value: 0 (0: active high; 1: active low)				
PP_OD	Push-pull/open drain selection on interrupt pads. Default value: 0 (0: push-pull; 1: open drain)				
F_FSS5	FIFO full flag on INT_DRDY pin. Default value: 0 (0: disable; 1: enable)				
F_FTH	FIFO watermark status on INT_DRDY pin. Default value: 0 (0: disable; 1: enable)				
F_OVR	FIFO overrun interrupt on INT_DRDY pin. Default value: 0 (0: disable; 1: enable)				
DRDY	Data-ready signal on INT_DRDY pin. Default value: 0 (0: disable; 1: enable)				
INT_S[2:1]	Data signal on INT_DRDY pin control bits. Default value: 00 Refer to <i>Table 19</i> .				



Table 19. Interrupt configurations

INT_S2	INT_S1	INT_DRDY pin configuration			
0	0	Data signal (in order of priority: DRDY or F_FTH or F_OVR or F_FSS5			
0	1	Pressure high (P_high)			
1	0	Pressure low (P_low)			
1	1	Pressure low OR high			

Figure 22. Interrupt events on the INT\_DRDY pin

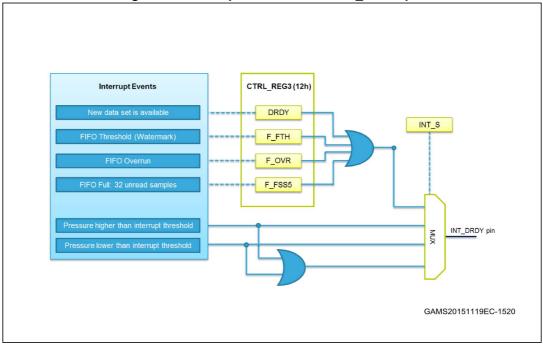

40/49 DocID029987 Rev 1

## 9.8 FIFO\_CTRL (14h)

FIFO control register

	7	6	5	4	3	2	1	0
F_M	DDE2	F_MODE1	F_MODE0	WTM4	WTM3	WTM2	WTM1	WTM0

F_MODE[2:0]	FIFO mode selection. Default value: 000 Refer to <i>Table 20</i> and <i>Section 5</i> for additional details.
WTM[4:0]	FIFO watermark level selection.

Table 20. FIFO mode selection

F_MODE2	F_MODE1	F_MODE0	FIFO mode selection
0	0	0	Bypass mode
0	0	1	FIFO mode
0	1	0	Stream mode
0	1	1	Stream-to-FIFO mode
1	0	0	Bypass-to-Stream mode
1	0	1	Reserved
1	1	0	Dynamic-Stream mode
1	1	1	Bypass-to-FIFO mode

## 9.9 REF\_P\_XL (15h)

Reference pressure (LSB data)

7	6	5	4	3	2	1	0	
REFL7	REFL6	REFL5	REFL4	REFL3	REFL2	REFL1	REFL0	

REFL[7:0]	This register contains the low part of the reference pressure value.	
-----------	--	--

The reference pressure value is 24-bit data and it is composed of *REF\_P\_H* (17h), *REF\_P\_L* (16h) and *REF\_P\_XL* (15h). The value is expressed as 2's complement.

The reference pressure value is used when the AUTOZERO or AUTORIFP function is enabled. Please refer to the *INTERRUPT\_CFG (0Bh)* register description.

## 9.10 REF\_P\_L (16h)

Reference pressure (middle part)

7	6	5	4	3	2	1	0	
REFL15	REFL14	REFL13	REFL12	REFL11	REFL10	REFL9	REFL8	l

REFL[15:8]	This register contains the mid part of the reference pressure value.
	Refer to REF_P_XL (15h).

# 9.11 REF\_P\_H (17h)

Reference pressure (MSB part)

7	6	5	4	3	2	1	0	
REFL23	REFL22	REFL21	REFL20	REFL19	REFL18	REFL17	REFL16	l

REFL[23:16]	This register contains the high part of the reference pressure value. Refer to
	REF_P_XL (15h).

#### 9.12 RPDS\_L (18h)

Pressure offset (LSB data)

7	6	5	4	3	2	1	0	
RPDS7	RPDS6	RPDS5	RPDS4	RPDS3	RPDS2	RPDS1	RPDS0	

RPDS[7:0]	This register contains the low part of the pressure offset value.
-----------	---

The pressure offset value is 16-bit data that can be used to implement the one-point calibration (OPC) after soldering. This value is composed of *RPDS\_H* (19h) and *RPDS\_L* (18h). The value is expressed as 2's complement.

## 9.13 RPDS\_H (19h)

Pressure offset (MSB data)

7	6	5	4	3	2	1	0
RPDS15	RPDS14	RPDS13	RPDS12	RPDS11	RPDS10	RPDS9	RPDS8

RPDS[15:8]	This register contains the high part of the pressure offset value.	
	Refer to RPDS_L (18h).	

## 9.14 **RES\_CONF** (1Ah)

Low-power mode configuration

7	6	5	4	3	2	1	0
0 <sup>(1)</sup>	reserved <sup>(2)</sup>	LC_EN					

- 1. These bits must be set to '0' for proper operation of the device.
- 2. The content of this bit must not be modified for proper operation of the device.

LC_EN <sup>(1)</sup>	Low-current mode enable. Default: 0
	0: Normal mode (low-noise mode); 1: Low-current mode).

The LC\_EN bit must be changed only with the device in power-down and not during operation. Once the LC\_EN bit is configured, it affects both One-shot mode and Continuous mode.

## 9.15 INT\_SOURCE (25h)

Interrupt source

7	6	5	4	3	2	1	0
BOOT_STATUS	0	0	0	0	IA	PL	PH

BOOT_STATUS	If '1', indicates that the Boot (Reboot) phase is running.
IA	Interrupt active. (0: no interrupt has been generated; 1: one or more interrupt events have been generated).
PL	Differential pressure Low. (0: no interrupt has been generated; 1: low differential pressure event has occurred).
PH	Differential pressure High. (0: no interrupt has been generated; 1: high differential pressure event has occurred).

## 9.16 FIFO\_STATUS (26h)

FIFO status

7	6	5	4	3	2	1	0
FTH_FIFO	OVR	FSS5	FSS4	FSS3	FSS2	FSS1	FSS0

FTH_FIFO	FIFO watermark status. (0: FIFO filling is lower than treshold level; 1: FIFO filling is equal or higher than treshold level).
OVR	FIFO overrun status. (0: FIFO is not completely full; 1: FIFO is full and at least one sample in the FIFO has been overwritten).
FSS[5:0]	FIFO stored data level. (000000: FIFO empty; 100000: FIFO is full and has 32 unread samples).

Table 21. FIFO\_STATUS example: OVR/FSS details

FTH	OVRN	FSS5	FSS4	FSS3	FSS2	FSS1	FSS0	Description
0	0	0	0	0	0	0	0	FIFO empty
(1)	0	0	0	0	0	0	1	1 unread sample
(1)	0	1	0	0	0	0	0	32 unread samples
1	1	1	0	0	0	0	0	At least one sample has been written

<sup>1.</sup> When the number of unread samples in FIFO is greater than the threshold level set in *FIFO\_CTRL (14h)*, the FTH value is '1'.

### 9.17 STATUS (27h)

Status register


7	6	5	4	3	2	1	0
		T_OR	P_OR			T_DA	P_DA

T_OR	Temperature data overrun. (0: no overrun has occurred; 1: new data for temperature has overwritten the previous data)
P_OR	Pressure data overrun. (0: no overrun has occurred; 1: new data for pressure has overwritten the previous data)
T_DA	Temperature data available. (0: new data for temperature is not yet available; 1: new temperature data is generated)
P_DA	Pressure data available. (0: new data for pressure is not yet available; 1: new pressure data is generated)

This register is updated every ODR cycle.

#### 9.18 PRESS\_OUT\_XL (28h)

Pressure output value (LSB)



POUT[7:0]	This register contains the low part of the pressure output value.
-----------	---

The pressure output value is 24-bit data that contains the measured pressure. It is composed of *PRESS\_OUT\_H* (2Ah), *PRESS\_OUT\_L* (29h) and *PRESS\_OUT\_XL* (28h). The value is expressed as 2's complement.


The output pressure register **PRESS\_OUT** is provided as the difference between the measured pressure and the content of the register RPDS (18h, 19h)\*.

Please refer to Section 4.4: Interpreting pressure readings for additional info.

\*DIFF\_EN = '0', AUTOZERO = '0', AUTORIFP = '0'

#### 9.19 PRESS\_OUT\_L (29h)

Pressure output value (mid part)



POUT[15:8] This register contains the mid part of the pressure output value. Refer to PRESS\_OUT\_XL (28h)

#### 9.20 PRESS\_OUT\_H (2Ah)

Pressure output value (MSB)

7	6	5	4	3	2	1	0
POUT23	POUT22	POUT21	POUT20	POUT19	POUT18	POUT17	POUT16

POUT[23:16] This register contains the high part of the pressure output value. Refer to *PRESS\_OUT\_XL* (28h)

#### 9.21 TEMP\_OUT\_L (2Bh)

Temperature output value (LSB)

TOUT7 TOUT6 TOUT5 TOUT4 TOUT3 TOUT2 TOUT	TOUT7 TOUT6 TOUT5	TOUT4	TOUT3	TOUT2	TOUT1	TOUT0

TOUT[7:0] This register contains the low part of the temperature output value.

The temperature output value is 16-bit data that contains the measured temperature. It is composed of *TEMP\_OUT\_H* (2Ch) and *TEMP\_OUT\_L* (2Bh). The value is expressed as 2's complement.

## 9.22 **TEMP\_OUT\_H** (2Ch)

Temperature output value (MSB)

7	6	5	4	3	2	1	0
TOUT15	TOUT14	TOUT13	TOUT12	TOUT11	TOUT10	TOUT9	TOUT8

TOUT[15:8] This register contains the high part of the temperature output value.

## 9.23 LPFP\_RES (33h)


Low-pass filter reset register. If the LPFP is active, in order to avoid the transitory phase, the filter can be reset by reading this register before generating pressure measurements.

## 10 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: <a href="https://www.st.com">www.st.com</a>. ECOPACK<sup>®</sup> is an ST trademark.

### 10.1 HLGA-10L package information

Figure 23. HLGA-10L (2.0 x 2.0 x 0.76 mm typ.) package outline and mechanical dimensions

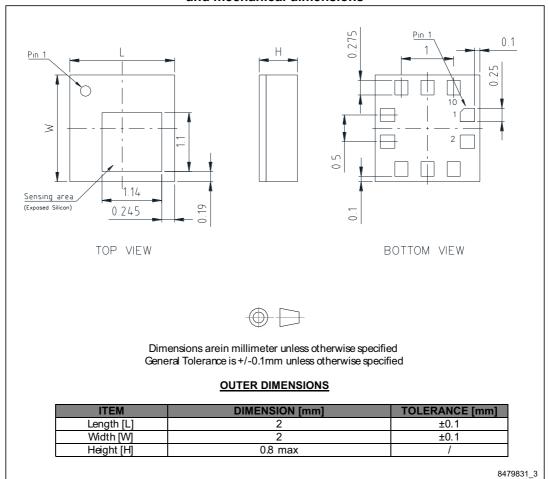

577

Revision history LPS22HD

# 11 Revision history

Table 22. Document revision history

Date	Revision	Changes
22-Nov-2016	1	Initial release

#### **IMPORTANT NOTICE - PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved





OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

#### Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru