


## 40 W bridge car radio amplifier with low voltage operation

Datasheet - production data

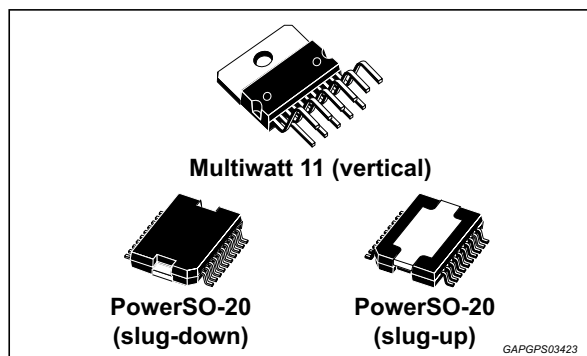

- Protections:
  - Short circuit (to GND, to  $V_S$ , across the load)
  - Very inductive loads
  - Chip over temperature
  - Load dump
  - Open GND
  - ESD

### Description

The TDA7391LV is a bridge class AB audio power amplifier for car radio applications.

The high power capability together with the possibility to operate either in differential input mode or single ended input mode makes it suitable for high end car radio equipment. The exclusive fully complementary output stage and the internal fixed gain configuration drop the external component count.

The on board clipping detector allows easy implementation of gain compression systems.

It is moreover compliant to the most recent OEM specifications for low voltage operation ('start-stop' battery profile during engine stop), and e-call functions.

### Features

- High power capability:
  - 40 W/ 4  $\Omega$  max
  - 45 W/ 3.2  $\Omega$  max
  - 32 W/ 3.2  $\Omega$  @  $V_S = 14.4$  V,  $f = 1$  kHz, THD = 10 %
  - 26 W/ 4  $\Omega$  @  $V_S = 14.4$  V,  $f = 1$  kHz, THD = 10%
- Differential inputs (either single ended or differential input signal is accepted)
- Minimum external component count
- Standby function (CMOS compatible)
- Capable to operate to 6 V - 'start-stop' and 'e-call' compatibility

Table 1. Device summary

| Order code      | Package                | Packing       |
|-----------------|------------------------|---------------|
| TDA7391LV       | Multiwatt 11           | Tube          |
| TDA7391LVDP     | PowerSO-20 (slug-down) | Tube          |
| TDA7391LVDPDTR  |                        | Tape and reel |
| TDA7391LVDPDU   | PowerSO-20 (slug-up)   | Tube          |
| TDA7391LVDPDUTR |                        | Tape and reel |

# Contents

|          |                                                    |           |
|----------|----------------------------------------------------|-----------|
| <b>1</b> | <b>Block diagram, test and application circuit</b> | <b>5</b>  |
| 1.1      | Block diagram                                      | 5         |
| 1.2      | Test and application circuit                       | 6         |
| <b>2</b> | <b>Pins description</b>                            | <b>7</b>  |
| <b>3</b> | <b>Electrical specifications</b>                   | <b>9</b>  |
| 3.1      | Absolute maximum ratings                           | 9         |
| 3.2      | Thermal data                                       | 9         |
| 3.3      | Electrical characteristics                         | 9         |
| 3.4      | Low voltage operation ('start stop')               | 11        |
| 3.5      | Electrical characteristics curves                  | 12        |
| <b>4</b> | <b>Package information</b>                         | <b>16</b> |
| 4.1      | Multiwatt 11 (vertical) package mechanical data    | 16        |
| 4.2      | PowerSO-20 (slug-down) package mechanical data     | 18        |
| 4.3      | PowerSO-20 (slug-up) package mechanical data       | 20        |
| <b>5</b> | <b>Revision history</b>                            | <b>22</b> |

List of tables

Table 1. Device summary . . . . . 1

Table 2. Pins function . . . . . 7

Table 3. Absolute maximum ratings . . . . . 9

Table 4. Thermal data . . . . . 9

Table 5. Electrical characteristics . . . . . 9

Table 6. Multiwatt 11 (vertical) package mechanical data . . . . . 16

Table 7. PowerSO-20 (slug-down) package mechanical data . . . . . 18

Table 8. PowerSO-20 (slug-up) package mechanical data . . . . . 20

Table 9. Document revision history. . . . . 22


## List of figures

|            |                                                                                                                                          |    |
|------------|------------------------------------------------------------------------------------------------------------------------------------------|----|
| Figure 1.  | Block diagram . . . . .                                                                                                                  | 5  |
| Figure 2.  | Test and application circuit . . . . .                                                                                                   | 6  |
| Figure 3.  | Multiwatt 11 pins connection (top view) . . . . .                                                                                        | 7  |
| Figure 4.  | PowerSO-20 pins connection . . . . .                                                                                                     | 7  |
| Figure 5.  | Worst case battery cranking curve sample 1 . . . . .                                                                                     | 11 |
| Figure 6.  | Worst case battery cranking curve sample 2 . . . . .                                                                                     | 11 |
| Figure 7.  | Quiescent current vs. supply voltage . . . . .                                                                                           | 12 |
| Figure 8.  | Output power vs. supply voltage ( $R_L = 3.2 \Omega$ ) . . . . .                                                                         | 12 |
| Figure 9.  | Output power vs. supply voltage ( $R_L = 4 \Omega$ ) . . . . .                                                                           | 12 |
| Figure 10. | Output power vs. supply voltage ( $R_L = 8 \Omega$ ) . . . . .                                                                           | 12 |
| Figure 11. | Distortion vs. output power ( $R_L = 3.2 \Omega$ ) . . . . .                                                                             | 12 |
| Figure 12. | Distortion vs. frequency ( $R_L = 3.2 \Omega$ ) . . . . .                                                                                | 12 |
| Figure 13. | Distortion vs. output power ( $R_L = 4 \Omega$ ) . . . . .                                                                               | 13 |
| Figure 14. | Distortion vs. frequency ( $R_L = 4 \Omega$ ) . . . . .                                                                                  | 13 |
| Figure 15. | Distortion vs. output power ( $R_L = 8 \Omega$ ) . . . . .                                                                               | 13 |
| Figure 16. | Distortion vs. frequency ( $R_L = 8 \Omega$ ) . . . . .                                                                                  | 13 |
| Figure 17. | Distortion vs. output power ( $R_L = 4 \Omega$ , $V_s = 6 \text{ V}$ ) . . . . .                                                         | 13 |
| Figure 18. | Distortion vs. frequency ( $R_L = 4 \Omega$ , $V_s = 6 \text{ V}$ ) . . . . .                                                            | 13 |
| Figure 19. | Distortion vs. output power ( $R_L = 8 \Omega$ , $V_s = 6 \text{ V}$ ) . . . . .                                                         | 14 |
| Figure 20. | Distortion vs. frequency ( $R_L = 8 \Omega$ , $V_s = 6 \text{ V}$ ) . . . . .                                                            | 14 |
| Figure 21. | Supply voltage rejection vs. frequency . . . . .                                                                                         | 14 |
| Figure 22. | Common mode rejection vs. frequency . . . . .                                                                                            | 14 |
| Figure 23. | Total power dissipation and efficiency vs. output power ( $R_L = 4 \Omega$ ) . . . . .                                                   | 14 |
| Figure 24. | Power dissipation vs. average output power (audio program simulation, $R_L = 4 \Omega$ ) . . . . .                                       | 14 |
| Figure 25. | Power dissipation vs. average output power (audio program simulation, $R_L = 4 \Omega$ &<br>$8 \Omega$ , $V_s = 6 \text{ V}$ ) . . . . . | 15 |
| Figure 26. | Power dissipation vs. output power ( $R_L = 4 \Omega$ & $8 \Omega$ , sine, $V_s = 6 \text{ V}$ ) . . . . .                               | 15 |
| Figure 27. | Multiwatt 11 (vertical) package mechanical drawing . . . . .                                                                             | 16 |
| Figure 28. | PowerSO-20 (slug-down) package mechanical drawing . . . . .                                                                              | 18 |
| Figure 29. | PowerSO-20 (slug-up) package mechanical drawing . . . . .                                                                                | 20 |

# 1 Block diagram, test and application circuit


## 1.1 Block diagram

Figure 1. Block diagram

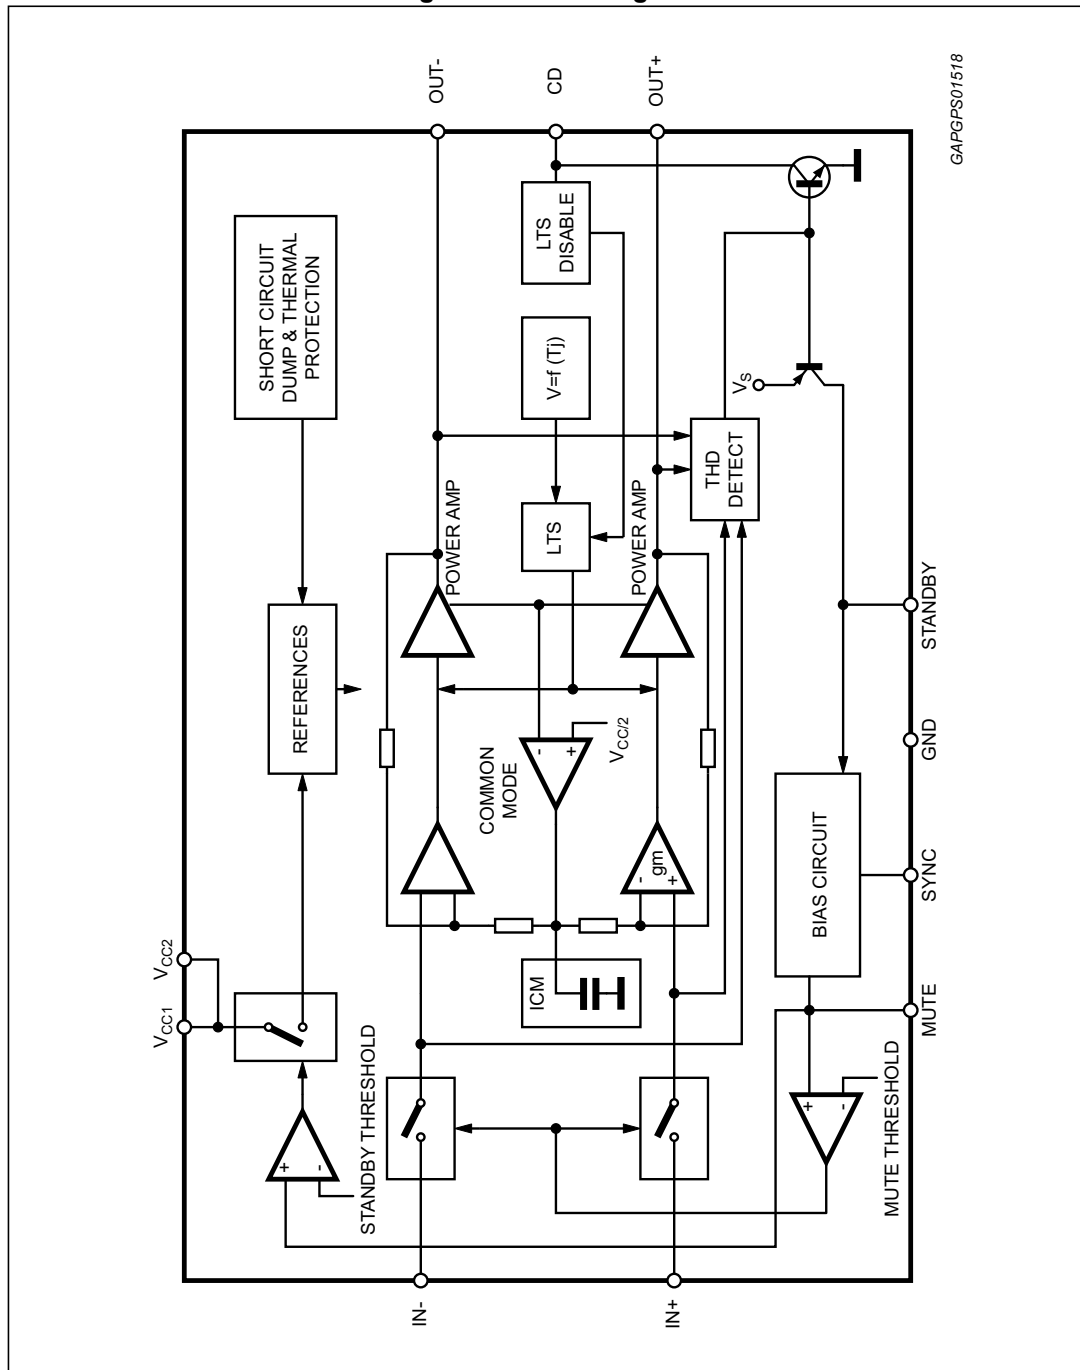

## 1.2 Test and application circuit

Figure 2. Test and application circuit

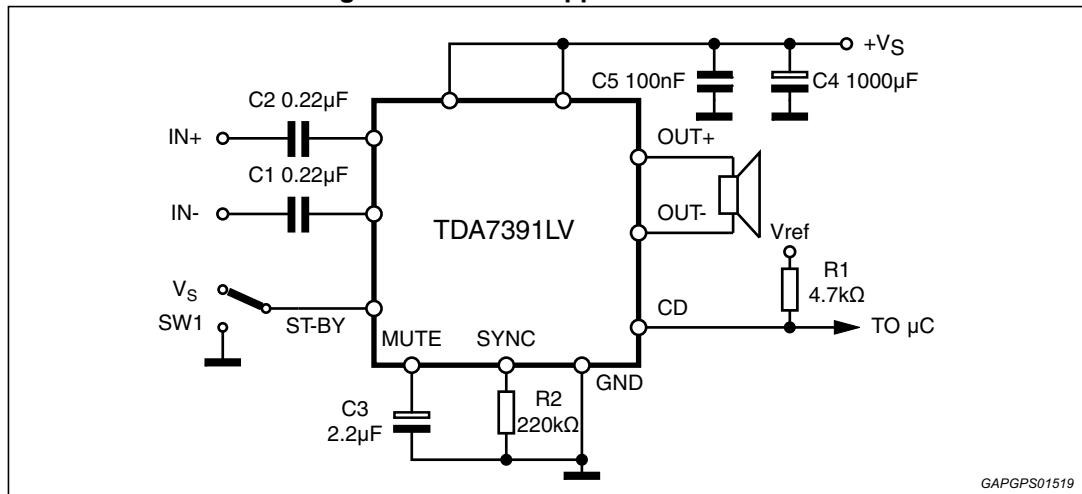

## 2 Pins description

Figure 3. Multiwatt 11 pins connection (top view)

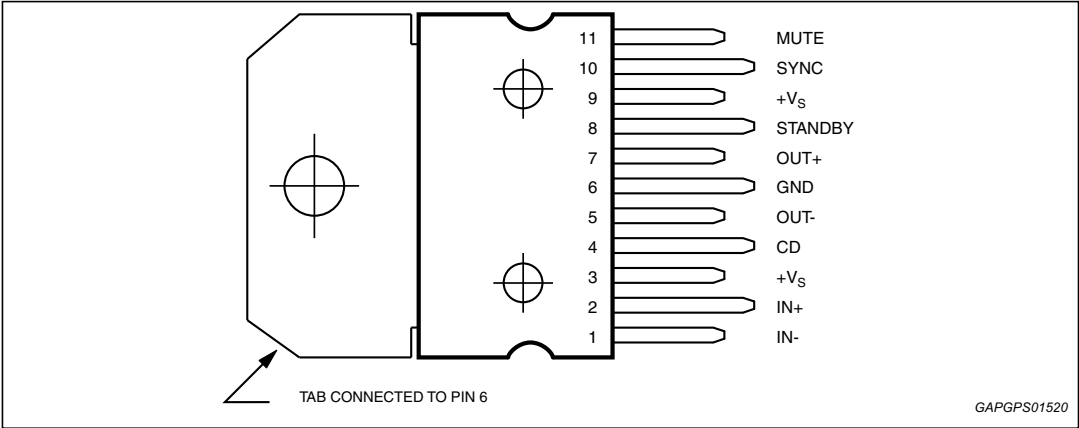


Figure 4. PowerSO-20 pins connection

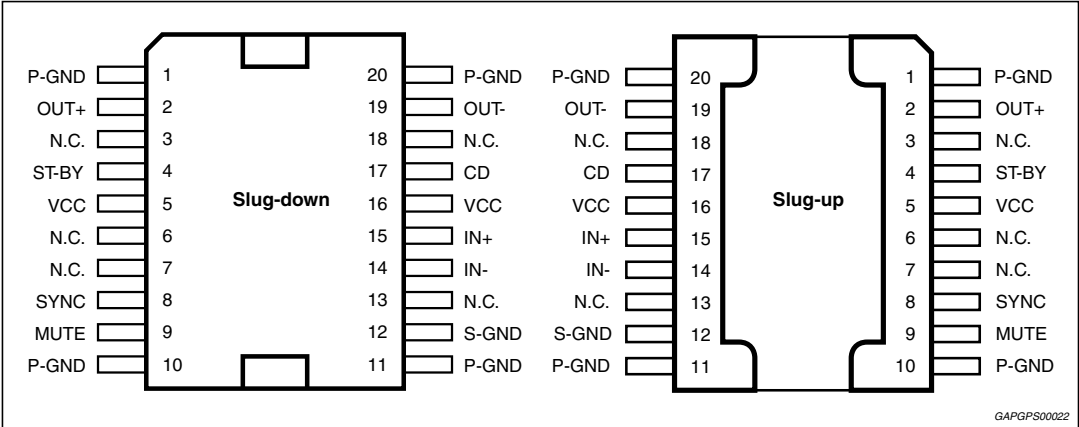


Table 2. Pins function

| Multiwatt 11<br>Pin # | PowerSO-20<br>Pin # | Name            | Description                                                                                                                                                                                                                      |
|-----------------------|---------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1, 2                  | 14, 15              | INPUTS          | The input stage is a high impedance type also capable of operation in single ended mode with one input capacitively coupled to the signal GND. The impedance seen by the inverting and non inverting input pins must be matched. |
| 3, 9                  | 5, 16               | +V <sub>S</sub> | Supply voltage.                                                                                                                                                                                                                  |
| 4                     | 17                  | CD              | The TDA7391LV is equipped with a diagnostic circuitry able to detect the clipping in the Output Signal (distortion = 10%).<br>The CD pin (open collector) gives out low level signal during clipping.                            |

Table 2. Pins function (continued)

| Multiwatt 11<br>Pin # | PowerSO-20<br>Pin # | Name    | Description                                                                                                                                                                                                                                                                                  |
|-----------------------|---------------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5, 7                  | 2, 19               | OUTPUTS | The output stage is a bridge type able to drive loads as low as $3.2\ \Omega$ . It consists of two class AB fully complementary PNP/NPN stages fully protected. A rail to rail output voltage swing is achieved without need of bootstrap capacitors. No external compensation is necessary. |
| 6                     | 1, 10, 11, 20       | GND     | Power ground.                                                                                                                                                                                                                                                                                |
|                       | 12                  | S-GND   | Signal ground.                                                                                                                                                                                                                                                                               |
| 8                     | 4                   | STANDBY | The device features a standby function which shuts down all the internal bias supplies when the standby pin is low. In standby mode the amplifier sinks a small current (in the range of few $\mu\text{A}$ ). When the standby pin is high the IC becomes fully operational.                 |
| 10                    | 8                   | SYNC    | A resistor ( $R_2$ ) between pin 8 and GND set the charging current of capacitor $C_3$ (pin 9). The suggested values of $C_3$ and $R_2$ define the correct timing in order to switch on/off the amplifier without any pop noise.                                                             |
| 11                    | 9                   | MUTE    | The pin is connected to a capacitor ( $C_3$ ) tied to GND to set the mute/standby time. An automatic mute during turn on/off is provided to prevent noisy transients.                                                                                                                        |

## 3 Electrical specifications

### 3.1 Absolute maximum ratings

Table 3. Absolute maximum ratings

| Symbol         | Parameter                                       | Value      | Unit |
|----------------|-------------------------------------------------|------------|------|
| $V_S$          | DC supply voltage                               | 28         | V    |
| $V_{OP}$       | Operating supply voltage                        | 18         | V    |
| $V_{PEAK}$     | Peak supply voltage (t = 50 ms)                 | 50         | V    |
| $I_O$          | Output peak current repetitive (f > 10 Hz)      | 4.5        | A    |
|                | Output peak current non repetitive              | 6          | A    |
| $P_{tot}$      | Power dissipation ( $T_{case} = 85\text{ °C}$ ) | 43         | W    |
| $T_{stg}, T_j$ | Storage and junction temperature                | -40 to 150 | °C   |

### 3.2 Thermal data

Table 4. Thermal data

| Symbol           | Parameter                                | Multiwatt | PowerSO | Unit |
|------------------|------------------------------------------|-----------|---------|------|
| $R_{th\ j-case}$ | Thermal resistance junction-to-case Max. | 1.8       | 2       | °C/W |

### 3.3 Electrical characteristics

$V_S = 14.4\text{ V}$ ;  $R_L = 4\ \Omega$ ,  $f = 1\text{ kHz}$ ,  $T_{amb} = 25\text{ °C}$ , unless otherwise specified.

Table 5. Electrical characteristics

| Symbol        | Parameter                     | Test condition              | Min. | Typ. | Max. | Unit |
|---------------|-------------------------------|-----------------------------|------|------|------|------|
| $V_S$         | Supply voltage range          | -                           | 6    | -    | 18   | V    |
| $I_q$         | Total quiescent current       | -                           | -    | 60   | 150  | mA   |
| $V_{OS}$      | Output offset voltage         | -                           | -    | -    | 120  | mV   |
| $I_{SB}$      | Standby current               | $V_{ST-BY} = 1.5\text{ V}$  | -    | -    | 50   | µA   |
| $I_{SBin}$    | Standby input bias current    | $V_{ST-BY} = 5\text{ V}$    | -    | -    | 10   | µA   |
| $V_{SBon}$    | Standby on threshold voltage  | -                           | -    | -    | 1.5  | V    |
| $V_{SBoff}$   | Standby off threshold voltage | -                           | 3.5  | -    | -    | V    |
| $ATT_{ST-BY}$ | Standby attenuation           | -                           | -    | 90   | -    | dB   |
| $I_{M\ in}$   | Mute input bias current       | ( $V_{MUTE} = 5\text{ V}$ ) | -    | -    | 10   | µA   |
| $A_M$         | Mute attenuation              | -                           | -    | 90   | -    | dB   |

Table 5. Electrical characteristics (continued)

| Symbol              | Parameter                                      | Test condition                                            | Min. | Typ. | Max. | Unit               |
|---------------------|------------------------------------------------|-----------------------------------------------------------|------|------|------|--------------------|
| $P_O$               | Output power                                   | THD = 10 %                                                | 20   | 26   | -    | W                  |
|                     |                                                | THD = 1 %                                                 | -    | 21   | -    | W                  |
|                     |                                                | THD = 10 %; $R_L = 3.2 \Omega$                            | -    | 32   | -    | W                  |
|                     |                                                | $V_S = 6 \text{ V}$ ; THD = 10 %                          | -    | 4.2  | -    | W                  |
| $P_{O \text{ MAX}}$ | Max. output power <sup>(1)</sup>               | $V_S = 14.4 \text{ V}$ ; $R_L = 3.2 \Omega$               | -    | 45   | -    | W                  |
|                     |                                                | $V_S = 6 \text{ V}$ ; THD = 10 %                          | -    | 6    | -    | W                  |
| THD                 | Total harmonic distortion                      | -                                                         | -    | 0.06 | -    | %                  |
|                     |                                                | $P_O = 0.1 \text{ to } 15 \text{ W}$                      | -    | 0.03 | -    | %                  |
|                     |                                                | $V_S = 6 \text{ V}$ ; $P_O = 1 \text{ W}$                 |      | 0.05 |      | %                  |
|                     |                                                | $V_S = 6 \text{ V}$ ; $P_O = 3.5 \text{ W}$               |      | 1.5  |      | %                  |
| $G_V$               | Voltage gain                                   | -                                                         | 29.5 | 30   | 30.5 | dB                 |
| $f_H$               | High frequency roll-off                        | $P_O = 1 \text{ W}$ ; -3 dB                               | 75   | -    | -    | kHz                |
| $R_{IN}$            | Input Impedance                                | Differential                                              | 36   | 60   | -    | k $\Omega$         |
|                     |                                                | Single ended                                              | 30   | 55   | -    | k $\Omega$         |
| $E_{IN}$            | Input noise voltage                            | $R_g = 0 \Omega$ ; $f = 22 \text{ Hz to } 22 \text{ kHz}$ | -    | 4    | -    | mV                 |
| CMRR                | Input common mode rejection                    | $f = 1 \text{ kHz}$ ; $V_{IN} = 1 \text{ V}_{rms}$        | -    | 65   | -    | dB                 |
| SVR                 | Supply voltage rejection                       | $R_g = 0 \Omega$ ; $V_r = 1 \text{ V}_{rms}$              | -    | 60   | -    | dB                 |
| CDL                 | Clipping detection level                       | -                                                         | 5    | 10   | 15   | %                  |
| $T_{sd}$            | Absolute thermal shutdown junction temperature | -                                                         | -    | 160  | -    | $^{\circ}\text{C}$ |


1. Saturated square wave output.

### 3.4 Low voltage operation ('start stop')

The most recent OEM specification are requiring automatic stop of car engine at traffic light, in order to reduce emissions of polluting substances. The TDA7391LV allows a continuous operation when battery falls down to 6/7 V during such conditions. The maximum system power will be reduced accordingly.

Worst case battery cranking curves are shown below, indicating the shape and durations of allowed battery transitions.


**Figure 5. Worts case battery cranking curve sample 1**

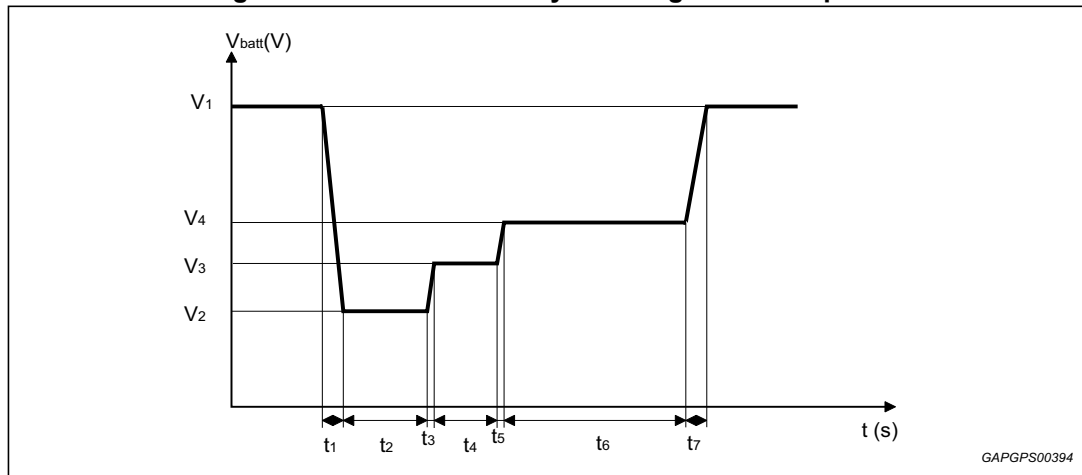

$V_1 = 12\text{ V}$ ;  $V_2 = 6\text{ V}$ ;  $V_3 = 7\text{ V}$ ;  $V_4 = 8\text{ V}$

$t_1 = 2\text{ ms}$ ;  $t_2 = 50\text{ ms}$ ;  $t_3 = 5\text{ ms}$ ;  $t_4 = 300\text{ ms}$ ;  $t_5 = 10\text{ ms}$ ;  $t_6 = 1\text{ s}$ ;  $t_7 = 2\text{ ms}$

**Figure 6. Worst case battery cranking curve sample 2**

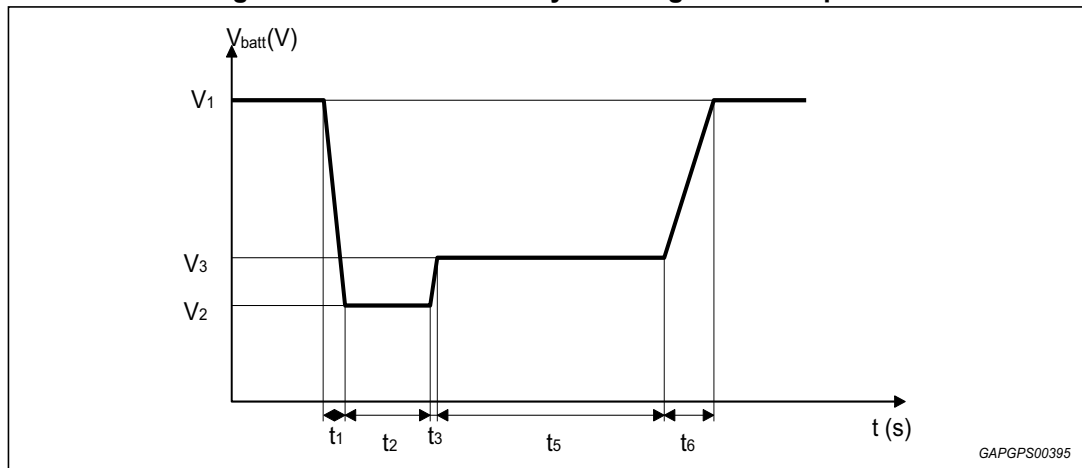

$V_1 = 12\text{ V}$ ;  $V_2 = 6\text{ V}$ ;  $V_3 = 7\text{ V}$

$t_1 = 2\text{ ms}$ ;  $t_2 = 5\text{ ms}$ ;  $t_3 = 15\text{ ms}$ ;  $t_5 = 1\text{ s}$ ;  $t_6 = 50\text{ ms}$

3.5 Electrical characteristics curves

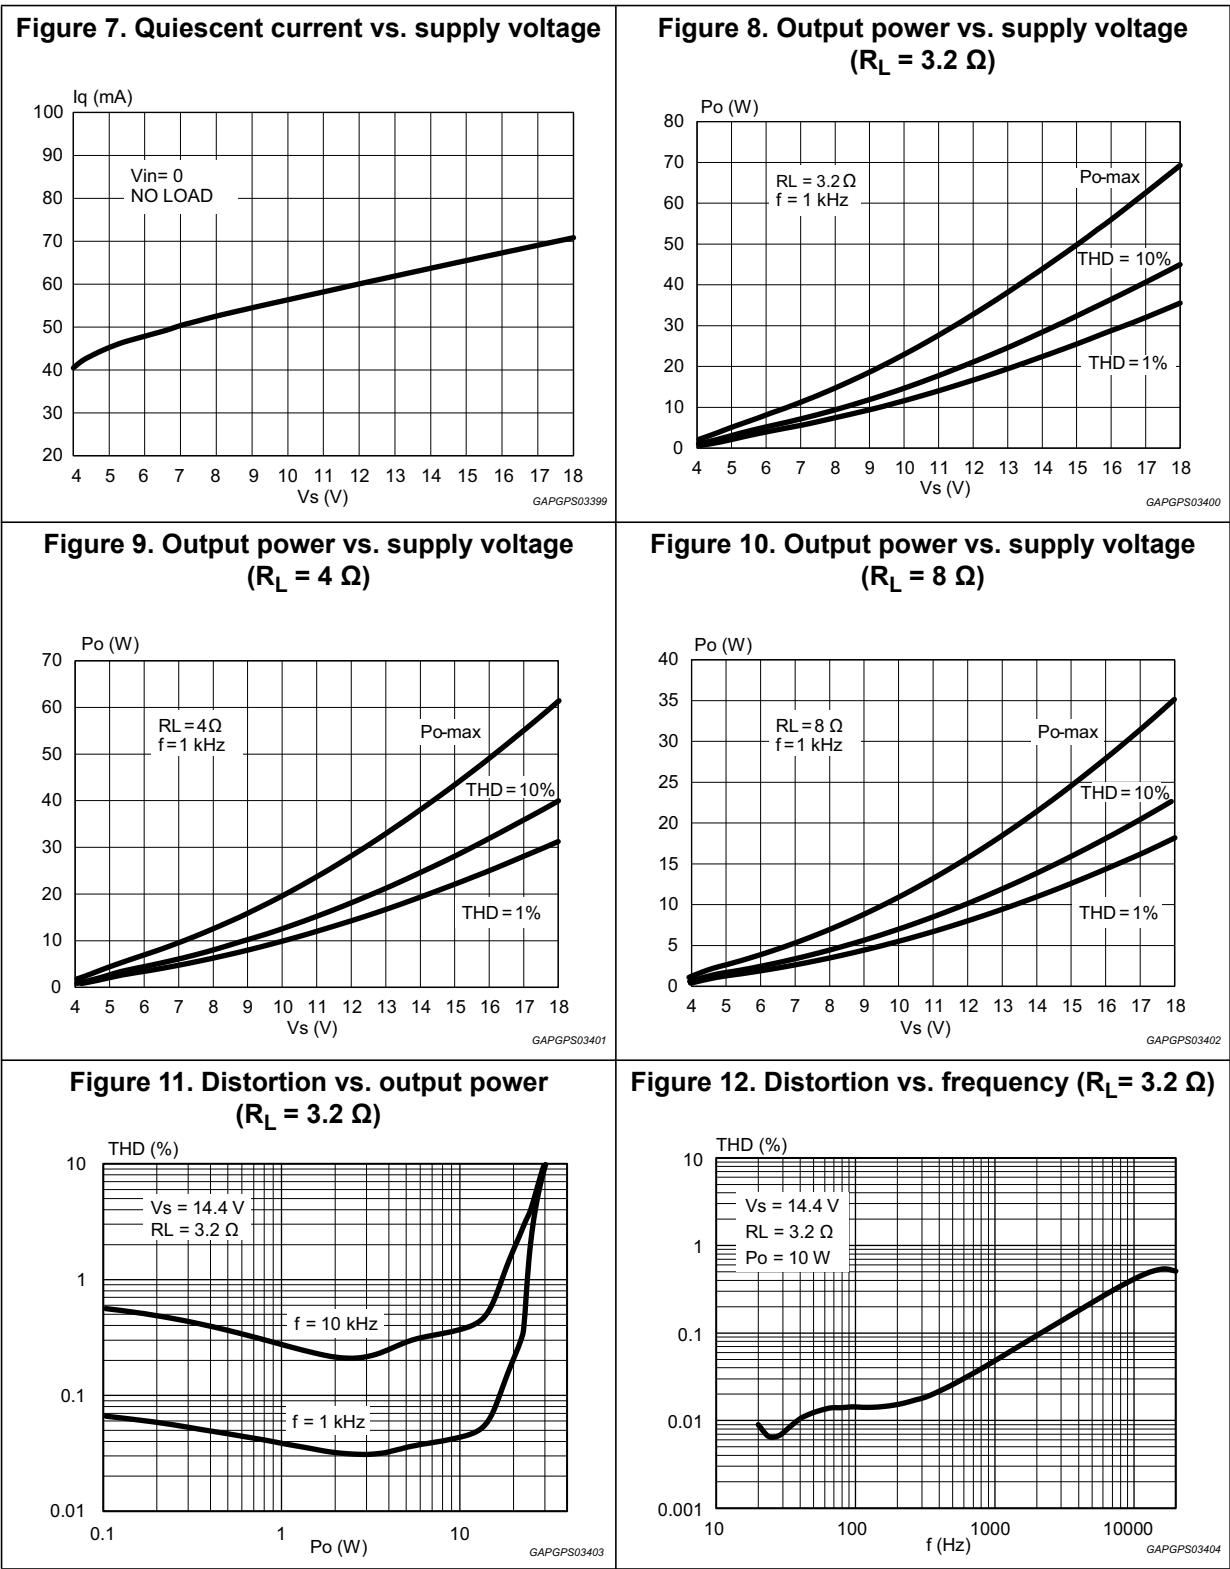


Figure 13. Distortion vs. output power  
( $R_L = 4 \Omega$ )

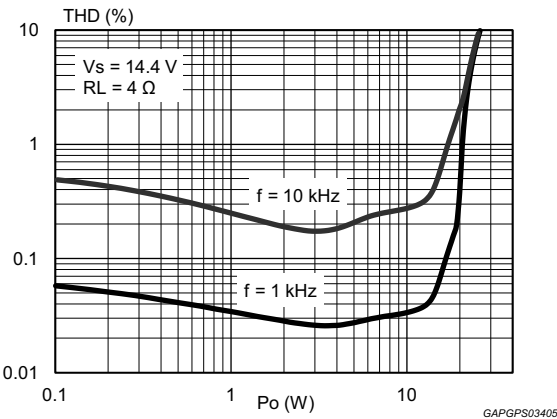


Figure 14. Distortion vs. frequency ( $R_L = 4 \Omega$ )

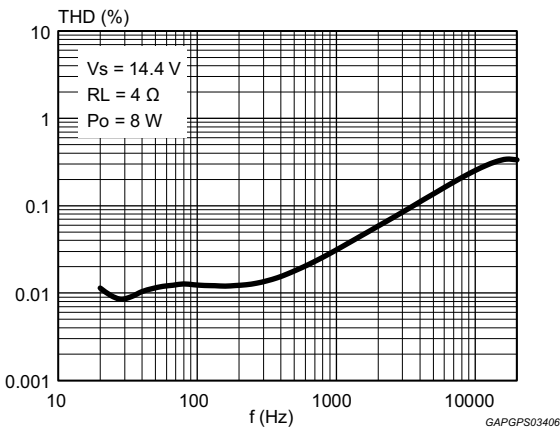


Figure 15. Distortion vs. output power  
( $R_L = 8 \Omega$ )

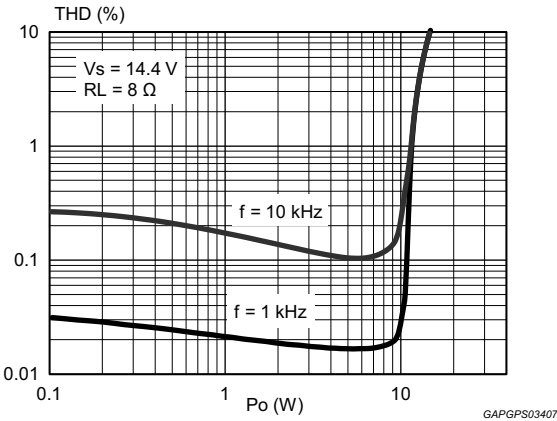


Figure 16. Distortion vs. frequency ( $R_L = 8 \Omega$ )

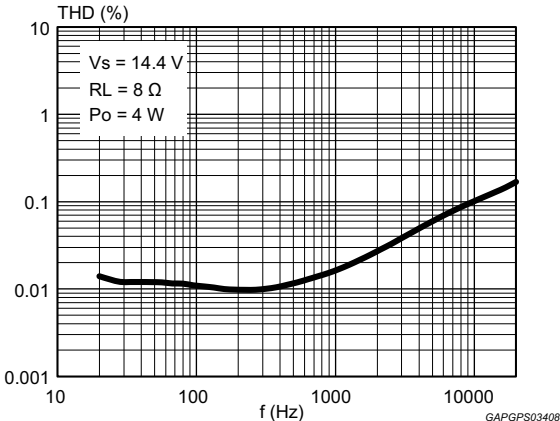


Figure 17. Distortion vs. output power  
( $R_L = 4 \Omega$ ,  $V_s = 6 \text{ V}$ )



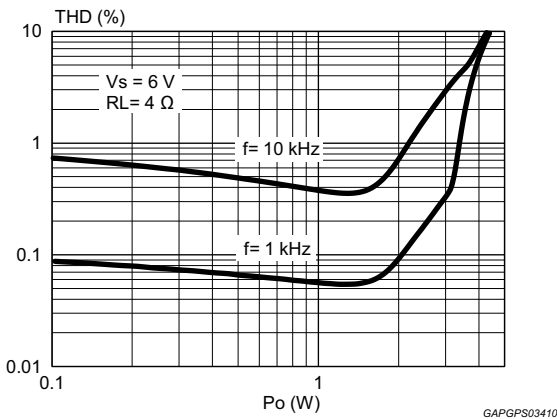



Figure 18. Distortion vs. frequency  
( $R_L = 4 \Omega$ ,  $V_s = 6 \text{ V}$ )

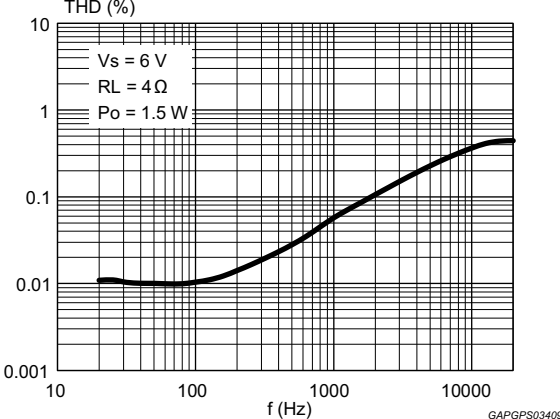


**Figure 19. Distortion vs. output power**  
( $R_L = 8\ \Omega$ ,  $V_S = 6\text{ V}$ )

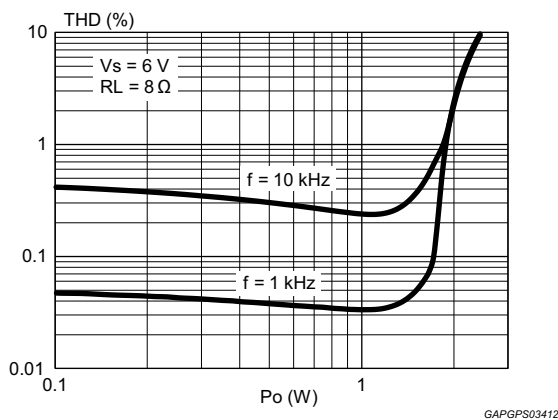


**Figure 20. Distortion vs. frequency**  
( $R_L = 8\ \Omega$ ,  $V_S = 6\text{ V}$ )

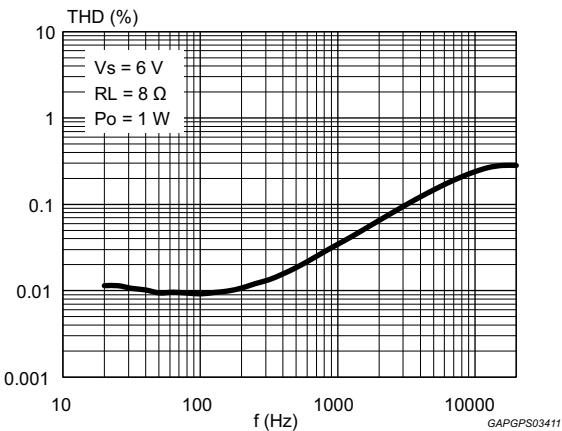


**Figure 21. Supply voltage rejection vs. frequency**

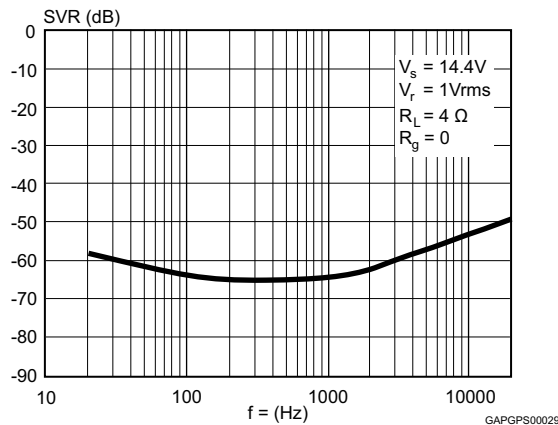

**Figure 22. Common mode rejection vs. frequency**

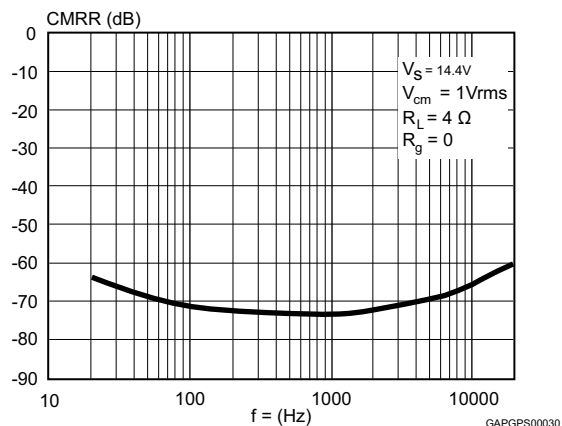

**Figure 23. Total power dissipation and efficiency vs. output power**  
( $R_L = 4\ \Omega$ )

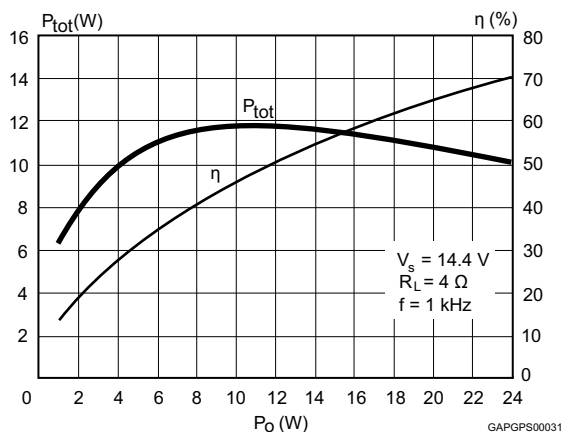

**Figure 24. Power dissipation vs. average output power**  
(audio program simulation,  $R_L = 4\ \Omega$ )

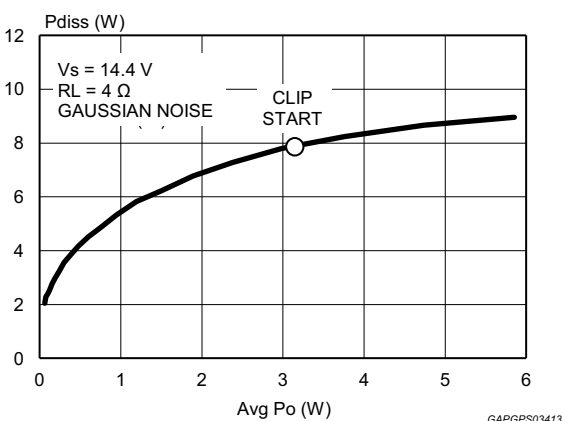


Figure 25. Power dissipation vs. average output power (audio program simulation,  $R_L = 4\ \Omega$  &  $8\ \Omega$ ,  $V_s = 6\ V$ )


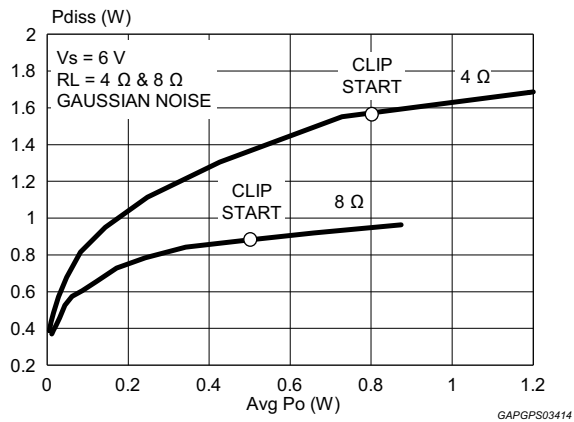


Figure 26. Power dissipation vs. output power ( $R_L = 4\ \Omega$  &  $8\ \Omega$ , sine,  $V_s = 6\ V$ )

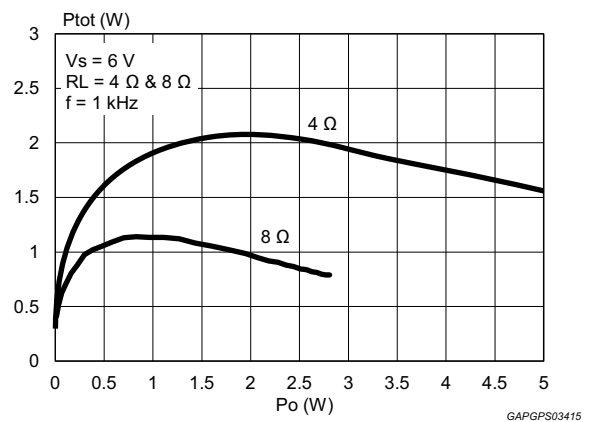

# 4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com).  
ECOPACK® is an ST trademark.

## 4.1 Multiwatt 11 (vertical) package mechanical data

Figure 27. Multiwatt 11 (vertical) package mechanical drawing

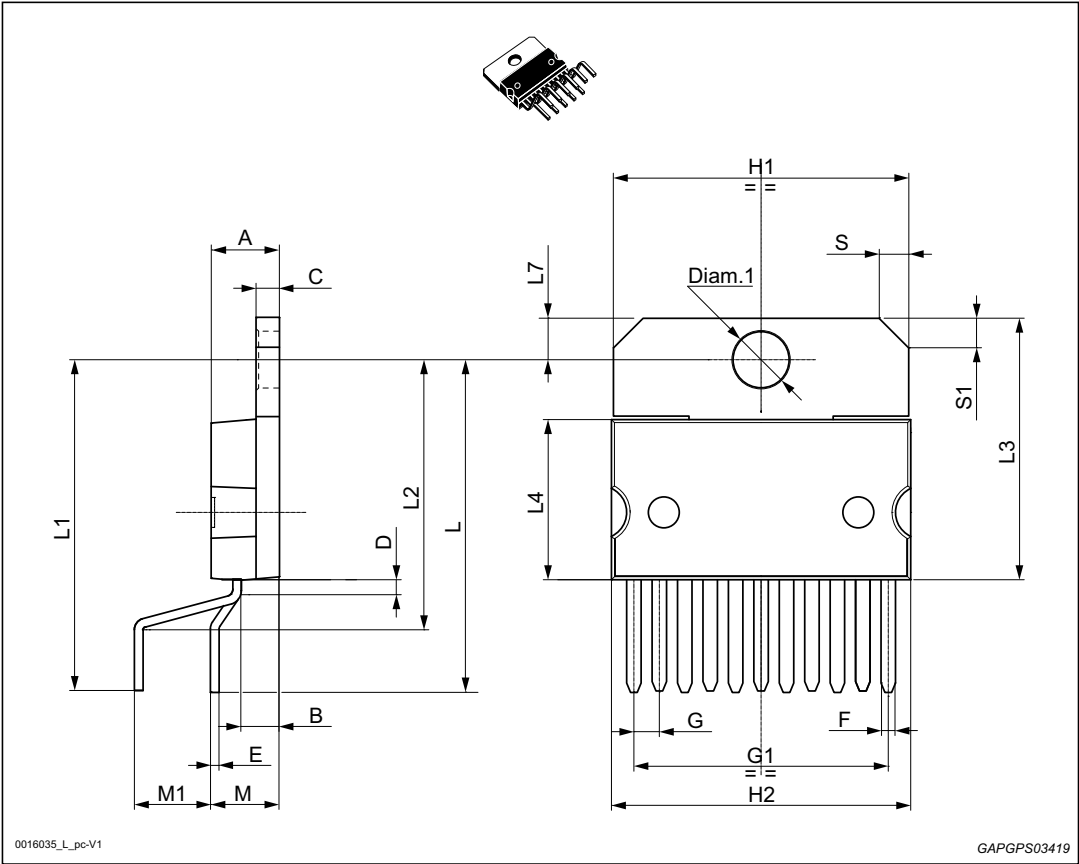


Table 6. Multiwatt 11 (vertical) package mechanical data

| Symbol | Millimeters |      |      | Inches |        |        |
|--------|-------------|------|------|--------|--------|--------|
|        | Min.        | Typ. | Max. | Min.   | Typ.   | Max.   |
| A      |             |      | 5    |        |        | 0.1969 |
| B      |             |      | 2.65 |        |        | 0.1043 |
| C      |             |      | 1.6  |        |        | 0.063  |
| D      |             | 1    |      |        | 0.0394 |        |

Table 6. Multiwatt 11 (vertical) package mechanical data (continued)

| Symbol | Millimeters |      |       | Inches |        |        |
|--------|-------------|------|-------|--------|--------|--------|
|        | Min.        | Typ. | Max.  | Min.   | Typ.   | Max.   |
| E      | 0.49        |      | 0.55  | 0.0193 |        | 0.0217 |
| F      | 0.88        |      | 0.95  | 0.0346 |        | 0.0374 |
| G      | 1.45        | 1.7  | 1.95  | 0.0571 | 0.0669 | 0.0768 |
| G1     | 16.75       | 17   | 17.25 | 0.6594 | 0.6693 | 0.6791 |
| H1     | 19.6        |      |       | 0.7717 |        |        |
| H2     |             |      | 20.2  |        |        | 0.7953 |
| L      | 21.9        | 22.2 | 22.5  | 0.8622 | 0.874  | 0.8858 |
| L1     | 21.7        | 22.1 | 22.5  | 0.8543 | 0.8701 | 0.8858 |
| L2     | 17.4        |      | 18.1  | 0.685  |        | 0.7126 |
| L3     | 17.25       | 17.5 | 17.75 | 0.6791 | 0.689  | 0.6988 |
| L4     | 10.3        | 10.7 | 10.9  | 0.4055 | 0.4213 | 0.4291 |
| L7     | 2.65        |      | 2.9   | 0.1043 |        | 0.1142 |
| M      | 4.25        | 4.55 | 4.85  | 0.1673 | 0.1791 | 0.1909 |
| M1     | 4.73        | 5.08 | 5.43  | 0.1862 | 0.2    | 0.2138 |
| S      | 1.9         |      | 2.6   | 0.0748 |        | 0.1024 |
| S1     | 1.9         |      | 2.6   | 0.0748 |        | 0.1024 |
| Diam.1 | 3.65        |      | 3.85  | 0.1437 |        | 0.1516 |

## 4.2 PowerSO-20 (slug-down) package mechanical data

Figure 28. PowerSO-20 (slug-down) package mechanical drawing

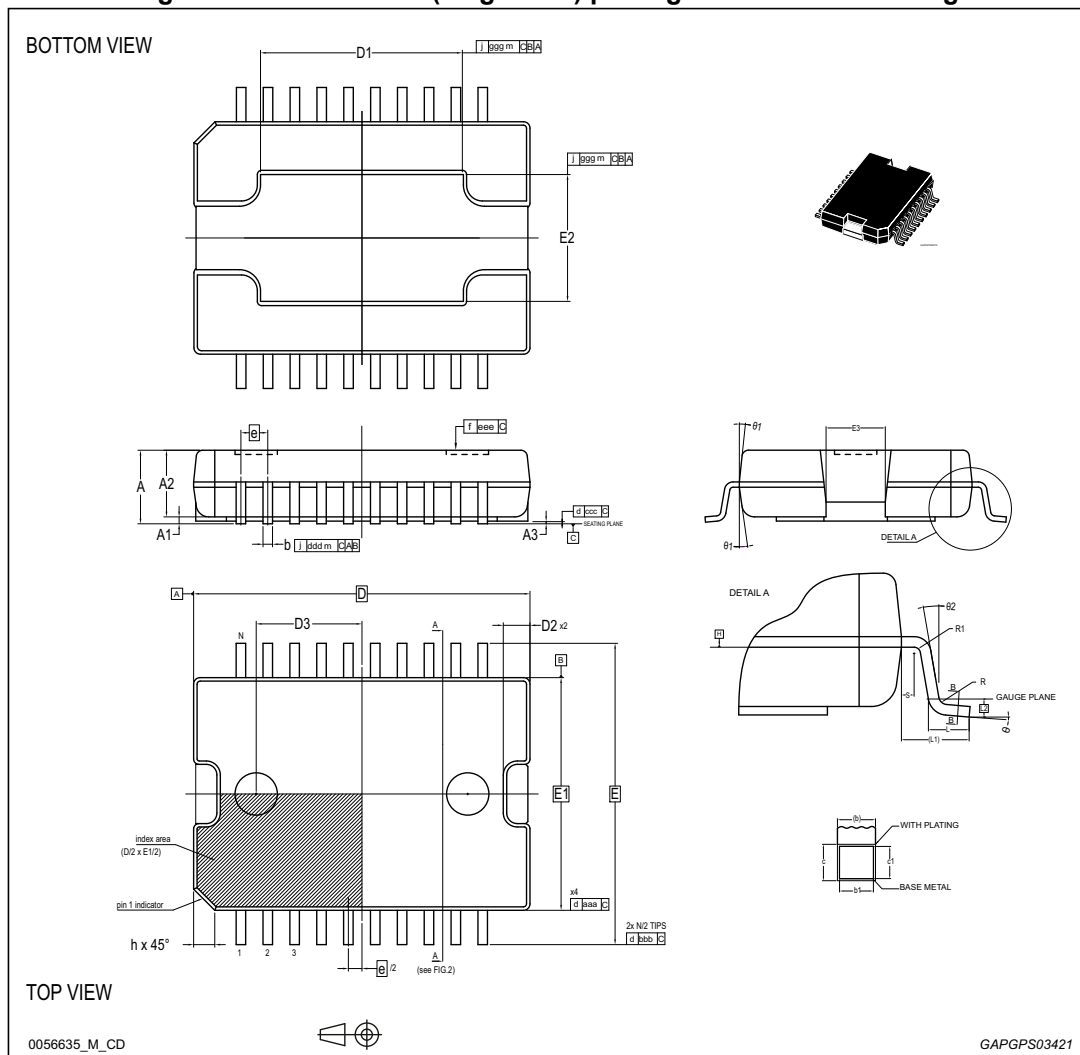


Table 7. PowerSO-20 (slug-down) package mechanical data

| Symbol     | Millimeters |      |      | Inches |       |        |
|------------|-------------|------|------|--------|-------|--------|
|            | Min.        | Typ. | Max. | Min.   | Typ.  | Max.   |
| $\Theta$   | 0°          |      | 8°   | 0°     |       | 8°     |
| $\Theta 1$ | 5°          |      | 10°  | 5°     |       | 10°    |
| $\Theta 2$ | 0°          |      |      | 0°     |       |        |
| A          |             |      | 3.6  |        |       | 0.1417 |
| A1         | 0.1         |      |      | 0.0039 |       |        |
| A2         | 3           | 3.15 | 3.3  | 0.1181 | 0.124 | 0.1299 |
| A3         |             |      | 0.1  |        |       | 0.0039 |

Table 7. PowerSO-20 (slug-down) package mechanical data (continued)

| Symbol            | Millimeters |      |      | Inches     |        |        |
|-------------------|-------------|------|------|------------|--------|--------|
|                   | Min.        | Typ. | Max. | Min.       | Typ.   | Max.   |
| b                 | 0.4         |      | 0.53 | 0.0157     |        | 0.0209 |
| b1                | 0.4         | 0.45 | 0.5  | 0.0157     | 0.0177 | 0.0197 |
| c                 | 0.23        |      | 0.32 | 0.0091     |        | 0.0126 |
| c1                | 0.23        | 0.25 | 0.29 | 0.0091     | 0.0098 | 0.0114 |
| D                 | 15.90 BSC   |      |      | 0.626 BSC  |        |        |
| D1 <sup>(1)</sup> | 9           |      | 13   | 0.3543     |        | 0.5118 |
| D2                |             |      | 1.1  |            |        | 0.0433 |
| D3                |             | 5    |      |            | 0.1969 |        |
| e                 | 1.27 BSC    |      |      | 0.050 BSC  |        |        |
| E                 | 14.20 BSC   |      |      | 0.5591 BSC |        |        |
| E1 <sup>(1)</sup> | 11.00 BSC   |      |      | 0.4331 BSC |        |        |
| E2                | 5.6         |      | 6.2  | 0.2205     |        | 0.2441 |
| E3                |             |      | 2.9  |            |        | 0.1142 |
| h                 |             |      | 1.1  |            |        | 0.0433 |
| L                 | 0.8         |      | 1.1  | 0.0315     |        | 0.0433 |
| L1                | 1.60 REF    |      |      | 0.063 REF  |        |        |
| L2                | 0.35 BSC    |      |      | 0.0138 BSC |        |        |
| N                 | 20          |      |      | 0.7874     |        |        |
| R                 | 0.2         |      |      | 0.0079     |        |        |
| R1                | 0.2         |      |      | 0.0079     |        |        |
| S                 | 0.25        |      |      | 0.0098     |        |        |
| aaa               | 0.1         |      |      | 0.0039     |        |        |
| bbb               | 0.3         |      |      | 0.0118     |        |        |
| ccc               | 0.1         |      |      | 0.0039     |        |        |
| ddd               | 0.25        |      |      | 0.0098     |        |        |
| eee               | 0.1         |      |      | 0.0039     |        |        |
| ggg               | 0.25        |      |      | 0.0098     |        |        |

1. Dimensions 'D' and 'E1' do not include mold flash or protrusions. Allowable mold flash or protrusions is "0.25 mm" per side D and "0.15 mm" per side E1. D and E1 are Maximum plastic body size dimensions including mold mismatch.

### 4.3 PowerSO-20 (slug-up) package mechanical data

Figure 29. PowerSO-20 (slug-up) package mechanical drawing

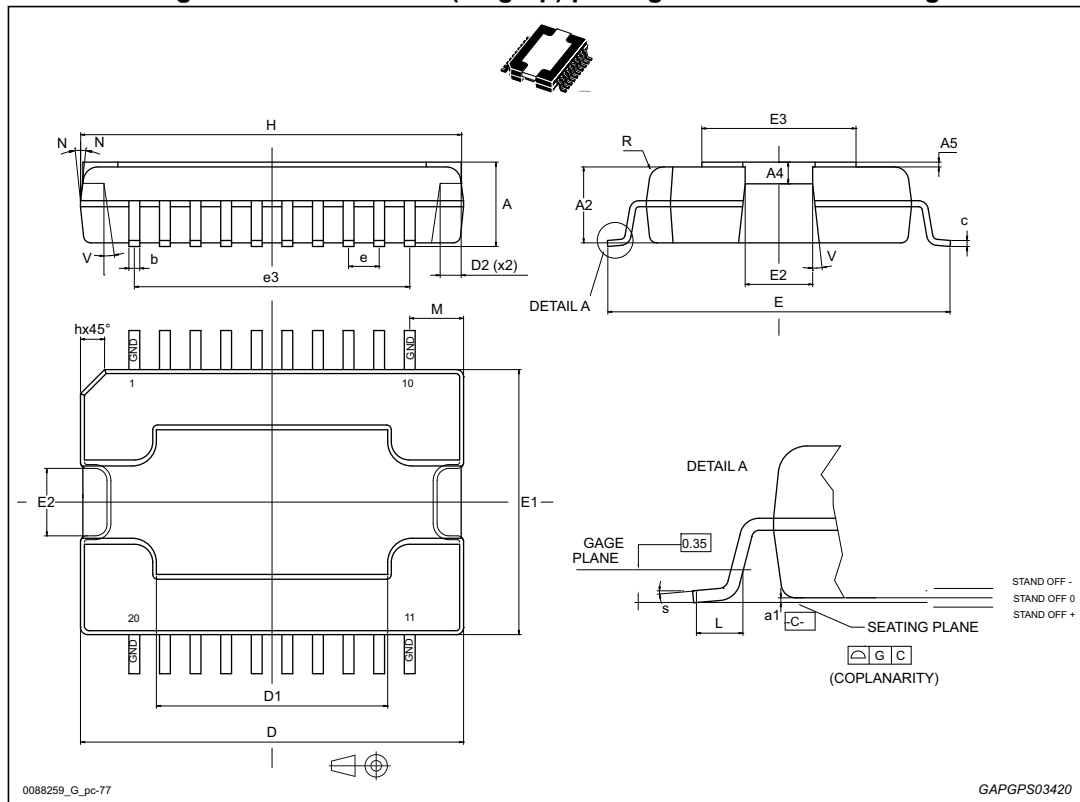


Table 8. PowerSO-20 (slug-up) package mechanical data

| Symbol            | Millimeters |       |       | Inches |        |         |
|-------------------|-------------|-------|-------|--------|--------|---------|
|                   | Min.        | Typ.  | Max.  | Min.   | Typ.   | Max.    |
| A                 | 3.25        |       | 3.5   | 0.128  |        | 0.1378  |
| A2                | 3           | 3.15  | 3.3   | 0.1181 | 0.124  | 0.1299  |
| a1                | 0.03        |       | -0.04 | 0.0012 |        | -0.0016 |
| A4                | 0.8         |       | 1     | 0.0315 |        | 0.0394  |
| A5                | 0.15        | 0.2   | 0.25  | 0.0059 | 0.0079 | 0.0098  |
| b                 | 0.4         |       | 0.53  | 0.0157 |        | 0.0209  |
| c                 | 0.23        |       | 0.32  | 0.0091 |        | 0.0126  |
| D                 | 15.8        |       | 16    | 0.622  |        | 0.6299  |
| D1 <sup>(1)</sup> | 9.4         |       | 9.8   | 0.3701 |        | 0.3858  |
| D2                |             | 1     |       |        | 0.0394 |         |
| E                 | 13.9        |       | 14.5  | 0.5472 |        | 0.5709  |
| e                 | 1.12        | 1.27  | 1.42  | 0.0441 | 0.05   | 0.0559  |
| e3                |             | 11.43 |       |        | 0.45   |         |

Table 8. PowerSO-20 (slug-up) package mechanical data (continued)

| Symbol            | Millimeters |      |      | Inches |        |        |
|-------------------|-------------|------|------|--------|--------|--------|
|                   | Min.        | Typ. | Max. | Min.   | Typ.   | Max.   |
| E1 <sup>(1)</sup> | 10.9        |      | 11.1 | 0.4291 |        | 0.437  |
| E2                |             |      | 2.9  |        |        | 0.1142 |
| E3                | 5.8         |      | 6.2  | 0.2283 |        | 0.2441 |
| G                 | 0           |      | 0.1  | 0      |        | 0.0039 |
| h                 |             |      | 1.1  |        |        | 0.0433 |
| H                 | 15.5        |      | 15.9 | 0.6102 |        | 0.626  |
| L                 | 0.8         |      | 1.1  | 0.0315 |        | 0.0433 |
| N                 |             |      | 10d. |        |        | 10d.   |
| R                 |             | 0.6  |      |        | 0.0236 |        |
| s                 | 0d.         |      | 8d.  | 0d.    |        | 8d.    |
| V                 | 5d.         |      | 7d.  | 5d.    |        | 7d.    |

1. 'D' and 'E1' do not include mold flash or protrusions.  
Mold flash or protrusions shall not exceed 0.15 mm (0.006 inches) per side.

## 5 Revision history

**Table 9. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                                                  |
|-------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 29-Mar-2012 | 1        | Initial release.                                                                                                                                                                                         |
| 18-Sep-2013 | 2        | Updated:<br><i>Features on page 1;</i><br><i>Figure 1: Block diagram on page 5;</i><br><i>Table 2: Pins function.</i><br>Updated disclaimer.                                                             |
| 01-Dec-2014 | 3        | Updated:<br><i>Features and Description on page 1;</i><br><i>Table 5: Electrical characteristics</i><br><i>Section 3.5: Electrical characteristics curves;</i><br><i>Section 4: Package information.</i> |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2014 STMicroelectronics – All rights reserved

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)