SOT-23-5 PWM Step-up DC/DC CONVERTER

R1210N××2× SERIES

APPLICATION MANUAL

NO. EA-064-0006

R1210N××2× SERIES

OUTLINE

The R1210NXX2C/XX2D Series are PWM step-up DC/DC Converter controllers, with high accuracy, low supply current by CMOS process.

Each of the R1210NXX2X Series consists of an oscillator, a PWM circuit, a reference voltage unit, an error amplifier, phase compensation circuit, resistors for voltage detection, a chip enable circuit, a controller against drastic load transient and an output voltage detector. A low ripple, high efficiency step-up DC/DC converter can be composed of this IC with only four external components, or an inductor, a diode, a transistor and a capacitor.

The R1210NXX2X Series can detect drastic change of output voltage with a circuit controller, the load transient response is improved.

Each of the R1210NXX2X Series has a driver pin, or 'EXT' pin for external transistor. By connecting a power transistor with low ON-resistance to EXT pin, a large current flows through an inductor, thus, large output current can be supplied.

The built-in chip enable circuit can make the standby mode with ultra low quiescent current.

Since the package for these ICs is small SOT-23-5, high density mounting of the ICs on board is possible.

FEATURES

- External Components ..... Only an inductor, a diode, a capacitor, and a transistor
- Standby Current ..... TYP. 0μA
- Low Temperature-Drift Coefficient of Output Voltage..... TYP. ±100ppm/°C
- Output Voltage..... Stepwise Setting with a step of 0.1V in the range of 2.2V to 6.0V
- Two choices of Basic Oscillator Frequency..... 100kHz (XX2C), 180kHz (XX2D)
- Small Package..... SOT-23-5 (Mini-mold)
- Low Ripple, Low Noise
- Oscillator Start-up Voltage..... MAX. 0.8V

APPLICATIONS

- Power source for battery-powered equipment.
- Power source for portable communication appliances, cameras, VCRs
- Power source for appliances which require higher voltage than battery voltage.

BLOCK DIAGRAM

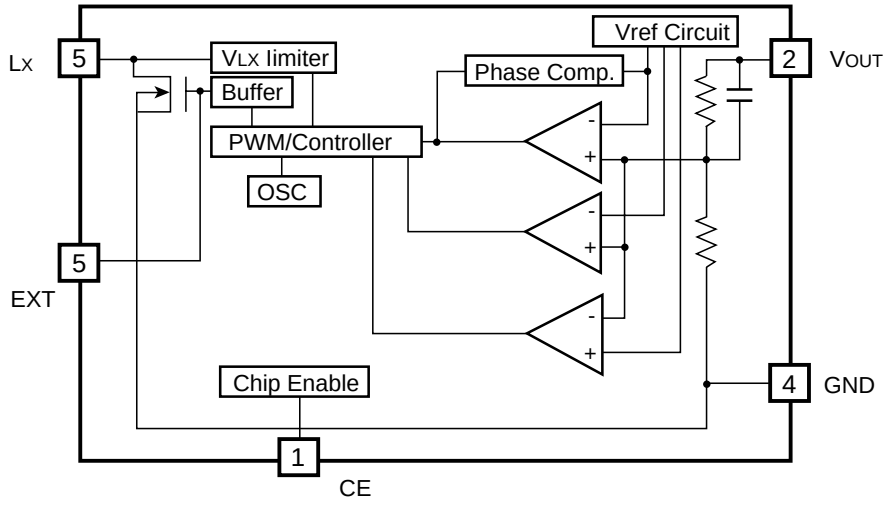

SELECTION GUIDE

In the R1210N Series, the output voltage, the oscillator frequency, the optional function, and the taping type for the ICs can be selected at the user's request.

The selection can be made by designating the part number as shown below;

R1210NXXXX-XX
↑ ↑↑ ↑
a bc d

Code	Contents
a	Setting Output Voltage(V_{OUT}): Stepwise setting with a step of 0.1V in the range of 2.2V to 6.0V
b	Designation of Driver 2: External Tr. Driver
c	Designation of Oscillator Frequency C: 100kHz D: 180kHz
d	Designation of Taping Type; Ex.: TR, TL (refer to Taping Specification) "TR" is prescribed as a standard.

PIN CONFIGURATION

SOT-23-5



PIN DESCRIPTION

Pin No.	Symbol	Description
1	CE	Chip Enable Pin
2	V_{OUT}	Pin for Output Voltage
3	NC	No Connection
4	GND	Ground Pin
5	EXT	External Transistor Drive Pin

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V_{OUT}	V_{OUT} Pin Output Voltage	9	V
V_{EXT}	EXT Pin Output Voltage	-0.3~V_{OUT}+0.3	V
V_{CE}	CE Pin Input Voltage	9	V
I_{EXT}	EXT Pin Inductor Drive Output Current	±40	mA
PD	Power Dissipation	250	mW
Topt	Operating Temperature Range	-40~+85	°C
Tstg	Storage Temperature Range	-55~+125	°C

ELECTRICAL CHARACTERISTICS

- **R1210NXX2**

(Topt=25°C)

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit
V_{OUT}	Output Voltage	V_{IN}=V_{SET}×0.6, I_{OUT}=1mA	×0.975		×1.025	V
V_{IN}	Maximum Input Voltage				8	V
$\Delta V_{OUT}/\Delta T$	Step-up Output Voltage Temperature Coefficient	-40°C≤ Topt ≤ 85°C		±100		ppm/°C
V_{START}	Start-up Voltage	V_{IN}=0V→2V			0.8	V
I_{DD2}	Supply Current 2	V_{OUT}=V_{CE}=V_{SET}+0.5V		10	15	µA (xx2C)
				15	22	µA (xx2D)
Istandby	Supply Current 3(Standby)	V_{OUT}=6.5V V_{CE}=0V			0.5	µA
I_{DD1}	Supply Current1	V_{OUT}=V_{SET}×0.96 EXT at no load 2.2V ≤ Vset ≤ 2.4V		18	35	µA (xx2C)
				23	45	µA (xx2D)
		V_{OUT}=V_{SET}×0.96 EXT at no load 2.5V ≤ Vset ≤ 3.0V		20	40	µA (xx2C)
				25	50	µA (xx2D)
		V_{OUT}=V_{SET}×0.96 EXT at no load 3.1V ≤ Vset ≤ 3.9V		25	50	µA (xx2C)
				30	60	µA (xx2D)
		V_{OUT}=V_{SET}×0.96 EXT at no load 4V ≤ Vset ≤ 4.4V		30	60	µA (xx2C)
				35	70	µA (xx2D)
		V_{OUT}=V_{SET}×0.96 EXT at no load 4.5V ≤ Vset ≤ 4.9V		35	70	µA (xx2C)
				40	80	µA (xx2D)

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit
I_{DD1}	Supply Current1	$V_{OUT}=V_{SET}\times0.96$ EXT at no load 5V ≤ Vset ≤ 5.4V		45	90	µA (xx2C)
				50	100	µA (xx2D)
		$V_{OUT}=V_{SET}\times0.96$ EXT at no load 5.5V ≤ Vset ≤ 6.0V		50	100	µA (xx2C)
				55	110	µA (xx2D)
I_{DD2}	Supply Current2	$V_{OUT}=V_{CE}=V_{SET}+0.5V$		10	15	µA (xx2C)
				15	22	µA (xx2D)
I_{EXTH}	EXT "H" Output Current	2.2V ≤ V_{SET} ≤ 2.5V, $V_{EXT}=V_{OUT}$-0.4V			-1.0	mA
		2.6V ≤ V_{SET} ≤ 3.0V, $V_{EXT}=V_{OUT}$-0.4V			-2.0	
		3.1V ≤ V_{SET} ≤ 3.5V, $V_{EXT}=V_{OUT}$-0.4V			-2.5	
		3.6V ≤ V_{SET} ≤ 4.0V, $V_{EXT}=V_{OUT}$-0.4V			-3.0	
		4.1V ≤ V_{SET} ≤ 4.5V, $V_{EXT}=V_{OUT}$-0.4V			-3.5	
		4.6V ≤ V_{SET} ≤ 5.0V, $V_{EXT}=V_{OUT}$-0.4V			-4.0	
		5.1V ≤ V_{SET} ≤ 5.5V, $V_{EXT}=V_{OUT}$-0.4V			-4.5	
		5.6V ≤ V_{SET} ≤ 6.0V, $V_{EXT}=V_{OUT}$-0.4V			-5.0	
fosc	Maximum Oscillator Frequency	$V_{OUT}=V_{CE}=V_{SET}\times0.96$	80	100	120	kHz (xx2C)
			144	180	216	kHz (xx2D)

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit
Δfosc/ΔT	Oscillator Frequency Temperature Coefficient	-40°C≤ Topt ≤ 85°C		0.5		kHz/°C (xx2C)
				0.6		kHz/°C (xx2D)
Maxdty	Oscillator Maximum Duty Cycle	$V_{OUT}=V_{CE}=V_{SET}\times0.96$, ($V_{EXT}$: "H" side)	70	85	97	%
I_{EXTL}	EXT "L" Output Current	2.2V ≤ V_{SET} ≤ 2.5V, V_{EXT}=0.4V	1.0			mA
		2.6V ≤ V_{SET} ≤ 3.0V, V_{EXT}=0.4V	2.0			
		3.1V ≤ V_{SET} ≤ 3.5V, V_{EXT}=0.4V	2.5			
		3.6V ≤ V_{SET} ≤ 4.0V, V_{EXT}=0.4V	3.0			
		4.1V ≤ V_{SET} ≤ 4.5V, V_{EXT}=0.4V	3.5			
		4.6V ≤ V_{SET} ≤ 5.0V, V_{EXT}=0.4V	4.0			
		5.1V ≤ V_{SET} ≤ 5.5V, V_{EXT}=0.4V	4.5			
		5.6V ≤ V_{SET} ≤ 6.0V, V_{EXT}=0.4V	5.0			
V_{CEH}	CE "H" Input Voltage	$V_{OUT}=V_{SET}\times0.96$	0.9			V
V_{CEL}	CE "L" Input Voltage	$V_{OUT}=V_{SET}\times0.96$			0.3	V
I_{CEH}	CE "H" Input Current	$V_{OUT}=V_{CE}$=6.5V	-0.1	0	0.1	μA
I_{CEL}	CE "L" Input Current	V_{OUT}=6.5V, V_{CE}=0V	-0.1	0	0.1	μA

*Note: V_{SET} means setting Output Voltage.

TEST CIRCUITS

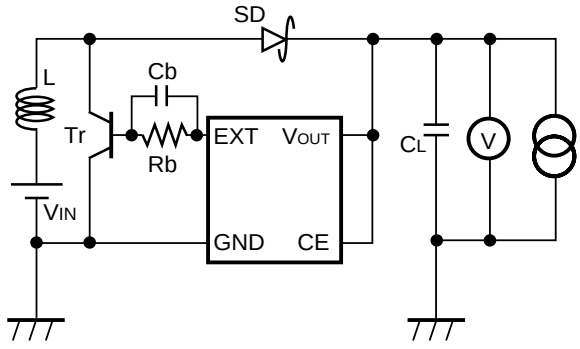

Test Circuit 1

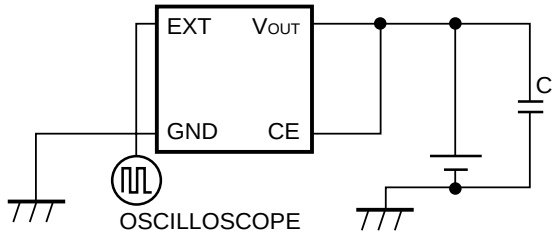

Test Circuit 2

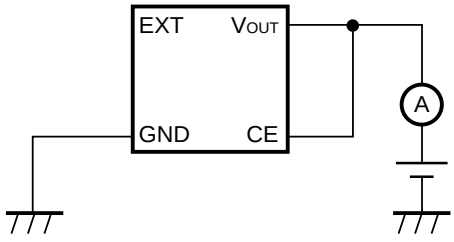

Test Circuit 3

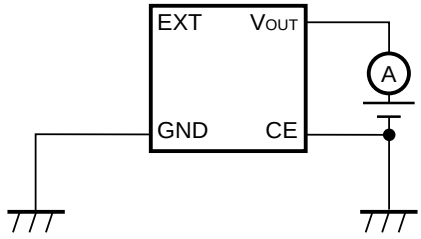

Test Circuit 4

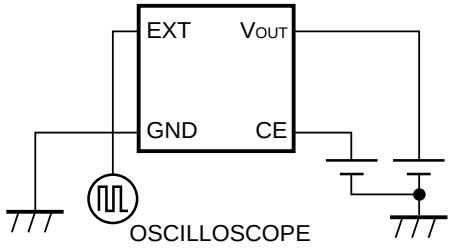

Test Circuit 5

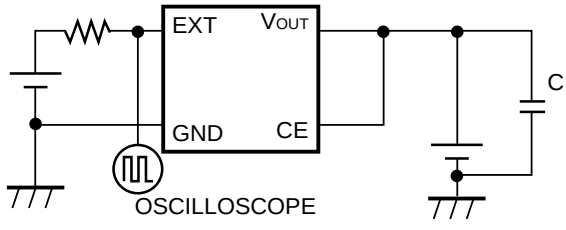

Test Circuit 6

Inductor (L) : 27µH (Sumida Electric Co., Ltd. CD104)
Diode (SD) : RB491D (Rohm, Schottky Type)
Capacitor (CL) : 47µF×2 (Tantalum Type)
Transistor (Tr) : 2SD1628G
Base Resistor (Rb) : 300Ω
Base Capacitor (Cb) : 0.01µF(Ceramic Type)

TYPICAL CHARACTERISTICS

1) Output Voltage vs. Output Current

R1210N302C

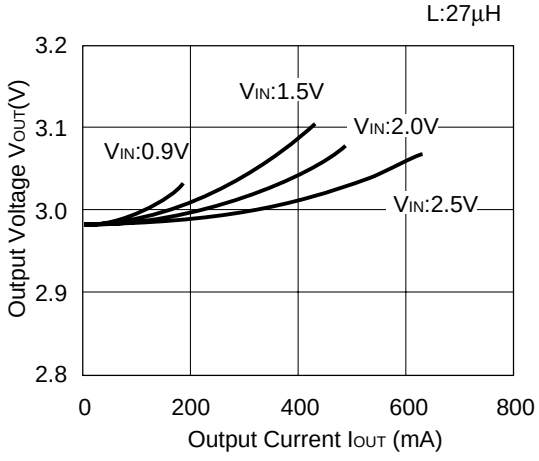

R1210N302D

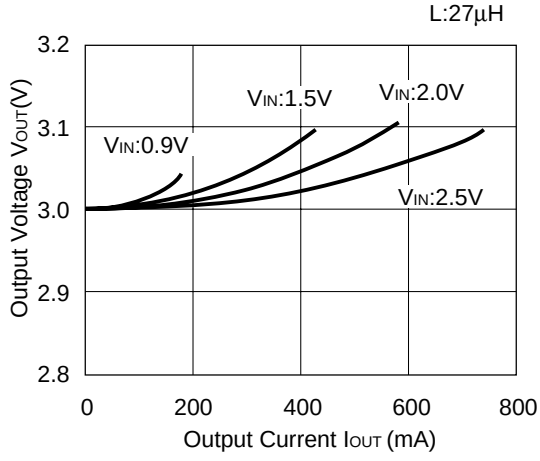

R1210N502C

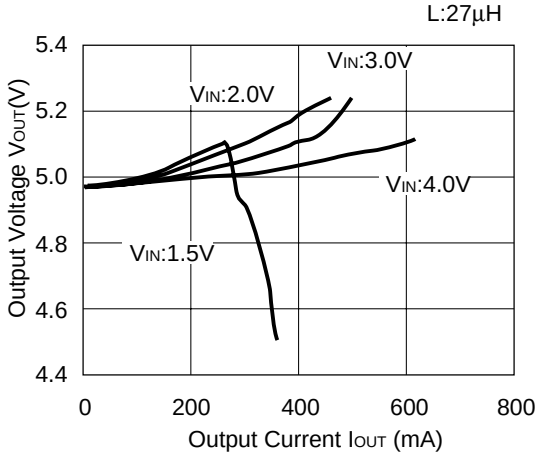

R1210N502D

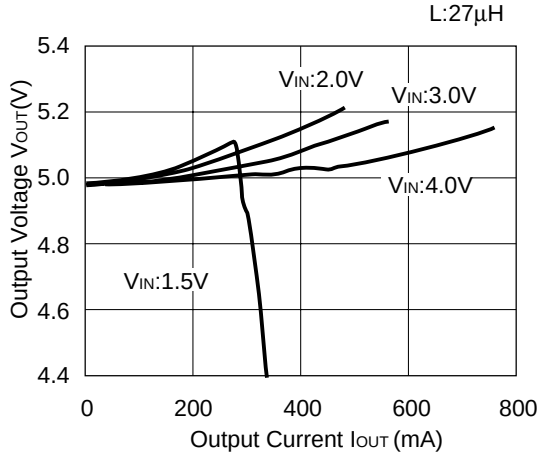

2) Efficiency vs. Output Current

R1210N302C

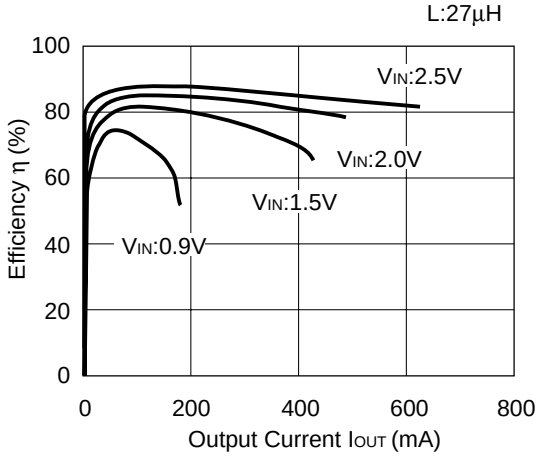

R1210N302D

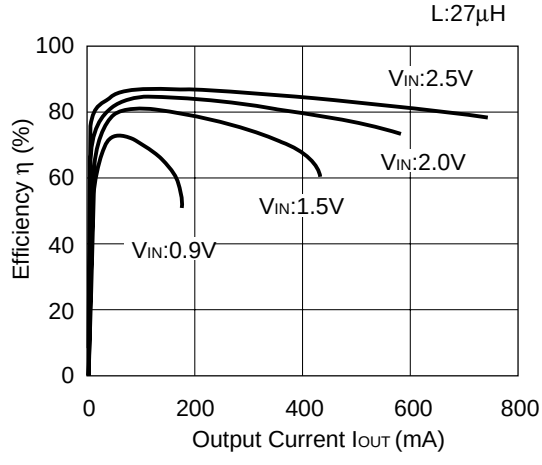

R1210N502C

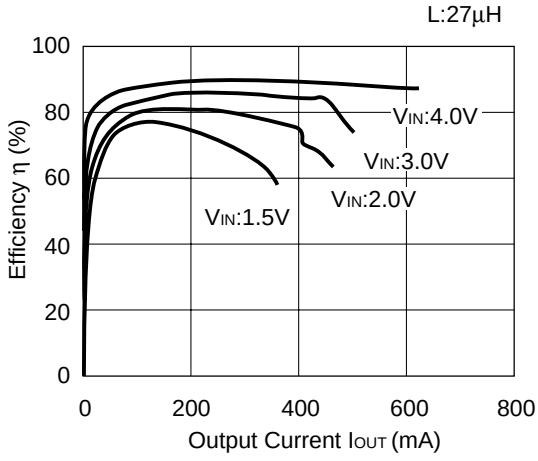

R1210N502D

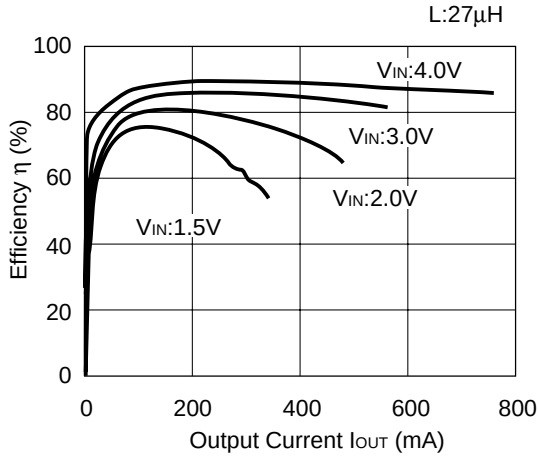

3) Ripple Voltage vs. Output Current

R1210N302C

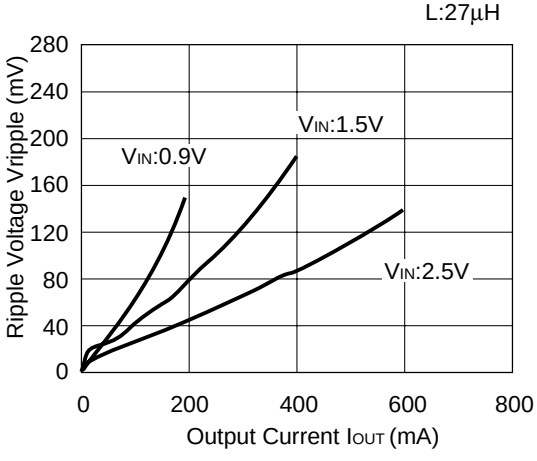

R1210N302D

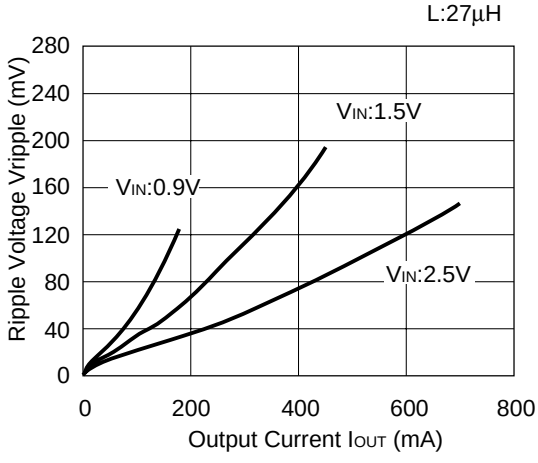

R1210N502C

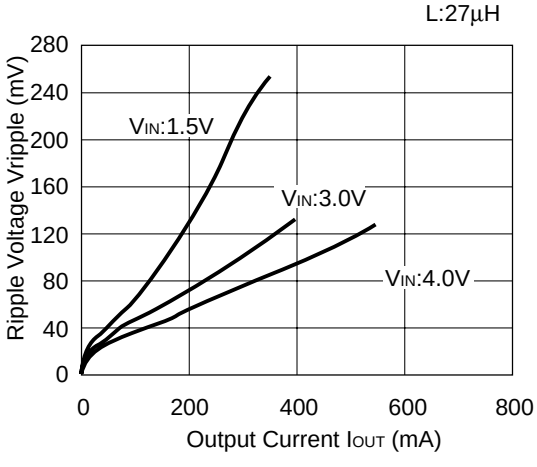

R1210N502D

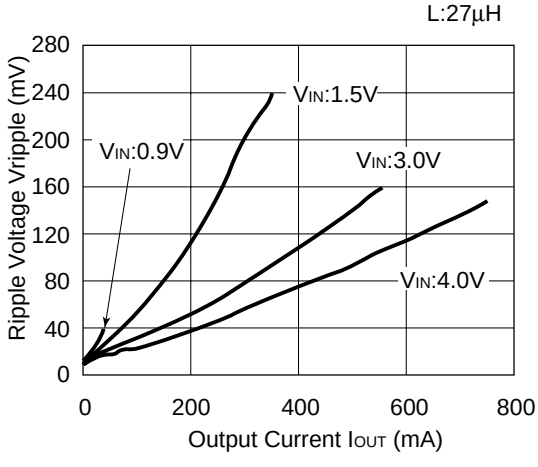

4) Start-up Voltage/ Hold-on Voltage vs. Output Current (Topt=25°C)

R1210N302C

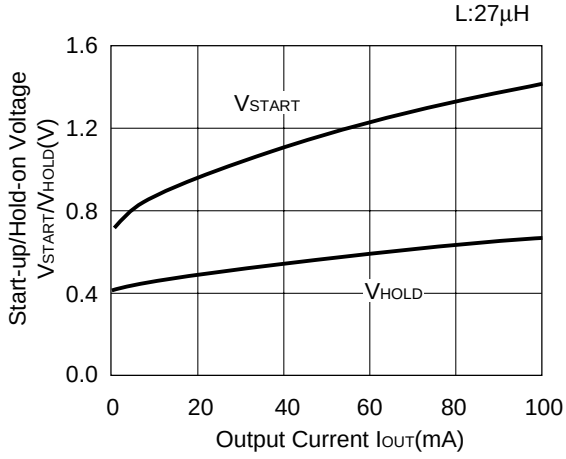

R1210N302D

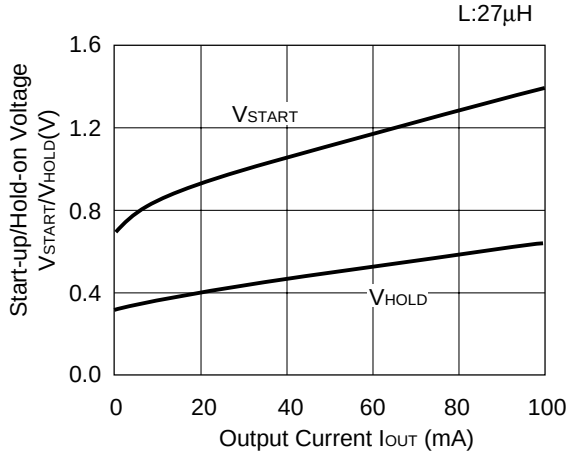

R1210N502C

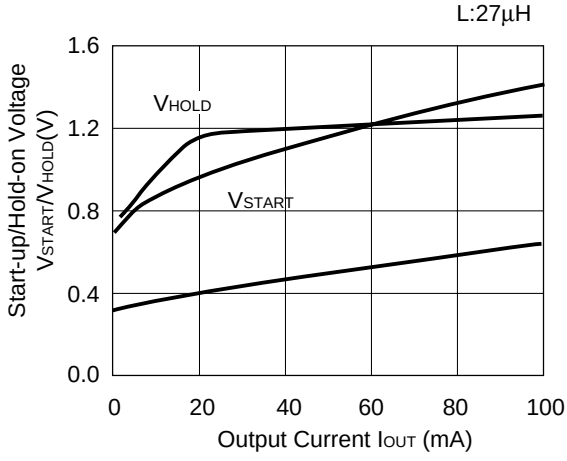

R1210N502D

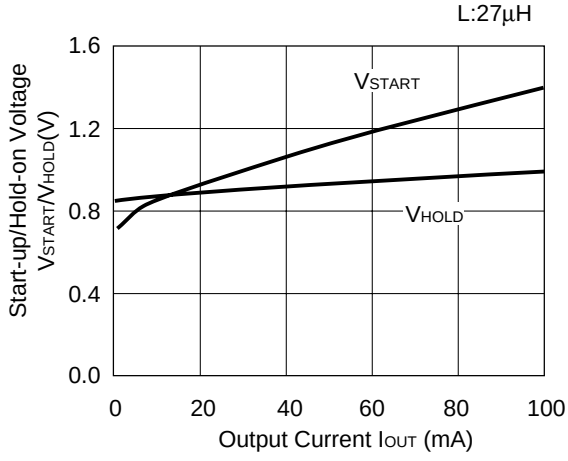

5) Output Voltage vs. Temperature

R1210N302C

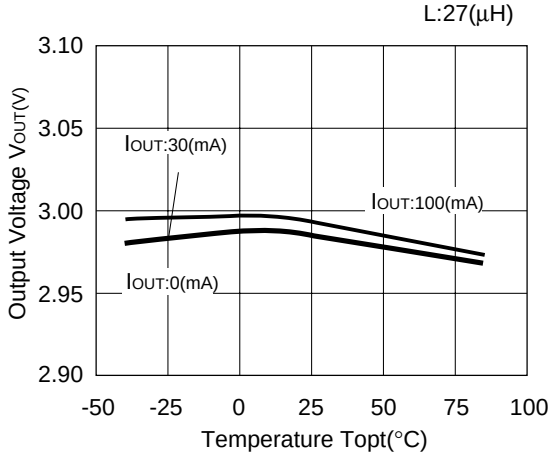

R1210N302D

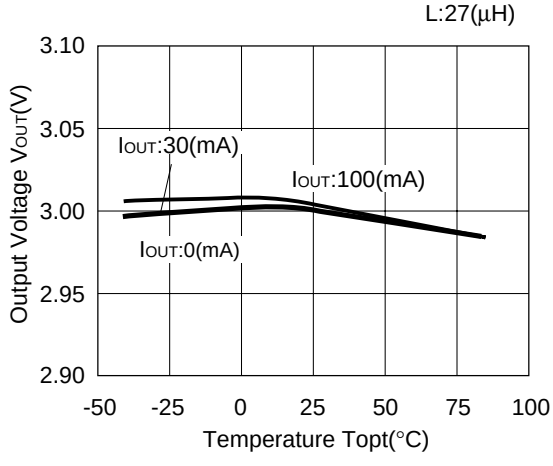

R1210N502C

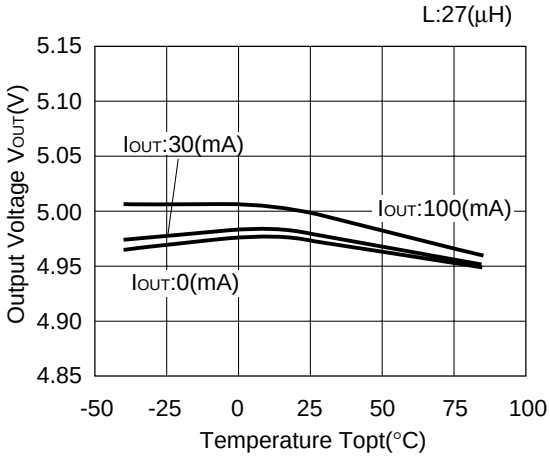

R1210N502D

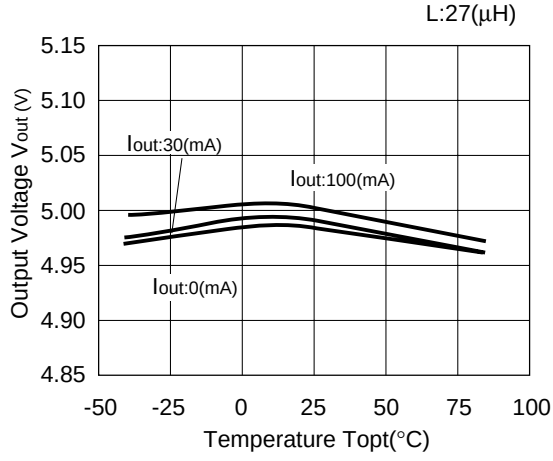

6) Supply Current 1 vs. Temperature

R1210N302C

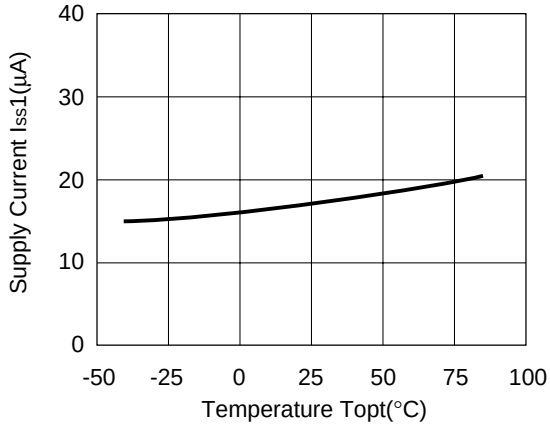

R1210N302D

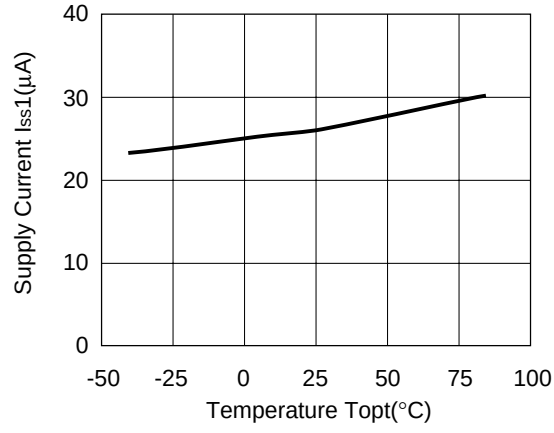

R1210N502C

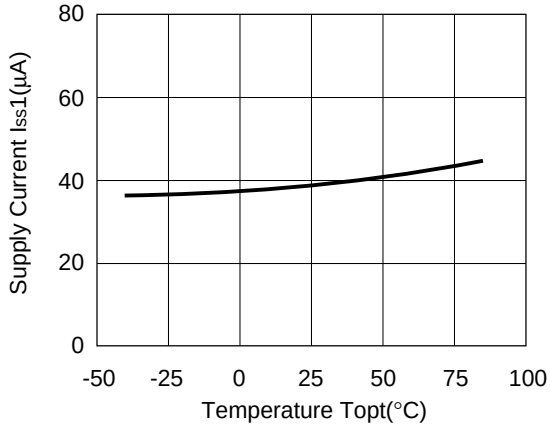

R1210N502D

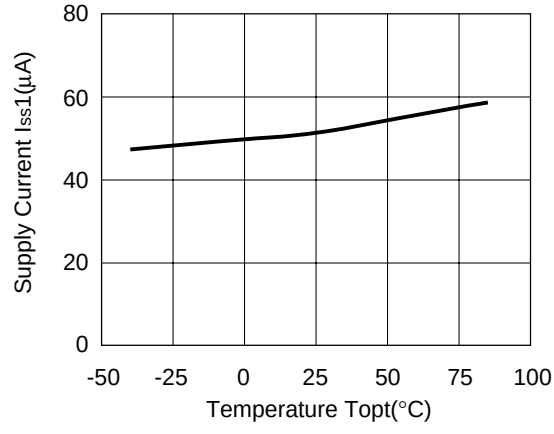

7) Supply Current 2 vs. Temperature

R1210N302C

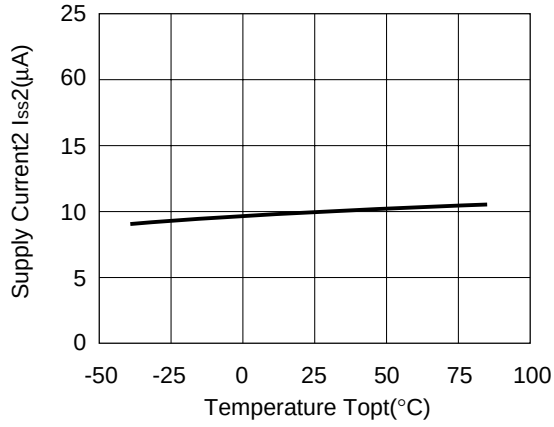

R1210N302D

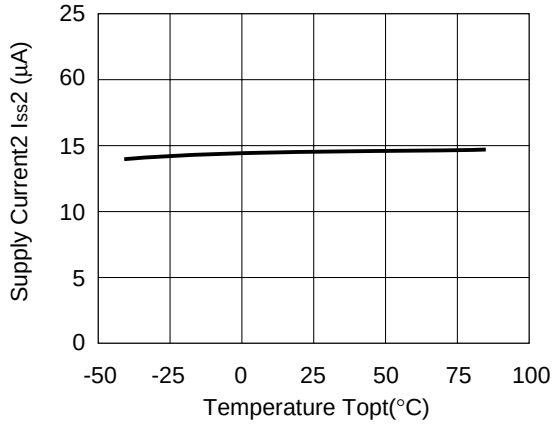

R1210N502C

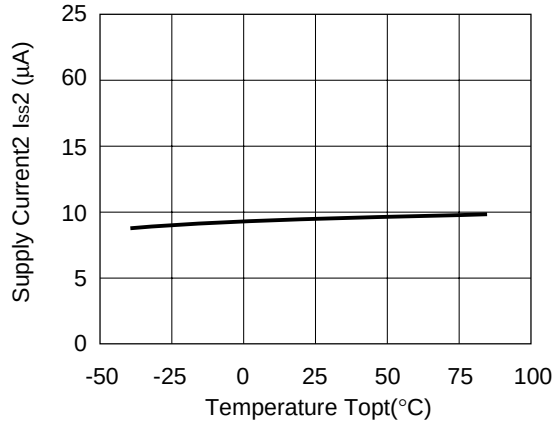

R1210N502D

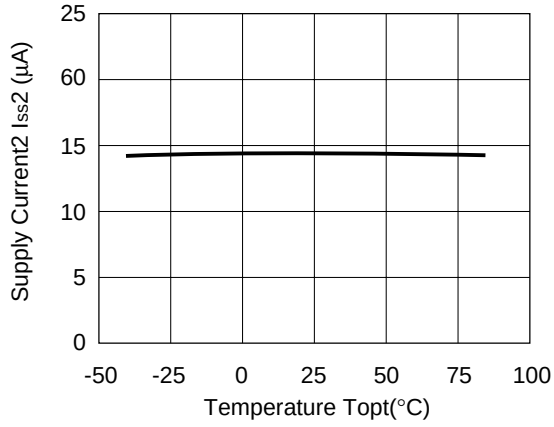

8) Supply Current 3 vs. Temperature

R1210N302C

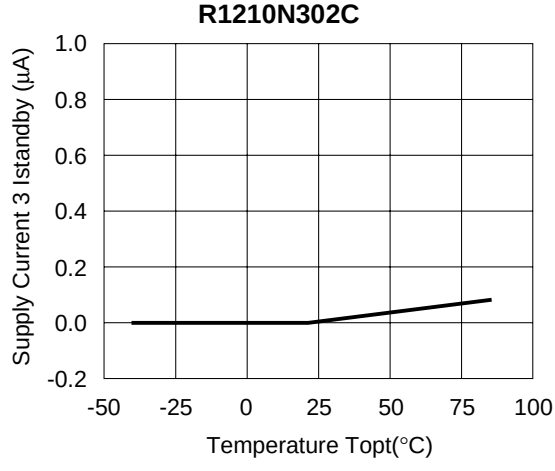

R1210N302D

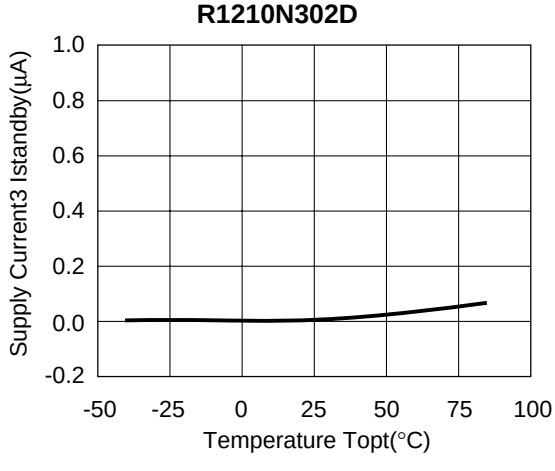

R1210N502C

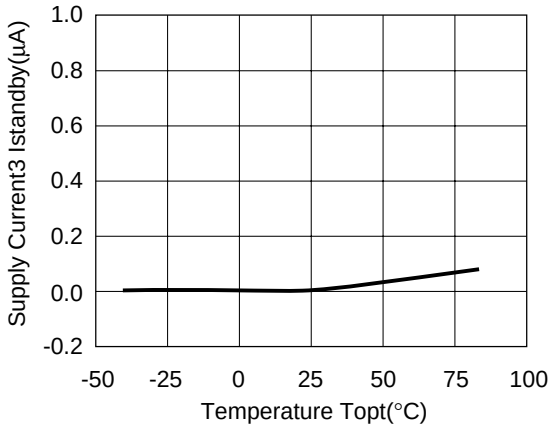

R1210N502D

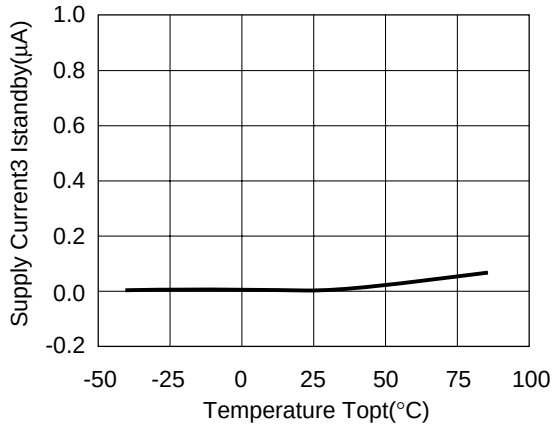

9) Oscillator Frequency vs. Temperature

R1210N302C

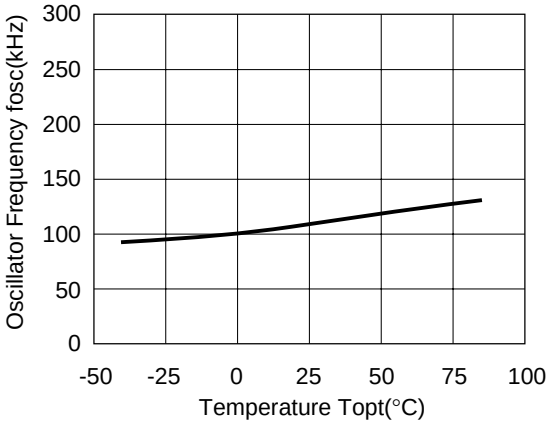

R1210N302D

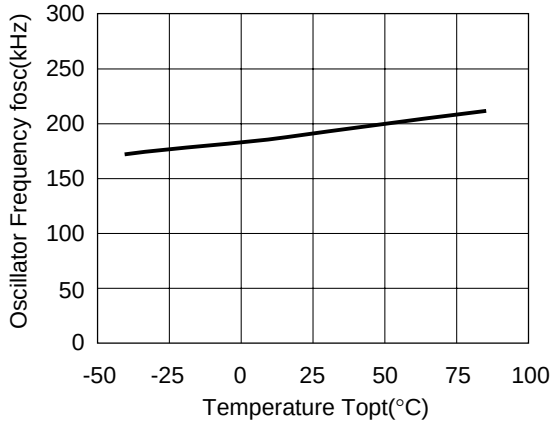

R1210N502C

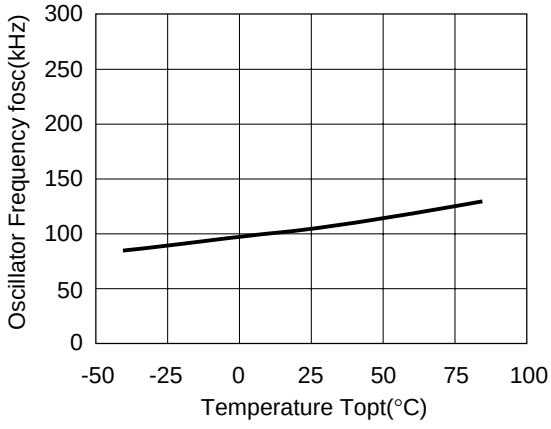

R1210N502D

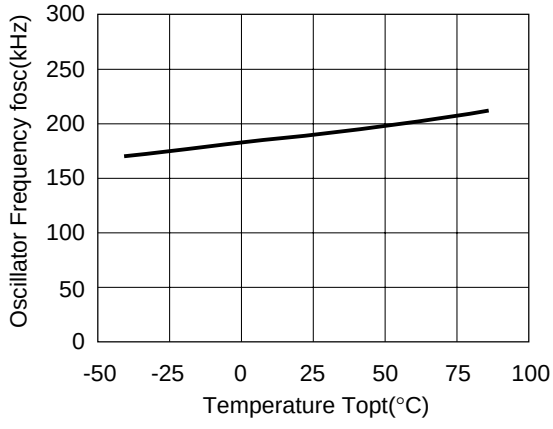

10) Maximum Duty Cycle vs. Temperature

R1210N302C

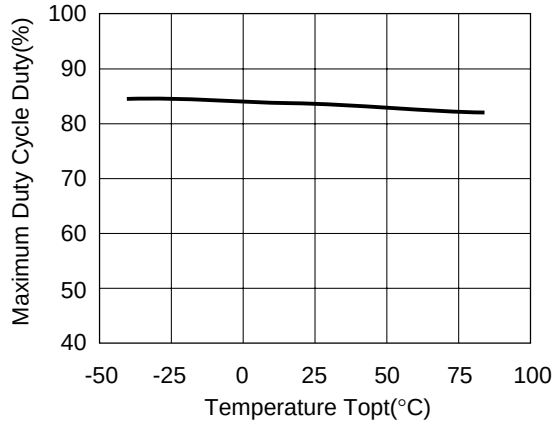

R1210N302D

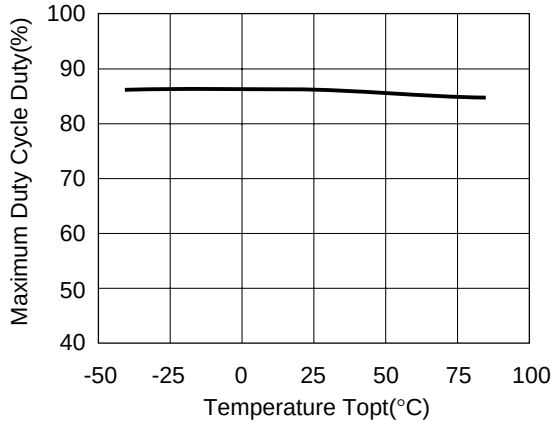

R1210N502C

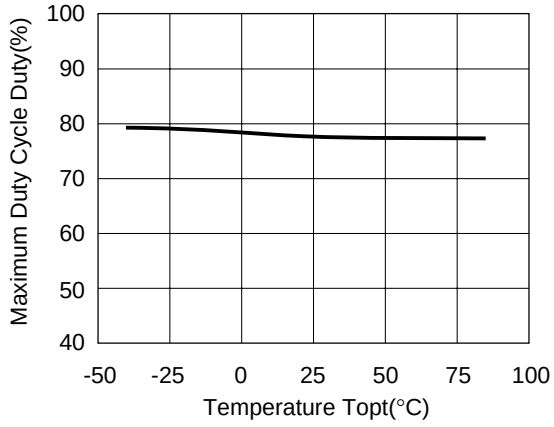

R1210N502D

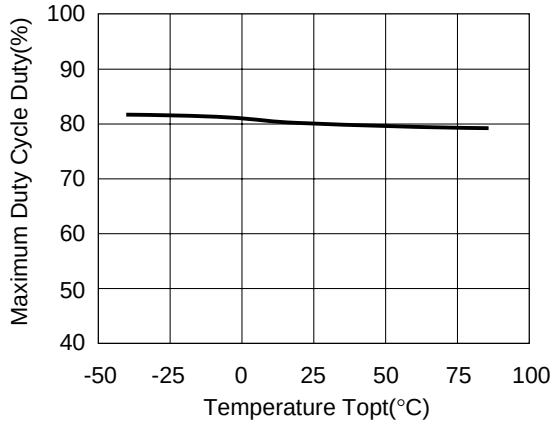

11) EXT “H” Output Current vs. Temperature

R1210N302C

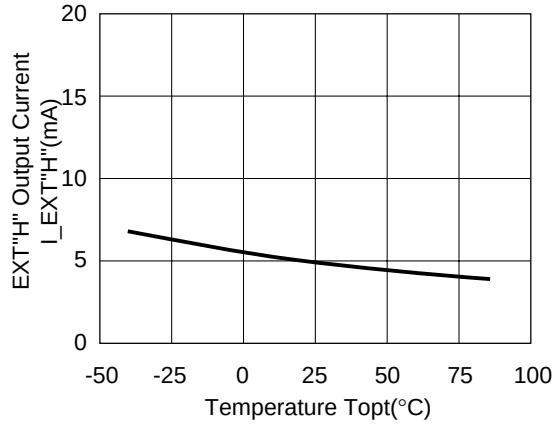

R1210N302D

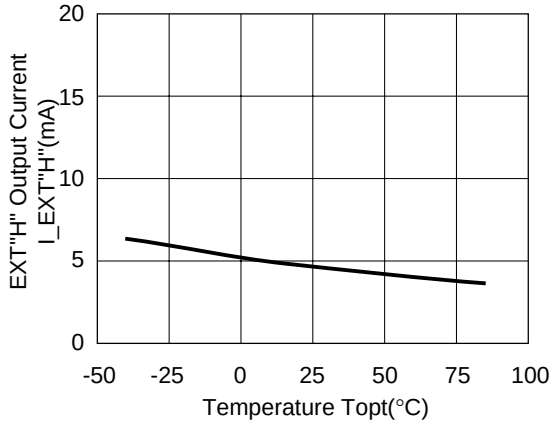

R1210N502C

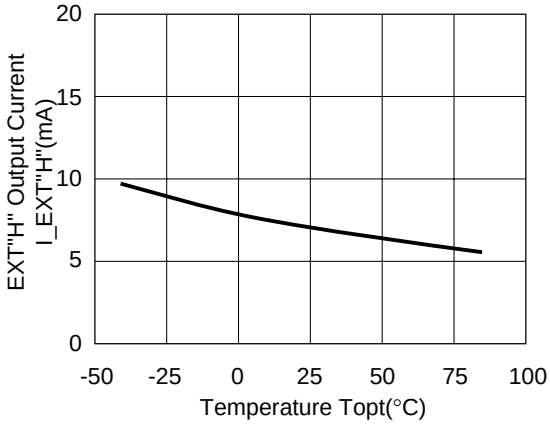

R1210N502D

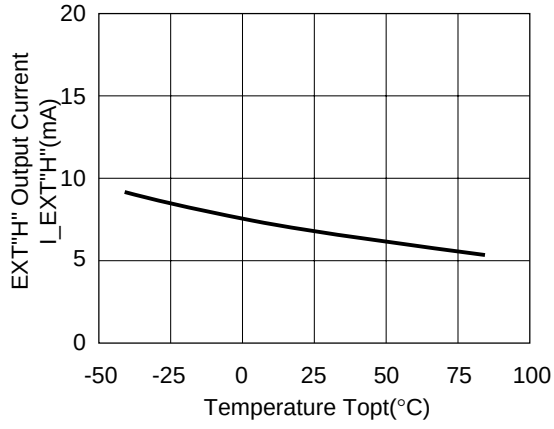

12) EXT “L” Output Current vs. Temperature

R1210N302C

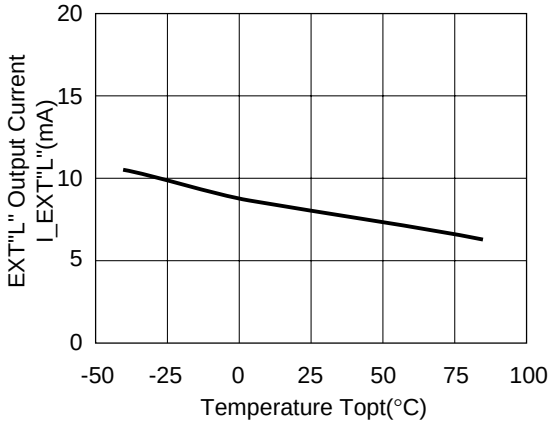

R1210N302D

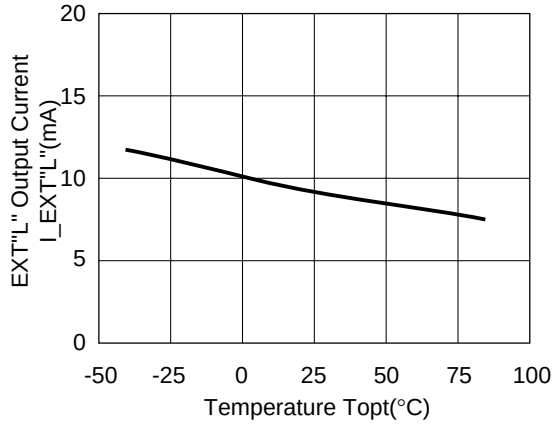

R1210N502C

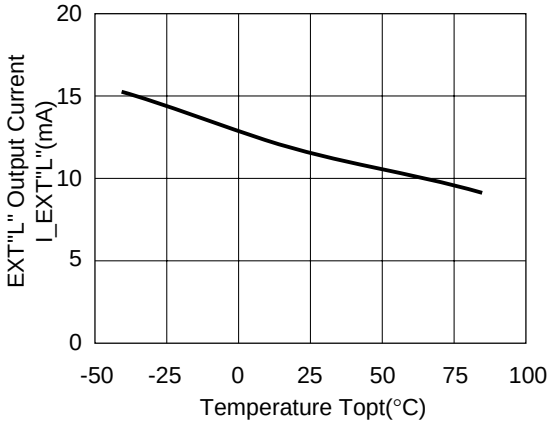

R1210N502D

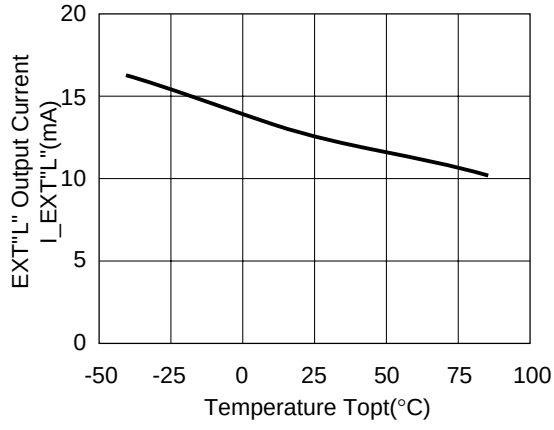

13) CE “H” Input Voltage vs. Temperature

R1210N602C

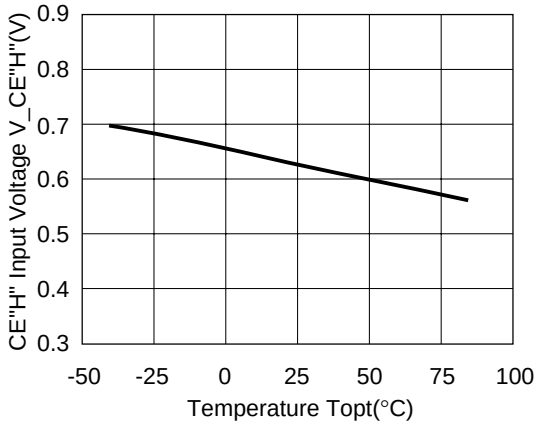

R1210N602D

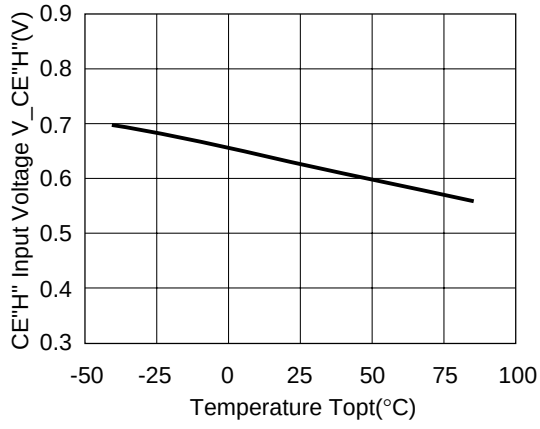

14) CE “L” Input Voltage vs. Temperature

R1210N602C

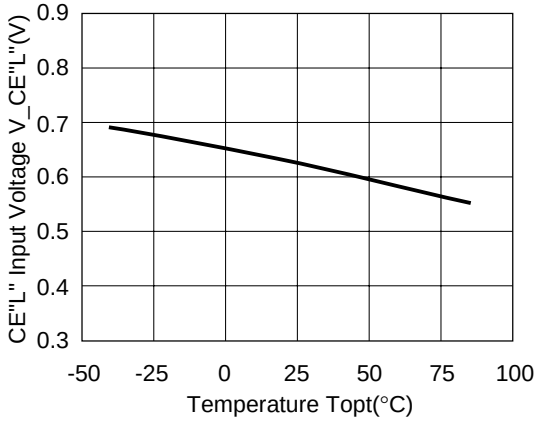

R1210N602D

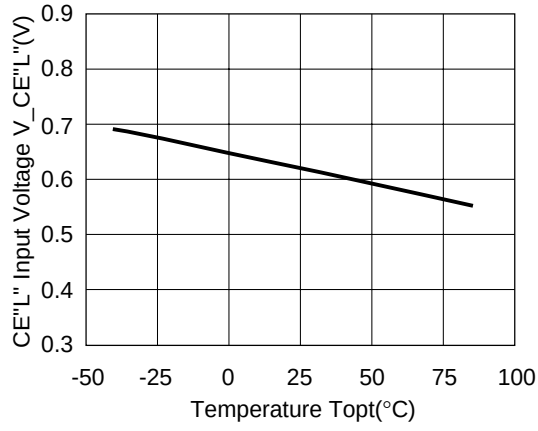

15) Output Waveform at Power-on (Topt: 25°C)

((R1210N502C)) (V_{IN}: 0[V]→3.0[V])

I_{OUT}: 1[mA]

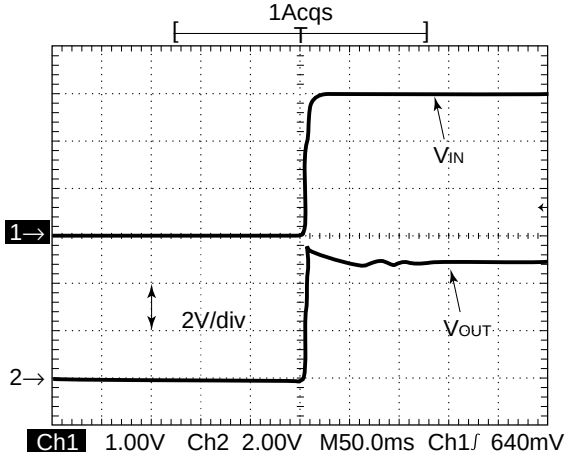

I_{OUT}: 100[mA]

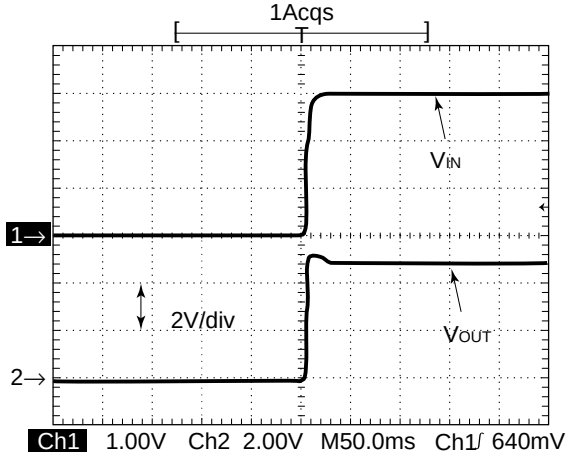

((R1210N502D)) (V_{IN}: 0[V]→3.0[V])

I_{OUT}: 1[mA]

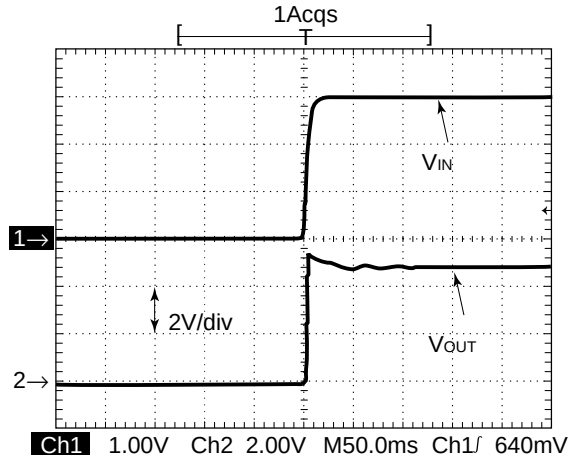

I_{OUT}: 100[mA]

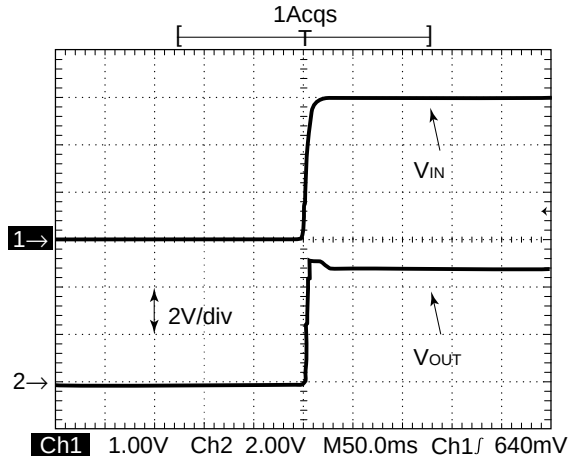

((R1210N302C)) (V_{IN}: 0[V]→1.5[V])

I_{OUT}: 1[mA]

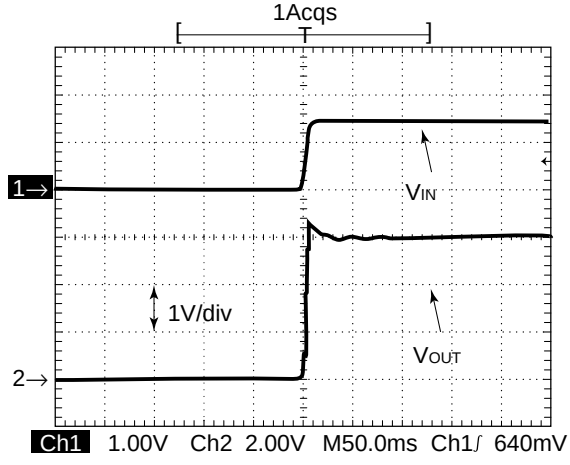

I_{OUT}: 100[mA]

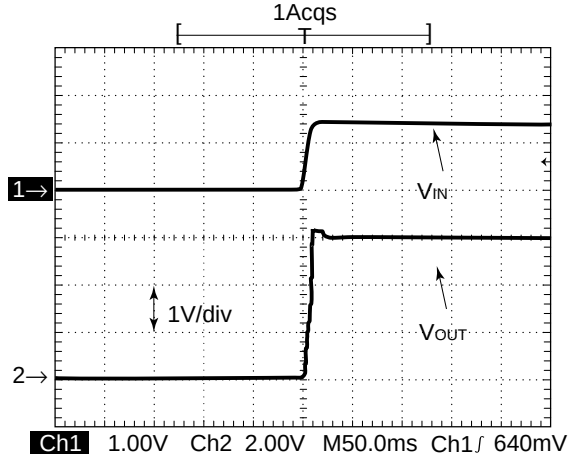

((R1210N302D)) (V_{IN}: 0[V]→1.5[V])

I_{OUT}: 1[mA]

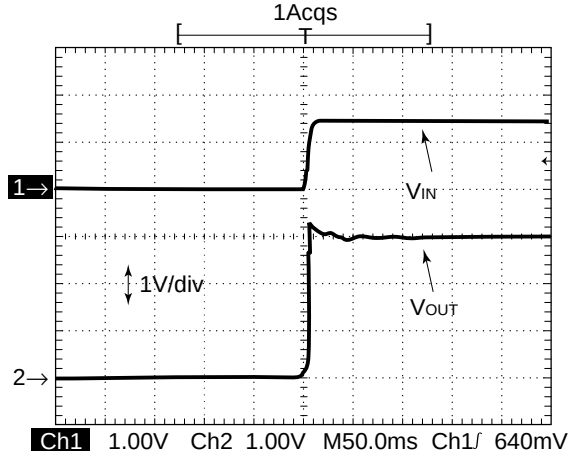

I_{OUT}: 100[mA]

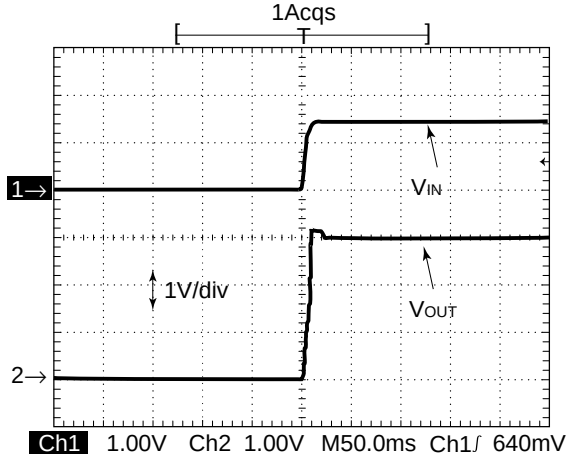

16) Load Transient Response (Topt: 25°C)

((R1210N502C)) (V_{IN}: 3.0[V], I_{OUT}: 1[mA]→200[mA])

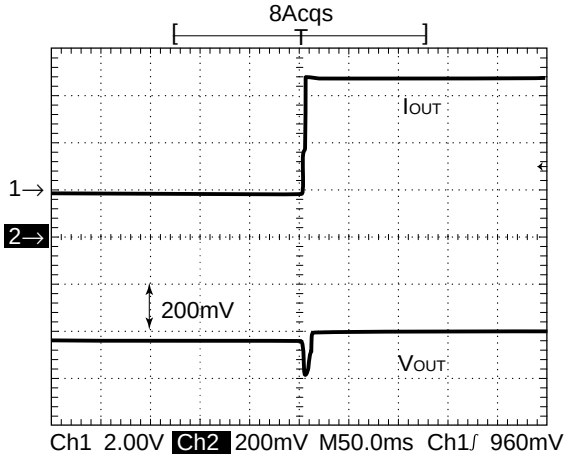

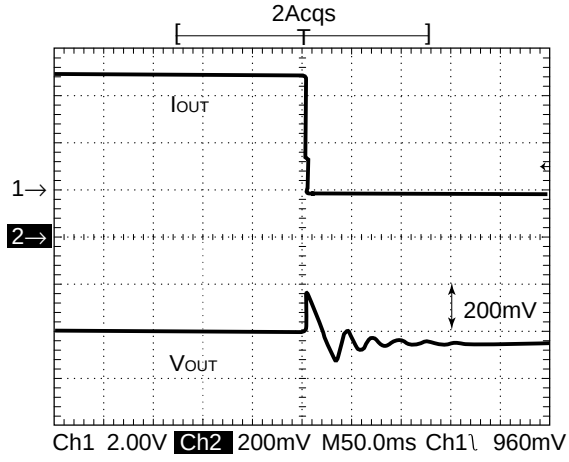

((R1210N502D)) (V_{IN}: 3.0[V], I_{OUT}: 1[mA]→200[mA])

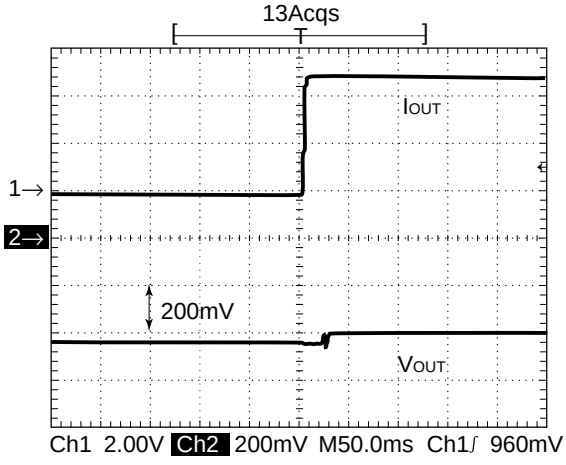

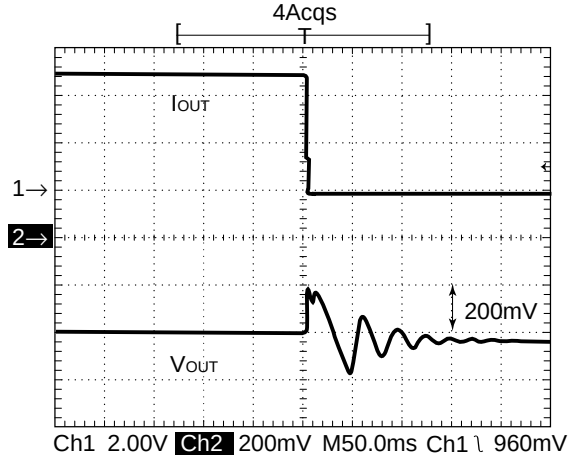

((R1210N302C)) (V_{IN}: 1.5[V], I_{OUT}: 1[mA]→100[mA])

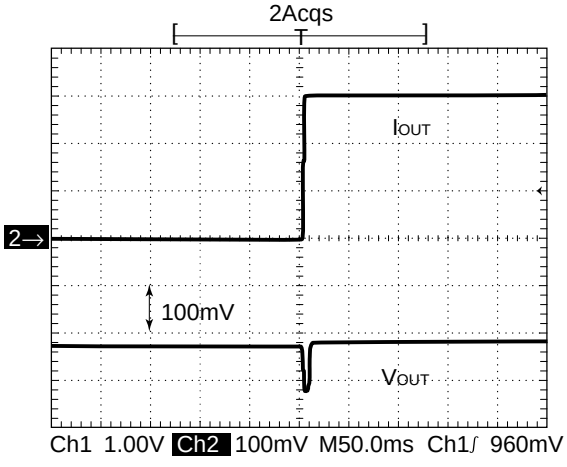

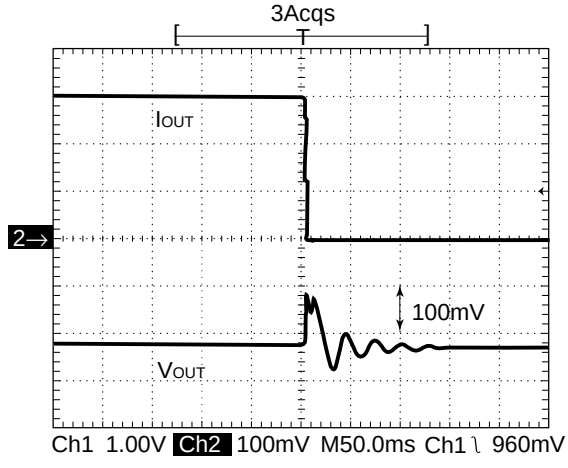

((R1210N302D)) (V_{IN}: 1.5[V], I_{OUT}: 1[mA]→100[mA])

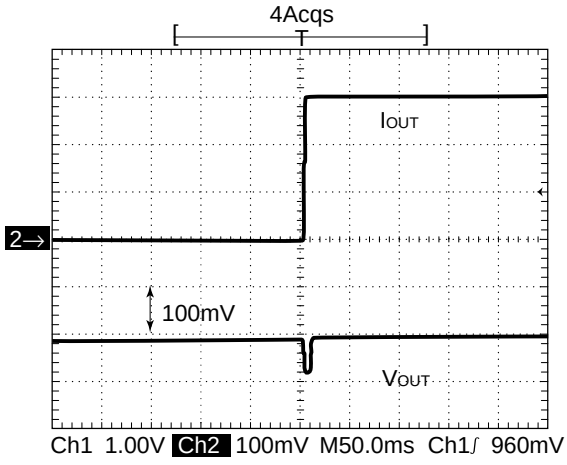

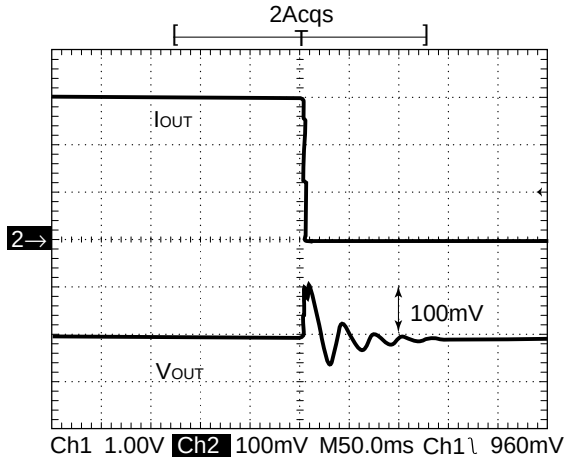

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru