

## Product Specification

### Industrial Temperature 1.25 Gb/s RoHS Compliant Long-Wavelength Pluggable SFP Transceiver

#### FTLF1318P3BTL

#### PRODUCT FEATURES

- Up to 1.25Gb/s bi-directional data links
- Hot-pluggable SFP footprint
- Built-in digital diagnostic functions
- 1310nm Fabry-Perot laser transmitter
- Duplex LC connector
- RoHS compliant and Lead Free
- Up to 10 km on 9/125µm SMF
- Metal enclosure for lower EMI
- Single 3.3V power supply
- Low power dissipation <600mW typical
- Industrial operating temperature range: -40°C to 85°C



#### APPLICATIONS

- 1.25Gb/s 1000Base-LX Ethernet
- 1.06 Gb/s Fibre Channel

Finisar's FTLF1318P3BTL Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA)<sup>4</sup>. They simultaneously comply with Gigabit Ethernet as specified in IEEE Std 802.3<sup>1</sup> and 1x Fibre Channel as defined in FC-P1-4 Rev. 8.00<sup>3</sup>. They are RoHS compliant and lead-free per Directive 2002/95/EC<sup>5</sup> and Finisar Appl. Note AN-2038. Digital diagnostics functions are available via the 2-wire serial bus specified in the SFP MSA.

#### PRODUCT SELECTION


|                      |
|----------------------|
| <b>FTLF1318P3BTL</b> |
|----------------------|

**I. Pin Descriptions**

| Pin | Symbol             | Name/Description   | Ref. |
|-----|--------------------|--|------|
| 1   | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 2   | T <sub>FAULT</sub> | Transmitter Fault.   | 2    |
| 3   | T <sub>DIS</sub>   | Transmitter Disable. Laser output disabled on high or open.    | 3    |
| 4   | MOD_DEF(2)         | Module Definition 2. Data line for Serial ID.                  | 4    |
| 5   | MOD_DEF(1)         | Module Definition 1. Clock line for Serial ID.                 | 4    |
| 6   | MOD_DEF(0)         | Module Definition 0. Grounded within the module.               | 4    |
| 7   | Rate Select        | No connection required   | 5    |
| 8   | LOS                | Loss of Signal indication. Logic 0 indicates normal operation. | 6    |
| 9   | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 10  | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 11  | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 12  | RD-                | Receiver Inverted DATA out. AC Coupled                         |      |
| 13  | RD+                | Receiver Non-inverted DATA out. AC Coupled                     |      |
| 14  | V <sub>EER</sub>   | Receiver Ground (Common with Transmitter Ground)               | 1    |
| 15  | V <sub>CCR</sub>   | Receiver Power Supply  |      |
| 16  | V <sub>CCT</sub>   | Transmitter Power Supply                                       |      |
| 17  | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)               | 1    |
| 18  | TD+                | Transmitter Non-Inverted DATA in. AC Coupled.                  |      |
| 19  | TD-                | Transmitter Inverted DATA in. AC Coupled.                      |      |
| 20  | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)               | 1    |

**Notes:**

1. Circuit ground is internally isolated from chassis ground.
2. T<sub>FAULT</sub> is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to V<sub>cc</sub> + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on T<sub>DIS</sub> >2.0V or open, enabled on T<sub>DIS</sub> <0.8V.
4. Should be pulled up with 4.7k - 10 kohms on host board to a voltage between 2.0V and 3.6V. MOD\_DEF(0) pulls line low to indicate module is plugged in.
5. Finisar FTLF1318xxxx transceivers operate at 1x Fibre Channel and Gigabit Ethernet data rates and respective protocols without active control.
6. LOS is open collector output. Should be pulled up with 4.7k – 10 kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

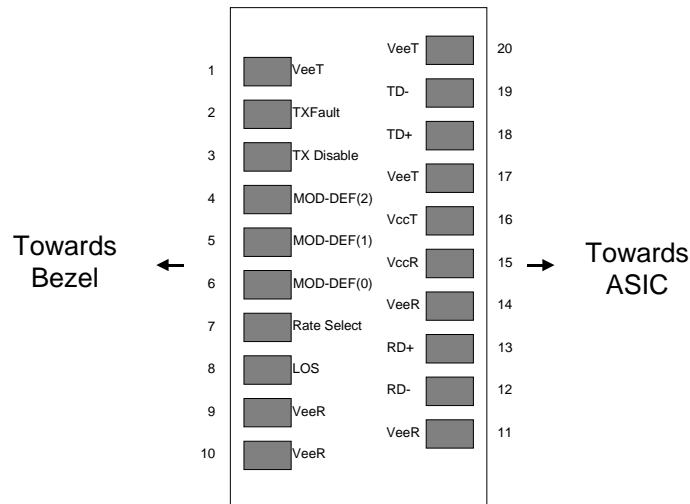

Pinout of Connector Block on Host Board

## II. Absolute Maximum Ratings

| Parameter                  | Symbol          | Min  | Typ | Max | Unit | Ref. |
|----------------------------|-----------------|------|-----|-----|------|------|
| Maximum Supply Voltage     | V <sub>CC</sub> | -0.5 |     | 4.0 | V    |      |
| Storage Temperature        | T <sub>S</sub>  | -40  |     | 100 | °C   |      |
| Case Operating Temperature | T <sub>OP</sub> | -40  |     | 85  | °C   |      |
| Relative Humidity          | RH              | 0    |     | 85  | %    | 1    |

## III. Electrical Characteristics (T<sub>OP</sub> = -40 to 85 °C, V<sub>CC</sub> = 3.00 to 3.60 Volts)

| Parameter                         | Symbol                 | Min                   | Typ | Max                             | Unit | Ref. |
|-----------------------------------|------------------------|-----------------------|-----|---------------------------------|------|------|
| Supply Voltage                    | V <sub>CC</sub>        | 3.00                  |     | 3.60                            | V    |      |
| Supply Current                    | I <sub>CC</sub>        |                       |     | 300                             | mA   |      |
| <b>Transmitter</b>                |                        |                       |     |                                 |      |      |
| Input differential impedance      | R <sub>in</sub>        |                       | 100 |                                 | Ω    | 2    |
| Single ended data input swing     | V <sub>in,pp</sub>     | 250                   |     | 1200                            | mV   |      |
| Transmit Disable Voltage          | V <sub>D</sub>         | V <sub>CC</sub> – 1.3 |     | V <sub>CC</sub>                 | V    |      |
| Transmit Enable Voltage           | V <sub>EN</sub>        | V <sub>EE</sub>       |     | V <sub>EE</sub> + 0.8           | V    | 3    |
| Transmit Disable Assert Time      |                        |                       |     | 10                              | us   |      |
| <b>Receiver</b>                   |                        |                       |     |                                 |      |      |
| Single ended data output swing    | V <sub>out,pp</sub>    | 300                   | 400 | 800                             | mV   | 4    |
| Data output rise time             | t <sub>r</sub>         |                       |     | 300                             | ps   | 5    |
| Data output fall time             | t <sub>f</sub>         |                       |     | 300                             | ps   | 5    |
| LOS Fault                         | V <sub>LOS fault</sub> | V <sub>CC</sub> – 0.5 |     | V <sub>CC</sub> <sub>HOST</sub> | V    | 6    |
| LOS Normal                        | V <sub>LOS norm</sub>  | V <sub>EE</sub>       |     | V <sub>EE</sub> +0.5            | V    | 6    |
| Power Supply Rejection            | PSR                    | 100                   |     |                                 | mVpp | 7    |
| Deterministic Jitter Contribution | RX Δ DJ                |                       |     | 80                              | ps   | 8    |
| Total Jitter Contribution         | RX Δ TJ                |                       |     | 122.4                           | ps   |      |

**Notes:**

1. Non-condensing.
2. AC coupled.
3. Or open circuit.
4. Into 100 ohm differential termination.
5. 20 – 80 %
6. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
7. All transceiver specifications are compliant with a power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the power supply filtering network shown on page 23 of the Small Form-factor Pluggable (SFP) Transceiver MultiSource Agreement (MSA), September 14, 2000.
8. Measured with DJ-free data input signal. In actual application, output DJ will be the sum of input DJ and  $\Delta$  DJ.

**IV. Optical Characteristics (T<sub>OP</sub> = -40 to 85 °C, V<sub>CC</sub> = 3.00 to 3.60 Volts)**

| Parameter   | Symbol                          | Min  | Typ | Max   | Unit    | Ref. |
|---|---------------------------------|------|-----|-------|---------|------|
| <b>Transmitter</b>                                    |                                 |      |     |       |         |      |
| Output Opt. Power                                     | P <sub>OUT</sub>                | -9.5 |     | -3    | dBm     | 1    |
| Optical Wavelength                                    | $\lambda$                       | 1270 |     | 1360  | nm      | 2    |
| Spectral Width  | $\sigma$                        |      |     | 3     | nm      | 2    |
| Optical Modulation Amplitude                          | OMA                             | 174  |     |       | $\mu$ W | 2,3  |
| Optical Rise/Fall Time                                | t <sub>r</sub> / t <sub>f</sub> |      | 150 | 260   | ps      | 4    |
| RIN   |                                 |      |     | -120  | dB/Hz   |      |
| Deterministic Jitter Contribution                     | TX $\Delta$ DJ                  |      | 20  | 56.5  | ps      | 5    |
| Total Jitter Contribution                             | TX $\Delta$ TJ                  |      | 50  | 119   | ps      |      |
| Optical Extinction Ratio                              | ER                              | 9    |     |       | dB      |      |
| <b>Receiver</b>                                       |                                 |      |     |       |         |      |
| Average Rx Sensitivity @ 1.25 Gb/s (Gigabit Ethernet) | R <sub>SENS2</sub>              |      |     | -19   | dBm     | 6, 7 |
| Average Rx Sensitivity @ 1.06 Gb/s (1X Fibre Channel) | R <sub>SENS1</sub>              |      |     | -21   | dBm     | 6, 7 |
| Stressed RX sens. = 1.25 Gb/s                         |                                 |      |     | -14.5 | dBm     |      |
| Average Received Power                                | R <sub>XMAX</sub>               |      |     | 0     | dBm     |      |
| Receiver Elec. 3 dB cutoff freq.                      |                                 |      |     | 1500  | MHz     |      |
| Optical Center Wavelength                             | $\lambda_C$                     | 1265 |     | 1600  | nm      |      |
| Return Loss   |                                 | 12   |     |       | dB      |      |
| LOS De-Assert   | LOS <sub>D</sub>                |      |     | -19   | dBm     |      |
| LOS Assert  | LOS <sub>A</sub>                | -30  |     |       | dBm     |      |
| LOS Hysteresis  |                                 | 0.5  |     |       | dB      |      |

**Notes:**

1. Class 1 Laser Safety per FDA/CDRH and EN (IEC) 60825 regulations.
2. Also specified to meet curves in FC-PI-4 Rev. 8.00 Figure 21, which allow trade-off between wavelength, spectral width and OMA.
3. Equivalent extinction ratio specification for Fibre Channel. Allows smaller ER at higher average power.
4. Unfiltered, 20-80%. Complies with IEEE 802.3 (Gig. E) and FC 1x eye masks when filtered.
5. Measured with DJ-free data input signal. In actual application, output DJ will be the sum of input DJ and  $\Delta$  DJ.
6. Measured with conformance signals defined in FC-PI-4 Rev. 8.00 specifications.
7. Measured with PRBS 2<sup>7</sup>-1 at 10<sup>-12</sup> BER

**V. General Specifications**

| Parameter  | Symbol            | Min  | Typ | Max        | Units  | Ref. |
|--|-------------------|------|-----|------------|--------|------|
| Data Rate  | BR                | 1062 |     | 1250       | Mb/sec | 1    |
| Bit Error Rate   | BER               |      |     | $10^{-12}$ |        | 2    |
| Max. Supported Link Length on 9/125 $\mu$ m SMF @ 1X Fibre Channel | L <sub>MAX1</sub> |      | 10  |            | km     | 3, 4 |
| Max. Supported Link Length on 9/125 $\mu$ m SMF @ Gigabit Ethernet | L <sub>MAX2</sub> |      | 10  |            | km     | 3, 4 |

**Notes:**

1. Gigabit Ethernet and 1x Fibre Channel compliant.
2. Tested with a PRBS 2<sup>7</sup>-1 test pattern.
3. Dispersion limited per FC-P1-4 Rev. 8.00
4. Attenuation of 0.55 dB/km is used for the link length calculations. Distances are indicative only.  
Please refer to the Optical Specifications in Table IV to calculate a more accurate link budget based on specific conditions in your application.

**VI. Environmental Specifications**

Finisar 1310nm Industrial Temperature SFP transceivers have an operating temperature range from -40°C to +85°C case temperature.

| Parameter                  | Symbol           | Min | Typ | Max | Units | Ref. |
|----------------------------|------------------|-----|-----|-----|-------|------|
| Case Operating Temperature | T <sub>op</sub>  | -40 |     | 85  | °C    |      |
| Storage Temperature        | T <sub>sto</sub> | -40 |     | 100 | °C    |      |

**VII. Regulatory Compliance**

Finisar transceivers are Class 1 Laser Products and comply with US FDA regulations. These products are certified by TÜV and CSA to meet the Class 1 eye safety requirements of EN (IEC) 60825 and the electrical safety requirements of EN (IEC) 60950. Copies of certificates are available at Finisar Corporation upon request.

## VIII. Digital Diagnostic Functions

Finisar FTLF1318P3BTL SFP transceivers support the 2-wire serial communication protocol as defined in the SFP MSA<sup>1</sup>. It is very closely related to the E<sup>2</sup> PROM defined in the GBIC standard, with the same electrical specifications.

The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Additionally, Finisar SFP transceivers provide a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.

The SFP MSA defines a 256-byte memory map in E<sup>2</sup> PROM that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged. The interface is identical to, and is thus fully backward compatible with both the GBIC Specification and the SFP Multi Source Agreement. The complete interface is described in Finisar Application Note AN-2030: "Digital Diagnostics Monitoring Interface for SFP Optical Transceivers".

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of the E<sup>2</sup> PROM that are not write-protected. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA, Mod Def 2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

For more information, please see the SFP MSA documentation<sup>1</sup> or Finisar Application Note AN-2030.

Digital diagnostics for the FTLF1318P3BTL are internally calibrated by default.

Please note that evaluation board FDB-1018 is available with Finisar ModDEMO software that allows simple to use communication over the 2-wire serial interface.

**IX. Digital Diagnostic Specifications**

FTLF1318P3BTL transceivers have internally calibrated digital diagnostics.


| Parameter                                      | Symbol                    | Min   | Typ | Max  | Units | Ref. |
|--|---------------------------|-------|-----|------|-------|------|
| <b>Accuracy</b>                                |                           |       |     |      |       |      |
| Internally measured transceiver temperature    | DD <sub>Temperature</sub> |       |     | ±3   | °C    |      |
| Internally measured transceiver supply voltage | DD <sub>Voltage</sub>     |       |     | ±100 | mV    |      |
| Measured TX bias current                       | DD <sub>Bias</sub>        |       |     | ±10  | %     | 1    |
| Measured TX output power                       | DD <sub>Tx-Power</sub>    |       |     | ±3   | dB    |      |
| Measured RX received average optical power     | DD <sub>Rx-Power</sub>    |       |     | ±3   | dB    |      |
| <b>Dynamic Range for Rated Accuracy</b>        |                           |       |     |      |       |      |
| Internally measured transceiver temperature    | DD <sub>Temperature</sub> | -40   |     | 85   | °C    |      |
| Internally measured transceiver supply voltage | DD <sub>Voltage</sub>     | 3.0   |     | 3.6  | V     |      |
| Measured TX bias current                       | DD <sub>Bias</sub>        | 0     |     | 60   | mA    |      |
| Measured TX output power                       | DD <sub>Tx-Power</sub>    | -11.5 |     | -1   | dBm   |      |
| Measured RX received average optical power     | DD <sub>Rx-Power</sub>    | -23   |     | 2    | dBm   |      |
| <b>Max Reporting Range</b>                     |                           |       |     |      |       |      |
| Internally measured transceiver temperature    | DD <sub>Temperature</sub> | -40   |     | 125  | °C    |      |
| Internally measured transceiver supply voltage | DD <sub>Voltage</sub>     | 2.8   |     | 4.0  | V     |      |
| Measured TX bias current                       | DD <sub>Bias</sub>        | 0     |     | 70   | mA    |      |
| Measured TX output power                       | DD <sub>Tx-Power</sub>    | -12.5 |     | 0    | dBm   |      |
| Measured RX received average optical power     | DD <sub>Rx-Power</sub>    | -24   |     | 3    | dBm   |      |

**Notes:**

1. Accuracy of Measured Tx Bias Current is 10% of the actual Bias Current from the laser driver to the laser.

## X. Mechanical Specifications


Finisar's Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA)<sup>3</sup>.


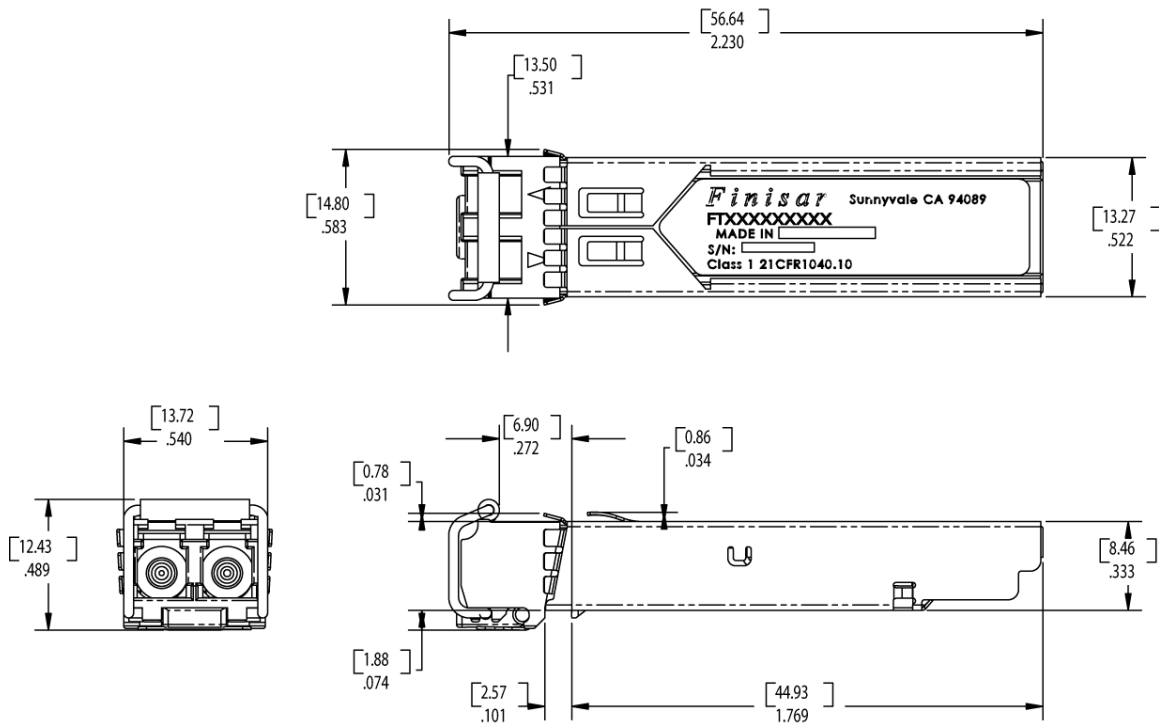


**FTLF1318P3BTL**



## XI. PCB Layout and Bezel Recommendations

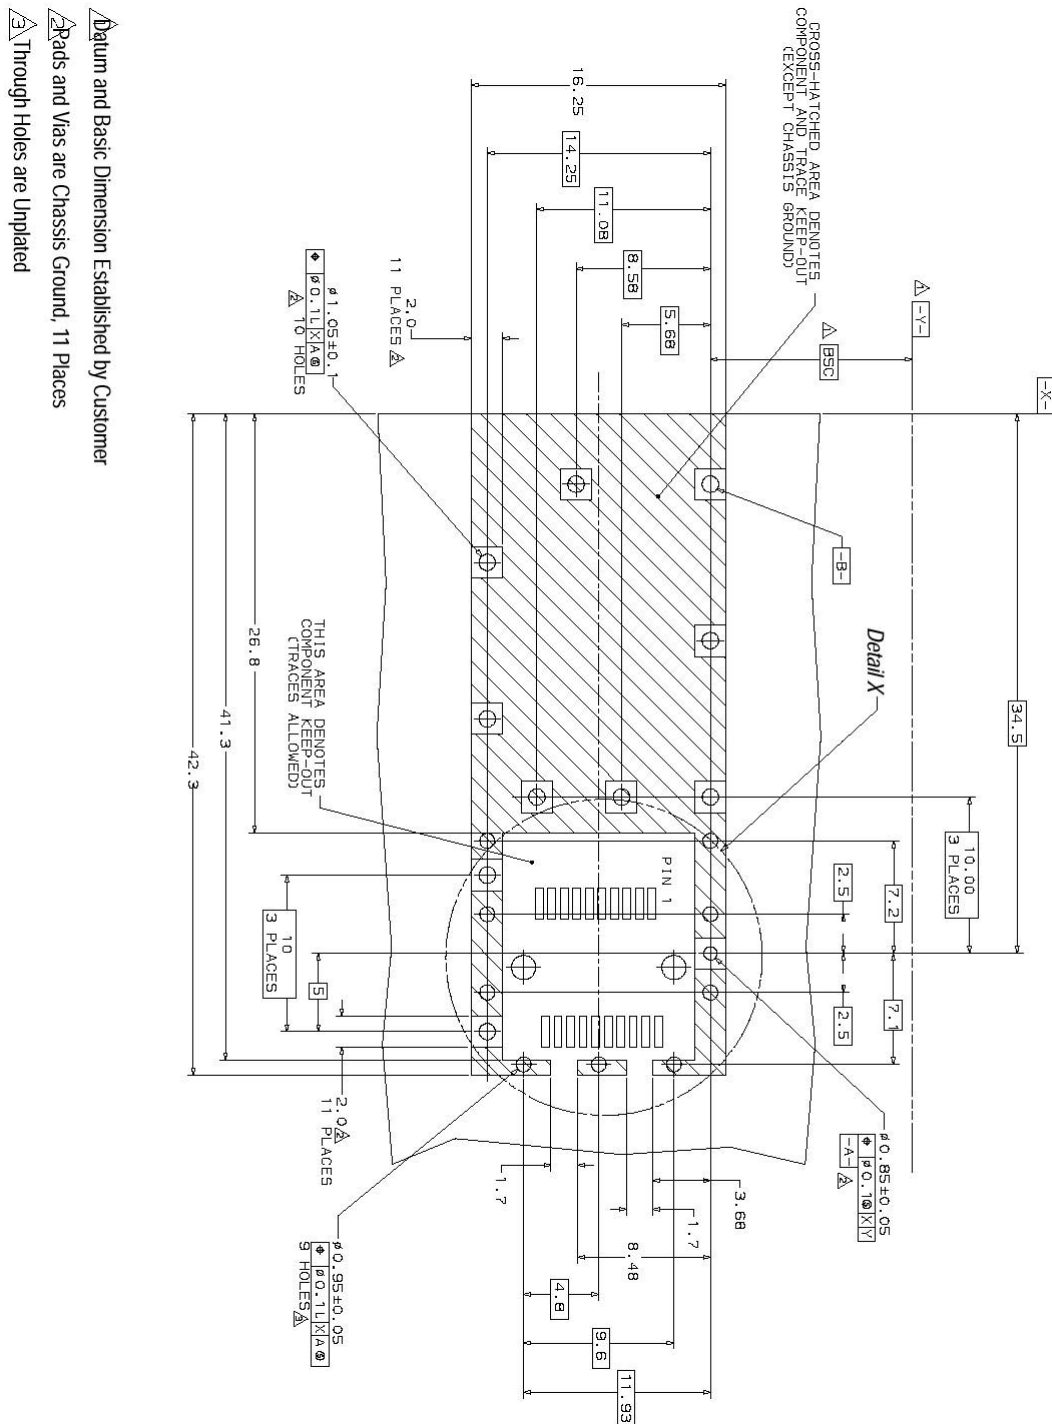

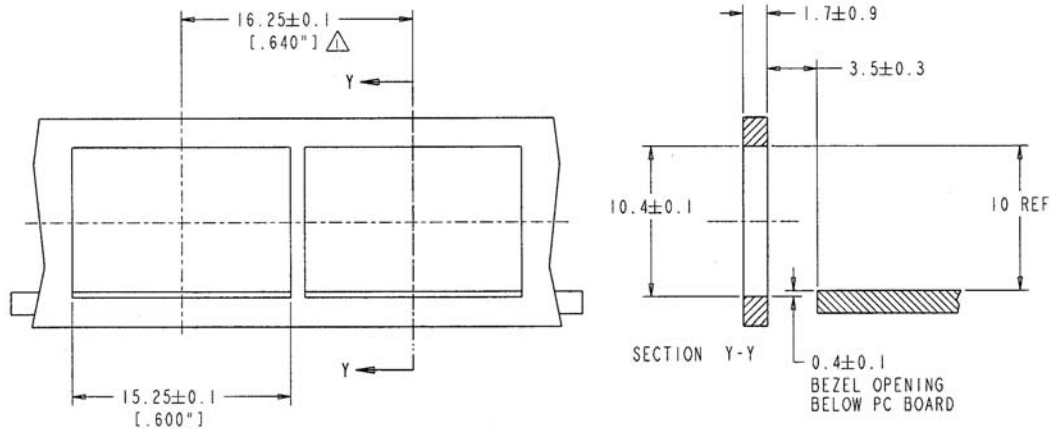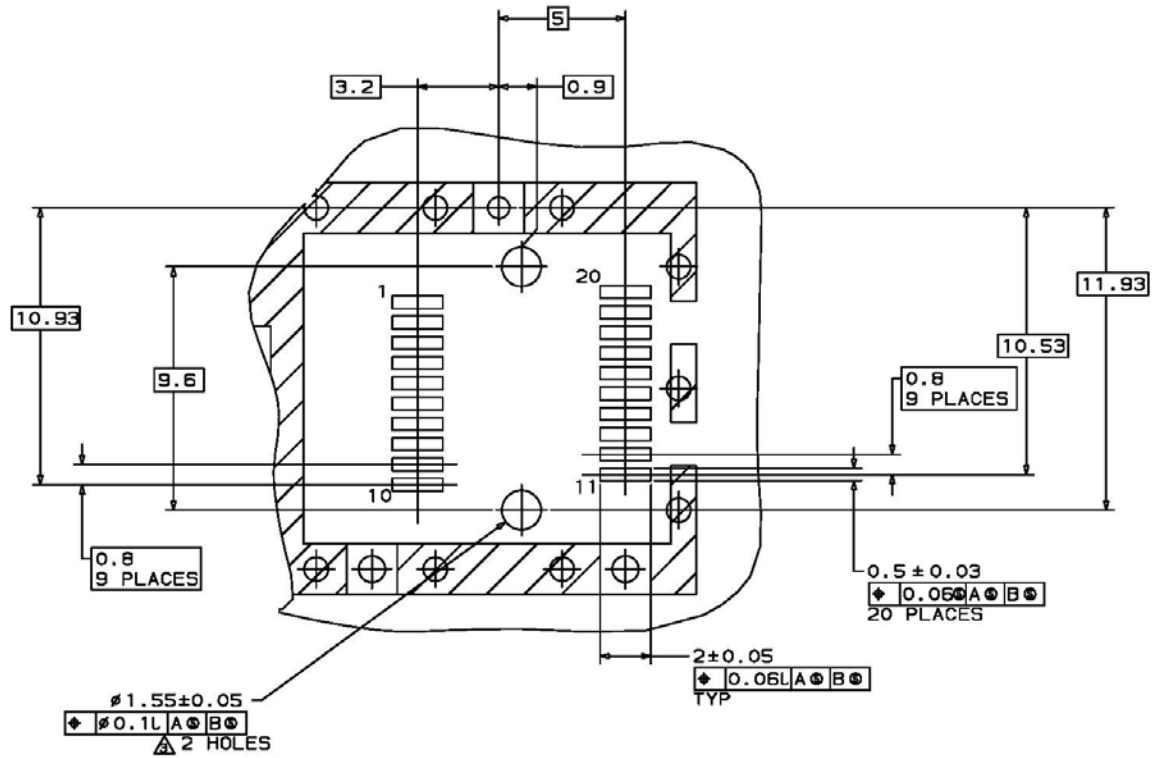

NOTES:

⚠ MINIMUM PITCH ILLUSTRATED, ENGLISH DIMENSIONS ARE FOR REFERENCE ONLY

2. NOT RECOMMENDED FOR PCI EXPANSION  
CARD APPLICATIONS

**XII. References**

1. IEEE Std 802.3, 2002 Edition, Clause 38, PMD Type 1000BASE-LX.  
IEEE Standards Department, 2002.
2. “Fibre Channel Physical and Signaling Interface (FC-PH, FC-PH2, FC-PH3)”.  
American National Standard for Information Systems.
3. “Fibre Channel Physical Interface-4 Specification (FC-PI-4 Rev. 8.00)”.  
American National Standard for Information Technology, May 21, 2008.
4. Small Form-factor Pluggable (SFP) Transceiver Multi-source Agreement (MSA),  
September 14, 2000.
5. Directive 2002/95/EC of the European Council Parliament and of the Council,  
“on the restriction of the use of certain hazardous substances in electrical and  
electronic equipment.” January 27, 2003.

**XIII. For More Information**

Finisar Corporation  
1389 Moffett Park Drive  
Sunnyvale, CA 94089-1134  
Tel. 1-408-548-1000  
Fax 1-408-541-6138  
[sales@finisar.com](mailto:sales@finisar.com)  
[www.finisar.com](http://www.finisar.com)

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)