

MAX15062C 12V Evaluation Kit

Evaluates: MAX15062C in 12V Output-Voltage Application

General Description

The MAX15062C 12V evaluation kit (EV kit) is a fully assembled and tested circuit board that demonstrates the performance of the MAX15062C 60V, 300mA ultra-small, high-efficiency, synchronous step-down converter. The EV kit operates over a wide input voltage range of 14V to 60V, and provides up to 300mA load current at 12V output voltage. The device features undervoltage lockout, overcurrent protection, and thermal shutdown. The EV kit switches at a frequency of 500kHz, and delivers a peak efficiency of 95% with the supplied components.

The EV kit comes installed with the MAX15062CATA+ in an 8-pin (2mm x 2mm) lead(Pb)-free/RoHS-compliant TDFN package.

Features and Benefits

- 14V to 60V Input Voltage Range
- 12V Output, 300mA Continuous Current
- Internal Compensation
- EN/UVLO for On/Off Control and Programmable Input Undervoltage Lockout
- 95% Peak Efficiency
- 500kHz Switching Frequency
- PFM or Forced-PWM Mode of Operation
- Hiccup Mode Overcurrent Protection
- Open-Drain $\overline{\text{RESET}}$ Output
- Thermal Shutdown
- Lead-Free, 8-Pin, 2mm x 2mm TDFN Package
- Proven PCB Layout
- Fully Assembled and Tested

Ordering Information appears at end of data sheet.

Quick Start

Recommended Equipment

- MAX15062C 12V EV kit
- 60V adjustable, 0.5A DC power supply
- Electronic load up to 300mA
- Voltmeter

Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify board operation. **Caution: Do not turn on the power supply until all connections are completed.**

- 1) Verify that shunts are installed on jumpers JU1, JU2 (EN/UVLO).
- 2) Verify that jumper JU3 (MODE-PFM operation) is open.
- 3) Set the electronic load to constant-current mode, 300mA, and disable the electronic load.
- 4) Connect the electronic load's positive terminal to the VOUT PCB pad. Connect the negative terminal to the GND PCB pad.
- 5) Connect the voltmeter across the VOUT and GND PCB pads.
- 6) Set the power-supply output to 24V. Disable the power supply.
- 7) Connect the 24V power-supply output to the VIN PCB pad. Connect the supply ground to the GND PCB pad.
- 8) Turn on the power supply.
- 9) Enable the electronic load and verify that output voltage is at 12V with respect to GND.
- 10) Vary the input voltage from 14V to 60V.
- 11) Vary the load current from 1mA to 100mA and verify that output voltage is 12V.

Detailed Description

The MAX15062C 12V evaluation kit (EV kit) is a fully assembled and tested circuit board that demonstrates the performance of the MAX15062C 60V, 300mA ultra-small, high-efficiency, synchronous step-down converter. The EV kit operates over a wide input voltage range of 14V to 60V, and provides up to 300mA load current at 12V output voltage. The device features undervoltage lockout, overcurrent protection, and thermal shutdown. The EV kit switches at a frequency of 500kHz, and delivers a peak efficiency of 95% with the supplied components.

The EV kit includes an EN/UVLO PCB pad and jumpers JU1, JU2 to enable control of the converter output. The MODE PCB pad and jumper JU3 are provided for selecting the mode of operation of the converter. The VCC PCB pad helps measure the internal LDO voltage. An additional RESET PCB pad is available for monitoring the open-drain logic output.

The EV kit output voltage can be configured to 15V by installing the resistor R6 and the inductor L1 (alternate) which comes along with the EV kit.

Enable Control (JU1, JU2)

The EN/UVLO pin on the device serves as an on/off control while also allowing the user to program the input

undervoltage-lockout (UVLO) threshold. Jumpers JU1 and JU2 configure the EV kit’s output for turn-on/turn-off control. Install a shunt across jumper JU2 pins 1-2 to disable VOUT. See [Table 1](#) for proper JU1, JU2 jumper configurations.

Additionally, resistors R1 and R2 are included to set the UVLO to a desired turn-on voltage. Refer to the *Enable Input (EN/UVLO)*, *Soft-Start* section in the MAX15062 IC data sheet for additional information on setting the UVLO threshold voltage.

Active-Low, Open-Drain Reset Output (RESET)

The EV kit provides a PCB pad to monitor the status of the RESET output. RESET goes high when VOUT rises above 95% (typ) of its nominal regulated output voltage. RESET goes low when VOUT falls below 92% (typ) of its nominal regulated voltage.

PFM or Forced-PWM Mode (MODE)

The EV kit includes a jumper (JU3) to program the mode of operation of the converter. Install a shunt across JU3 before powering up the EV kit to enable the forced-PWM operation. Keep JU3 open to enable the light-load PFM operation. See [Table 2](#) for proper JU3 jumper configurations.

Table 1. Enable Control (EN/UVLO) (JU1, JU2)

| SHUNT POSITION | | EN/UVLO PIN | VOUT OUTPUT |
|----------------|------|--|----------------------|
| JU1 | JU2 | | |
| 1-2 | Open | Connected to VIN | Enabled |
| Open | 1-2 | Connected to GND | Disabled |
| 1-2* | 1-2 | Connected to midpoint of R1, R2 resistor-divider | Enabled at VIN ≥ 13V |









*Default position.

Table 2. MODE Control

| SHUNT POSITION | MODE PIN | MODE OF OPERATION |
|----------------|------------------|-------------------|
| 1-2 | Connected to GND | Forced PWM |
| Open* | Unconnected | PFM |

*Default position.

EV Kit Performance Report

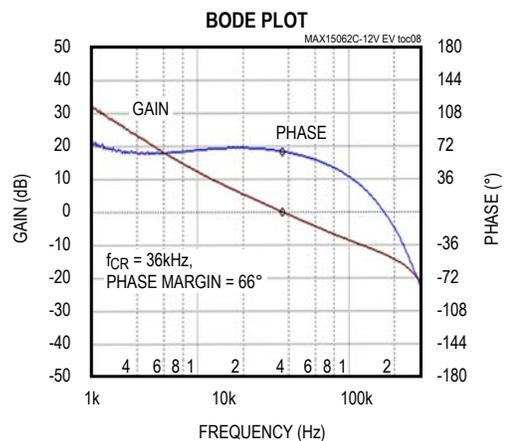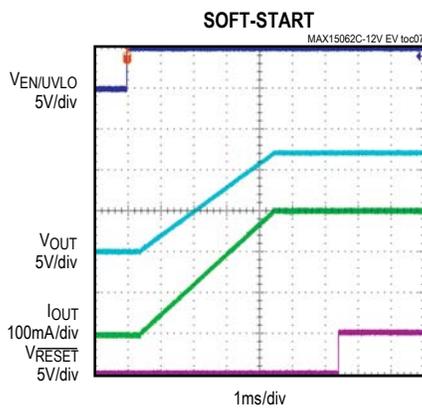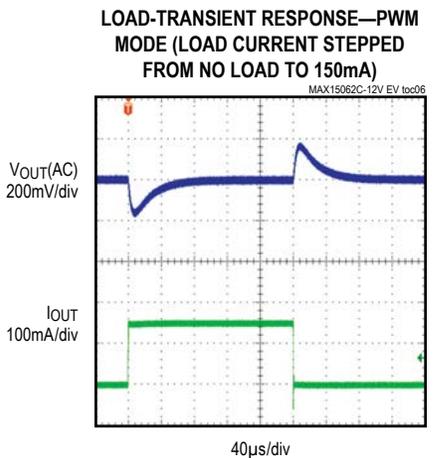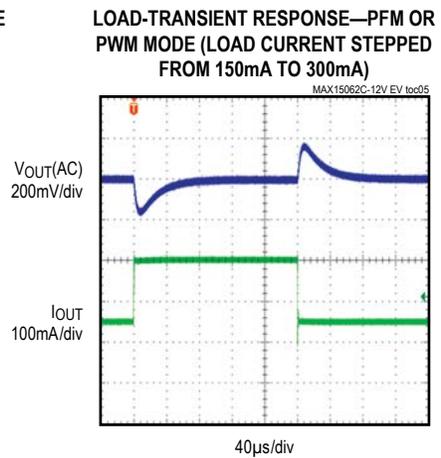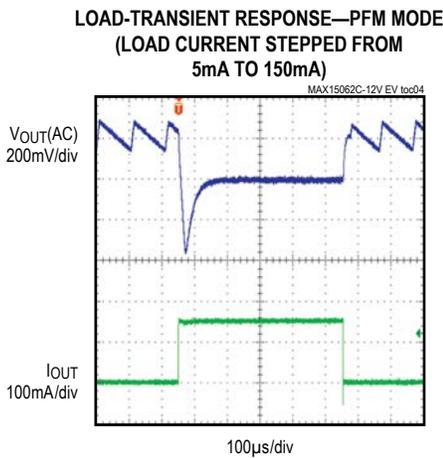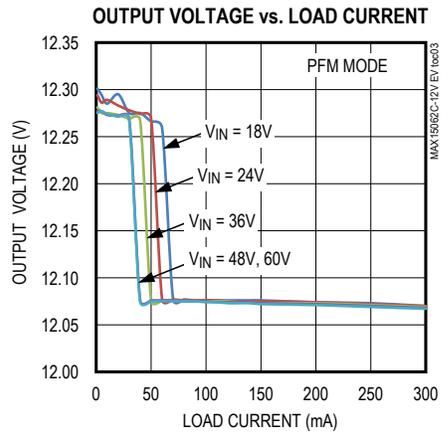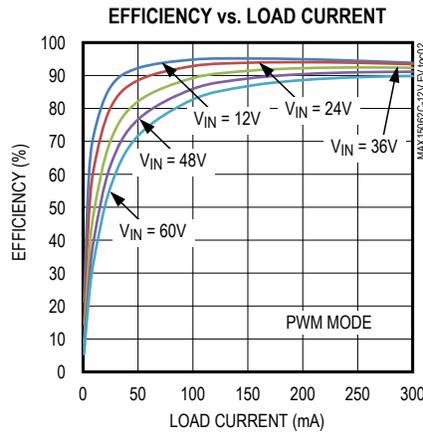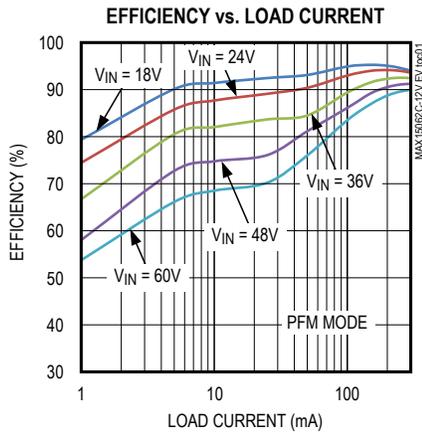

MAX15062C 12V Evaluation Kit

Evaluates: MAX15062C in
12V Output-Voltage Application

Component List

| DESIGNATION | QTY | DESCRIPTION |
|----------------|-----|--|
| C1 | 1 | 22 μ F, 100V electrolytic capacitor (8.3mm x 8.3mm) Panasonic EEVFK2A220P |
| C2 | 1 | 1 μ F \pm 10% 100V X7R ceramic capacitor (1206) Murata GRM31CR72A105K |
| C3 | 1 | 1 μ F \pm 10%, 6.3V X7R ceramic capacitor (0603) Murata GRM188R70J105K |
| C4 | 1 | 4.7 μ F \pm 10%, 16V X7R ceramic capacitor (1206) Murata GRM31CR71C475K |
| JU1, JU2, JU3 | 3 | 2-pin headers |
| L1 | 1 | 100 μ H, 680mA inductor Würth 74408943101 |
| L1 (Alternate) | 1 | 150 μ H, 600mA inductor TDK VLC6045T-151M |

| DESIGNATION | QTY | DESCRIPTION |
|-------------|-----|---|
| R1 | 1 | 2.2M Ω \pm 1% resistor (0402) |
| R2 | 1 | 226k Ω \pm 1% resistor (0402) |
| R3 | 1 | 100k Ω \pm 1% resistor (0402) |
| R4 | 1 | 499k Ω \pm 1% resistor (0402) |
| R5 | 1 | 40.2k Ω \pm 1% resistor (0402) |
| R6 | 1 | 150k Ω \pm 1% resistor (0402) |
| U1 | 1 | 60V, 300mA, ultra-small, high-efficiency, synchronous step-down DC-DC converter (8 TDFN) Maxim MAX15062CATA+ |
| — | 3 | Shunts |
| — | 1 | PCB: MAX15062C-12V EVKIT |

Component Suppliers

| SUPPLIER | PHONE | WEBSITE |
|------------------|--------------|--|
| Murata Americas | 770-436-1300 | www.murataamericas.com |
| Panasonic Corp. | 800-344-2112 | www.panasonic.com |
| Würth Elektronik | — | www.we-online.com |

Note: Indicate that you are using the MAX15062C when contacting these component suppliers.

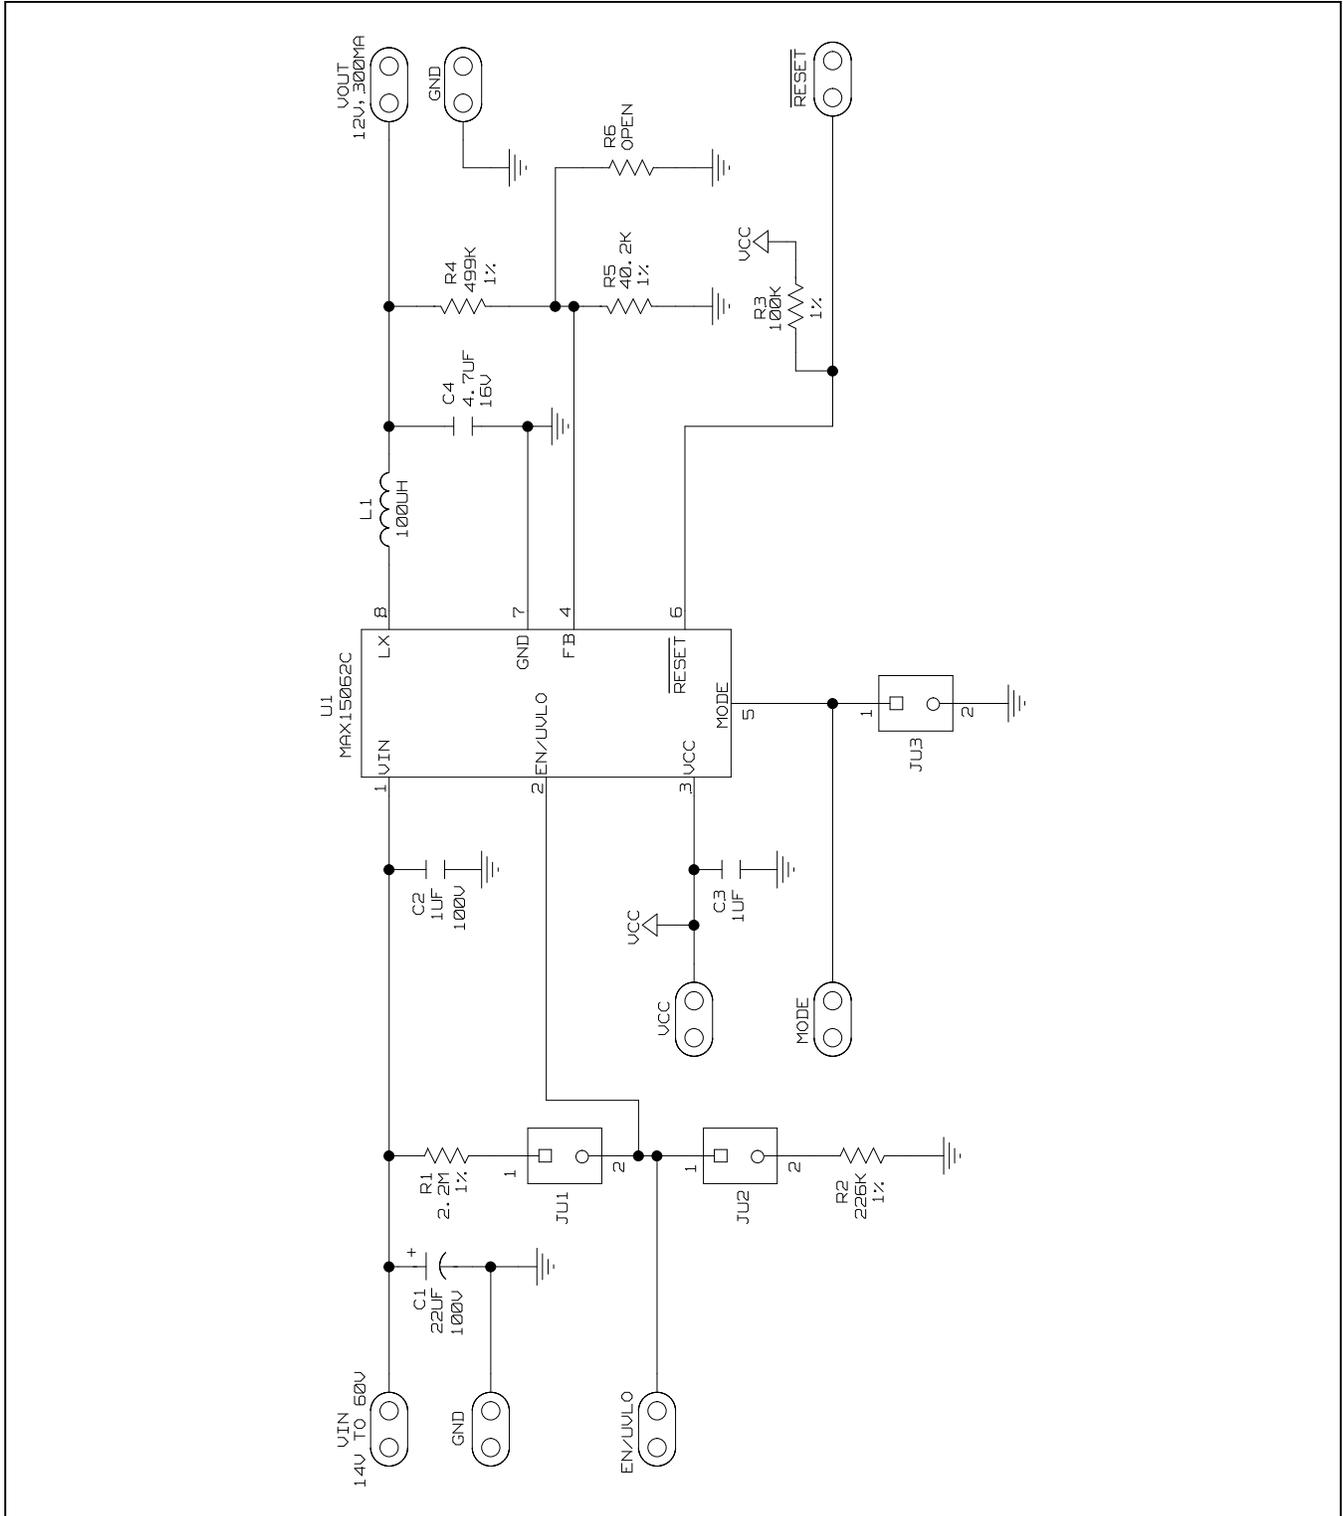


Figure 1. MAX15062C 12V EV Kit Schematic

MAX15062C 12V Evaluation Kit

Evaluates: MAX15062C in 12V Output-Voltage Application

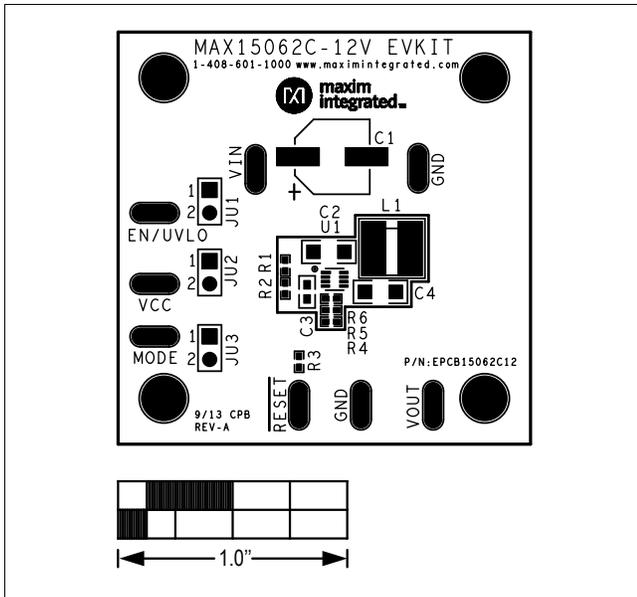


Figure 2. MAX15062C 12V EV Kit Component Placement Guide—Component Side

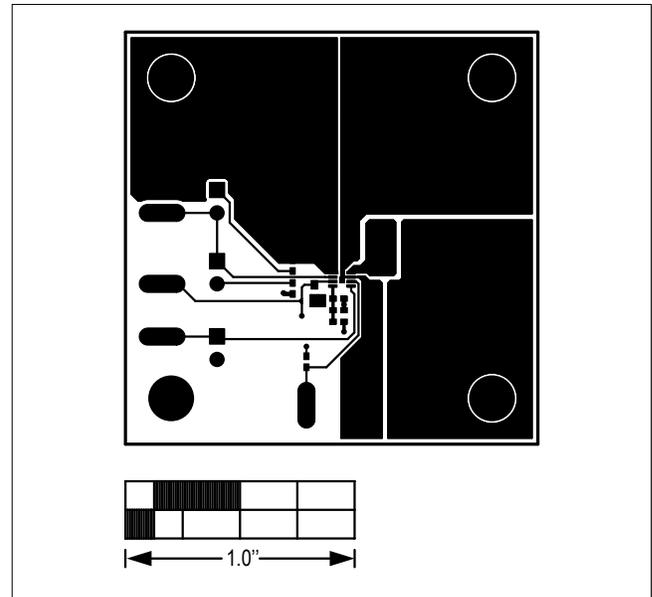


Figure 3. MAX15062C 12V EV Kit PCB Layout—Component Side

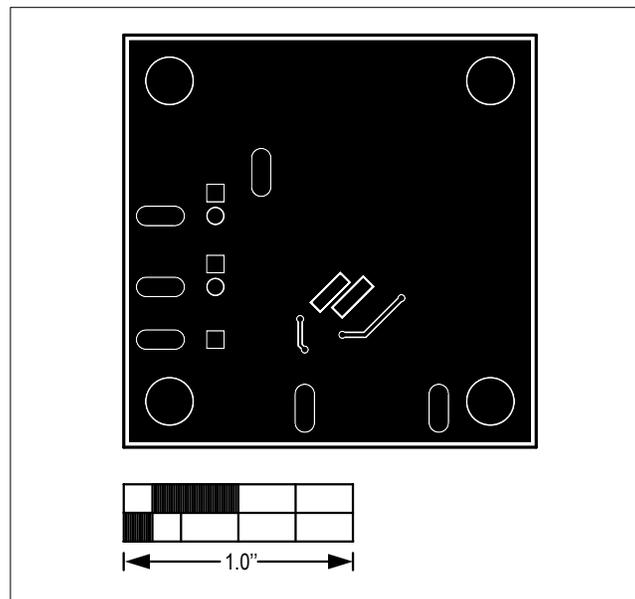


Figure 4. MAX15062C 12V EV Kit PCB Layout—Solder Side

Ordering Information

| PART | TYPE |
|-------------------|--------|
| MAX15062C12EVKIT# | EV Kit |

Denotes RoHS compliant.

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|-----------------|---------------|
| 0 | 11/13 | Initial release | — |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru