

3-Channel LED Ballaster with PWM

FEATURES

- 3% LED Current Matching
- Up to 350mA Continuous Current per LED String
- Up to 3000:1 True Color PWM[™] Dimming Range
- PWM Input Disconnects LED Strings
- Can Operate in Buck, Boost and Buck-Boost Modes
- Wide Input Range: 3V to 40V
- Overtemperature Outputs
- Works with LT1618, LT3477, LT3474, LT3475, LT3476, LTC[®]3783
- Thermally Enhanced 10-Pin MSOP Package

APPLICATIONS

- High Power LED Ballaster
- Automotive Lighting
- Video Cameras
- TFT LCD Backlighting

DESCRIPTION

The LT®3003 drives three separate strings of LEDs up to 350mA/channel with 3% accurate current matching, resulting in uniform LED brightness and intensity. This approach is superior to conventional methods of running three separate channels with external ballast resistors requiring expensive factory calibration.

The LT3003 operates in boost, buck and buck-boost mode. A True Color PWM Dimming ratio of up to 3000:1 is achievable using a logic-level signal at the PWM pin for all modes without the need for external level-shifting circuitry. For applications with input supply above and below the output voltage of the LED strings, the LT3003 allows the LEDs to be returned to the input supply (buck-boost mode) instead of being limited to only SEPIC solutions.

The LT3003 is ideal for high power LED driver applications such as TFT LCD backlighting and heads-up displays. Additional overtemperature outputs allow appropriate system management for increased reliability.

The LT3003 is available in a small 10-pin MSE package.


(LT, LTC and LTM are registered trademarks of Linear Technology Corporation.


True Color PWM is a trademark of Linear Technology Corporation.

All other trademarks are the property of their respective owners.

TYPICAL APPLICATION








LINEAR

ABSOLUTE MAXIMUM RATINGS

PACKAGE/ORDER INFORMATION

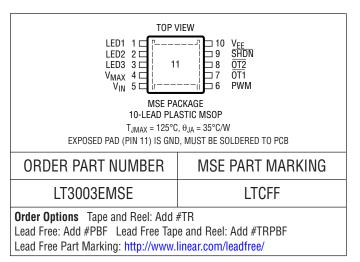

Consult LTC Marketing for parts specified with wider operating temperature ranges.

ELECTRICAL CHARACTERISTICS The \bullet denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}C$. PWM = 1V, $V_{MAX} = 4V$, $V_{IN} = 3V$, $V_{EE} = 0V$, $I_{LED2} = 100mA$, $\overline{0T1} = \overline{0T2} = 0$ pen, $\overline{SHDN} = V_{IN}$.

PARAMETER	CONDITIONS	NDITIONS		ТҮР	MAX	UNITS
V _{IN} Operational Input Voltage	V _{EE} = 0V, I _{LED1,2,3} = 100mA V _{EE} = 4V, I _{LED1,2,3} = 100mA	•	3		36 40	V
Minimum (V _{IN} – V _{EE})	V _{EE} = 0V to 36V			2.7	3	V
V _{IN} Quiescent Current	PWM = 1V, I _{LED1,2,3} = 100mA PWM = 0V, V _{LED1} = V _{LED2} = V _{LED3}			10.5 470	600	mA μA
V _{IN} Shutdown Current	SHDN = 0V, I _{LED1,2,3} = 0mA		2	4	10	μΑ
V _{MAX} Quiescent Current	PWM = 1V, I _{LED2} = 100mA PWM = 0V, V _{LED1} = V _{LED2} = V _{LED3}			55 20	90 300	μA nA
SHDN Pin Threshold	I _{LED2} = 100mA, V _{LED1} = V _{LED2} = V _{LED3}	•	0.25	0.7	1	V
LED Current Matching	I _{LED2} = 350mA, V _{LED1} = V _{LED2} = V _{LED3}		-3	0	+3	%
LED2 – LED1 , LED2 – LED3 LED Current Matching with LED Pin Voltage Mismatch	$I_{LED2} = 350 \text{mA},$ $(V_{LED2} - V_{LED1} + V_{LED2} - V_{LED3}) = 700 \text{mV}$		-3.5	0.5	+3.5	%
LED Pin Voltage	I _{LED2} = 100mA		0.7	0.8	0.9	V
LED1, LED2, LED3 Maximum Current	V _{LED1,2,3} < 1.5V		375	500	550	mA
LED1, LED2, LED3 Maximum Leakage Current	PWM = 0V, V _{LED1,2,3} = 48V			0.1	1	μΑ
PWM Switching Threshold	I _{LED1,2,3} = 100mA	•	0.3	0.5	0.7	V
Turn-On Delay (PWM On to I _{LED} On)	PWM = 0V to 1V, I _{LED} > 50mA			2		μs
V _{EE} Pin Current in Buck Mode	PWM = 0V, V _{MAX} = 40V, V _{IN} = 39V, V _{EE} = 36V			0.1	1	μΑ
Overtemperature Sense Point ($\overline{\text{OT1}}$, $\overline{\text{OT2}}$)	(Note 4)			125		°C
Overtemperature Hysteresis Point	(Note 5)		-6° from Overtemp Sense Point		°C	
OT1 Pull-Down Current	OT1 = 0.3V (Note 4)		100			μA

TECHNOLOGY TECHNOLOGY

ELECTRICAL CHARACTERISTICS The \bullet denotes the specifications which apply over the full operating temperature range, otherwise specifications are at $T_A = 25^{\circ}C$. PWM = 1V, $V_{MAX} = 4V$, $V_{IN} = 3V$, $V_{EE} = 0V$, $I_{LED2} = 100$ mA, $\overline{0T1} = \overline{0T2} = 0$ pen, SHDN = V_{IN} .

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
OT2 Pull-Down Current	OT2 = 0.3V (Note 4)	300			μA
OT1, OT2 Leakage Current	0T1 = 0T2 = 5V			1	μA

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: The LT3003E is guaranteed to meet performance specifications from 0°C to 85°C junction temperature. Specifications over the –40°C to 125°C operating junction temperature range are assured by design, characterization and correlation with statistical process controls.

Note 3: This IC includes overtemperature protection that is intended to protect the device during momentary overload conditions. Junction temperature will exceed 125°C when overtemperature protection is active. Continuous operation above the specified maximum operating junction temperature may impair device reliability.


Note 4: Correlation to static test at $T_A = 25$ °C.


Note 5: Guaranteed by design.


TYPICAL PERFORMANCE CHARACTERISTICS TA = 25°C unless otherwise noted.


JUNCTION TEMPERATURE (°C)


0 25 50 75 100













-50 -25

TYPICAL PERFORMANCE CHARACTERISTICS $T_A = 25$ °C unless otherwise noted.





PIN FUNCTIONS

LED1 (Pin 1): Controlled current input for a string of LEDs with a cathode lead connected to the pin. Connect the first string of LEDs to this pin.

LED2 (Pin 2): Controlled current input for a string of LEDs with a cathode lead connected to the pin. Connect the second string of LEDs to this pin.

LED3 (Pin 3): Controlled current input for a string of LEDs with a cathode lead connected to the pin. Connect the third string of LEDs to this pin.

V_{MAX} (Pin 4):

Boost: Connect to V_{OUT}

• Buck Mode: Connect to Input Supply

• Buck-Boost Mode: Connect to V_{OUT}

 V_{IN} (Pin 5): Input Supply, Upper Rail. This pin must be locally bypassed with a capacitor to ground. V_{IN} powers the internal control circuitry.

Boost: Connect to Input Supply

• Buck Mode: Connect to Input Supply

Buck-Boost Mode: Connect to V_{OUT}

PWM (Pin 6): Input Pin for PWM Dimming Control. A PWM signal above 0.5V (on threshold) turns the LT3003

channels on. A PWM signal below 0.5V completely disconnects each LED string. If the application does not require PWM dimming, then the PWM pin can be left either open (an internal $10\mu A$ source current pulls PWM high) or it can be connected to a supply between 0.5V to 15V.

OT1 (**Pin 7**): Overtemperature Output. OT1 pulls 100μA from the pin when the junction temperature exceeds 125°C. The part has to cool down by 6°C for the flag to reset; ideal for providing an overtemperature flag to the system microprocessor.

OT2 (Pin 8): Overtemperature Output. OT2 Pulls $300\mu A$ from the pin when the junction temperature exceeds $125^{\circ}C$. The part has to cool down by $6^{\circ}C$ for the flag to reset; ideal for connecting to the switching regulator g_m error amplifier output to defeat switching.

SHDN (Pin 9): Micropower Shutdown Pin. Below 0.7V shuts down the IC. Typically $I_{VIN} = 4\mu A$ for $\overline{SHDN} = 0V$.

 \bullet Boost: Connect to System Shutdown Signal or $V_{\mbox{\scriptsize IN}}$

 \bullet Buck Mode: Connect to System Shutdown Signal or V_{IN}

 Buck-Boost Mode: If PWM dimming, connect to PWM (Pin 6); if no PWM dimming, connect to system shutdown signal or V_{IN}

3003fa



PIN FUNCTIONS

VEE (Pin 10): Lower Rail.

• Boost: Connect to System Ground

• Buck Mode: Connect to Inductor

• Buck-Boost Mode: Connect to Input Supply

Exposed Pad (Pin 11): GND. The ground for the IC should be soldered to a continuous copper ground plane under the LT3003 die. Soldering the Exposed Pad to the copper ground plane under the device will reduce thermal resistance and increase the power capability of the LT3003.

BLOCK DIAGRAM

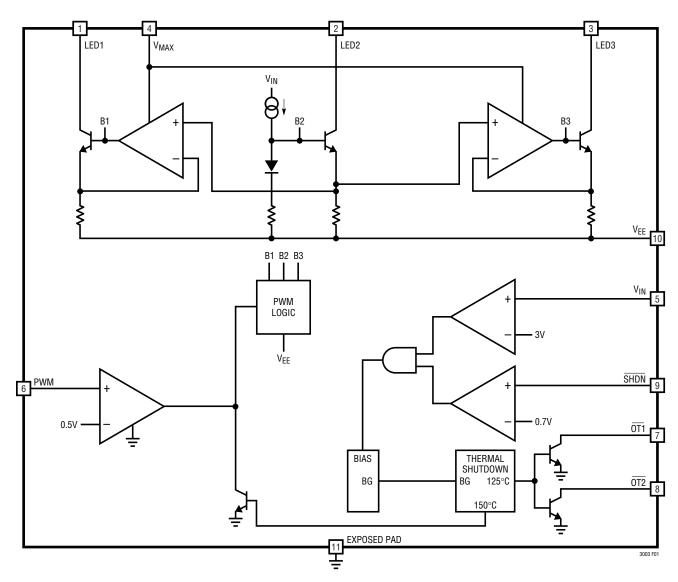


Figure 1. Block Diagram



OPERATION

The LT3003 is an easy-to-use 3-channel LED ballaster. It allows three strings of LEDs to be driven in parallel with accurate LED current matching. A PWM pin is also provided allowing LED currents to be turned on and off at very low duty cycles for very wide LED dimming ranges. For reliable system thermal management, two output flags, OT1 and OT2, are provided to indicate when the junction temperature exceeds 125°C.

The Block Diagram in Figure 1 best illustrates the features of LT3003. The LT30<u>03</u> internal bias circuitry is turned on when $V_{\text{IN}} > 3V$ and SHDN > 0.7V. For LED current to be active in each channel, the PWM pin must exceed 0.5V. V_{MAX} should be connected to the highest supply in the application (see various application modes of boost, buck, buck-boost in the Typical Applications section).

The LT3003 ballasting feature is achieved by using the current monitored in the LED2 channel to control the current in channels LED1 and LED3. A servo loop exists for each channel LED1 and LED3 that compares the current in each channel to the LED2 reference channel. The current in LED2 channel is determined by the LED current programmed by the partner LED driver. Details of how LED current can be programmed by the partner IC are covered in the Typical Applications section using various ICs as LED drivers. Maximum fault current in each of the LT3003 LED pins is internally limited to 550mA. If any LED string experiences an open-circuit fault, all LED string currents are turned off.

The LT3003 PWM pin has unique level-shifting circuitry to allow a simple logic-level PWM signal to turn each LED pin current on and off regardless of the V_{EE} pin voltage. This allows very simple PWM dimming control of LED current without any need for external level-shifting components in buck mode and buck-boost mode applications. Care is taken to ensure low current (nano amps) in the V_{EE} and V_{MAX} pins 10µs after PWM low edge. This feature minimizes leakage currents in each application to maximize PWM dimming ratio. Details of PWM dimming and critical parameters are given in the Applications Information section PWM Dimming.

The LT3003 incorporates internal junction temperature sensing and provides two open-collector outputs, $\overline{OT1}$ and $\overline{OT2}$, which become active low when junction temperature exceeds 125°C. $\overline{OT1}$ is sized to pull 100µA and can be used as an input to the microprocessor for system thermal management. $\overline{OT2}$ is sized to pull 300µA to defeat switching for most of LTC's LED drivers by pulling down the g_m error amplifier output. LT3003 is forced to a "zero LED current state" by a special internal protection circuit when junction temperature reaches 150°C.

To calculate the LT3003 junction temperature, see Thermal Calculations in the Applications Information section.

APPLICATIONS INFORMATION

Input Capacitor Selection

The LT3003 is typically driven from the same input voltage used for the partner LED driver IC. The LED driver and inductor govern the requirements for the input capacitor of the application. A ceramic input capacitor in the range of $1\mu F$ to $10\mu F$ works for most applications. In cases where the LT3003 input voltage is derived separately from the LED driver, a $1\mu F$ input capacitor works well.

LED Current Matching

An LED driver programs the LED current and LT3003 actively ballasts three separate strings of LEDs. The currents in all three channels will be matched to better than $\pm 3\%$. To achieve best current matching, $(V_{IN}-V_{EE})$ should be between 3V and 10V. A low $(V_{IN}-V_{EE})$ also minimizes LT3003 internal power dissipation (see Thermal Calculation section for more information).




Figure 2. I_{LED} Matching vs (V_{IN} – V_{EE})

LED Pin Current Range

The steady-state operational current range for each LED pin is between 100mA and 350mA. Internal protection circuitry limits absolute maximum pin current to 550mA.

LED Open-Circuit Protection

If any LED string is open, then currents in all three channels reduce to zero. The driver chip, which supplies LED current, should have an overvoltage clamp to protect the LT3003 from high LED pin voltages.

PWM Dimming

The LT3003 has a wide PWM dimming range for constant color LED dimming. PWM dimming is superior to analog dimming as it preserves true color quality. PWM dimming control with the LT3003 is achieved using a simple ground referenced PWM signal with a 0.5V on/off threshold. The LEDs operate at either programmed or zero current but their brightness changes with the PWM signal duty cycle. When PWM is low, LED strings are completely disconnected. In addition, the LT3003 switches to low power standby mode ~10µs after PWM low edge, resulting in higher system power efficiency.

For the widest dimming range, the PWM signal should be 100Hz. The human eye is typically sensitive to flickering below ~80Hz. Operating the PWM higher than 100Hz results in a reduced PWM dimming ratio.

Achieving high PWM dimming ratios require attention to circuit leakages, such as reverse bias leakage currents through the external Schottky. Hence, for high PWM dimming ratios, components should be chosen to minimize leakage currents.

If an application does not require PWM dimming, the PWM pin can be left open (unconnected) and an internal $10\mu A$ source current pulls PWM high.

Boost PWM Dimming

The LT3003 supports up to a 3000:1 PWM dimming ratio with a 100Hz PWM dimming frequency. To achieve such high PWM ratios, leakages of the LED driver and other external components should be minimal.

Buck Mode: PWM Dimming

The LT3003 supports up to a 3000:1 PWM dimming ratio in buck mode. The PWM dimming in buck mode is achieved by an architecture that allows the LT3003 power ground (V_{EE}) to move with output capacitor voltage. PWM dimming control is achieved by a simple ground referenced PWM signal, eliminating the need for any external level-shift component.

High PWM dimming ratios require very low V_{EE} and V_{MAX} pin currents during the PWM off state. The LT3003



3003fa

APPLICATIONS INFORMATION

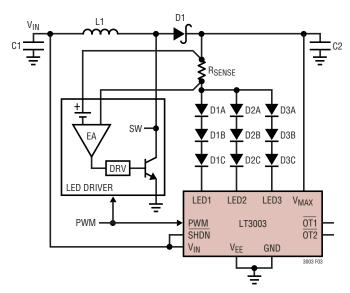


Figure 3. Boost Mode

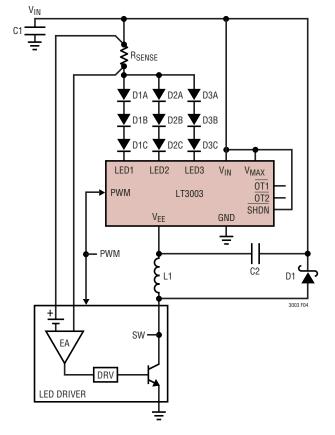


Figure 4. Buck Mode

uses novel circuit techniques to reduce V_{EE} and V_{MAX} pin currents to nano amp range ~10µs after PWM low edge. This preserves the output capacitor voltage and results in higher PWM dimming ratios.

Buck-Boost Mode: PWM Dimming

The LT3003 can also perform PWM dimming in buck-boost mode. The buck-boost configuration requires the PWM and SHDN pins to be tied together. This configuration can support up to a 2000:1 PWM dimming ratio.




Figure 5. Buck-Boost Mode

Overtemperature Protection

The LT3003 incorporates internal junction temperature sensing and provides two open-collector outputs, $\overline{OT1}$ and $\overline{OT2}$, which become active low when junction temperature exceeds 125°C. The active $\overline{OT1}$ output can sink 100µA of current and can be connected to system microprocessor. The active low $\overline{OT2}$ output can sink 300µA of current and can be connected to the switching regulator's g_m error amplifier output to defeat switching. The LT3003 has to cool down by 6°C (119°C) for $\overline{OT1}$ and $\overline{OT2}$ outputs to reset (collector outputs high).

LINEAR

APPLICATIONS INFORMATION

In addition, LT3003 has an internal 150°C overtemperature protection circuitry that resets the chip to zero LED current mode. This prevents the chip from continuous operation at high temperature.

Thermal Calculations

To maximize output power capability in an application without exceeding the LT3003125°C maximum operational junction temperature, it is useful to be able to calculate power dissipation within the IC. The power dissipation within the LT3003 comes from four main sources: switch DC loss, switch loss due to LED V_{LED} mismatch and input quiescent current.

1. Switch DC Loss:

$$P_{SW(DC)} = I_{LED} \cdot V_{LED} \cdot 3$$

(See $(V_{LED1,2,3} - V_{EE})$ vs I_{LED} Typical Performance Characteristics graph.)

2. Switch Loss due to V_{LFD} Mismatch:

$$P_{SW(\Delta VLED)}$$
 = Total V_{LED} mismatch • I_{LED}

3. Input Quiescent Loss:

$$P_Q = (V_{IN} - V_{EE}) \cdot (I_Q - 1mA) + 1mA \cdot V_{IN}$$

$$I_{Q} = \frac{3 \cdot I_{LED}}{40} + 3mA$$

4. Total Power Dissipation:

$$P_{TOT} = P_{SW(DC)} + P_{SW(\Delta VLED)} + P_{Q}$$

5. LT3003 Junction Temperature:

$$T_J (LT3003) = T_A + \theta_{JA}(P_{TOT});$$

 $\theta_{JA}(P_{TOT}) = P_{TOT} \cdot 35^{\circ}C/W$

Example

 $V_{IN} = 3V$; $V_{FF} = 0V$; $I_{IFD} = 350$ mA/string;

•
$$I_Q = \frac{3 \cdot 350 \text{mA}}{40} + 3 \text{mA} = 29.25 \text{mA}$$

Total V_{LED} mismatch = 1V:

• Total
$$V_{LFD}$$
 mismatch = $(6V - 5.7V) + (6V - 5.3V) = 1V$

 V_{LED} = 1.1V at I_{LED} = 350mA (see ($V_{LED} - V_{EE}$) vs I_{LED} Typical Performance Characteristics graph).

1.
$$P_{SW(DC)} = 3 \cdot 350 \text{mA} \cdot (1.1 \text{V}) = 1.16 \text{W}$$

3.
$$P_0 = (3-0) \cdot (29.25-1) \text{mA} + 3 \cdot 1 \text{mA} = 88 \text{mW}$$

4.
$$P_{TOT} = 1.1W + 350mW + 88mW \approx 1.6W$$

The LT3003 uses a thermally enhanced 10-lead MSE package. With proper soldering of the Exposed Pad to the underside of the package, combined with a full copper plane underneath the device, the thermal resistance (θ_{JA}) is about 35°C/W. For an ambient temperature of T_A = 25°C, the junction temperature of the LT3003, for the example application described above, can be calculated as:

5.
$$T_J = T_A + \theta_{JA} \cdot P_{TOT} = 25^{\circ}C + 35^{\circ}C/W \cdot 1.6W$$


= 81°C


Minimizing LT3003 Internal Power Dissipation

The LT3003 requires at least 3V headroom between V_{IN} and V_{EE} . Hence, for systems with high system input voltage and low V_{EE} (such as running multiple series LEDs in a Buck Mode), it is beneficial to lower the level of V_{IN} pin voltage (LT3003 upper rail) with an external zener to reduce power dissipation in the chip. Therefore, it is recommended to limit ($V_{IN}-V_{EE}$) to less than 10V. To achieve best performance, ($V_{IN}-V_{EE}$) should equal 3V.




1.05A Buck Mode LT3003 with the LT3476

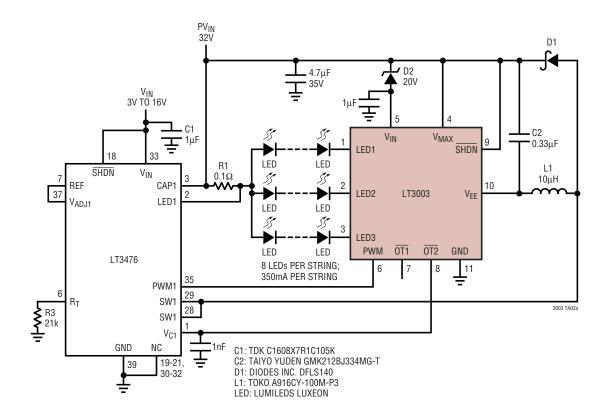





LINEAR TECHNOLOGY

330mA Boost LT3003 with the LT3477

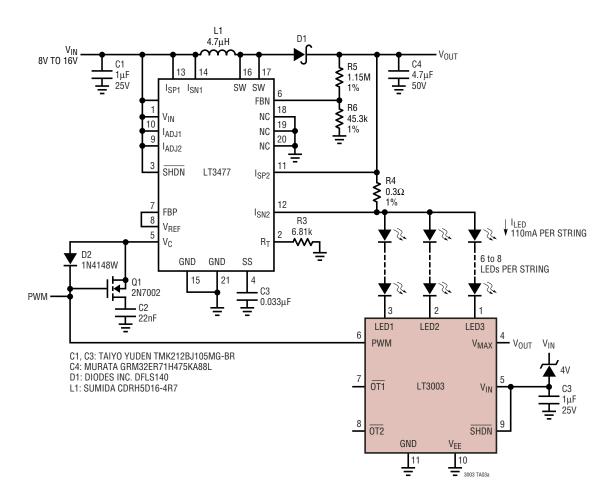







LINEAD TECHNOLOGY

300mA Buck-Boost Mode LT3003 with the LT3477

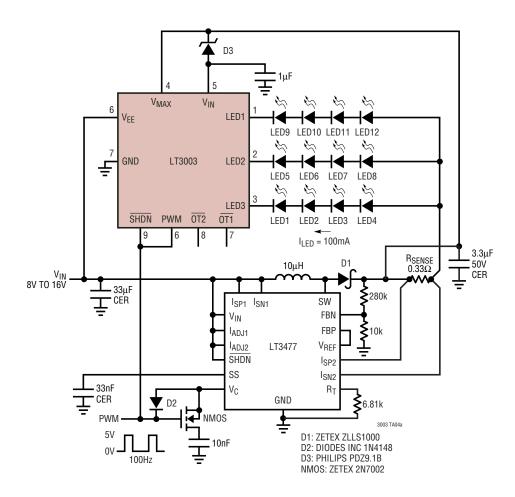


Efficiency




LINEAR TECHNOLOGY

1A Buck Mode LT3003 with the LT1618

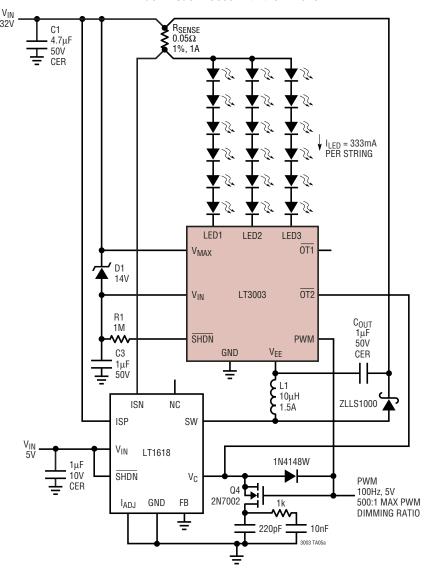


Efficiency




3003fa



1A Buck LT3003 with the LT3475

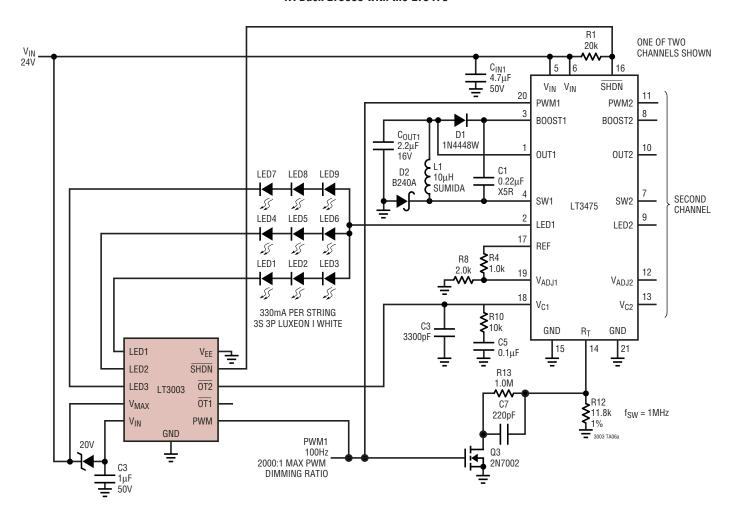




LINEAR TECHNOLOGY

PACKAGE DESCRIPTION

MSE Package 10-Lead Plastic MSOP

(Reference LTC DWG # 05-08-1664)

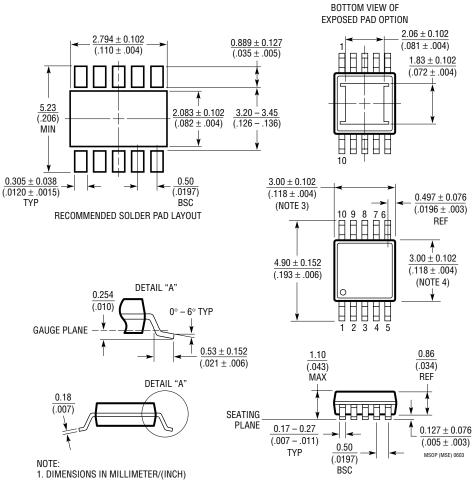

- 2. DRAWING NOT TO SCALE
- 3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
- 4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.
- INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
- 5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.102mm (.004") MAX



RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1618	Constant-Current/Constant-Voltage DC/DC Converter	Drives 20 White LEDs from Li-Ion, 10-Lead MS Package
LT1932	Constant Current,1.2MHz, High Efficiency White LED Boost Regulator	$V_{IN}\!\!: 1V$ to 10V, $V_{OUT(MAX)}$ = 34V, I_Q = 1.2mA, I_{SD} $<$ $1\mu A$, ThinSOT TM Package
LT1942	Quad DC/DC Converter for Triple Output TFT Supply Plus Boost LED Driver, with a 2-Channel Ballaster	TFT Supply: Three Switching Regulators (Two Boost, One Inverting) LED Supply: Up to Two Strings of 10 LEDs. V_{IN} : 2.6V to 16V, $V_{OUT(MAX)} = 45V$, $I_Q = 7mA$, $I_{SD} < 1\mu A$, Low Profile QFN package.
LT3475	36V, 2MHz, Dual 1.5A Step-Down LED Driver	V _{IN} : 4V to 36V, 200kHz to 2MHz, TSSOP20E Package, 3000:1 Dimming
LT3477	3A, 3.5mHz, Constant-Current DC/DC Converter with Dual Rail Sense. Can Drive LEDs in Boost, Buck and Buck-Boost Configurations	V_{IN} : 2.5V to 25V, $V_{OUT(MAX)}$ = 42V, I_{SD} < 1 μ A, QFN/TSSOP Packages
LT3478	4.5A Constant Current BOOST LED Driver with PWM	$V_{IN}\!\!: 2.7V$ to 36V, $V_{OUT(MAX)}$ = 40V, $I_{LED(MAX)}$ = 1.05A, I_{SD} < $5\mu A$, FE16 Package
LT3479	3A, 3.5MHz, 42V Full Featured Boost/Inverter Converter with Soft-Start	$V_{IN}\!\!: 2.5V$ to 24V, $V_{OUT(MAX)}$ = 40V, I_Q = 5mA, I_{SD} < 1 μA , DFN/TSSOP Packages
LT3474	36V, 2MHz, Step-Down 1A LED Driver	V _{IN} : 4V to 36V, 200kHz to 2MHz, TSSOP16E Package, 400:1 Dimming
LTC3205	Multi-Display LED Controller, Step-Up/Step-Down Fractional Charge Pump, Independent Current and Dimming Control	V _{IN} : 2.8V to 4.5V, 800MHz, QFN Package
LTC3783	PWM LED Power and Boost, Flyback and SEPIC Controller	V _{IN} : 3.6V to 36V, 300kHz, DFN, TSSOP16E Package, 3000:1 Dimming

ThinSOT is a trademark of Linear Technology Corporation.



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru