



MAX17112 Evaluation Kit

Evaluates: MAX17112

General Description

The MAX17112 evaluation kit (EV kit) provides a proven design to evaluate the MAX17112 high-performance step-up DC-DC converter, which provides a regulated supply voltage for active-matrix thin-film transistor (TFT) liquid-crystal displays (LCDs).

The EV kit operates from a DC supply voltage of 4.5V to 5.5V and is configured to operate with a switching frequency of 1MHz. The high switching frequency allows the use of small, surface-mount components. The step-up switching regulator is configured for a 15V output and provides 600mA with a 4.5V input.

Features

- ◆ 4.5V to 5.5V Input Range
- ◆ 15V Output Voltage
- ◆ 1MHz Switching Frequency
- ◆ Programmable Soft-Start
- ◆ Lead(Pb)-Free and RoHS Compliant
- ◆ Proven PCB Layout
- ◆ Fully Assembled and Tested

Ordering Information

| PART | TYPE |
|----------------|--------|
| MAX17112EVKIT+ | EV Kit |

+Denotes lead(Pb)-free and RoHS compliant.

Component List

| DESIGNATION | QTY | DESCRIPTION |
|-------------|-----|--|
| C1, C2 | 2 | 4.7 μ F \pm 10%, 10V X5R ceramic capacitors (0603) TDK C1608X5R1A475K |
| C3, C9, C10 | 3 | 1 μ F \pm 10%, 6.3V X5R ceramic capacitors (0603) Murata GRM188R60J105K |
| C4 | 1 | 0.033 μ F \pm 10%, 25V X7R ceramic capacitor (0603) Murata GRM188R71E333K |
| C5 | 1 | 560pF \pm 5%, 50V C0G ceramic capacitor (0603) Murata GRM1885C1H561J |
| C6 | 0 | Not installed, capacitor |
| C7, C8 | 2 | 10 μ F \pm 10%, 25V X5R ceramic capacitors (1210) Murata GRM32DR61E106K |

| DESIGNATION | QTY | DESCRIPTION |
|-------------|-----|--|
| D1 | 1 | 3A, 30V Schottky diode (M-Flat) Toshiba CMS03 |
| JU1 | 1 | 3-pin header |
| L1 | 1 | 2.7 μ H \pm 20% power inductor (65m Ω , 3.9A) TOKO FDV0630-2R7 (27m Ω , 4.4A) |
| R1 | 1 | 0 Ω \pm 5% resistor (0603) |
| R2 | 1 | 47k Ω \pm 5% resistor (0603) |
| R3 | 1 | 20k Ω \pm 1% resistor (0603) |
| R4 | 1 | 221k Ω \pm 1% resistor (0603) |
| R5 | 1 | 10k Ω \pm 5% resistor (0603) |
| U1 | 1 | High-performance step-up converter (10 TDFN-EP*) Maxim MAX17112ETB+ |
| — | 1 | Shunt |
| — | 1 | PCB: MAX17112 Evaluation Kit+ |

*EP = Exposed pad.

Component Suppliers

| SUPPLIER | PHONE | WEBSITE |
|---|--------------|-----------------------------|
| Murata Electronics North America, Inc. | 770-436-1300 | www.murata-northamerica.com |
| TDK Corp. | 847-803-6100 | www.component.tdk.com |
| TOKO America, Inc. | 847-297-0070 | www.tokoam.com |
| Toshiba America Electronic Components, Inc. | 949-623-2900 | www.toshiba.com/taec |

Note: Indicate that you are using the MAX17112 when contacting these component suppliers.



Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

MAX17112 Evaluation Kit

Quick Start

Recommended Equipment

- MAX17112 EV kit
- 4.5V to 5.5V, 5A DC power supply (VIN)
- One voltmeter

Procedure

The MAX17112 EV kit is fully assembled and tested. Follow the steps below to verify board operation.

Caution: Do not turn on power supply or the electronic load until all connections are completed.

- 1) Verify that a shunt is placed across pins 1-2 of JU1.
- 2) Connect the positive terminal of the DC power supply to the VIN pad. Connect the negative terminal of the DC power supply to the GND pad.
- 3) Turn on the 4.5V to 5.5V DC power supply and verify that the step-up switching regulator output (VOUT) is 15V.

Detailed Description of Hardware

The MAX17112 evaluation kit (EV kit) provides a proven design to evaluate the MAX17112 high-performance step-up DC-DC converter, which provides a regulated supply voltage for active-matrix thin-film transistor (TFT) liquid-crystal displays (LCDs).

The EV kit operates from a 4.5V to 5.5V DC power supply. As configured, the step-up switching regulator generates a 15V output (VOUT) and provides 600mA with a 4.5V input. The step-up switching regulator output voltage can be adjusted from VIN to 20V by changing the values of the feedback resistors (see the *Evaluating Other Output Voltages* section).

The MAX17112 EV kit can operate from a 2.6V to 5.5V input supply. When input voltage is less than 4.5V, output current needs to be reduced from 600mA to avoid reaching inductor current limit. **Operation at a different input voltage, output voltage, or switching frequency may require a different inductor, output capacitor, and compensation components.** Refer to the MAX17112 IC data sheet for detailed information on loop compensation and component selection.

Shutdown Mode ($\overline{\text{SHDN}}$)

The EV kit features a shutdown mode that reduces the MAX17112 quiescent current. JU1 selects the shutdown mode. See Table 1 for jumper JU1 functions.

When the shunt of JU1 is placed in the 1-2 position, the $\overline{\text{SHDN}}$ pin is connected to the on-board capacitor (C10). The internal 5 μ A current source of the MAX17112 charges this capacitor. When the voltage on the $\overline{\text{SHDN}}$ pin rises above 1.24V, the MAX17112 is enabled.

To shut down the MAX17112, place the shunt of JU1 in the 2-3 position.

When JU1 is open, the $\overline{\text{SHDN}}$ pin is controlled by the external signal on the $\overline{\text{SHDN}}$ pad.

Evaluating Other Output Voltages

The MAX17112 EV kit's step-up switching-regulator output (VOUT) is set to 15V by feedback resistors R3 and R4. To generate output voltages other than 15V, select different external voltage-divider resistors, R3 and R4. Select R3 in the 10k Ω to 50k Ω range. R4 is then given by the following equation:

$$R4 = R3 \times [(VOUT/VFB) - 1]$$

where VFB = 1.24V. For significantly different operation points, the EV kit might require a different inductor and component changes. Refer to the MAX17112 IC data sheet for proper component selection.

Table 1. Jumper JU1 Functions.

| JUMPER | SHUNT POSITION | DESCRIPTION |
|--------|----------------|--|
| JU1 | Open | Connects the external shutdown signal to the on-board $\overline{\text{SHDN}}$ pad |
| | 1-2* | MAX17112 enabled (VOUT = 15V) |
| | 2-3 | Shutdown mode (VOUT = VIN - VDIODE) |

*Default position.

MAX17112 Evaluation Kit

Evaluates: **MAX17112**

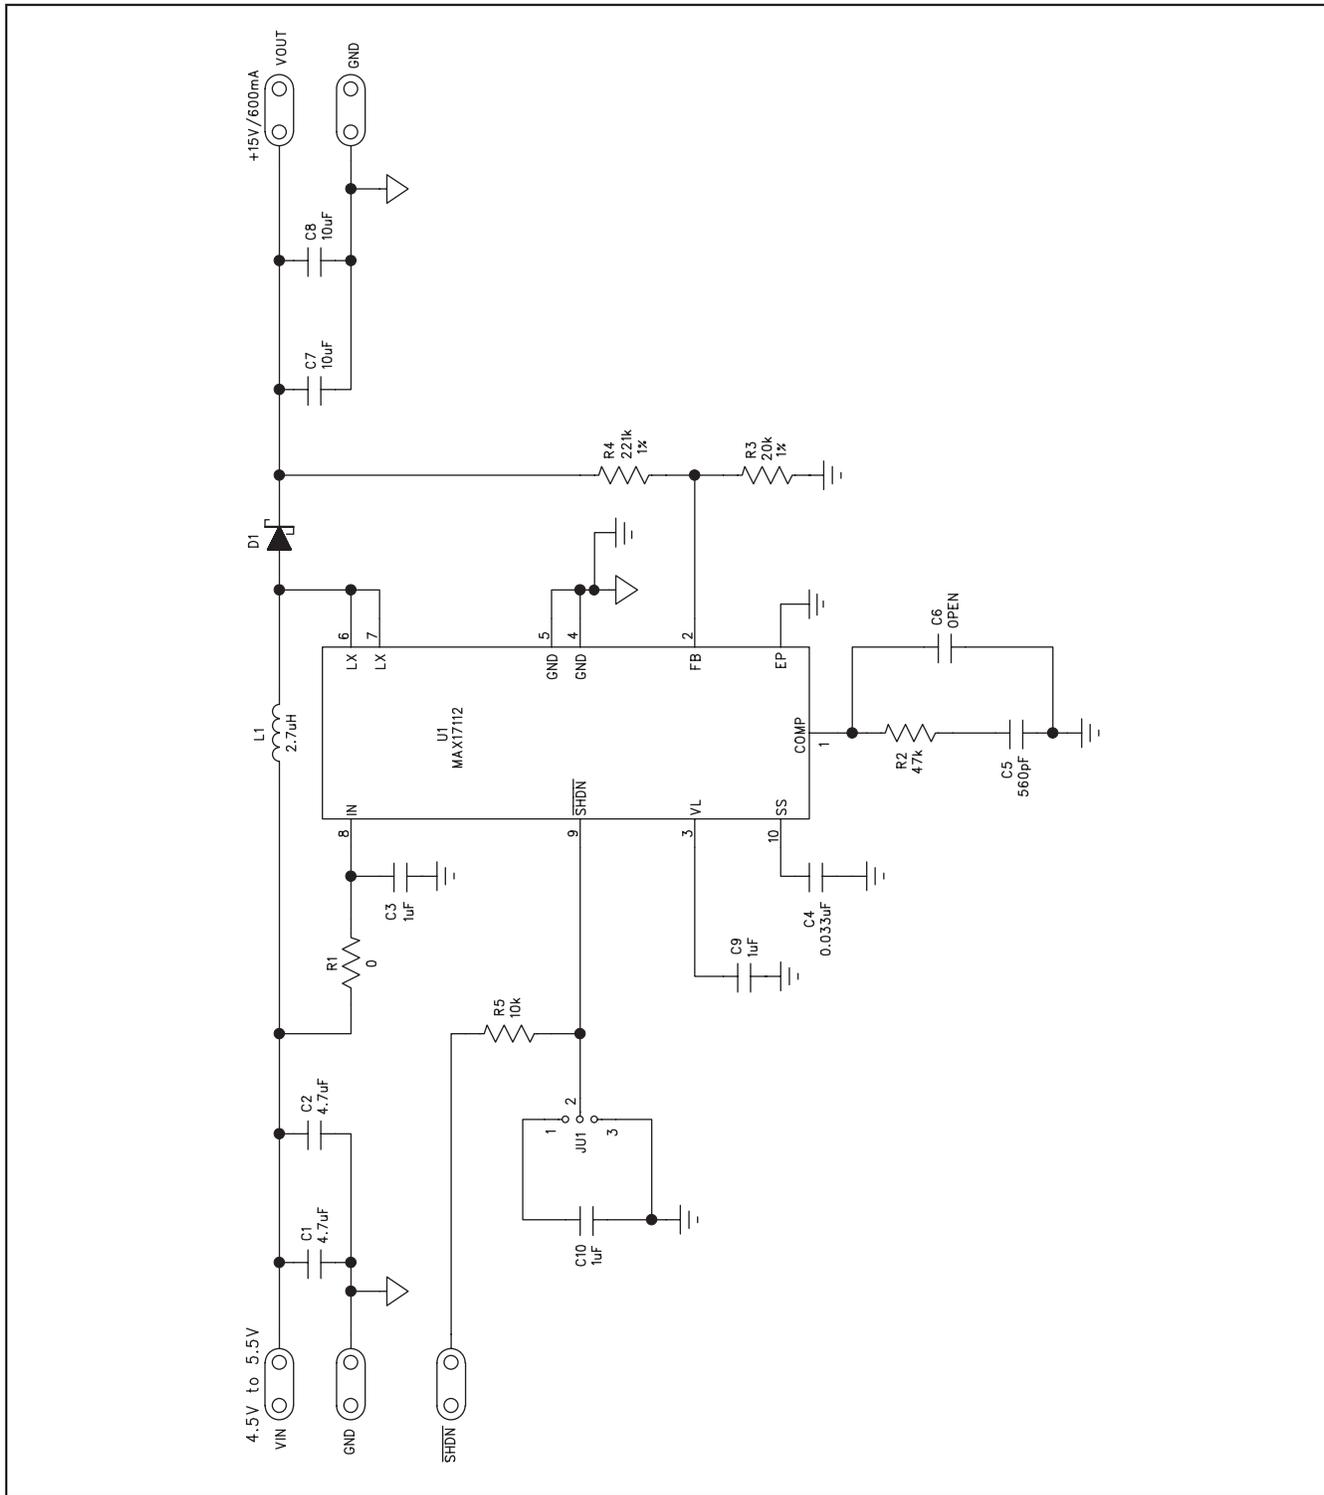


Figure 1. MAX17112 EV Kit Schematic

MAX17112 Evaluation Kit

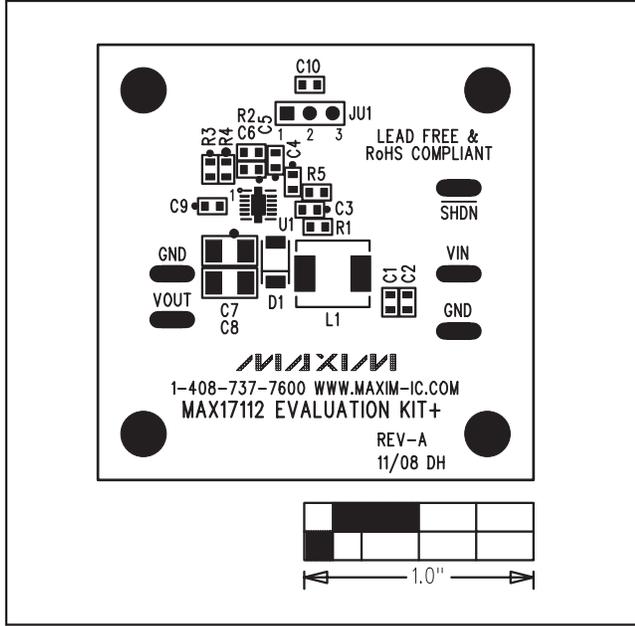


Figure 2. MAX17112 EV Kit Component Placement Guide—Component Side

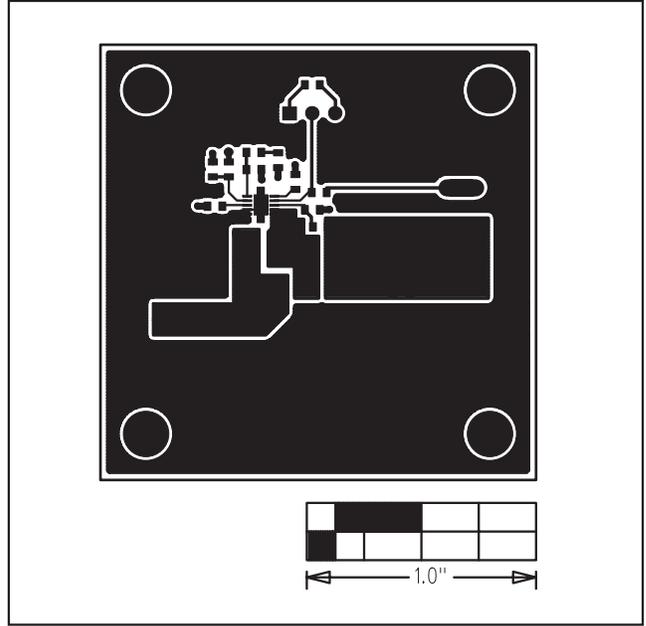


Figure 3. MAX17112 EV Kit PCB Layout—Component Side

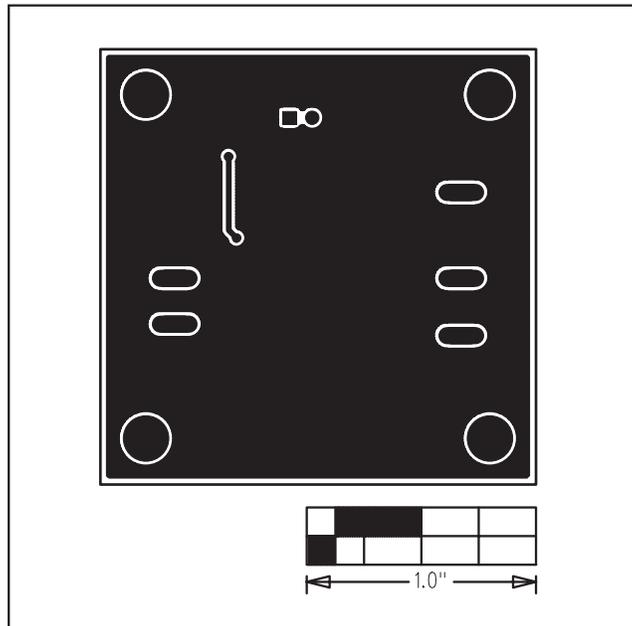


Figure 4. MAX17112 EV Kit PCB Layout—Solder Side

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

4 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru