

# CSCA-A Series

## Hall-Effect Based Open-Loop Current Sensors



### DESCRIPTION

The CSCA-A Series of open-loop current sensors are based on the principles of the Hall-effect wherein a Hall-effect device (HED) produces an output voltage linearly related to the amplitude and phase of a magnetic field applied to it.

Current flowing through a primary conductor generates a rotating magnetic field around the conductor. This field is collected by a core of magnetically sensitive material and

concentrated in the gap in this core. The HED is located in this core gap. Therefore, the HED output is directly proportional to the amplitude and phase of the primary current.

The HED output is trimmed for gain and offset calibration such that the CSCA-A Series sensor provides a predefined output sensitivity versus primary current.

### FEATURES

- Measures ac, dc and impulse currents
- Competitive cost/performance ratio
- Low power consumption
- Compact size
- High level of electrical isolation between primary and secondary circuits
- Large primary aperture
- RoHS compliant
- CE, UL approvals (pending)

### POTENTIAL APPLICATIONS

- Variable speed drives
- Ground fault detectors
- Current feedback control systems
- Robotics
- UPS and telecommunication power supplies
- Welding power supplies
- Automotive - Battery management systems
- Watt meters

# CSCA-A Series

**SPECIFICATIONS** (all specifications are at  $\pm 15$  Vdc supply and  $25^\circ\text{C}$  [ $77^\circ\text{F}$ ] ambient temperature unless otherwise specified)

Characteristic	Symbol	Parameter
Nominal current	$I_{PN}$	See product selection guide
Peak measuring range (ac peak)	$I_{PK}$	See product selection guide
Nominal output voltage at $I_{PN}$	$V_{SN}$	$4 \text{ V} \pm 1\%$
Supply voltage	$V_{cc}$	$\pm 15 \text{ Vdc} \pm 5\%$
Supply current	$I_{cc}$	17 mA typ.
Accuracy at $I_{PN}$ <sup>1</sup>	X	$\leq \pm 2\%$ of $I_{PN}$
Linearity <sup>2</sup>	$E_I$	$< \pm 1\%$
Zero current offset	$V_O$	$\leq \pm 20 \text{ mV}$
Residual offset after $I_{PN}$	$V_{OR}$	$\leq \pm 20 \text{ mV}$
Thermal drift of offset	$V_{OT}$	$\leq \pm 3 \text{ mV}/^\circ\text{C}$ @ $I_{PN} = 50 \text{ A}$ $\leq \pm 1.5 \text{ mV}/^\circ\text{C}$ @ $I_{PN} = 100 \text{ A}$ to $600 \text{ A}$
Thermal drift of gain	$V_{ST}$	$\leq \pm 4 \text{ mV}/^\circ\text{C}$
Response time <sup>3</sup>	$t_R$	$3 \mu\text{s}$ to $7 \mu\text{s}$
di/dt accuracy followed	di/dt	$\geq 50\text{A}/\mu\text{s}$
Bandwidth	f	dc to 50 kHz
Isolation voltage	$V_D$	3 kV, 50 Hz, 60 sec
Rated insulation voltage	$V_I$	849 V reinforced
Output resistance	$R_S$	$\geq 10 \text{ kOhm}$
Ambient operating temperature	$T_A$	-10 °C to 80 °C [14 °F to 176 °F]
Ambient storage temperature	$T_S$	-25 °C to 85 °C [-13 °F to 185 °F]

## NOTES:

<sup>1</sup> For  $I_P > I_{PN}$  then X is the same percentage value but of  $I_P$

<sup>2</sup> Independent linearity per the Instrument Society of America


<sup>3</sup> At 90% of  $I_P$

<sup>4</sup> Appropriate specification items defined using the guidance of EN50178


# Hall-Effect Based Open Loop Current Sensors

## MOUNTING DIMENSIONS (For reference only. mm)

CSCA-A-001

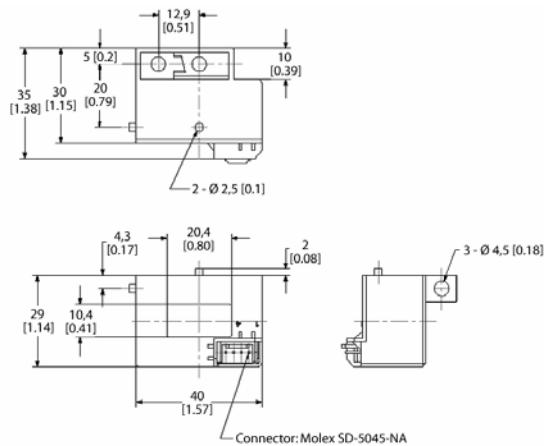

CSCA-A-002

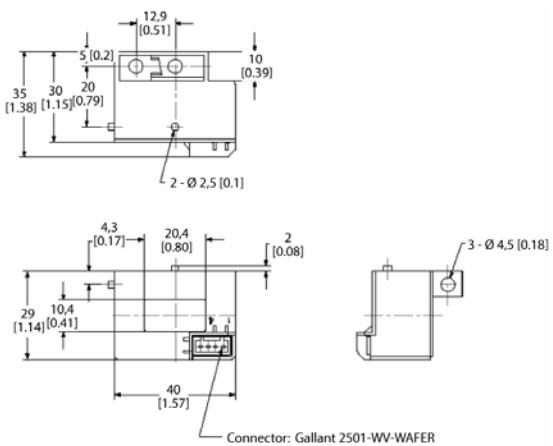

## Pins arrangement

1. + 15 V
2. - 15 V
3. Output
4. Ground

## Pins arrangement

1. + 15 V
2. - 15 V
3. Output
4. Ground

## ORDER GUIDE

Catalog listing	Description
CSCA0050A000B15B01	Hall-effect based, open-loop current sensor, Molex-type connector, 50 A rms nominal, $\pm 150$ A range
CSCA0100A000B15B01	Hall-effect based, open-loop current sensor, Molex-type connector, 100 A rms nominal, $\pm 300$ A range
CSCA0200A000B15B01	Hall-effect based, open-loop current sensor, Molex-type connector, 200 A rms nominal, $\pm 600$ A range
CSCA0300A000B15B01	Hall-effect based, open-loop current sensor, Molex-type connector, 300 A rms nominal, $\pm 900$ A range
CSCA0400A000B15B01	Hall-effect based, open-loop current sensor, Molex-type connector, 400 A rms nominal, $\pm 900$ A range
CSCA0500A000B15B01	Hall-effect based, open-loop current sensor, Molex-type connector, 500 A rms nominal, $\pm 900$ A range
CSCA0600A000B15B01	Hall-effect based, open-loop current sensor, Molex-type connector, 600 A rms nominal, $\pm 900$ A range
CSCA0050A000B15B02	Hall-effect based, open-loop current sensor, Gallant connector, 50 A rms nominal, $\pm 150$ A range
CSCA0100A000B15B02	Hall-effect based, open-loop current sensor, Gallant connector, 100 A rms nominal, $\pm 300$ A range
CSCA0200A000B15B02	Hall-effect based, open-loop current sensor, Gallant connector, 200 A rms nominal, $\pm 600$ A range
CSCA0300A000B15B02	Hall-effect based, open-loop current sensor, Gallant connector, 300 A rms nominal, $\pm 900$ A range
CSCA0400A000B15B02	Hall-effect based, open-loop current sensor, Gallant connector, 400 A rms nominal, $\pm 900$ A range
CSCA0500A000B15B02	Hall-effect based, open-loop current sensor, Gallant connector, 500 A rms nominal, $\pm 900$ A range
CSCA0600A000B15B02	Hall-effect based, open-loop current sensor, Gallant connector, 600 A rms nominal, $\pm 900$ A range

### **WARNING**

#### **PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

### **WARNING**

#### **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

#### **WARRANTY/REMEDY**

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

#### **SALES AND SERVICE**

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

**E-mail:** info.sc@honeywell.com

**Internet:** www.honeywell.com/sensing

#### **Phone and Fax:**

Asia Pacific	+65 6355-2828 +65 6445-3033 Fax
Europe	+44 (0) 1698 481481 +44 (0) 1698 481676 Fax
Latin America	+1-305-805-8188 +1-305-883-8257 Fax
USA/Canada	+1-800-537-6945 +1-815-235-6847 +1-815-235-6545 Fax

#### **Sensing and Control**

Honeywell

1985 Douglas Drive North

Golden Valley, Minnesota 55422

[www.honeywell.com/sensing](http://www.honeywell.com/sensing)

005872-1-EN IL50 GLO Printed in USA

February 2007

Copyright © 2007 Honeywell International Inc. All rights reserved.

**Honeywell**

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru