

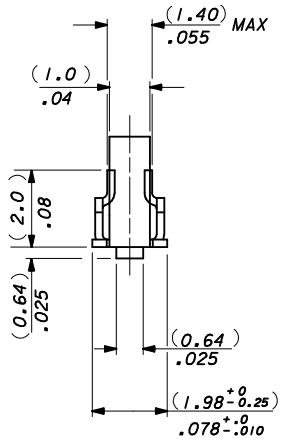





NOTES:

1. MATERIAL: (0.21)/.008 THICK BRASS.
2. FINISH: SEE SHEET 2.
3. THIS PART CONFORMS TO PRODUCT SPEC. 99020-0088.
4. TERMINAL MUST MEET BEND SPEC. SDES-219.
5. SUITABLE FOR 22-30 GA. WIRE, (1.57)/.062 MAX. INSULATION.
6. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

SECTION D-D
(4809-1T ONLY)




SECTION B-B

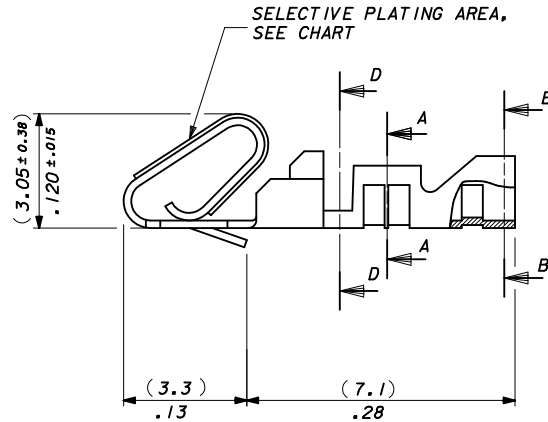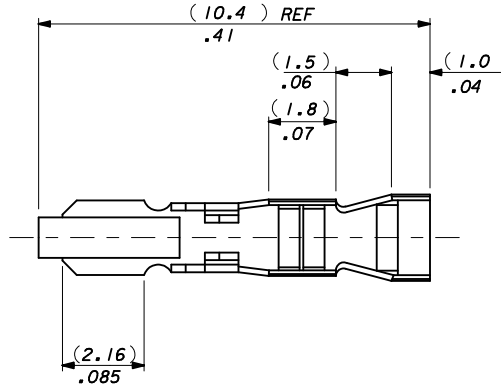

SECTION A-A

4809-(*)**
PLATING CODE
BLANK : DIM. A = (2.1) / 1.083 REF.
M: DIM A = (2.2) / .087 REF.
BLANK=CHAIN FORM TOP
FEEDING REEL
L=LOOSE FORM



CARRIER STRIP DETAIL
SCALE 2:1

CORRECT PLATING EC NO: UCP2011-2131 DRAWN: STEWART 2011/01/18 CHKD: HKL 2011/01/26 APPR: FSMITH 2011/02/04 AM	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
						MM/IN		10:1	METRIC				
						DRAWN BY DATE		TITLE					
						MCC 1986/07/30		ANTI-FISH HOOKING					
						CHECKED BY DATE		TERMINAL KK.(2.50)/.100					
						DMORIARTY 2004/10/18							
						APPROVED BY DATE							
						JDENNEY 2004/10/19		MOLEX MOLEX INCORPORATED					
						MATERIAL NO.		DOCUMENT NO.				SHEET NO.	
						SEE CHART		SD-4809-*				1 OF 2	
REV			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					


FINISH NOTES*

(550) GOLD PLATE (0.00038)/(0.00015 MIN. OVER (0.00076)/(0.00030 MIN. NICKEL

IN CONTACT AREA WITH (0.00005)/(0.00002 MIN. GOLD FLASH OVERALL.

(555) SELECTIVE GOLD (0.00038)/(0.00015 MIN. OVER (0.00076)/(0.00030 MIN. NICKEL IN CONTACT AREA ONLY.




(P918) HOT TIN DIP (0.00102-0.00305)/(0.00040-.000120

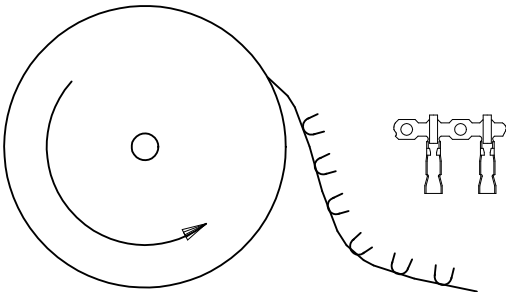


TERMINALS FEEDING FROM THE TOP OF THE REEL ARE STANDARD WOUND

08-55-0110	4809-(555)	CHAIN	(555)	(2.45 - 1.75)/ .096 - .069
08-55-0111	↑ -(555)L	LOOSE		
08-56-0120	-(550)	CHAIN	(550)	(2.45 - 1.75)/ .096 - .069
08-56-0115	↑ -(550)L	LOOSE		
08-50-0135	↓ -(P918)	CHAIN	(P918)	(2.45 - 1.75)/ .096 - .069
08-50-0136	4809 - (P918) L	LOOSE		
PART No	ENG No	FORM	FINISH	DIM . A
TOP FEEDING REELS ONLY				

CORRECT PLATING EC NO: UCP2011-2131 DRWN:STEWART 2011/01/18 CHKD:HKIPER 2011/01/26 APPR:FSMITH 2011/02/04 AM	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE NTS	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	TITLE ANTI-FISH HOOKING TERMINAL KK,(2.50)/.100  MOLEX INCORPORATED			
					MM/IN								
			mm		DRAWN BY	DATE							
			INCH		MCC	1986/07/30							
			4 PLACES ± ---		CHECKED BY	DATE							
			3 PLACES ± ---		DMORIART	2004/10/18							
			2 PLACES ± 0.25		APPROVED BY	DATE							
			1 PLACE ± 0.35		JDENNEHY	2004/10/19							
			ANGULAR ± ---°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-4809-*		2 OF 2				
					SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

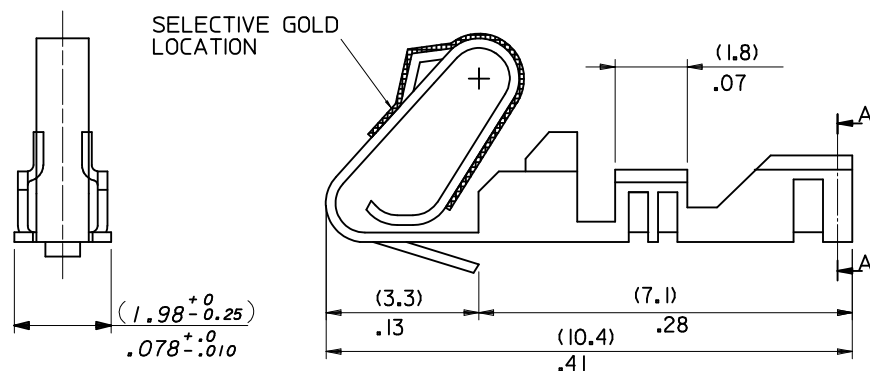

97-00-0001	4809C-(P918)BF	CHAIN	(P918)	(2.45-1.75)/.096-.069
PART No	ENG No	FORM	FINISH (SEE NOTE-2)	DIM . A
'A' WINDING PER E.S. 339				

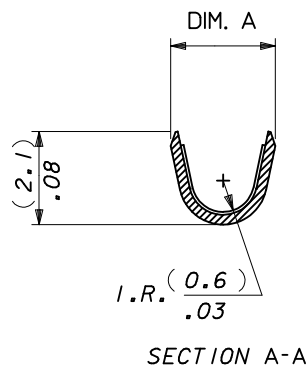

INSULATION CRIMP WIDTH
BLANK: DIM. A = (2.1)/.083 REF.
M: DIM. A = (2.2)/.087 REF.

PLATING CODE

FORM:

BLANK = CHAIN FORM. TOP FEEDING REEL

L = LOOSE FORM

BF = CHAIN FORM, BOTTOM FEEDING REEL

08-55-0112	4809C-(555)	CHAIN	(555)	(2.45-1.75)/ .096-.069
08-50-0030	4809C-(P918)M	CHAIN	(P918)	(2.35-2.05)/ .093-.081
08-50-0031	4809C-(P918)	CHAIN	(P918)	(2.45-1.75)/ .096-.069
08-50-0032	4809C-(P918)L	LOOSE	(P918)	(2.45-1.75)/ .096-.069
PART No	ENG No	FORM	FINISH (SEE NOTE-2)	DIM . A
'B' WINDING PER E.S. 339 (CHAIN ONLY)				

NOTES:

1. MATERIAL (0.20±0.01)/.008±.0004 THICK BRASS.
2. FINISH: (555) - SELECTIVE GOLD (0.00038)/0.000015 MIN., OVERALL
NICKEL (0.00076)/0.000030 MIN.
(P918) - HOT TIN DIP: (0.00102-0.00305)/.000040-.000120
3. THIS PART CONFORMS TO MOLEX PRODUCT SPEC. PS-99020-0088.
4. SAME AS SD-4809-* EXCEPT WITH CAT EARS.
5. FOR 22-30 GAUGE WIRE & (1.57)/.062 DIA. INSULATION MAX.
6. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC
SPECIFICATION PS-45499-002.

CORRECT PLATING EC NO: UCP2011-2131 DRWN:STEWART 2011/01/18 CHKD:MK1PPER 2011/01/26 APPR:FSW1TH 2011/02/04	QUALITY SYMBOLS F =0 F =0 F =0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY AOD	DATE 1999/02/20	TITLE ANTI FISH HOOKING TERMINAL KK,(2.50)/.100 WITH CAT EARS				
						CHECKED BY DMORIARTY	DATE 2004/10/18					
						APPROVED BY JDENNEHY	DATE 2004/10/19	MOLEX MOLEX INCORPORATED				
			ANGULAR ±---°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-4809C-****		1 OF 1			
		REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru