


## SLLIMM™-nano IPM, 3 A, 600 V, 3-phase IGBT inverter bridge

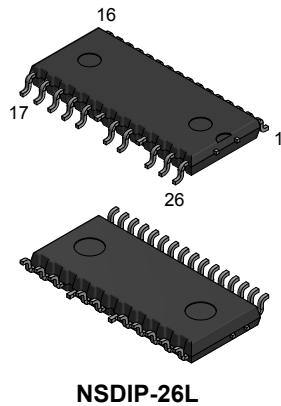

### Features

- IPM 3 A, 600 V, 3-phase IGBT inverter bridge including control ICs for gate driving and freewheeling diodes
- Optimized for low electromagnetic interference
- $V_{CE(sat)}$  negative temperature coefficient
- 3.3 V, 5 V, 15 V CMOS/TTL inputs comparators with hysteresis and pull-down/pull-up resistors
- Undervoltage lockout
- Internal bootstrap diode
- Interlocking function
- Comparator for fault protection against overtemperature and overcurrent
- Op-amp for advanced current sensing
- Optimized pinout for easy board layout
- NTC for temperature control (UL 1434 CA 2 and 4)
- Moisture sensitivity level (MSL) 3 for SMD package

### Applications

- 3-phase inverters for motor drives
- Roller shutters, dish washers, refrigerator compressors, heating systems, airconditioning fans, draining and recirculation pumps


| Product status |                |
|----------------|----------------|
| STGIPNS3H60T-H |                |
| Device summary |                |
| Order code     | STGIPNS3H60T-H |
| Marking        | GIPNS3H60T-H   |
| Package        | NSDIP-26L      |
| Packing        | Tape and reel  |

### Description

This SLLIMM (small low-loss intelligent molded module) nano provides a compact, high-performance AC motor drive in a simple, rugged design. It is composed of six IGBTs and three half-bridge HVICs for gate driving, providing low electromagnetic interference (EMI) characteristics with optimized switching speed. The package is optimized for thermal performance and compactness in built-in motor applications, or other low power applications where assembly space is limited. This IPM includes an operational amplifier, completely uncommitted, and a comparator that can be used to design a fast and efficient protection circuit. SLLIMM™ is a trademark of STMicroelectronics.

# 1 Internal schematic diagram and pin configuration


Figure 1. Internal schematic diagram

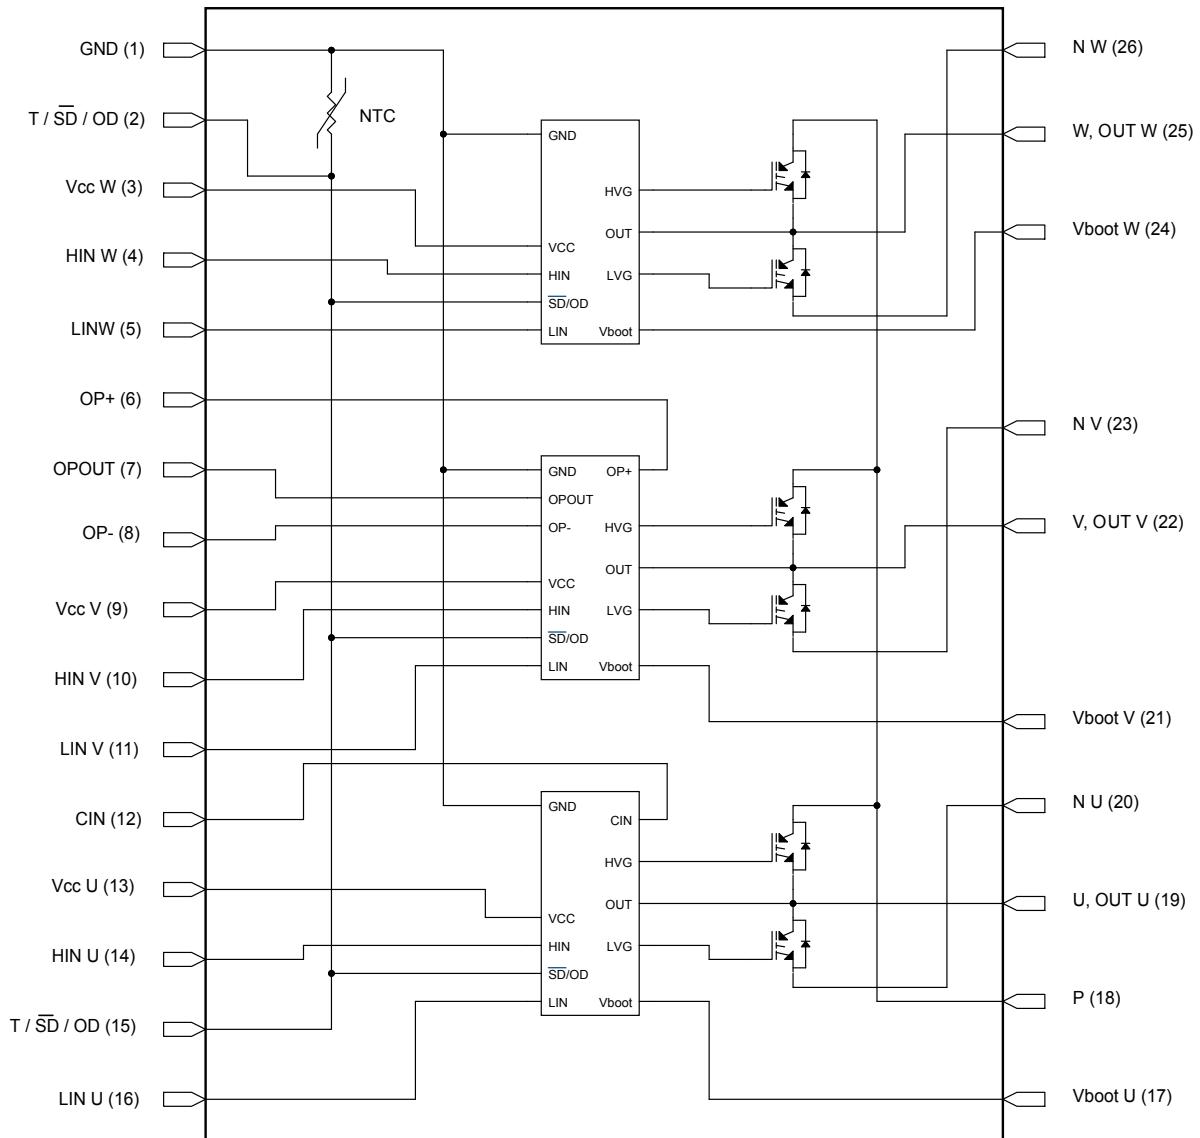

GADG250120171448FSR

**Table 1.** Pin description

| Pin | Symbol              | Description  |
|-----|---------------------|--|
| 1   | GND                 | Ground   |
| 2   | T/SD/ OD            | NTC thermistor terminal / shutdown logic input (active low) / open-drain (comparator output) |
| 3   | V <sub>CC</sub> W   | Low voltage power supply W phase   |
| 4   | HIN W               | High-side logic input for W phase  |
| 5   | LIN W               | Low-side logic input for W phase   |
| 6   | OP+                 | Op-amp non inverting input   |
| 7   | OP <sub>OUT</sub>   | Op-amp output  |
| 8   | OP-                 | Op-amp inverting input   |
| 9   | V <sub>CC</sub> V   | Low voltage power supply V phase   |
| 10  | HIN V               | High-side logic input for V phase  |
| 11  | LIN V               | Low-side logic input for V phase   |
| 12  | CIN                 | Comparator input   |
| 13  | V <sub>CC</sub> U   | Low voltage power supply for U phase   |
| 14  | HIN U               | High-side logic input for U phase  |
| 15  | T/SD/OD             | NTC thermistor terminal / shutdown logic input (active low) / open-drain (comparator output) |
| 16  | LIN U               | Low-side logic input for U phase   |
| 17  | V <sub>BOOT</sub> U | Bootstrap voltage for U phase  |
| 18  | P                   | Positive DC input  |
| 19  | U, OUT <sub>U</sub> | U phase output   |
| 20  | N <sub>U</sub>      | Negative DC input for U phase  |
| 21  | V <sub>BOOT</sub> V | Bootstrap voltage for V phase  |
| 22  | V, OUT <sub>V</sub> | V phase output   |
| 23  | N <sub>V</sub>      | Negative DC input for V phase  |
| 24  | V <sub>BOOT</sub> W | Bootstrap voltage for W phase  |
| 25  | W, OUT <sub>W</sub> | W phase output   |
| 26  | N <sub>W</sub>      | Negative DC input for W phase  |

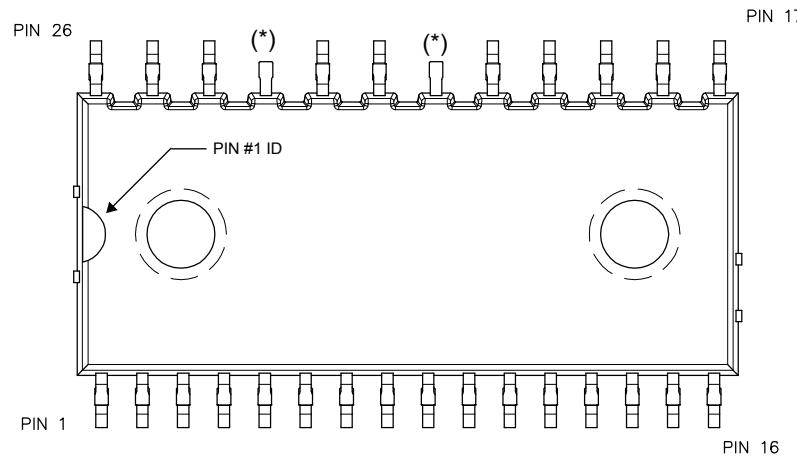**Figure 2. Pin layout (top view)**

(\*) Dummy pin internally connected to P (positive DC input).

## 2 Electrical ratings

### 2.1 Absolute maximum ratings

**Table 2. Inverter part**

| Symbol             | Parameter   | Value | Unit |
|--------------------|---|-------|------|
| $V_{CES}$          | Each IGBT collector emitter voltage ( $V_{IN}^{(1)} = 0$ V) | 600   | V    |
| $\pm I_C^{(2)}$    | Each IGBT continuous collector current ( $T_C = 25$ °C)     | 3     | A    |
| $\pm I_{CP}^{(3)}$ | Each IGBT pulsed collector current (less than 1 ms)         | 18    | A    |
| $P_{TOT}$          | Each IGBT total dissipation ( $T_C = 25$ °C)                | 6.6   | W    |

1. Applied among  $HIN_i$ ,  $LIN_i$  and GND for  $i = U, V, W$

2. Calculated according to the iterative formula:

$$I_C(T_C) = \frac{T_{j(max)} - T_C}{R_{thj-c} \cdot V_{CE(sat)(max)}(T_{j(max)}) I_C(T_C))}$$

3. Pulse width limited by max junction temperature.

**Table 3. Control part**

| Symbol        | Parameter  | Min.            | Max.             | Unit |
|---------------|--|-----------------|------------------|------|
| $V_{OUT}$     | Output voltage applied among $OUT_U$ , $OUT_V$ , $OUT_W$ - GND | $V_{boot} - 21$ | $V_{boot} + 0.3$ | V    |
| $V_{CC}$      | Low voltage power supply                                       | - 0.3           | 21               | V    |
| $V_{CIN}$     | Comparator input voltage                                       | - 0.3           | $V_{CC} + 0.3$   | V    |
| $V_{op+}$     | Op-amp non-inverting input                                     | - 0.3           | $V_{CC} + 0.3$   | V    |
| $V_{op-}$     | Op-amp inverting input   | - 0.3           | $V_{CC} + 0.3$   | V    |
| $V_{boot}$    | Bootstrap voltage  | - 0.3           | 620              | V    |
| $V_{IN}$      | Logic input voltage applied among $HIN$ , $LIN$ and GND        | - 0.3           | 15               | V    |
| $V_{T/SD/OD}$ | Open-drain voltage   | - 0.3           | 15               | V    |
| $dv_{out}/dt$ | Allowed output slew rate                                       |                 | 50               | V/ns |

**Table 4. Total system**

| Symbol    | Parameter  | Value      | Unit |
|-----------|--|------------|------|
| $V_{ISO}$ | Isolation withstand voltage applied between each pin and heatsink plate (AC voltage, $t = 60$ s) | 1000       | V    |
| $T_j$     | Power chips operating junction temperature   | -40 to 150 | °C   |
| $T_C$     | Module case operation temperature  | -40 to 125 | °C   |

## 2.2 Thermal data

**Table 5. Thermal data**

| Symbol            | Parameter                           | Value | Unit |
|-------------------|-------------------------------------|-------|------|
| R <sub>thJA</sub> | Thermal resistance junction-ambient | 44    | °C/W |

## 3 Electrical characteristics

### 3.1 Inverter part

$T_J = 25^\circ\text{C}$  unless otherwise specified

**Table 6. Static**

| Symbol               | Parameter  | Test conditions  | Min. | Typ. | Max. | Unit          |
|----------------------|--|--|------|------|------|---------------|
| $V_{CE(\text{sat})}$ | Collector-emitter saturation voltage                             | $V_{CC} = V_{\text{boot}} = 15 \text{ V}$ ,<br>$V_{IN}^{(1)} = 0 \text{ to } 5 \text{ V}$ , $I_C = 1 \text{ A}$                                | -    | 2.15 | 2.6  | V             |
|                      |  | $V_{CC} = V_{\text{boot}} = 15 \text{ V}$ ,<br>$V_{IN}^{(1)} = 0 \text{ to } 5 \text{ V}$ , $I_C = 1 \text{ A}$ ,<br>$T_J = 125^\circ\text{C}$ | -    | 1.65 |      |               |
| $I_{CES}$            | Collector-cut off current<br>( $V_{IN}^{(1)} = 0$ "logic state") | $V_{CE} = 550 \text{ V}$ , $V_{CC} = 15 \text{ V}$ ,<br>$V_{BS}=15 \text{ V}$  | -    |      | 250  | $\mu\text{A}$ |
| $V_F$                | Diode forward voltage  | $V_{IN}^{(1)} = 0$ "logic state",<br>$I_C = 1 \text{ A}$   | -    |      | 1.7  | V             |

1. Applied among  $HIN_i$ ,  $LIN_i$  and  $GND$  for  $i = U, V, W$ .


**Table 7. Inductive load switching time and energy**

| Symbol             | Parameter                 | Test conditions   | Min. | Typ. | Max. | Unit          |
|--------------------|---------------------------|---|------|------|------|---------------|
| $t_{on}^{(1)}$     | Turn-on time              | $V_{DD} = 300 \text{ V}$ ,<br>$V_{CC} = V_{\text{boot}} = 15 \text{ V}$ ,<br>$V_{IN}^{(2)} = 0 \text{ to } 5 \text{ V}$ ,<br>$I_C = 1 \text{ A}$<br>(see Figure 4. Switching time definition) | -    | 275  | -    | ns            |
| $t_{c(on)}^{(1)}$  | Crossover time (on)       |   | -    | 90   | -    |               |
| $t_{off}^{(1)}$    | Turn-off time             |   | -    | 890  | -    |               |
| $t_{c(off)}^{(1)}$ | Crossover time (off)      |   | -    | 125  | -    |               |
| $t_{rr}$           | Reverse recovery time     |   | -    | 50   | -    |               |
| $E_{on}$           | Turn-on switching energy  |   | -    | 18   | -    | $\mu\text{J}$ |
| $E_{off}$          | Turn-off switching energy |   | -    | 13   | -    |               |


1.  $t_{ON}$  and  $t_{OFF}$  include the propagation delay time of the internal drive.  $t_{C(ON)}$  and  $t_{C(OFF)}$  are the switching times of IGBT itself under the internally given gate driving condition.

2. Applied among  $HIN_i$ ,  $LIN_i$  and  $GND$  for  $i = U, V, W$ .

**Figure 3. Switching time test circuit**

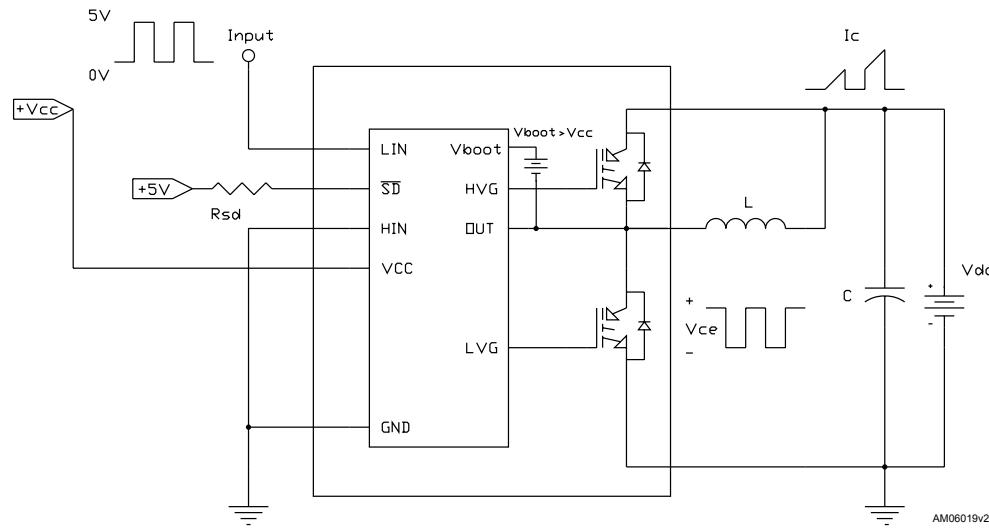

**Figure 4. Switching time definition**

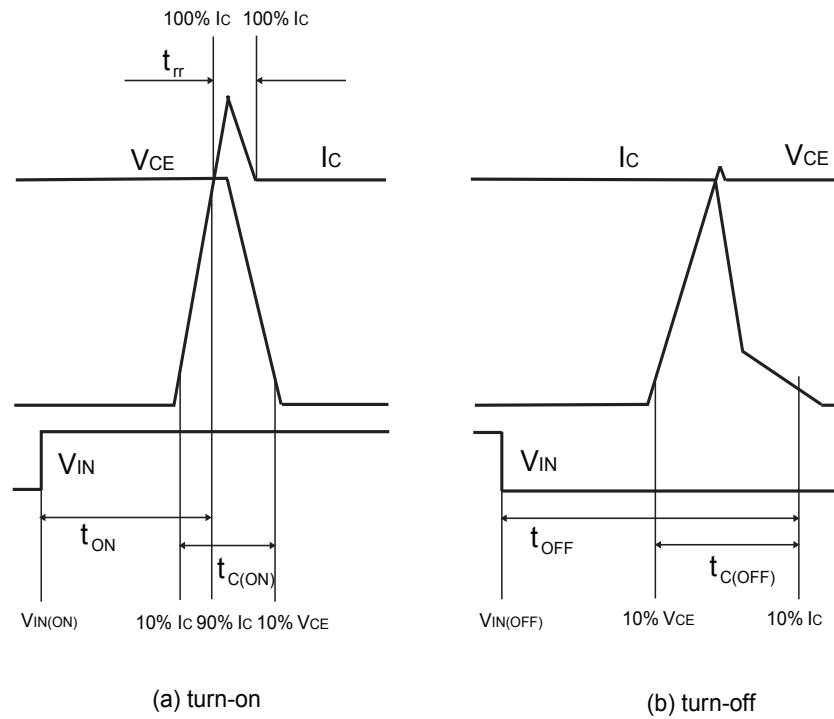

ADG090820161404MT

Figure 4. Switching time definition refers to HIN, LIN inputs (active high).

### 3.2 Control part

$V_{CC} = 15 \text{ V}$  unless otherwise specified

**Table 8. Low voltage power supply**

| Symbol          | Parameter                                   | Test conditions  | Min. | Typ. | Max. | Unit          |
|-----------------|---|--|------|------|------|---------------|
| $V_{CC\_hys}$   | $V_{CC}$ UV hysteresis                      |  | 1.2  | 1.5  | 1.8  | V             |
| $V_{CC\_thON}$  | $V_{CC}$ UV turn ON threshold               |  | 11.5 | 12   | 12.5 | V             |
| $V_{CC\_thOFF}$ | $V_{CC}$ UV turn OFF threshold              |  | 10   | 10.5 | 11   | V             |
| $I_{qccu}$      | Undervoltage quiescent supply current       | $V_{CC} = 10 \text{ V}$ , $T/\overline{SD}/OD = 5 \text{ V}$ , $LIN = 0 \text{ V}$ , $HIN = 0 \text{ V}$ , $CIN = 0 \text{ V}$ |      |      | 150  | $\mu\text{A}$ |
| $I_{qcc}$       | Quiescent current                           | $V_{CC} = 15 \text{ V}$ , $T/\overline{SD}/OD = 5 \text{ V}$ , $LIN = 0 \text{ V}$ , $HIN = 0 \text{ V}$ , $CIN = 0 \text{ V}$ |      |      | 1    | mA            |
| $V_{ref}$       | Internal comparator (CIN) reference voltage |  | 0.5  | 0.54 | 0.58 | V             |

**Table 9. Bootstrapped voltage**

| Symbol          | Parameter                               | Test conditions  | Min. | Typ. | Max. | Unit          |
|-----------------|---|--|------|------|------|---------------|
| $V_{BS\_hys}$   | $V_{BS}$ UV hysteresis                  |  | 1.2  | 1.5  | 1.8  | V             |
| $V_{BS\_thON}$  | $V_{BS}$ UV turn ON threshold           |  | 11.1 | 11.5 | 12.1 | V             |
| $V_{BS\_thOFF}$ | $V_{BS}$ UV turn OFF threshold          |  | 9.8  | 10   | 10.6 | V             |
| $I_{QBSU}$      | Undervoltage $V_{BS}$ quiescent current | $V_{BS} < 9 \text{ V}$ , $T/\overline{SD}/OD = 5 \text{ V}$ , $LIN = 0 \text{ V}$ and $HIN = 5 \text{ V}$ , $CIN = 0 \text{ V}$  |      | 70   | 110  | $\mu\text{A}$ |
| $I_{QBS}$       | $V_{BS}$ quiescent current              | $V_{BS} = 15 \text{ V}$ , $T/\overline{SD}/OD = 5 \text{ V}$ , $LIN = 0 \text{ V}$ and $HIN = 5 \text{ V}$ , $CIN = 0 \text{ V}$ |      | 200  | 300  | $\mu\text{A}$ |
| $R_{DS(on)}$    | Bootstrap driver on-resistance          | LVG ON   |      | 120  |      | $\Omega$      |

**Table 10. Logic inputs**

| Symbol     | Parameter                        | Test conditions      | Min. | Typ. | Max. | Unit          |
|------------|----------------------------------|----------------------|------|------|------|---------------|
| $V_{il}$   | Low logic level voltage          |                      |      |      | 0.8  | V             |
| $V_{ih}$   | High logic level voltage         |                      | 2.25 |      |      | V             |
| $I_{HINh}$ | HIN logic "1" input bias current | $HIN = 15 \text{ V}$ | 20   | 40   | 100  | $\mu\text{A}$ |
| $I_{HINI}$ | HIN logic "0" input bias current | $HIN = 0 \text{ V}$  |      |      | 1    | $\mu\text{A}$ |
| $I_{LINI}$ | LIN logic "0" input bias current | $LIN = 0 \text{ V}$  |      |      | 1    | $\mu\text{A}$ |
| $I_{LInh}$ | LIN logic "1" input bias current | $LIN = 15 \text{ V}$ | 20   | 40   | 100  | $\mu\text{A}$ |

| Symbol           | Parameter                       | Test conditions   | Min. | Typ. | Max. | Unit |
|------------------|---------------------------------|---|------|------|------|------|
| I <sub>SDh</sub> | SD logic "0" input bias current | SD = 15 V   | 220  | 295  | 370  | µA   |
| I <sub>SDI</sub> | SD logic "1" input bias current | SD = 0 V  |      |      | 3    | µA   |
| D <sub>t</sub>   | Dead time                       | (see Figure 9. Dead time and interlocking waveform definitions) |      | 180  |      | ns   |

**Table 11. Op-amp characteristics**

| Symbol          | Parameter                         | Test condition   | Min. | Typ. | Max. | Unit |
|-----------------|-----------------------------------|--|------|------|------|------|
| V <sub>io</sub> | Input offset voltage              | V <sub>ic</sub> = 0 V, V <sub>o</sub> = 7.5 V                  |      |      | 6    | mV   |
| I <sub>io</sub> | Input offset current              | V <sub>ic</sub> = 0 V, V <sub>o</sub> = 7.5 V                  |      | 4    | 40   | nA   |
| I <sub>ib</sub> | Input bias current <sup>(1)</sup> |  |      | 100  | 200  | nA   |
| V <sub>OL</sub> | Low level output voltage          | R <sub>L</sub> = 10 kΩ to V <sub>cc</sub>                      |      | 75   | 150  | mV   |
| V <sub>OH</sub> | High level output voltage         | R <sub>L</sub> = 10 kΩ to GND                                  | 14   | 14.7 |      | V    |
| I <sub>o</sub>  | Output short-circuit current      | Source, V <sub>id</sub> = +1 V, V <sub>o</sub> = 0 V           | 16   | 30   |      | mA   |
|                 |                                   | Sink, V <sub>id</sub> = -1 V, V <sub>o</sub> = V <sub>CC</sub> | 50   | 80   |      | mA   |
| SR              | Slew rate                         | V <sub>i</sub> = 1 - 4 V, C <sub>L</sub> = 100 pF, unity gain  | 2.5  | 3.8  |      | V/µs |
| GBWP            | Gain bandwidth product            | V <sub>o</sub> = 7.5 V   | 8    | 12   |      | MHz  |
| A <sub>vd</sub> | Large signal voltage gain         | R <sub>L</sub> = 2 kΩ  | 70   | 85   |      | dB   |
| SVR             | Supply voltage rejection ratio    | vs. V <sub>CC</sub>  | 60   | 75   |      | dB   |
| CMRR            | Common mode rejection ratio       |  | 55   | 70   |      | dB   |

1. The direction of input current is out of the IC.

**Table 12. Sense comparator characteristics**

| Symbol              | Parameter   | Test conditions  | Min. | Typ. | Max. | Unit |
|---------------------|---|--|------|------|------|------|
| I <sub>ib</sub>     | Input bias current  | V <sub>CIN</sub> = 1 V   |      |      | 1    | µA   |
| V <sub>od</sub>     | Open-drain low level output voltage   | I <sub>od</sub> = 3 mA   |      |      | 0.5  | V    |
| R <sub>ON_OD</sub>  | Open-drain low level output   | I <sub>od</sub> = 3 mA   |      | 166  |      | Ω    |
| R <sub>PD_SD</sub>  | SD pull-down resistor <sup>(1)</sup>  |  |      | 125  |      | kΩ   |
| t <sub>d_comp</sub> | Comparator delay  | T/SD/OD pulled to 5 V through 100 kΩ resistor  |      | 90   | 130  | ns   |
| SR                  | Slew rate   | C <sub>L</sub> = 180 pF; R <sub>pu</sub> = 5 kΩ  |      | 60   |      | V/µs |
| t <sub>sd</sub>     | Shutdown to high- / low-side driver propagation delay                       | V <sub>OUT</sub> = 0, V <sub>boot</sub> = V <sub>CC</sub> , V <sub>IN</sub> = 0 to 3.3 V | 50   | 125  | 200  | ns   |
| t <sub>isd</sub>    | Comparator triggering to high- / low-side driver turn-off propagation delay | Measured applying a voltage step from 0 V to 3.3 V to pin CIN                            | 50   | 200  | 250  |      |


1. Equivalent value derived from the resistances of three drivers in parallel.

**Table 13. Truth table**

| Condition                                 | Logic input ( $V_i$ ) |                  |                  | Output |     |
|---|-----------------------|------------------|------------------|--------|-----|
|   | T/SD/OD               | LIN              | HIN              | LVG    | HVG |
| Shutdown enable half-bridge tri-state     | L                     | X <sup>(1)</sup> | X <sup>(1)</sup> | L      | L   |
| Interlocking half-bridge tri-state        | H                     | H                | H                | L      | L   |
| 0 "logic state" half-bridge tri-state     | H                     | L                | L                | L      | L   |
| 1 "logic state" low- side direct driving  | H                     | H                | L                | H      | L   |
| 1 "logic state" high- side direct driving | H                     | L                | H                | L      | H   |

1. X: don't care.

### 3.2.1 NTC thermistor

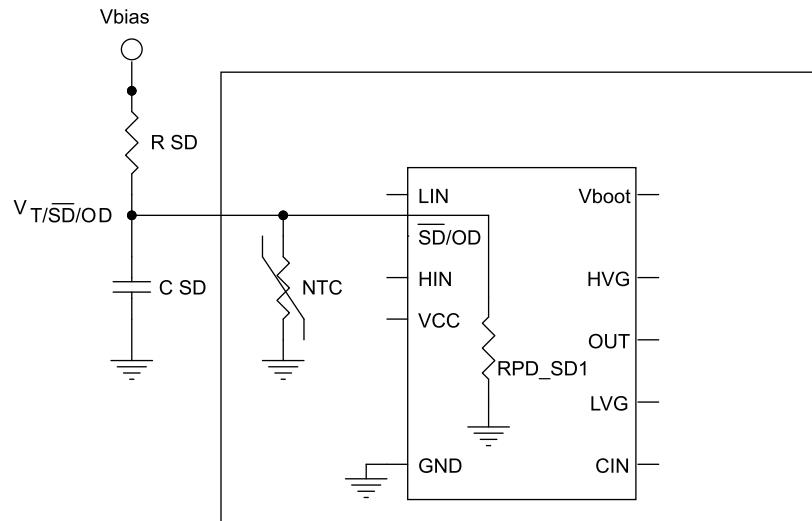**Figure 5. Internal structure of  $\overline{SD}$  and NTC**


GADG020120181050SA

$R_{PD\_SD}$ : equivalent value as result of resistances of three drivers in parallel.

Figure 6. Equivalent resistance (NTC//R<sub>PD\_SD</sub>)

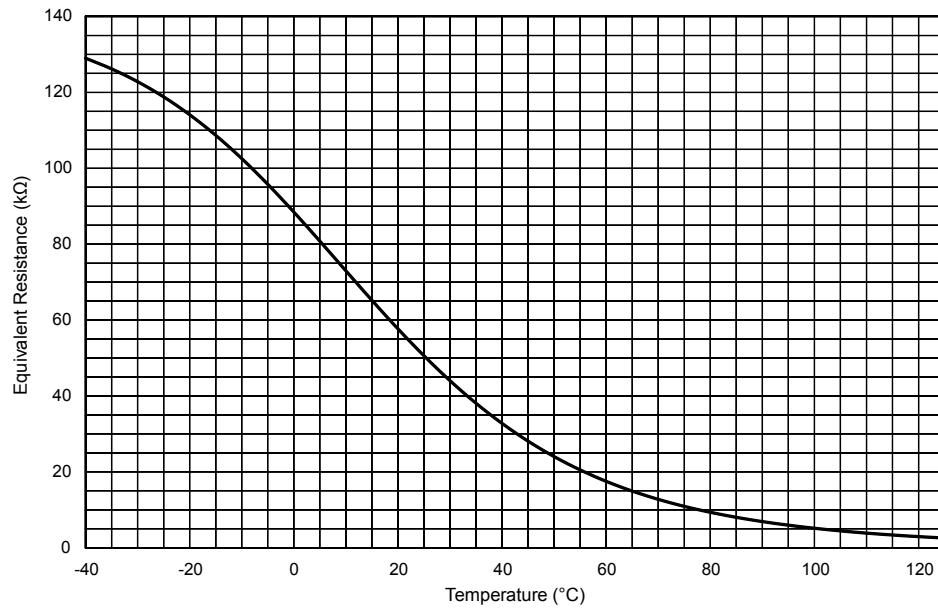


Figure 7. Equivalent resistance (NTC//R<sub>PD\_SD</sub>) zoom



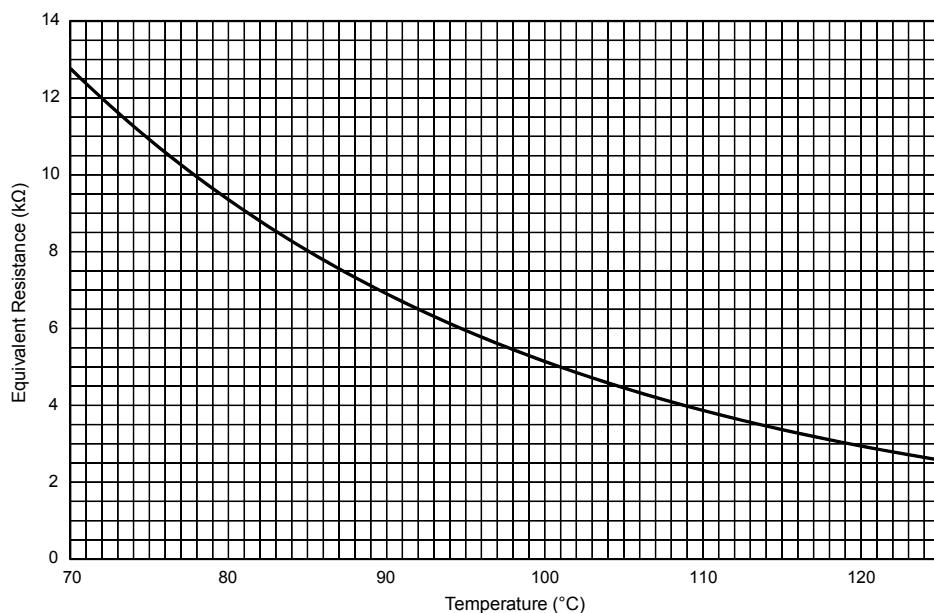


Figure 8. Voltage of T/SD/OD pin according to NTC temperature

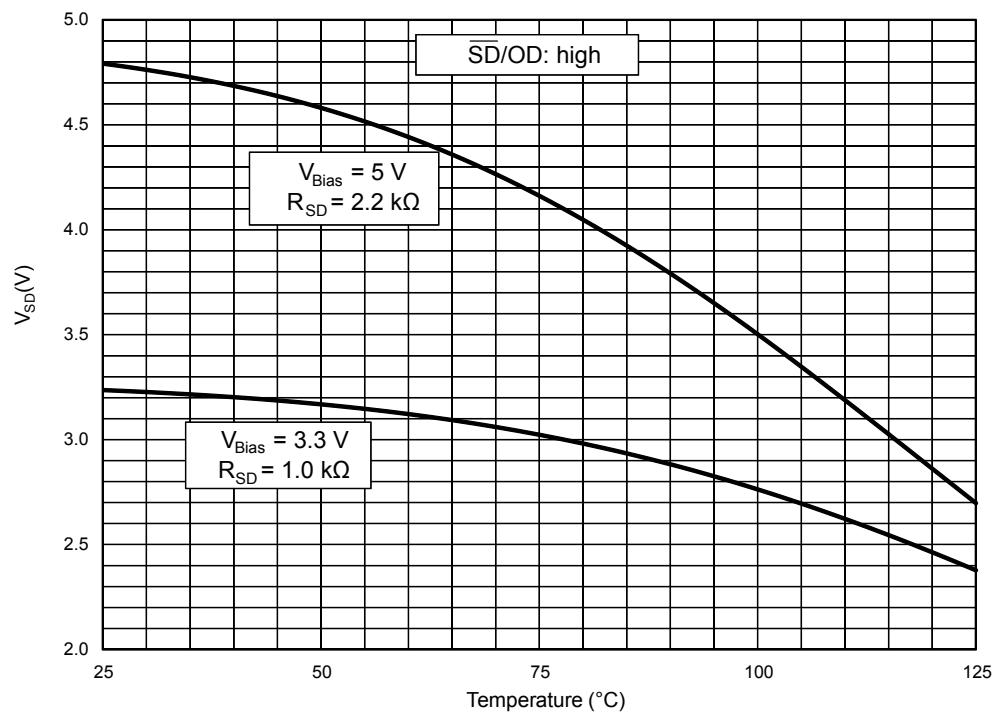

### 3.3 Waveform definitions

Figure 9. Dead time and interlocking waveform definitions

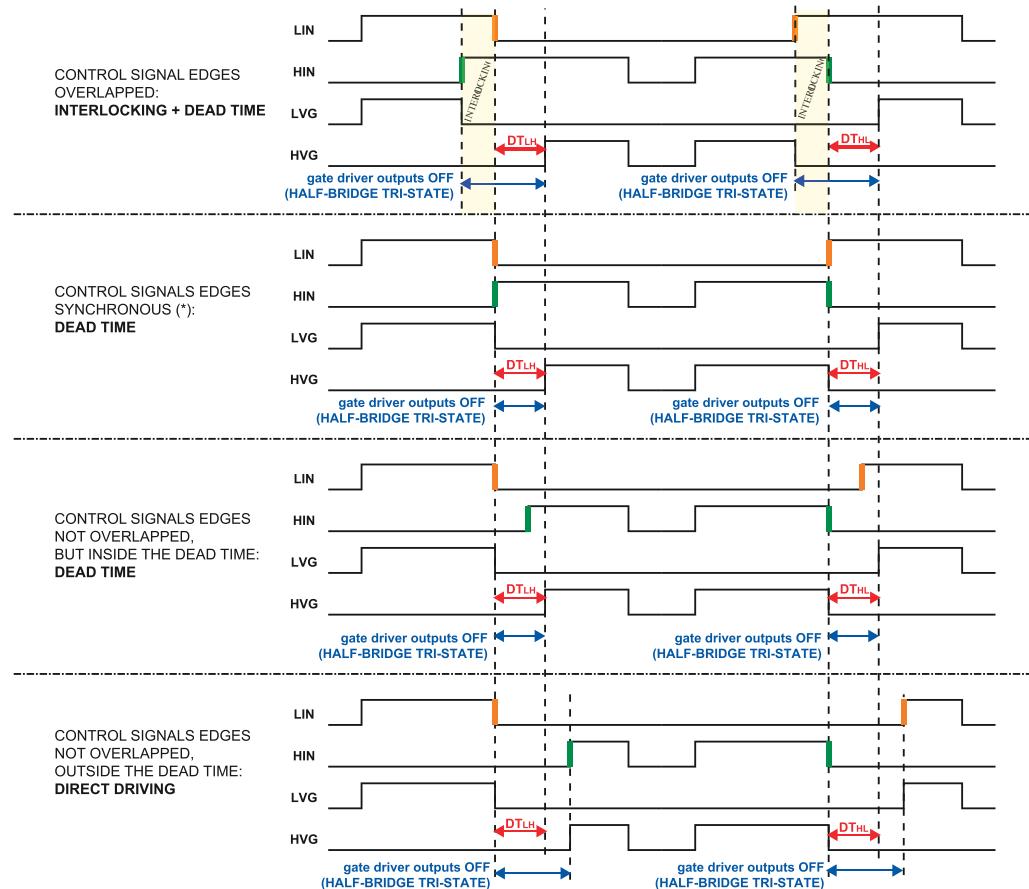



GADG080120181131SA

## 4

## Shutdown function

The device is equipped with three half-bridge IC gate drivers and integrates a comparator for fault detection. The comparator has an internal voltage reference  $V_{REF}$  connected to the inverting input, while the non-inverting input pin (CIN) can be connected to an external shunt resistor for current monitoring. Since the comparator is embedded in the U IC gate driver, in case of fault it disables directly the U outputs, whereas the shutdown of V and W IC gate drivers depends on the RC value of the external SD circuitry, which fix the disabling time. For an effective design of the shutdown circuit, please refer to the AN4966.

**Figure 10. Shutdown timing waveforms**

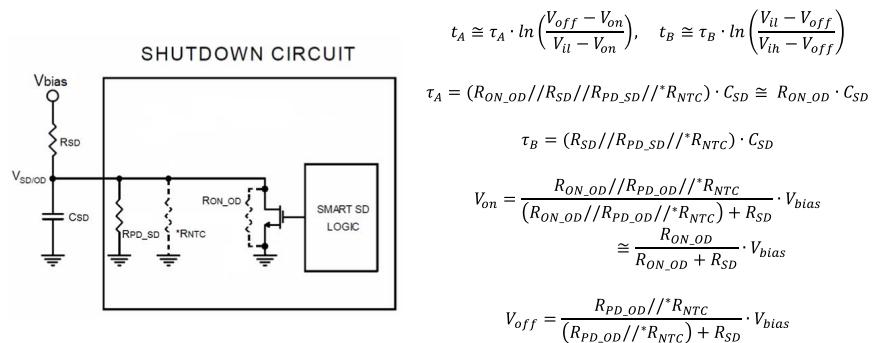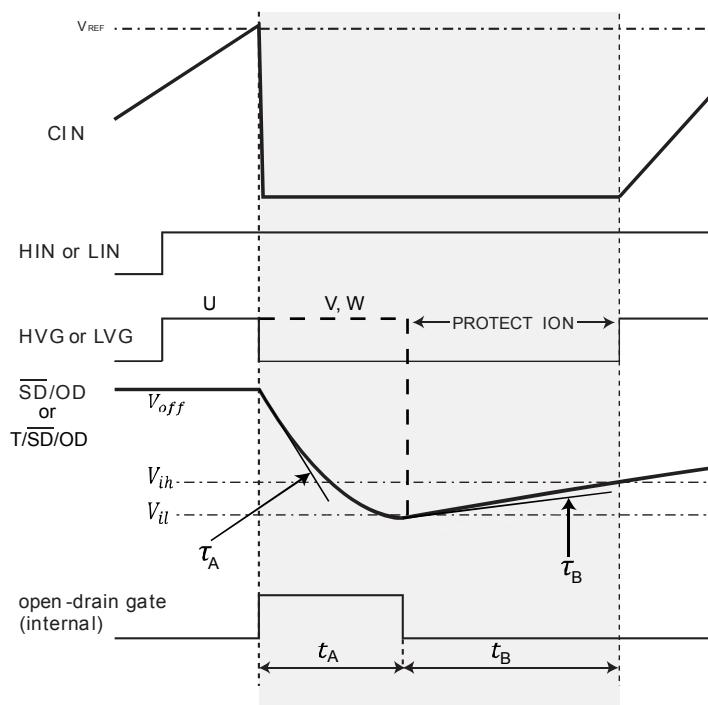


R<sub>SD</sub> and C<sub>SD</sub> external circuitry must be designed to ensure  $V_{on} < V_{il}$  &  $V_{off} > V_{th}$

Please refer to AN4966 for further details.

\* R<sub>NTC</sub> to be considered only when the NTC is internally connected to the T/SD/OD pin.

## 5 Application circuit example

Figure 11. Application circuit example

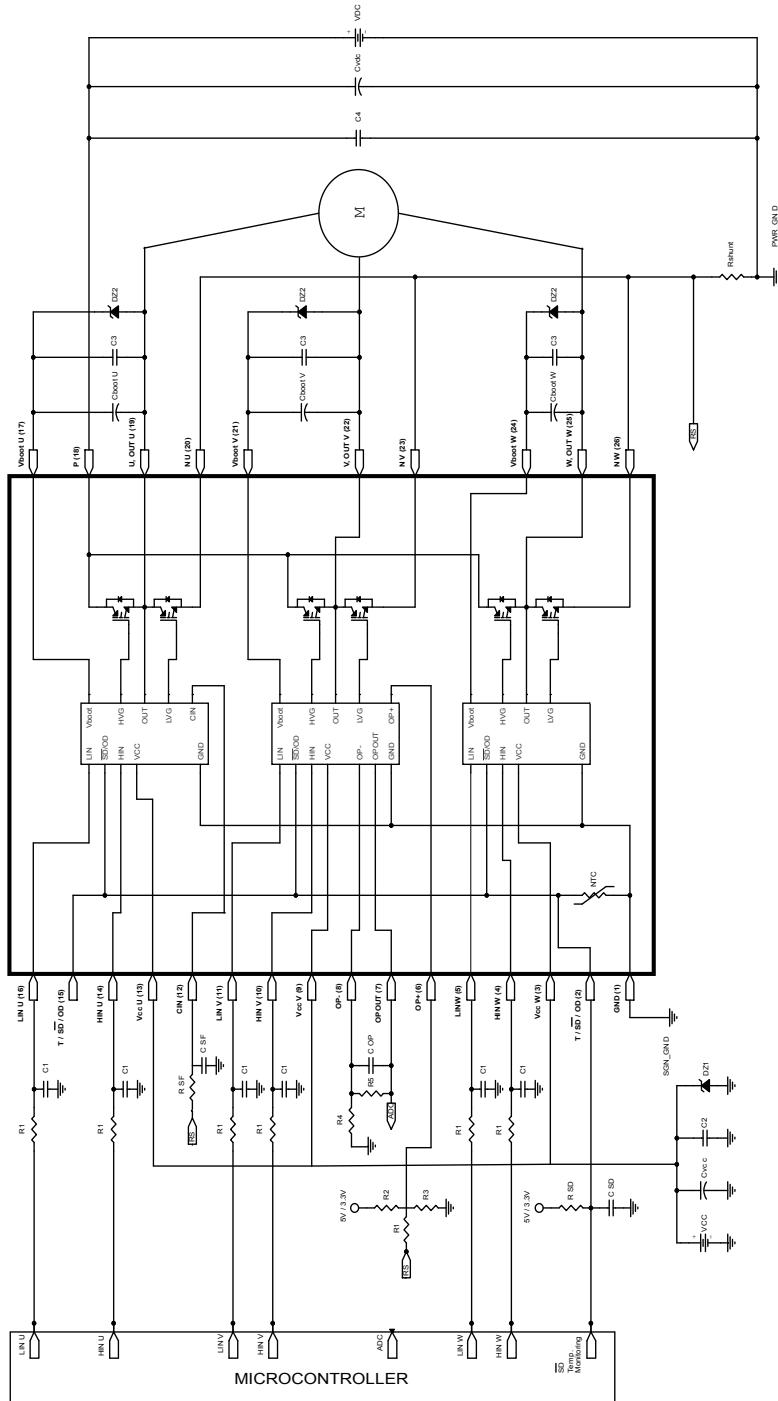

GAD250720161156FSR

Application designers are free to use a different scheme according to the device specifications.

## 5.1

### Guidelines

- The HIN, LIN input signals are active-high logic. A 375 kΩ (typ.) pull-down resistor is built-in for each input. To prevent input signal oscillation, the wiring of each input should be as short as possible and the use of RC filters ( $R_1$ ,  $C_1$ ) on each input signal is suggested. The filters should be made with a time constant of about 100 ns and placed as close as possible to the IPM input pins.
- The use of an (aluminum or tantalum) bypass capacitor  $C_{VCC}$  can help to reduce the transient circuit demand on the power supply. Also, to reduce any high-frequency switching noise distributed on the power lines, it is suggested to place a decoupling capacitor  $C_2$  (100 to 220 nF, with low ESR and low ESL) as close as possible to the Vcc pin and in parallel with the bypass capacitor.
- It is recommended to use of an RC filter ( $R_{SF}$ ,  $C_{SF}$ ) for preventing protection circuit malfunction. The time constant ( $R_{SF} \times C_{SF}$ ) should be set to 1 µs and the filter must be placed as close as possible to the CIN pin.
- The SD is an input/output pin (open-drain type if used as output). A built-in thermistor NTC is internally connected between the SD pin and GND. The  $V_{SD}$ -GND voltage decreases as the temperature increases due to the pull-up  $R_{SD}$  resistor. In order to keep the voltage always higher than the high-level logic threshold, the pull-up resistor is suggested to be set at 1 kΩ or 2.2 kΩ for 3.3 V or 5 V MCU power supply respectively. The  $C_{SD}$  capacitor of the filter on SD should be fixed no higher than 3.3 nF in order to assure an SD activation time of  $T_A \leq 500$  ns; in addition, the filter should be placed as close as possible to the SD pin.
- The  $C_3$  decoupling capacitor (from 100 to 220 nF, ceramic with low ESR and low ESL), placed in parallel with each  $C_{boot}$ , is useful to filter high-frequency disturbance. Both  $C_{boot}$  and  $C_3$  (if present) should be placed as close as possible to the U, V, W and  $V_{boot}$  pins. Bootstrap negative electrodes should be connected to the U, V, W terminals directly and separated from the main output wires.
- To prevent overvoltage on the Vcc pin, a Zener diode (Dz1) can be used. Similarly on the  $V_{boot}$  pin, a Zener diode (Dz2) can be placed in parallel with each  $C_{boot}$ .
- The use of the  $C_4$  decoupling capacitor (100 to 220 nF, with low ESR and low ESL) in parallel with the electrolytic capacitor  $C_{VDC}$  is useful to prevent surge destruction. Both the  $C_4$  and  $C_{VDC}$  capacitors should be placed as close as possible to the IPM ( $C_4$  has priority over  $C_{VDC}$ ).
- By integrating an application-specific type HVIC inside the module, it is possible to perform direct coupling to the MCU terminals without an opto-coupler.
- Use low inductance shunt resistors for phase leg current sensing.
- To avoid malfunctions, the wiring between the N pins, the shunt resistor and PWR\_GND should be as short as possible.
- The connection of SGN\_GND to PWR\_GND at only one point (close to the shunt resistor terminal) can help to reduce the impact of power ground fluctuation.

These guidelines ensure the device specifications for application designs. For further details, please refer to the relevant application note.

**Table 14. Recommended operating conditions**


| Symbol     | Parameter                          | Test conditions                                    | Min. | Typ. | Max. | Unit |
|------------|------------------------------------|--|------|------|------|------|
| $V_{PN}$   | Supply voltage                     | Applied among P-Nu, Nv, Nw                         |      | 300  | 500  | V    |
| $V_{CC}$   | Control supply voltage             | Applied to $V_{CC}$ -GND                           | 13.5 | 15   | 18   | V    |
| $V_{BS}$   | High-side bias voltage             | Applied to $V_{BOOTx}$ -OUT<br>for $x = U, V, W$   | 13   |      | 18   | V    |
| $t_{dead}$ | Blanking time to prevent arm-short | For each input signal                              | 1.5  |      |      | µs   |
| $f_{PWM}$  | PWM input signal                   | -40 °C < $T_c$ < 100 °C<br>-40 °C < $T_j$ < 125 °C |      | 25   |      | kHz  |
| $T_c$      | Case operation temperature         |  |      |      | 100  | °C   |

## 6 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

### 6.1 NSDIP-26L package information

Figure 12. NSDIP-26L package outline

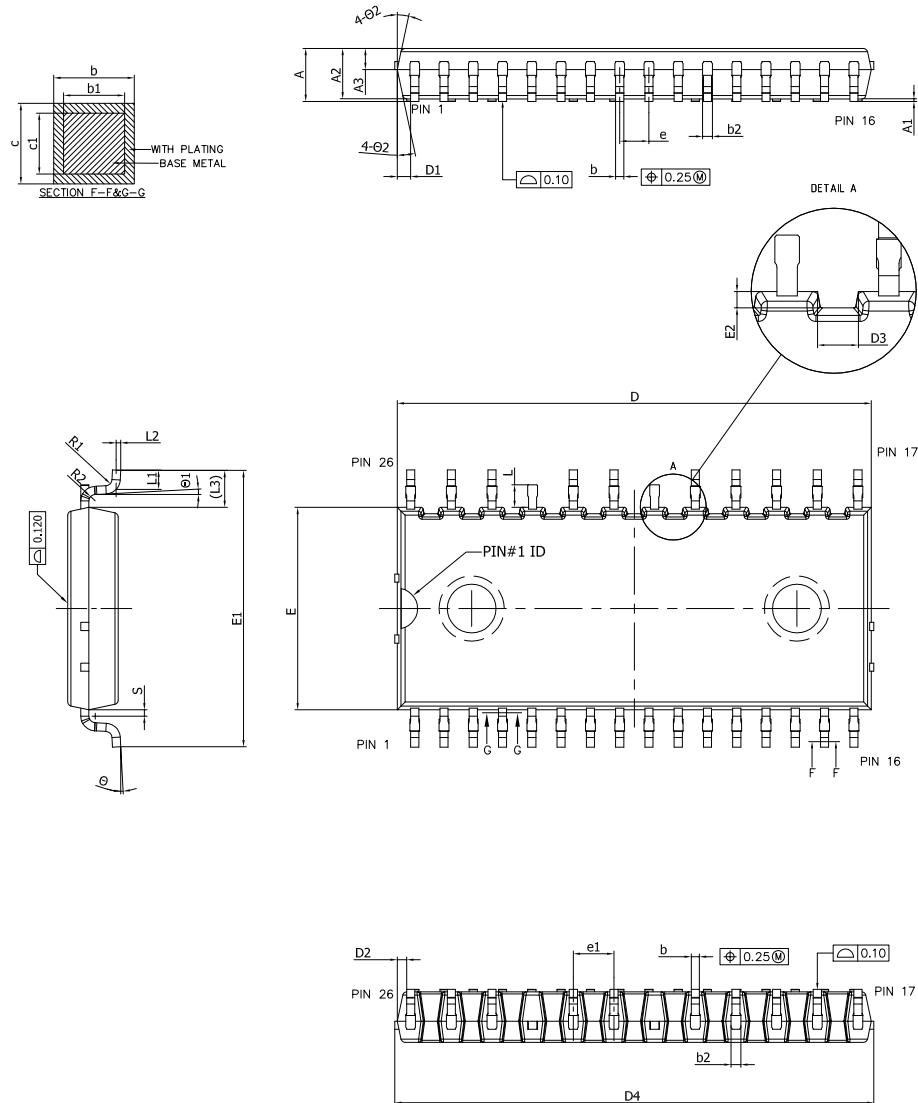


8374968\_3

Table 15. NSDIP-26L package mechanical data

| Dim. | mm    |           |       |
|------|-------|-----------|-------|
|      | Min.  | Typ.      | Max.  |
| A    |       |           | 3.45  |
| A1   | 0.10  |           | 0.25  |
| A2   | 3.00  | 3.10      | 3.20  |
| A3   | 1.70  | 1.80      | 1.90  |
| b    | 0.47  |           | 0.57  |
| b1   | 0.45  | 0.50      | 0.55  |
| b2   | 0.63  |           | 0.67  |
| c    | 0.47  |           | 0.57  |
| c1   | 0.45  | 0.50      | 0.55  |
| D    | 29.05 | 29.15     | 29.25 |
| D1   | 0.70  |           |       |
| D2   | 0.45  |           |       |
| D3   | 0.90  |           |       |
| D4   |       |           | 29.65 |
| E    | 12.35 | 12.45     | 12.55 |
| E1   | 16.70 | 17.00     | 17.30 |
| E2   | 0.35  |           |       |
| e    | 1.70  | 1.80      | 1.90  |
| e1   | 2.40  | 2.50      | 2.60  |
| L    | 1.24  | 1.39      | 1.54  |
| L1   | 1.00  | 1.15      | 1.30  |
| L2   |       | 0.25 BSC  |       |
| L3   |       | 2.275 REF |       |
| R1   | 0.25  | 0.40      | 0.55  |
| R2   | 0.25  | 0.40      | 0.55  |
| S    |       | 0.39      | 0.55  |
| Θ    | 0°    |           | 8°    |
| Θ1   |       | 3° BSC    |       |
| Θ2   | 10°   | 12°       | 14°   |

**Figure 13.** NSDIP-26L recommended footprint (dimensions are in mm)

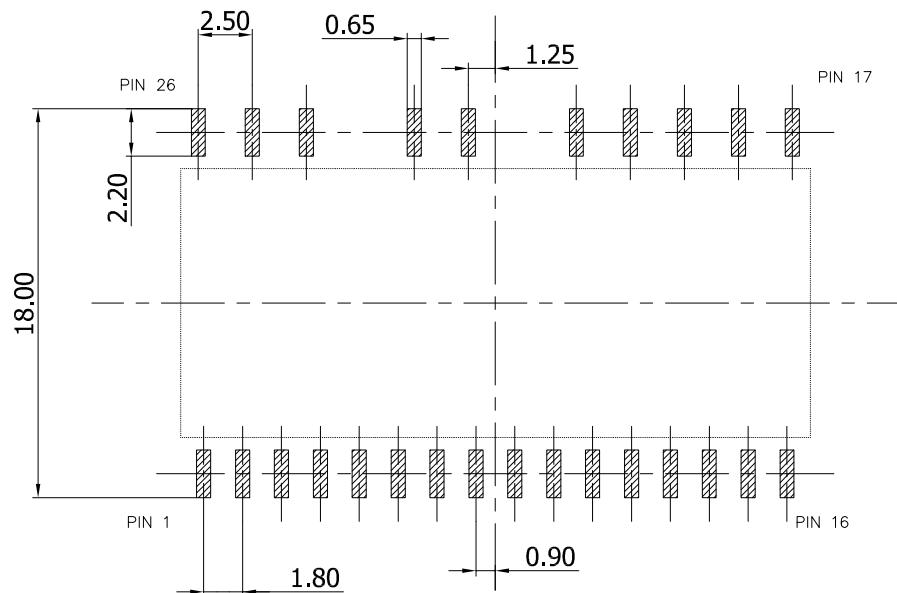

8374868\_3\_fp

## Revision history

**Table 16. Document revision history**

| Date        | Revision | Changes   |
|-------------|----------|---|
| 19-Apr-2017 | 1        | Initial release   |
| 09-Jan-2018 | 2        | Datasheet promoted from preliminary data to production data.<br>Modified features on cover page.<br>Modified Figure 2: "Pin layout (top view)", Table 3: "Inverter part",<br>Table 5: "Total system", Table 6: "Thermal data", Table 9: "Low<br>voltage power supply", Table 10: "Bootstrapped voltage", Table 13:<br>"Sense comparator characteristics".<br>Updated Section 6.1: "NSDIP-26L package information".<br>Minor text changes. |
| 03-Apr-2018 | 3        | Removed maturity status indication from cover page.<br>Modified <a href="#">Table 2. Inverter part</a> , <a href="#">Table 3. Control part</a> .<br>Modified <a href="#">Section 4 Shutdown function</a> .<br>Added <a href="#">Table 14. Recommended operating conditions</a> .<br>Minor text changes.   |

## Contents

|              |   |           |
|--------------|---|-----------|
| <b>1</b>     | <b>Internal schematic diagram and pin configuration .....</b> | <b>2</b>  |
| <b>2</b>     | <b>Electrical ratings.....</b>                                | <b>5</b>  |
| <b>2.1</b>   | Absolute maximum ratings .....                                | 5         |
| <b>2.2</b>   | Thermal data.....   | 5         |
| <b>3</b>     | <b>Electrical characteristics.....</b>                        | <b>7</b>  |
| <b>3.1</b>   | Inverter part .....   | 7         |
| <b>3.2</b>   | Control part.....   | 9         |
| <b>3.2.1</b> | NTC thermistor.....   | 11        |
| <b>3.3</b>   | Waveform definitions .....                                    | 13        |
| <b>4</b>     | <b>Shutdown function .....</b>                                | <b>15</b> |
| <b>5</b>     | <b>Application circuit example .....</b>                      | <b>16</b> |
| <b>5.1</b>   | Guidelines .....  | 17        |
| <b>6</b>     | <b>Package information.....</b>                               | <b>18</b> |
| <b>6.1</b>   | NSDIP-26L package information .....                           | 18        |
|              | <b>Revision history .....</b>                                 | <b>21</b> |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: org@lifeelectronics.ru