

Multilayer Balun Transformers

For GSM900 Tx & Rx

HHM Series

Type: **HHM1515B2 (2.0×1.25×0.95mm)**
 HHM1522B1 (2.0×1.25×0.95mm)
 HHM1523C1 (2.0×1.25×0.95mm)
 HHM1524B1 (2.0×1.25×0.95mm)

Issue date: December 2010


- All specifications are subject to change without notice.
 - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

Multilayer Baluns For EGSM/Tx & Rx


Conformity to RoHS Directive

HHM Series HHM1515B2


SHAPES AND DIMENSIONS

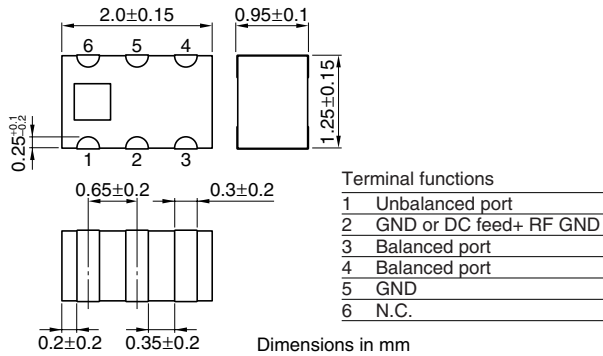

CIRCUIT DIAGRAM

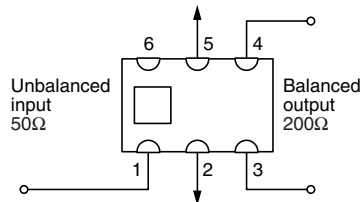

RECOMMENDED PC BOARD PATTERNS

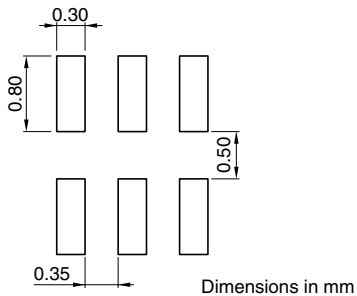

ELECTRICAL CHARACTERISTICS

Unbalanced impedance	50 Ω
Balanced impedance	200 Ω
Frequency range	880 to 960MHz
Unbalanced port return loss	10dB min.
Phase imbalance at balanced port	180 $\pm$ 10deg.
Amplitude imbalance at balanced port	0 $\pm$ 1.0dB
Insertion loss	1.0dB max.
Temperature range	Operating -40 to +85°C
	Storage -40 to +85°C
Packaging style and quantities	2000pieces/reel


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 200Ω


RETURN LOSS

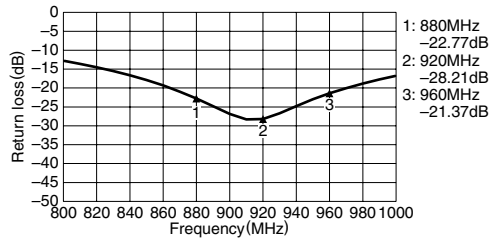


AMPLITUDE BALANCE

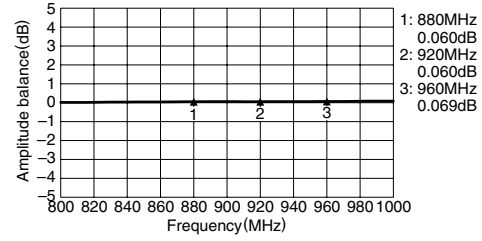

INSERTION LOSS

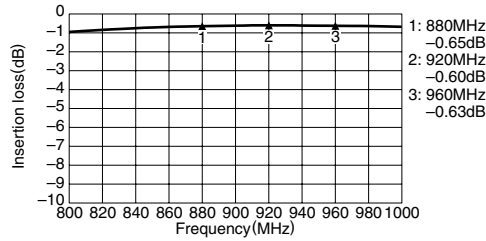

PHASE BALANCE

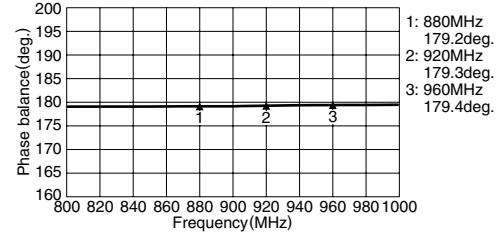


Multilayer Chip Baluns For EGSM/Tx & Rx


Conformity to RoHS Directive

HHM Series HHM1522B1


SHAPES AND DIMENSIONS

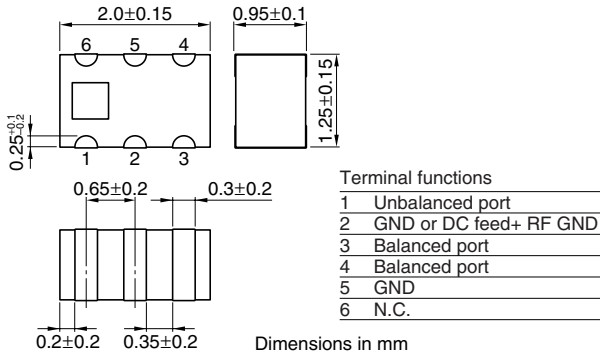

CIRCUIT DIAGRAM

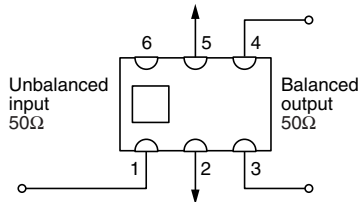

RECOMMENDED PC BOARD PATTERNS

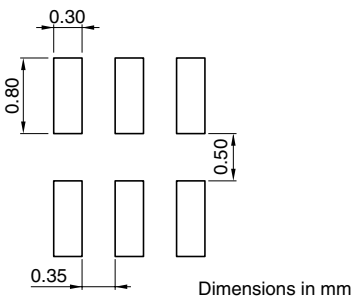

ELECTRICAL CHARACTERISTICS

Unbalanced impedance		50Ω
Balanced impedance		50Ω
Frequency range		880 to 960MHz
Unbalanced port return loss		12dB min.
Phase imbalance at balanced port		180±10deg.
Amplitude imbalance at balanced port		0±1.0dB
Insertion loss		1.3dB max.
Temperature range	Operating	-40 to +85°C
	Storage	-40 to +85°C
Packaging style and quantities		2000pieces/reel


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 50Ω


RETURN LOSS

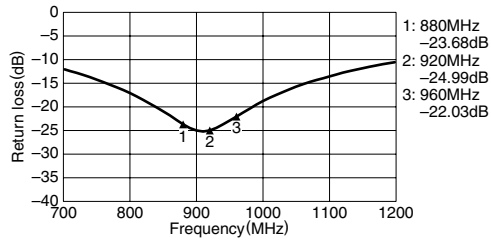


INSERTION LOSS

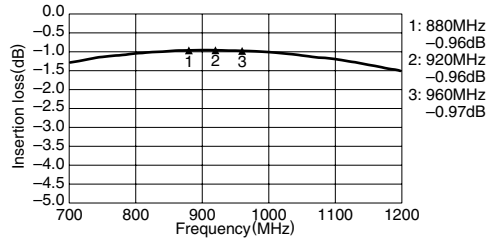

AMPLITUDE BALANCE

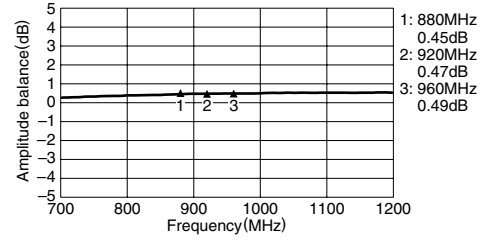

PHASE BALANCE

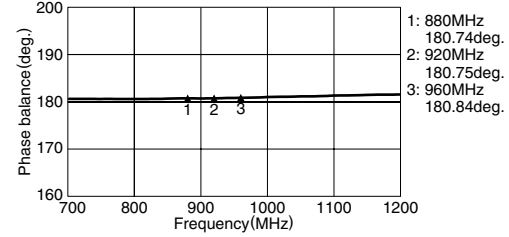


Multilayer Chip Baluns For EGSM/Tx & Rx


Conformity to RoHS Directive

HHM Series HHM1523C1


SHAPES AND DIMENSIONS

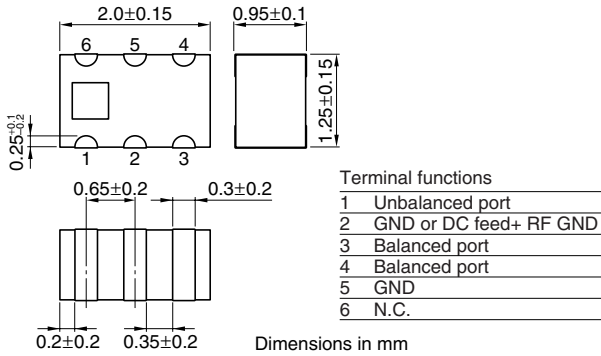

CIRCUIT DIAGRAM

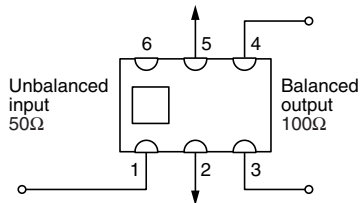

RECOMMENDED PC BOARD PATTERNS

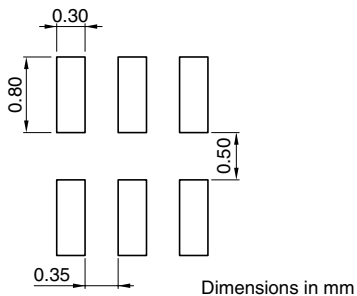

ELECTRICAL CHARACTERISTICS

Unbalanced impedance	50 Ω
Balanced impedance	100 Ω
Frequency range	880 to 960MHz
Unbalanced port return loss	10dB min.
Phase imbalance at balanced port	180 $\pm$ 10deg.
Amplitude imbalance at balanced port	0 $\pm$ 1.0dB
Insertion loss	1.1dB max.
Temperature range	Operating -40 to +85°C
	Storage -40 to +85°C
Packaging style and quantities	2000pieces/reel


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 100Ω


RETURN LOSS

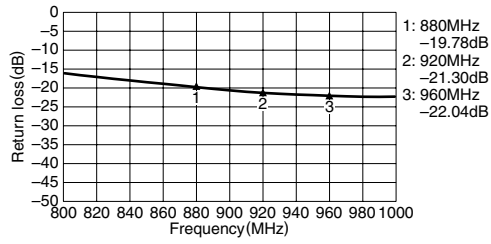


INSERTION LOSS

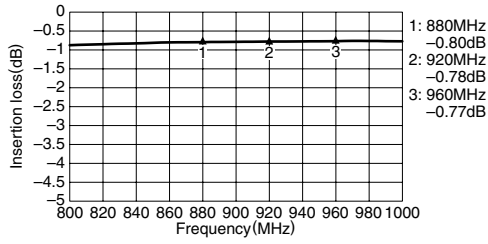

AMPLITUDE BALANCE

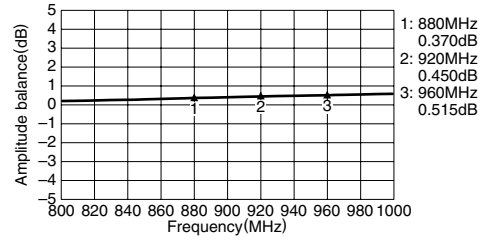

PHASE BALANCE

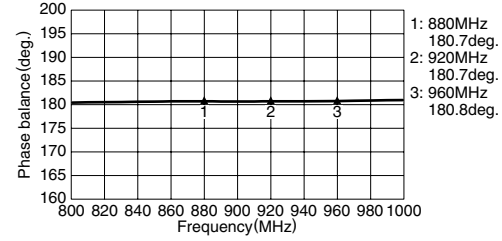


Multilayer Chip Baluns For EGSM/Tx & Rx


Conformity to RoHS Directive

HHM Series HHM1524B1


SHAPES AND DIMENSIONS

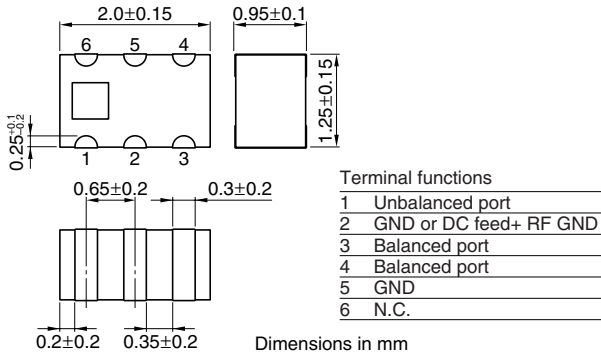

CIRCUIT DIAGRAM

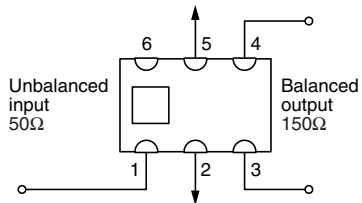

RECOMMENDED PC BOARD PATTERNS

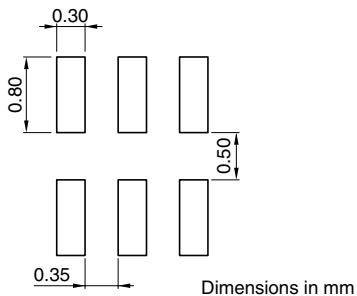

ELECTRICAL CHARACTERISTICS

Unbalanced impedance	50 Ω
Balanced impedance	150 Ω
Frequency range	880 to 960MHz
Unbalanced port return loss	10dB min.
Phase imbalance at balanced port	180 $\pm$ 10deg.
Amplitude imbalance at balanced port	0 $\pm$ 1.0dB
Insertion loss	1.0dB max.
Temperature range	Operating -40 to +85 $^{\circ}$ C
	Storage -40 to +85 $^{\circ}$ C
Packaging style and quantities	2000pieces/reel


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 150Ω


RETURN LOSS

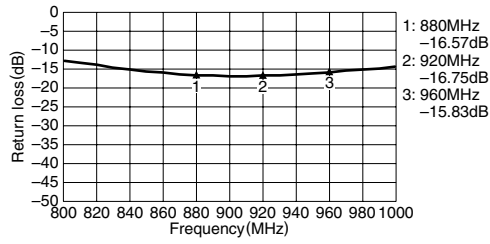


INSERTION LOSS

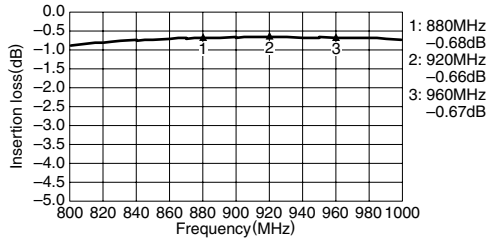

AMPLITUDE BALANCE

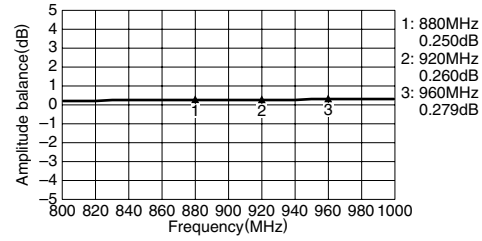

PHASE BALANCE

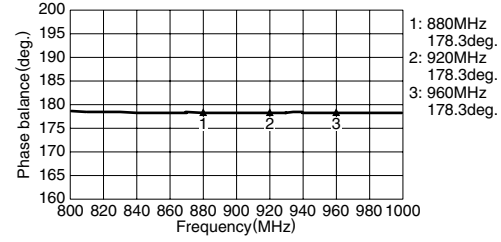

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru