

GENERAL DESCRIPTION

The SP6686 is a current-regulated charge pump ideal for powering high brightness LEDs for camera flash applications.

The charge pump can be set to regulate two current levels for FLASH and TORCH modes. The SP6686 automatically switches modes between step-up and step-down ensuring that LED current does not depend on the forward voltage. A low current sense reference voltage (50mV) allows the use of small 0603 current sensing resistors.

The SP6686 is designed to operate from a single cell lithium-ion battery or fixed 3.3V or 5.0V power rails and is available in a RoHS compliant, "green"/halogen free space saving 10-pin 3mmx3mm DFN package

APPLICATIONS

- White LED Torch/Flash for Mobile Phones, DSCs and Camcorders
- Generic Lighting/Flash/Strobe Applications
- White LED Backlighting

FEATURES

- Output Current up to 400mA
- Up to 94% Efficiency in Torch Mode
- Adjustable FLASH Mode
- x1 and x2 Automatic Modes for High Efficiency
- Minimum External Components: No Inductors
- 2.4MHz High Frequency Operation
- 1 μ A Shutdown Current
- Built-In Soft Start Limit Inrush Current
- Output Overvoltage Protection
- Over current/Temperature Protection
- 10-pin 3mm x 3mm DFN Package

TYPICAL APPLICATION DIAGRAM

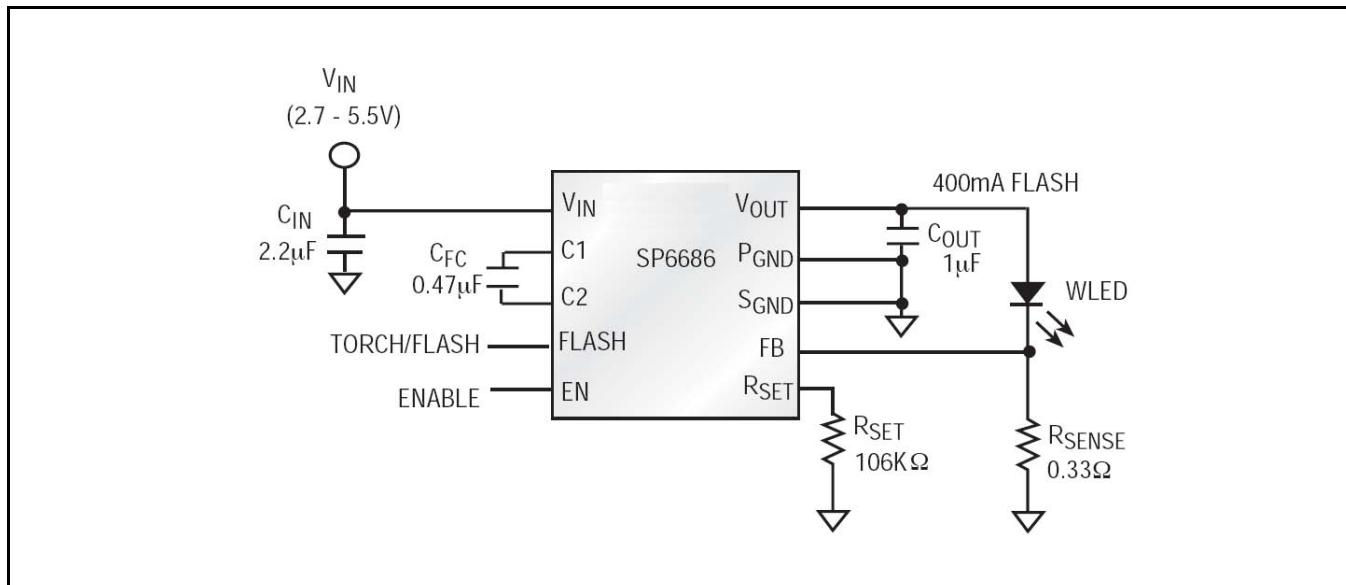


Fig. 1: SP6686 Application Diagram

ABSOLUTE MAXIMUM RATINGS

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

| | |
|--|----------------|
| V_{IN} , V_{OUT} | -0.3V to 6.0V |
| Output Current Pulse (FLASH) | 500mA |
| Output Current Continuous (TORCH) | 200mA |
| V_{EN} | 0V to 7V |
| Storage Temperature | -65°C to 150°C |
| Lead Temperature (Soldering, 10 sec) | 260°C |
| ESD Rating EN pin (HBM - Human Body Model) | 1kV |
| ESD Rating All Other Pins (HBM) | 2kV |

OPERATING RATINGS

| | |
|--|---------------|
| Input Voltage Range V_{IN} | 2.7V to 5.5V |
| Operating Temperature Range | -40°C to 85°C |
| Thermal Resistance θ_{JA} | 57.1°C/W |

ELECTRICAL SPECIFICATIONS

Specifications with standard type are for an Operating Junction Temperature of $T_J = 25^\circ\text{C}$ only; limits applying over the full Operating Junction Temperature range are denoted by a “•”. Minimum and Maximum limits are guaranteed through test, design, or statistical correlation. Typical values represent the most likely parametric norm at $T_J = 25^\circ\text{C}$, and are provided for reference purposes only. Unless otherwise indicated, $V_{IN} = V_{SHTDN} = 3.6V$, $C_{IN} = 2.2\mu\text{F}$, $C_{FC} = 0.47\mu\text{F}$, $C_{OUT} = 1\mu\text{F}$. $T_A = -40^\circ\text{C}$ to 85°C .

| Parameter | Min. | Typ. | Max. | Units | | Conditions |
|---|------|------|------|------------------|---|--|
| Operating Input Voltage | 2.7 | | 5.5 | V | • | |
| Quiescent Current | 0.5 | 3 | mA | | • | $V_{IN} = 2.7 - 5.5\text{V}$ FLASH = 0V $I_{LOAD} = 100\ \mu\text{A}$ |
| | | 2 | | | | FLASH = V_{IN} , 2x Mode |
| Shutdown Current | | | 1 | μA | | $V_{IN} = 5.5\text{V}$, $V_{EN} = 0\text{V}$ |
| Oscillator Frequency | | 2.4 | | MHz | | |
| Charge Pump Equivalent Resistance (x2 Mode) | | 5 | | Ω | | $V_{FB} = 0\text{V}$, $V_{IN} = 3.6\text{V}$ |
| Charge Pump Equivalent Resistance (x1 Mode) | | 0.6 | 0.8 | Ω | | $V_{IN} = 3.6\text{V}$ |
| FB Reference Voltage | 138 | 150 | 162 | mV | • | FLASH = V_{IN} , $R_{SET} = 106\text{k}\Omega$ |
| FB Reference Voltage | 45 | 50 | 55 | mV | • | FLASH = GND |
| FB Pin Current | | | 0.5 | μA | | $V_{FB} = 0.3\text{V}$ |
| EN, Flash Logic Low | | | 0.4 | V | • | |
| EN, Flash Logic High | 1.3 | | | V | • | |
| EN, Flash Pin Current | | | 0.5 | μA | • | |
| V_{OUT} Turn-on Time | | 250 | 500 | μs | • | $V_{IN} = 3.6\text{V}$, FB within 90% of regulation |
| Thermal Shutdown Temperature | | 145 | | $^\circ\text{C}$ | | |

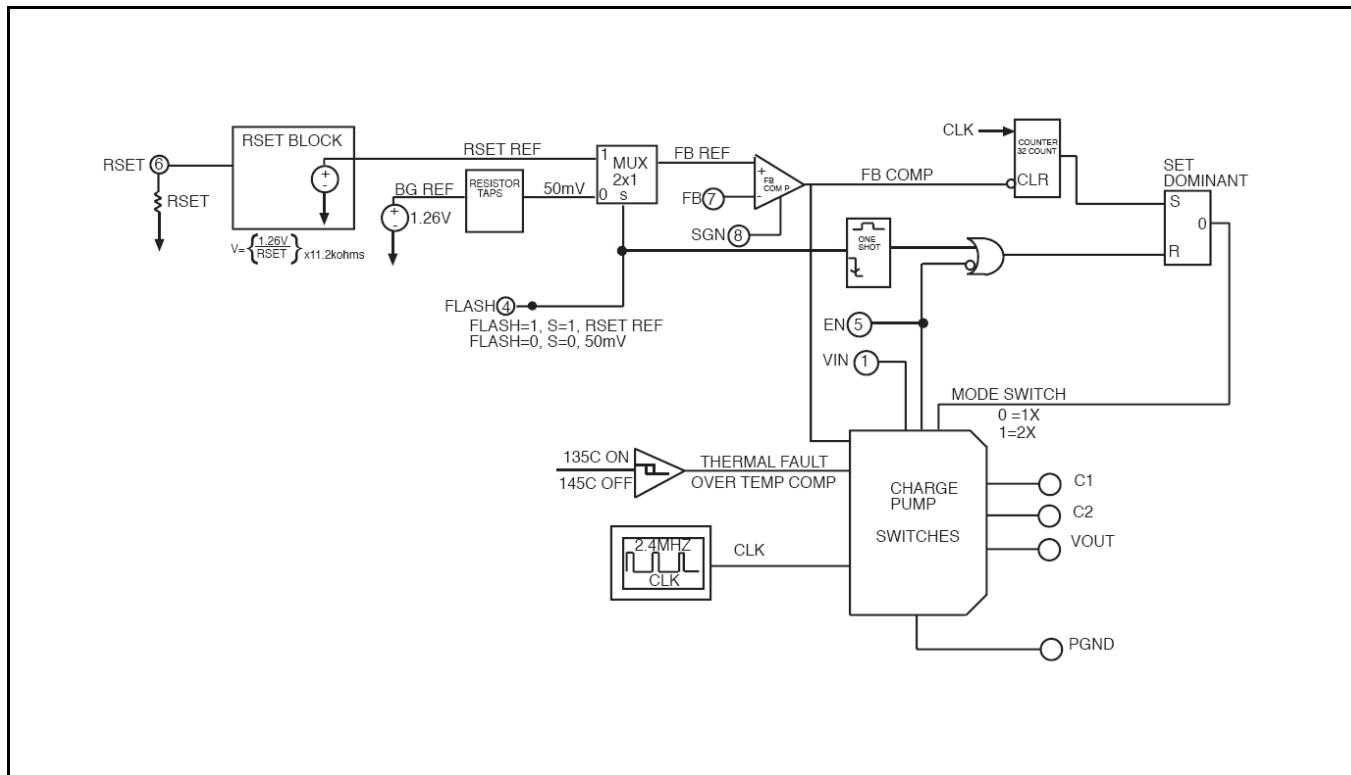
BLOCK DIAGRAM


Fig. 2: SP6686 Block Diagram

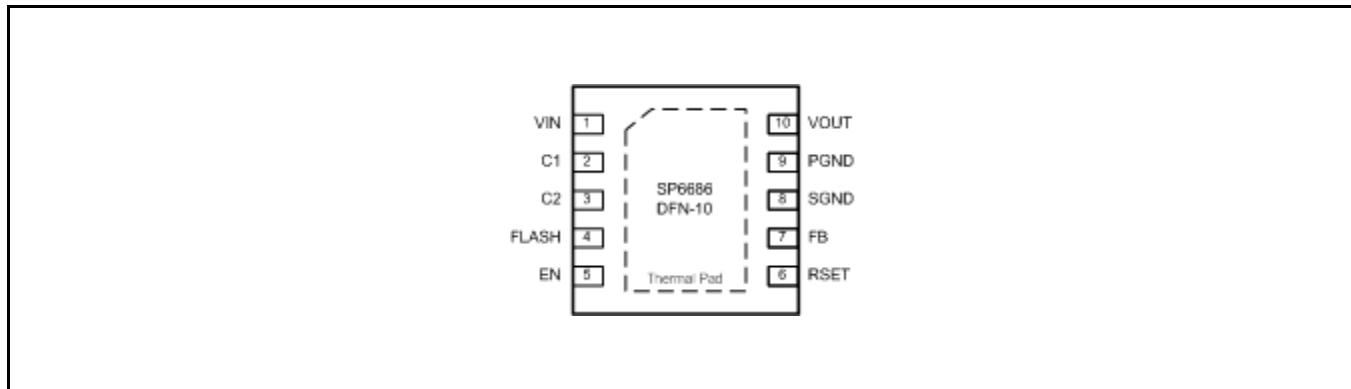
PIN ASSIGNMENT


Fig. 3: SP6686 Pin Assignment



SP6686

400mA Buck/Boost Charge Pump LED Driver

PIN DESCRIPTION

| Name | Pin Number | Description |
|------------------|------------|---|
| V _{IN} | 1 | Input voltage for the charge pump. Decouple with 2.2µF ceramic capacitor close to the pins of the IC. |
| C1 | 2 | Positive input for the external fly capacitor. Connect a ceramic 0.47µF capacitor close to the pins of the IC. |
| C2 | 3 | Negative input for the external fly capacitor. Connect a ceramic 0.47µF capacitor close to the pins of the IC. |
| FLASH | 4 | Logic input to toggle between FLASH and TORCH mode. In TORCH Mode FB is regulated to the internal 50mV reference. In FLASH Mode FB reference voltage can be adjusted by changing the resistor from R _{SET} pin to ground. Choose the external current sense Resistor (R _{SENSE}) based on desired current in TORCH Mode. |
| EN | 5 | Shutdown control input. Connect to V _{IN} for normal operation, connect to ground for shutdown. |
| R _{SET} | 6 | Connect a resistor from this pin to ground. When in FLASH Mode (FLASH = High) this resistor sets the current regulation point according to the following: $V_{FB} = (1.26V/R_{SET}) * 11.2K\Omega$ |
| FB | 7 | Feedback input for the current control loop. Connect directly to the current sense resistor. |
| S _{GND} | 8 | Internal ground pin. Control circuitry returns current to this pin. |
| P _{GND} | 9 | Power ground pin. Fly capacitor current returns through this pin. |
| V _{OUT} | 10 | Charge Pump Output Voltage. Decouple with an external capacitor. At least 1µF is recommended. Higher capacitor values reduce output ripple. |

ORDERING INFORMATION

| Part Number | Temperature Range | Marking | Package | Packing Quantity | Note 1 | Note 2 |
|---------------|--------------------------------|---------------------|---------|------------------|--------------------------------|--------|
| SP6686ER-L | -40°C ≤ T _A ≤ +85°C | SP66 86ER WWX | DFN-10 | Bulk | RoHS Compliant Halogen Free | |
| SP6686ER-L/TR | -40°C ≤ T _A ≤ +85°C | SP66 86ER WWX | DFN-10 | 3K/Tape & Reel | RoHS Compliant Halogen Free | |
| SP6686EB | SP6686 Evaluation Board | | | | | |

"WW" = Work Week – "X" = Lot Number

TYPICAL PERFORMANCE CHARACTERISTICS

All data taken at $V_{IN} = 3.6V$, $T_A = 25^\circ C$, unless otherwise specified - Schematic and BOM from Application Information section of this datasheet. D1 = AOT 2015HPW-1915B LED.

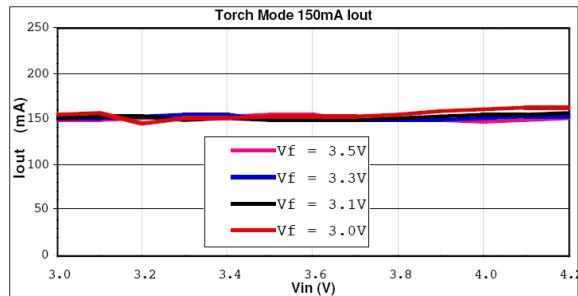


Fig. 4: Output Current vs Supply Voltage
 $C_{IN}=2.2\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=1\mu F$

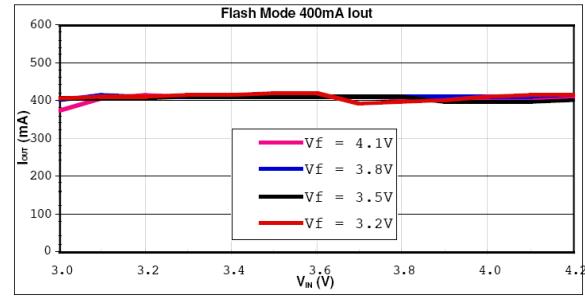


Fig. 5: Output Current vs Supply Voltage
 $C_{IN}=2.2\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=1\mu F$

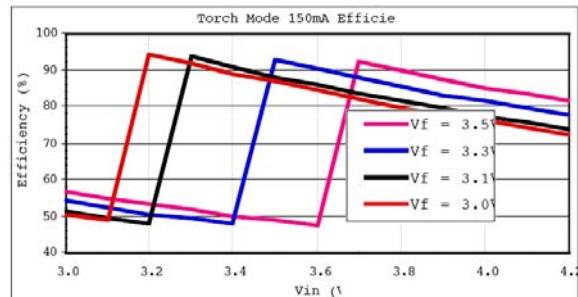


Fig. 6: Efficiency vs Supply Voltage
 $C_{IN}=2.2\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=1\mu F$

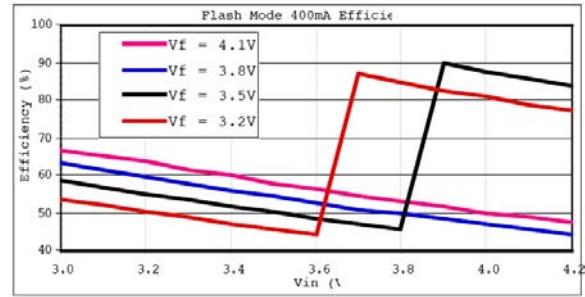


Fig. 7: Efficiency vs Supply Voltage
 $C_{IN}=2.2\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=1\mu F$

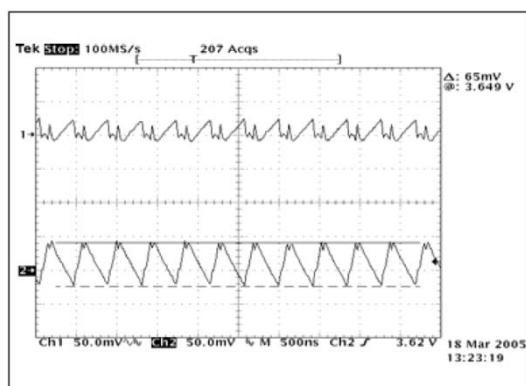


Fig. 8: Ripple 1x Flash 400mA, Ch1= V_{IN} , Ch2= V_{OUT}
 $V_{IN}=4.2V$, $C_{IN}=4.7\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=2.2\mu F$

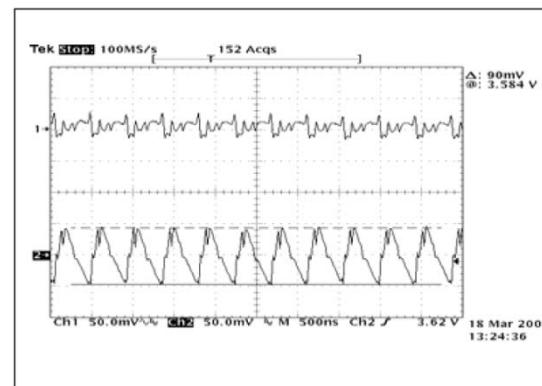


Fig. 9: Ripple 2x Flash 400mA, Ch1= V_{IN} , Ch2= V_{OUT}
 $V_{IN}=3.6V$, $C_{IN}=4.7\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=2.2\mu F$

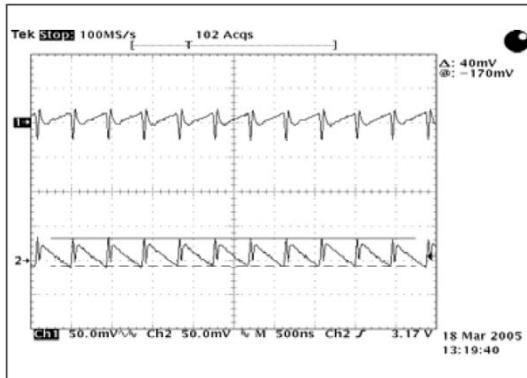


Fig. 10: Ripple 1x Torch 150mA, Ch1=V_{IN}, Ch2=V_{OUT}
V_{IN}=4.2V, C_{IN}=4.7μF, C_{FC}=0.47μF, C_{OUT}=2.2μF

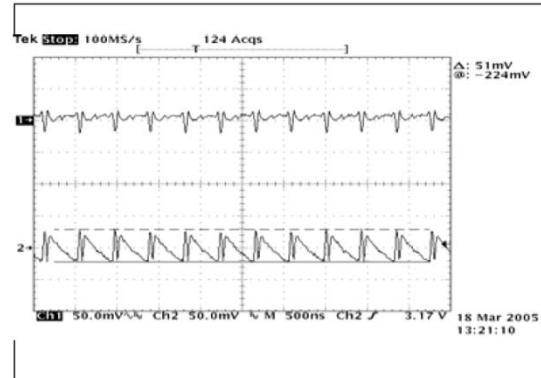


Fig. 11: Ripple 2x Torch 150mA, Ch1=V_{IN}, Ch2=V_{OUT}
V_{IN}=3.0V, C_{IN}=4.7μF, C_{FC}=0.47μF, C_{OUT}=2.2μF

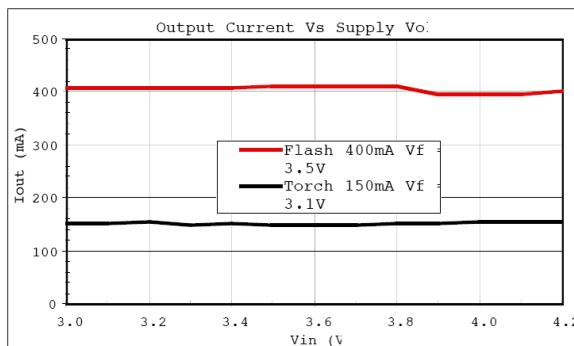


Fig. 12: Output Current vs Supply Voltage
D1=AOT2015HPW-1915 LED, R_{SENSE}=0.3Ω
R_{SET}=106kΩ, C_{IN}=2.2μF, C_{FC}=0.47μF, C_{OUT}=1μF

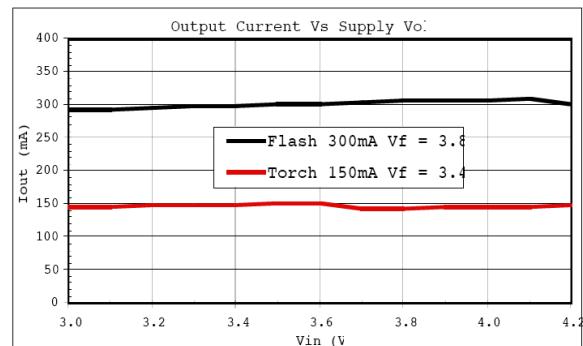


Fig. 13: Output Current vs Supply Voltage
D1=AOT3228HPW0303B LED, R_{SENSE}=0.3Ω
R_{SET}=140kΩ, C_{IN}=2.2μF, C_{FC}=0.47μF, C_{OUT}=1μF

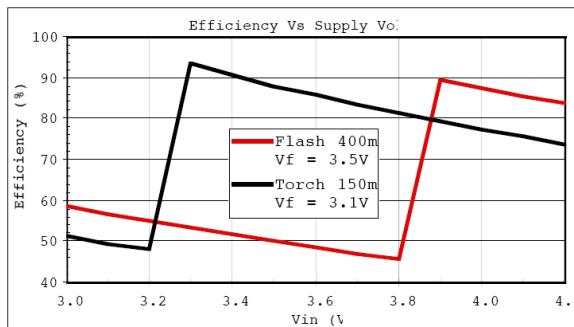


Fig. 14: Efficiency vs Supply Voltage
D1=AOT2015HPW-1915 LED, R_{SENSE}=0.3Ω
R_{SET}=106kΩ, C_{IN}=2.2μF, C_{FC}=0.47μF, C_{OUT}=1μF

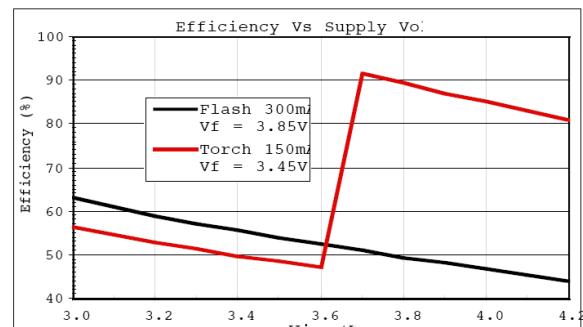


Fig. 15: Efficiency vs Supply Voltage
D1=AOT3228HPW0303B LED, R_{SENSE}=0.3Ω
R_{SET}=140kΩ, C_{IN}=2.2μF, C_{FC}=0.47μF, C_{OUT}=1μF

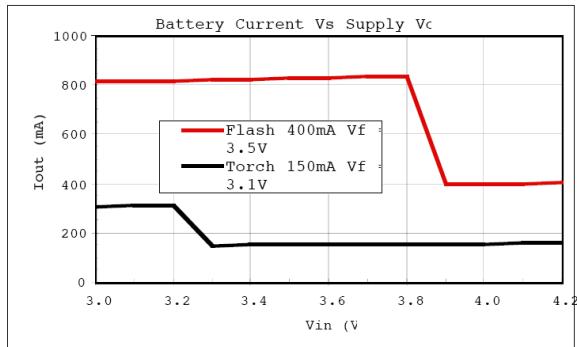


Fig. 16: Battery Current vs Supply Voltage
 D1=AOT2015HPW-1915 LED, $R_{SENSE}=0.3\Omega$
 $R_{SET}=106k\Omega$, $C_{IN}=2.2\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=1\mu F$

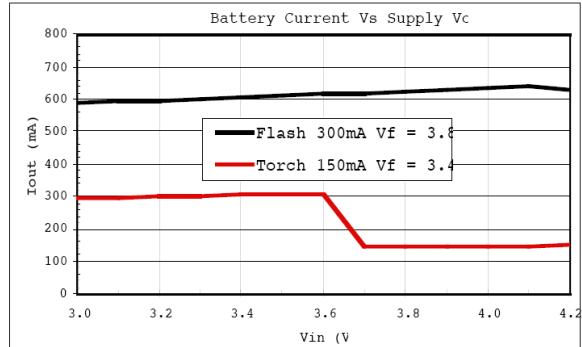


Fig. 17: Battery Current vs Supply Voltage
 D1=AOT3228HPW0303B LED, $R_{SENSE}=0.3\Omega$
 $R_{SET}=140k\Omega$, $C_{IN}=2.2\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=1\mu F$

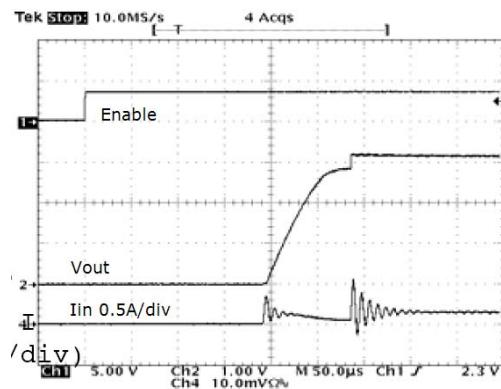


Fig. 18: Startup Torch
 $V_{IN}=3.6V$, $V_{OUT}=3.1V$, $C_{IN}=4.7\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=2.2\mu F$

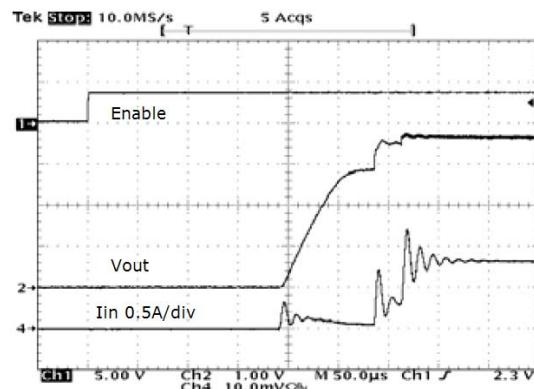


Fig. 19: Startup Flash
 $V_{IN}=3.6V$, $V_{OUT}=3.5V$, $C_{IN}=4.7\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=2.2\mu F$

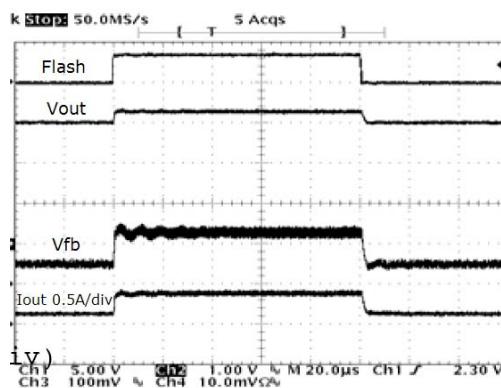


Fig. 20: Torch in 1x to Flash in 1x Mode
 $V_{IN}=4.2V$, $C_{IN}=4.7\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=2.2\mu F$

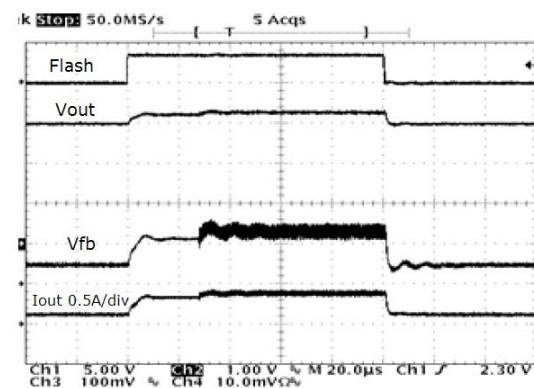


Fig. 21: Torch in 1x to Flash in 2x Mode
 $V_{IN}=3.6V$, $C_{IN}=4.7\mu F$, $C_{FC}=0.47\mu F$, $C_{OUT}=2.2\mu F$

THEORY OF OPERATION

The SP6686 is a charge pump regulator designed for converting a Li-Ion battery voltage of 2.7V to 4.2V to drive a white LED used in digital still camera Flash and Torch applications. The SP6686 has two modes of operation which are pin selectable for either Flash or Torch. Flash mode is usually used with a pulse of about 200 to 300 milliseconds to generate a high intensity Flash. Torch can be used continuously at a lower output current than Flash and is often used for several seconds in a digital still camera "movie" mode.

The SP6686 also has two modes of operation to control the output current, the 1x mode and 2x mode. Operation begins after the enable pin EN receives a logic high, the bandgap reference wakes up after 200 μ sec, and then SP6686 goes through a soft-start mode designed to reduce inrush current. The SP6686 starts in the 1x mode, which acts like a linear regulator to control the output current by continuously monitoring the feedback pin FB. In 1x mode, if the SP6686 auto detects a dropout condition, which is when the FB pin is below the regulation point for more than 32 cycles of the internal clock, the SP6686 automatically switches to the 2x mode. The SP6686 remains in the 2x mode until one of four things happens:

- 1) The enable pin EN has been toggled
- 2) The Flash pin has changed from high to low
- 3) V_{IN} is cycled
- 4) A thermal fault occurs

The 2X mode is the charge pump mode where the output can be pumped as high as two times the input voltage, provided the output does not exceed the maximum voltage for the SP6686, which is internally limited to about 5.5V. In the 2x mode, as in the 1x mode, the output current is regulated by the voltage at the FB pin.

In the Torch mode, (Flash = GND) the Flash pin is set to logic low and the SP6686 FB pin regulates to 50mV output:

$$V_{FB} = 50mV \text{ (Torch Mode)}$$

When in Flash mode, (Flash = V_{IN}), the FB regulation voltage is set by the resistor R_{SET} connected between the R_{SET} pin and SGND and the equation:

$$V_{FB} = \left(\frac{1.26V}{R_{SET}} \right) \times 11.2k\Omega \text{ (Flash Mode)}$$

Where 1.26V is the internal bandgap reference voltage and 11.2k Ω is an internal resistance used to scale the R_{SET} current. Typical values of R_{SET} are 40k Ω to 180k Ω for a range of V_{FB} = 300mV to 75mV in Flash mode.

The output current is then set in either Flash or Torch mode by the equation:

$$I_{OUT} = \frac{V_{FB}}{R_{SENSE}}$$

OVER TEMPERATURE PROTECTION

When the temperature of the SP6686 rises above 145°C, the over temperature protection circuitry turns off the output switches to prevent damage to the device. If the temperature drops back down below 135°C, the part automatically recovers and executes a soft start cycle.

OVER VOLTAGE PROTECTION

The SP6686 has over voltage protection. If the output voltage rises above the 5.5V threshold, the over voltage protection shuts off all of the output switches to prevent the output voltage from rising further. When the output decreases below 5.5V, the device resumes normal operation

OVER CURRENT PROTECTION

The over current protection circuitry monitors the average current out of the $V_{OUT}=50mV$ (Torch Mode) pin. If the average output current exceeds approximately 1Amp, then the over current protection circuitry shuts off the output switches to protect the chip.

COMPONENT SELECTION

The SP6686 charge pump circuit requires 3 capacitors: 4.7 μ F input, 1 μ F output and

0.47 μ F fly capacitor are typically recommended. For the input capacitor, a larger value of 10 μ F will help reduce input voltage ripple for applications sensitive to ripple on the battery voltage. All the capacitors should be ceramic to obtain low ESR, which improves bypassing on the input and output and improves output voltage drive by reducing output resistance. X5R or X7R Ceramic capacitors are recommended for most applications. A selection of recommended capacitors is included in Table 1. The input and output capacitors should be located as close to the V_{IN} and V_{OUT} pins as possible to obtain best bypassing, and the returns should be connected directly to the PGND pin or to the thermal pad ground located under the SP6686. The fly capacitor should be located as close to the C1 and C2 pins as possible. The sense resistor R_{SENSE} is determined by the value needed in the Torch mode for the desired output current by the equation:

$$R_{SENSE} = \frac{V_{FB}}{I_{OUT}}$$

Where V_{FB}=50mV in torch mode.

Once the R_{SENSE} resistor has been selected for Torch mode, the V_{FB} voltage can be selected for Flash mode using the following equation:

$$V_{FB} = I_{OUT} \times R_{SENSE} \text{ (Flash Mode)}$$

Where I_{OUT} is for Flash Mode

Next, the R_{SET} resistor can be selected for Flash mode using the following equation:


$$R_{SET} = \left(\frac{1.26V}{V_{FB}} \right) \times 11.2k\Omega \text{ (Flash Mode)}$$

For an example of 150mA Torch mode and 400mA Flash mode, the values R_{SENSE}=0.33 Ω , V_{FB}=135mV (Flash Mode), and R_{SET}=106k Ω are calculated. The power obtained in the Flash mode would be:

$$P_{FLASH} = V_{FB} \times I_{OUT} = 133mV \times 400mA = 53mW$$

The typical 0603 surface mount resistor is rated at 1/10 Watt continuous power and 1/5 Watt pulsed power, more than enough for this application. For other applications, the PFLASH can be calculated from the resistor size selected. The R_{SENSE} resistor is recommended to be size 0603 for most applications.

EVALUATION BOARD LAYOUT

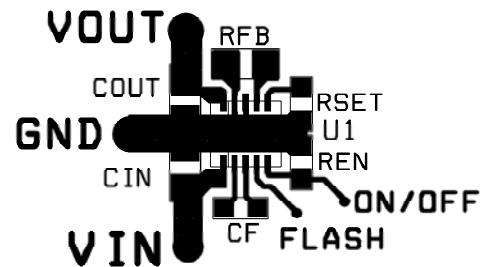

| Manufacturer | Part Number | Value | Size/Type | ESR |
|--------------|--------------------|-------------|-----------------|------|
| TDK | C1005X5R0J474K | 0.47uF/6.3V | 0402/X5R/0.55mm | 0.03 |
| TDK | C1005X5R0J105K | 1uF/6.3V | 0402/X5R/0.55mm | 0.03 |
| TDK | C1608X5R0J225K | 2.2uF/6.3V | 0603/X5R/0.9mm | 0.03 |
| TDK | C1608X5R0J475K | 4.7uF/6.3V | 0603/X5R/0.9mm | 0.02 |
| Murata | GRM155R60J474KE19D | 0.47uF/6.3V | 0402/X5R/0.55mm | 0.03 |
| Murata | GRM155R60J105KE19D | 1uF/6.3V | 0402/X5R/0.55mm | 0.03 |
| Murata | GRM188R60J225KE19D | 2.2uF/6.3V | 0603/X5R/0.8mm | 0.03 |
| Murata | GRM188R60J475KE19D | 4.7uF/6.3V | 0603/X5R/0.8mm | 0.02 |



Table 1: Recommended Capacitors

| Part Reference | Value | Tolerance | Size |
|--------------------|-------|-----------|------|
| R _{SET} | 68KΩ | 5% | 0402 |
| R _{SET} | 75KΩ | 5% | 0402 |
| R _{SET} | 82KΩ | 5% | 0402 |
| R _{SET} | 91KΩ | 5% | 0402 |
| R _{SET} | 100KΩ | 5% | 0402 |
| R _{SET} | 110KΩ | 5% | 0402 |
| R _{SET} | 120KΩ | 5% | 0402 |
| R _{SET} | 130KΩ | 5% | 0402 |
| R _{SET} | 140KΩ | 5% | 0402 |
| R _{SET} | 150KΩ | 5% | 0402 |
| R _{SENSE} | 0.22Ω | 5% | 0603 |
| R _{SENSE} | 0.27Ω | 5% | 0603 |
| R _{SENSE} | 0.33Ω | 5% | 0603 |
| R _{SENSE} | 0.39Ω | 5% | 0603 |
| R _{SENSE} | 0.47Ω | 5% | 0603 |

Table 2: Resistor Value and Sizes

PACKAGE SPECIFICATION

10-PIN DFN

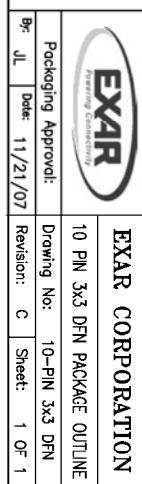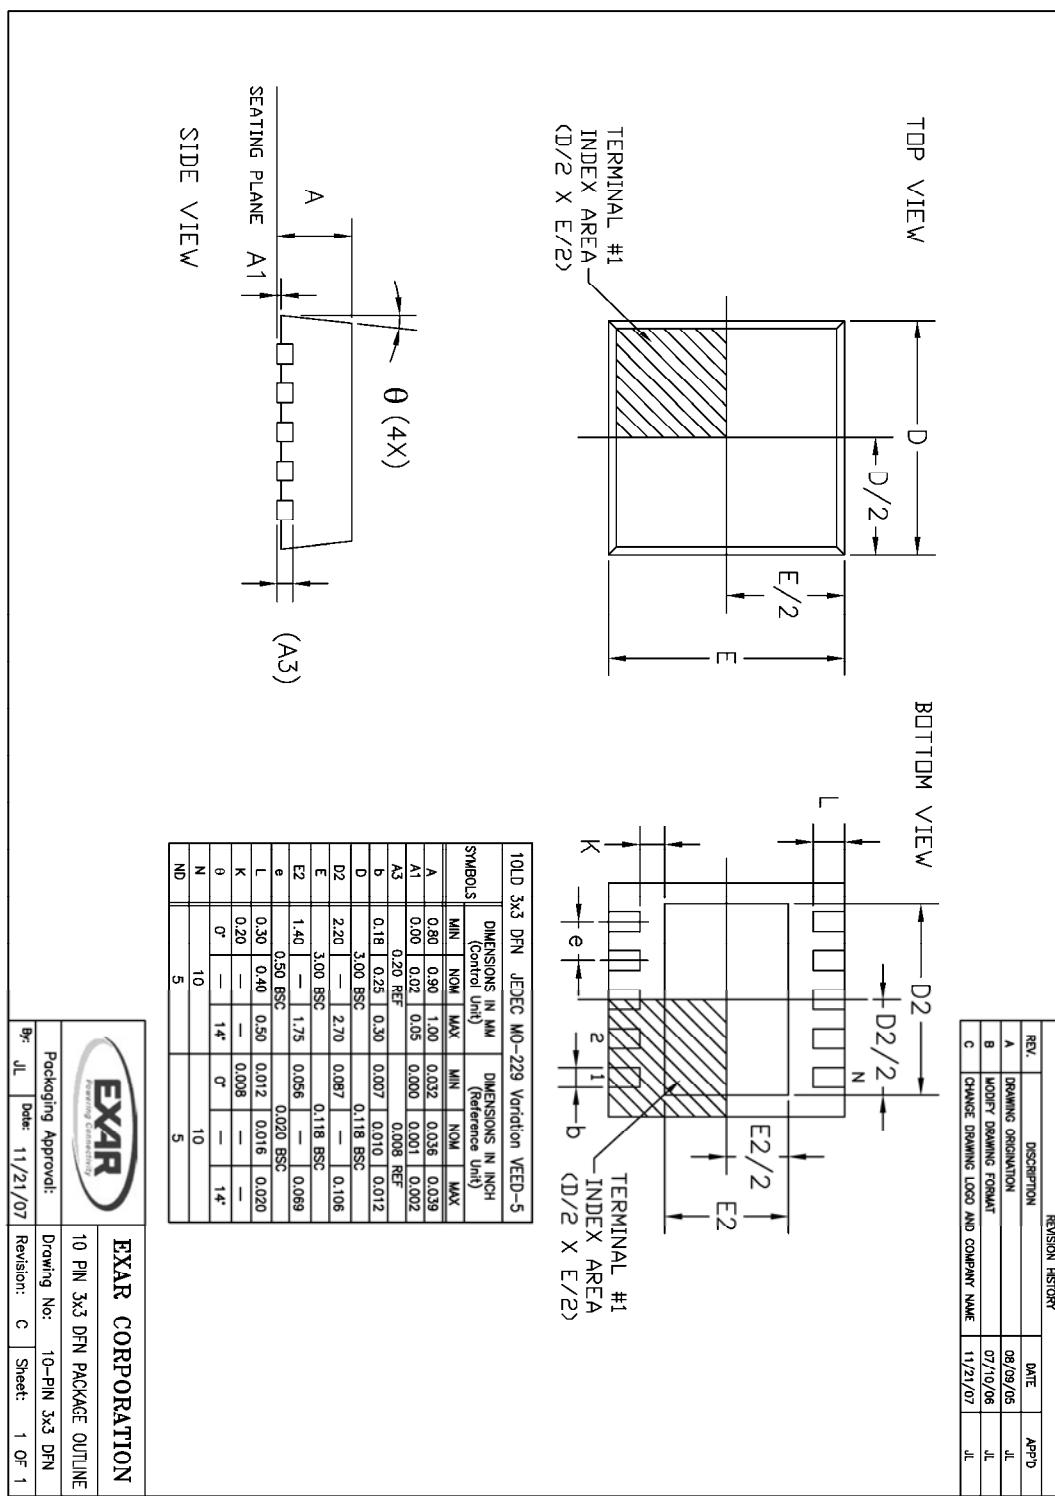



SP6686

400mA Buck/Boost Charge Pump LED Driver

REVISION HISTORY

| Revision | Date | Description |
|-----------------|-------------|---|
| 2.0.0 | 08/04/2009 | Reformat of datasheet. Added EN pin ESD information. |
| | | |
| | | |
| | | |
| | | |

FOR FURTHER ASSISTANCE

Email:

customersupport@exar.com

Exar Technical Documentation:

<http://www.exar.com/TechDoc/default.aspx?>



EXAR CORPORATION

HEADQUARTERS AND SALES OFFICES

48720 Kato Road

Fremont, CA 94538 – USA

Tel.: +1 (510) 668-7000

Fax: +1 (510) 668-7030

www.exar.com

NOTICE

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. Charts and schedules contained here in are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.

ООО "ЛайфЭлектроникс"

"LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru