

# A01 series

## Keylock & selector switches

Distinctive features and specifications

A018\_AX1607US



- ☐ Panel Sealed to IP65
- ☐ Single pole to four pole changeover
- ☐ Custom engraving & overmould key
- ☐ Push on tab terminals
- ☐ 6A 250VAC

### ELECTRICAL SPECIFICATIONS

- **Current/Voltage Rating** : 10mA 5VAC min, 6A 250VAC, 6A 12VDC
- **Initial Contact Resistance** : 10mΩ max at 1Amp 4VDC
- **Insulation Resistance** : 50MΩ min
- **Dielectric Strength** : 750V between open contacts, 5KV live to accessible
- **Electrical Life** : 50,000 cycles min
- **Contact Gap** : >1mm (0.039)
- **Insulation** : Class 2

### MECHANICAL SPECIFICATIONS

- **Mechanical Life (operator)** : Momentary, 1 million cycles, maintained 100,000 cycles
- **Lamp** : Midget grove T1 ¾ filament, neon or LED
- **Terminals** : Solder/quick connect 2.8mm (0.110)

### GENERAL SPECIFICATIONS

- **Operating Temperature** : -20°C to +55°C
- **Solder Heat Resistance** : 350°C for 5 seconds
- **Sealing** : Panel sealed to IP65, rear of panel IP40

### AGENCY APPROVALS




### MATERIALS


- **Key** : Nickel plated steel
- **Key Barrel** : Chrome plated alloy
- **Operator** : PBT
- **Nut** : ABS
- **Camtrack Momentary** : PPE
- **Camtrack Maintained** : PPSU
- **Switch Block 1 & 2 pole** : PBT
- **Switch Block 3 & 4 pole** : PEI
- **Contacts** : Gold plated silver

### PANEL CUT OUT

Round & Square bezel operators only



Rectangular bezel operators only



Max panel thickness 8mm (0.314)



Dimensions : first dimensions are in mm while inches are shown in brackets.  
Refer to the following pages for further information.




Mounting accessories : standard hardware 1 nut and 1 sealing washer.

# A01 series


## Keylock & selector switches

Panel cut-out Ø16 (0.755)

### Keylock

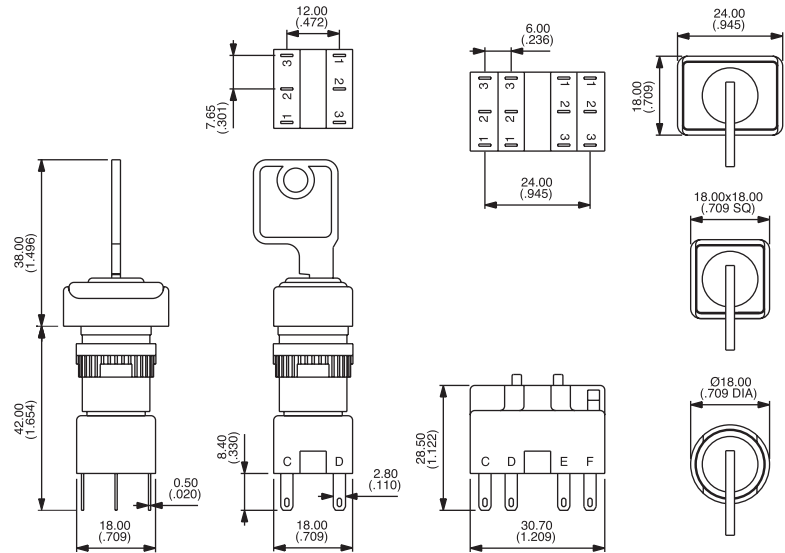

### Selector

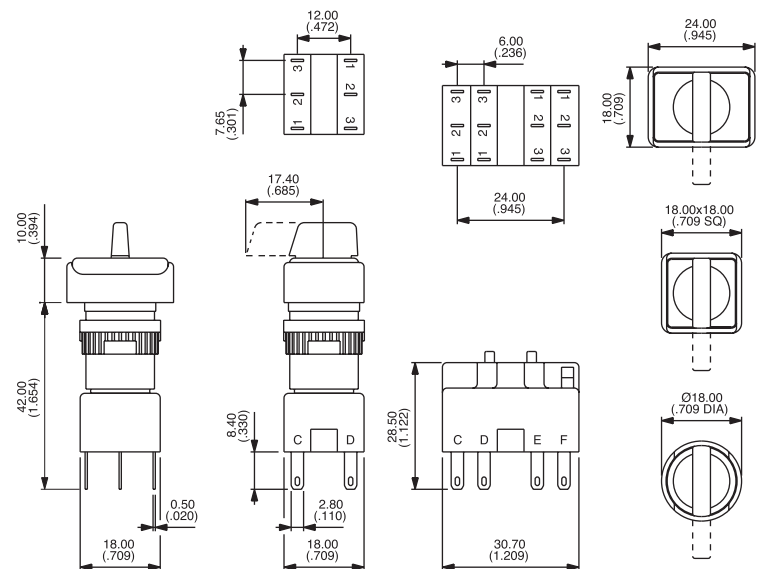

# A01 series

## Keylock & selector switches

Overview

### Keylock

| Operator |       |                    | +        |               | Switch block |         | Key position |
|----------|-------|--------------------|----------|---------------|--------------|---------|--------------|
| Pole     | Bezel | Description        | Part No. | Key removable | No of poles  | Part No |              |
| 1 or 2   |       | 2 pos. maintained  | A018101  | A-C           | Single pole  | A0151B  |              |
| 1 or 2   |       | 2 pos. momentary   | A018102  | A             | Double pole  | A0152B  |              |
| 3 or 4   |       | 2 pos. maintained  | A018103  | A-C           | Three pole   | A0155B  |              |
| 3 or 4   |       | 2 pos. momentary   | A018104  | A             | Four pole    | A0153B  |              |
| 1 or 2   |       | 3 pos. maintained  | A018105  | A-B-C         |              |         |              |
| 1 or 2   |       | 3 pos. momentary   | A018106  | A             |              |         |              |
| 1 or 2   |       | 3 pos. mainL, momR | A018107  | A-B           |              |         |              |
| 1 or 2   |       | 3 pos. momL, mainR | A018108  | A-C           |              |         |              |
| 1 or 2   |       | 2 pos. maintained  | A018201  | A-C           |              |         |              |
| 1 or 2   |       | 2 pos. momentary   | A018202  | A             |              |         |              |
| 3 or 4   |       | 2 pos. maintained  | A018203  | A-C           |              |         |              |
| 3 or 4   |       | 2 pos. momentary   | A018204  | A             |              |         |              |
| 1 or 2   |       | 3 pos. maintained  | A018205  | A-B-C         |              |         |              |
| 1 or 2   |       | 3 pos. momentary   | A018206  | A             |              |         |              |
| 1 or 2   |       | 3 pos. mainL, momR | A018207  | A-B           |              |         |              |
| 1 or 2   |       | 3 pos. momL, mainR | A018208  | A-C           |              |         |              |
| 1 or 2   |       | 2 pos. maintained  | A018301  | A-C           |              |         |              |
| 1 or 2   |       | 2 pos. momentary   | A018302  | A             |              |         |              |
| 3 or 4   |       | 2 pos. maintained  | A018303  | A-C           |              |         |              |
| 3 or 4   |       | 2 pos. momentary   | A018304  | A             |              |         |              |
| 1 or 2   |       | 3 pos. maintained  | A018305  | A-B-C         |              |         |              |
| 1 or 2   |       | 3 pos. momentary   | A018306  | A             |              |         |              |
| 1 or 2   |       | 3 pos. mainL, momR | A018307  | A-B           |              |         |              |
| 1 or 2   |       | 3 pos. momL, mainR | A018308  | A-C           |              |         |              |

Bezel: rectangular square round. 'pos' - position, 'mainL' - maintained left 'momR' - momentary right, etc

- Non-removable key positions: contact APEM components
- 2 standard keys are supplied
- 20 key barrel types available from stock
- For on-on-on function contact APEM components
- Note: 3/4 pole switch block for use only with 2 position key switches

**Key Rotation – 2 position switches**

The model numbers shown are for switches with anticlockwise key rotation.

For clockwise rotation, replace:

|    |      |    |
|----|------|----|
| 01 | with | 25 |
| 02 | with | 24 |
| 03 | with | 27 |
| 04 | with | 28 |

at the end of the model number

### Selector

| Operator |       |                    | +           |            | Switch block |         | Lever position |
|----------|-------|--------------------|-------------|------------|--------------|---------|----------------|
| Pole     | Bezel | Description        | Short lever | Long lever | No of poles  | Part No |                |
| 1 or 2   |       | 2 pos. maintained  | A019201     | A019101    | Single pole  | A0151B  |                |
| 1 or 2   |       | 2 pos. momentary   | A019202     | A019102    | Double pole  | A0152B  |                |
| 3 or 4   |       | 2 pos. maintained  | A019203     | A019103    | Three pole   | A0155B  |                |
| 3 or 4   |       | 2 pos. momentary   | A019204     | A019104    | Four pole    | A0153B  |                |
| 1 or 2   |       | 3 pos. maintained  | A019205     | A019105    |              |         |                |
| 1 or 2   |       | 3 pos. momentary   | A019206     | A019106    |              |         |                |
| 1 or 2   |       | 3 pos. mainL, momR | A019207     | A019107    |              |         |                |
| 1 or 2   |       | 3 pos. momL, mainR | A019208     | A019108    |              |         |                |
| 1 or 2   |       | 2 pos. maintained  | A019401     | A019301    |              |         |                |
| 1 or 2   |       | 2 pos. momentary   | A019402     | A019302    |              |         |                |
| 3 or 4   |       | 2 pos. maintained  | A019403     | A019303    |              |         |                |
| 3 or 4   |       | 2 pos. momentary   | A019404     | A019304    |              |         |                |
| 1 or 2   |       | 3 pos. maintained  | A019405     | A019305    |              |         |                |
| 1 or 2   |       | 3 pos. momentary   | A019406     | A019306    |              |         |                |
| 1 or 2   |       | 3 pos. mainL, momR | A019407     | A019307    |              |         |                |
| 1 or 2   |       | 3 pos. momL, mainR | A019408     | A019308    |              |         |                |
| 1 or 2   |       | 2 pos. maintained  | A019601     | A019501    |              |         |                |
| 1 or 2   |       | 2 pos. momentary   | A019602     | A019502    |              |         |                |
| 3 or 4   |       | 2 pos. maintained  | A019603     | A019503    |              |         |                |
| 3 or 4   |       | 2 pos. momentary   | A019604     | A019504    |              |         |                |
| 1 or 2   |       | 3 pos. maintained  | A019605     | A019505    |              |         |                |
| 1 or 2   |       | 3 pos. momentary   | A019606     | A019506    |              |         |                |
| 1 or 2   |       | 3 pos. mainL, momR | A019607     | A019507    |              |         |                |
| 1 or 2   |       | 3 pos. momL, mainR | A019608     | A019508    |              |         |                |

Bezel: rectangular square round. 'pos' - position, 'mainL' - maintained left 'momR' - momentary right, etc

- Note: 3/4 pole switch block for use only with 2 position rotary lever

**Lever Rotation – 2 position switches**

The model numbers shown are for switches with anticlockwise lever rotation.

For clockwise rotation, replace:

|    |      |    |
|----|------|----|
| 01 | with | 09 |
| 02 | with | 10 |
| 03 | with | 11 |
| 04 | with | 12 |

at the end of the model number

Optional engraving on lever end add "WL" to the end of the part number.



Unsealed switches & indicators (IP40) suffix 01 to the end of the part number.  
Screen engraving insertable legends, & bi-color LED's please contact APEM


# A01 series

## Keylock & selector switches

Accessories

### Flush mount bezels

Dark grey plastic material – supplied with sealing washer

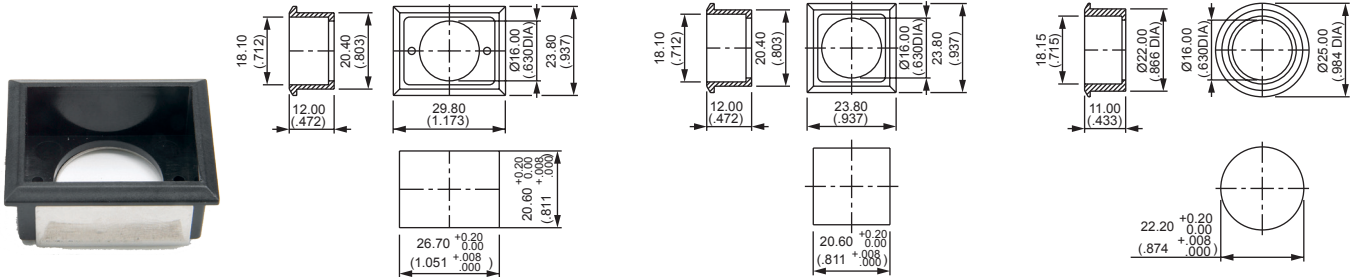


Rectangular : A01FM1

Square : A01FM

Round : A01FM2

Anodised aluminium/matt black

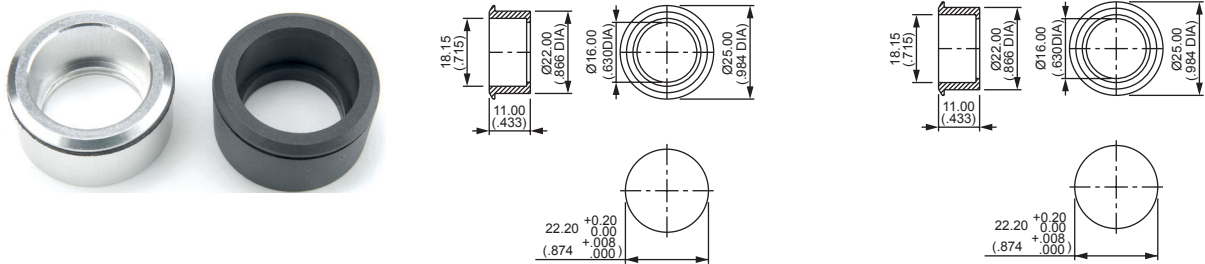

Round natural anodised : A01FMM


Round matt black : A01FMMG

### PCB Sockets

Number of Poles

Part No.

|                                |        |
|--------------------------------|--------|
| Single pole, non illuminated : | A01PC1 |
| Double pole, non illuminated : | A01PC2 |
| Single pole, illuminated :     | A01PC3 |
| Double pole, illuminated :     | A01PC4 |
| Indicator :                    | A01PC5 |

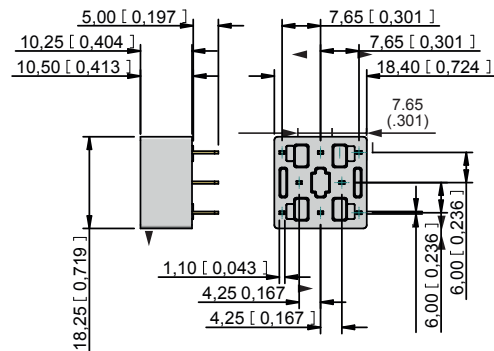



Dimensions : first dimensions are in mm while inches are shown in brackets.  
Refer to the following pages for further information.

# A01 series


## Keylock & selector switches

Accessories

### Flap guards




To fit rectangular bezel : A01FG1




To fit round & Square bezel: A01FM2


### Alluminium bezel protection guards



Rectangular : A01MG1




Square : A01MG




Round natural anodised: A01MG2  
Matt black : A01MG2G

### Anti rotation ring




A01LW


### Blanking plugs

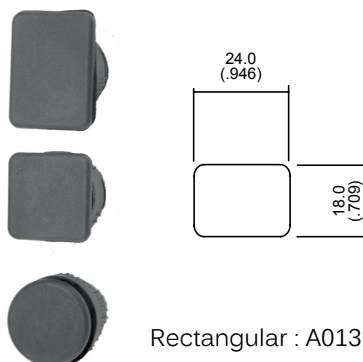

Rectangular : A0131



Square : A0132




Round : A0133

# A01 series

## Keylock & selector switches

Installation & tools

### Installation guide

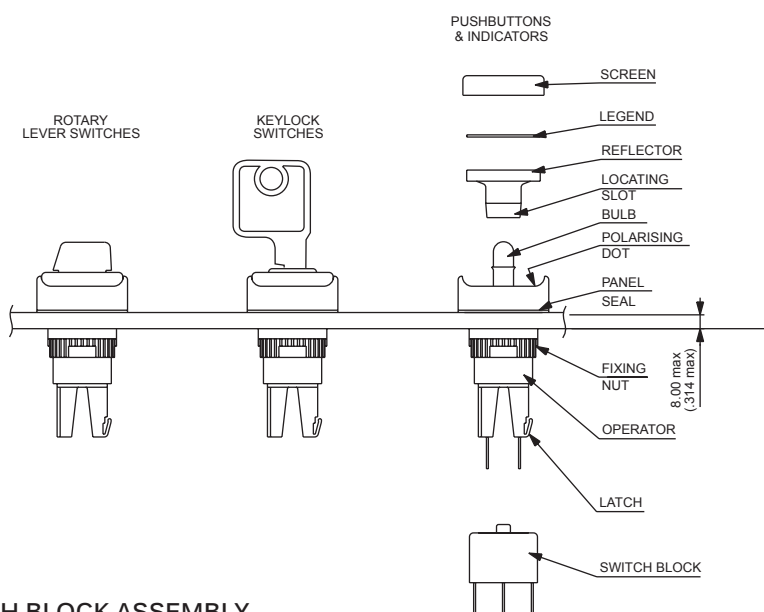

#### SWITCH BLOCK ASSEMBLY

To assemble switch block to the operator, firstly, take care to line up the switch block with the back of the operator. Once in position slide on to the back of the operator. N.B. Ensure latch is fully engaged correctly onto the switch block. To remove switch block, depress the latch and slide the switch block off the operator.

#### PANEL MOUNTING ASSEMBLY

- Drill/punch hole shaped as shown on page one.
- Assemble front operator through hole, fit fixing nut and tighten to a maximum torque of 0.8Nm using tool No. 30-0001.
- Wire chosen switch block as required and slide onto operator until latch engages.
- Fit bulb if required using tool No. 30-0002.
- Snap screen onto reflector assembly with legend in between if required and snap onto front operator, take care to line up the locating slot with the polarising dot and not to damage the internal seal
- To place/remove the bulb use the bulb extractor 30-0002.

### Tools

Nut fixing key



30-0001

Bulb remover



30-0002

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)