


Future Technology Devices International Ltd.

FT311 GPIO Board (UMFT311GP)

The FT311 GPIO Board is a shield board to be used with FT311D Development Module. This board has push button keypad which can be used as a user input and LED which can be used as output.

The FT311 GPIO Board has the following features:

- 8 GPIO lines interface.
- 8 LEDs controlled through the GPIO interface.
- 8 Push Button Switch to be used as user input which is connected to GPIO interface.
- +5V Single Supply Operation.
- Board supply current: 300mA
- board dimensions: 66.60mm x 55.38mm x 22mm (L x W x H).
- Extended operating temperature range; -40 to 85°C.
- Recommended operating temperature is between 0°C and 55°C.
- Suitable for use with FT311D Module.
- Suitable for use with FT311D Development Board.
- Suitable for use with Vinco Development Module

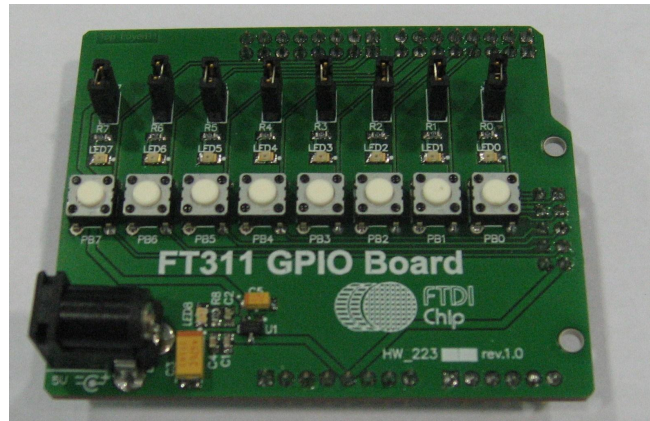

Neither the whole nor any part of the information contained in, or the product described in this manual, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. This product and its documentation are supplied on an as-is basis and no warranty as to their suitability for any particular purpose is either made or implied. Future Technology Devices International Ltd will not accept any claim for damages howsoever arising as a result of use or failure of this product. Your statutory rights are not affected. This product or any variant of it is not intended for use in any medical appliance, device or system in which the failure of the product might reasonably be expected to result in personal injury. This document provides preliminary information that may be subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Future Technology Devices International Ltd, Unit 1, 2 Seaward Place, Centurion Business Park, Glasgow G41 1HH United Kingdom. Scotland Registered Company Number: SC136640

1 Typical Applications

- The 8 LEDs are used as GPIO output indicators.
- The 8 Push Button Switches are used as user input for GPIO input.
-

1.1 Part Numbers

Part Number	Description
UMFT311GP	FT311 GPIO Board Rev1.0

The FT311 GPIO Board includes the following hardware items as standard

- 1 x FT311 GPIO Board (UMFT311GP).

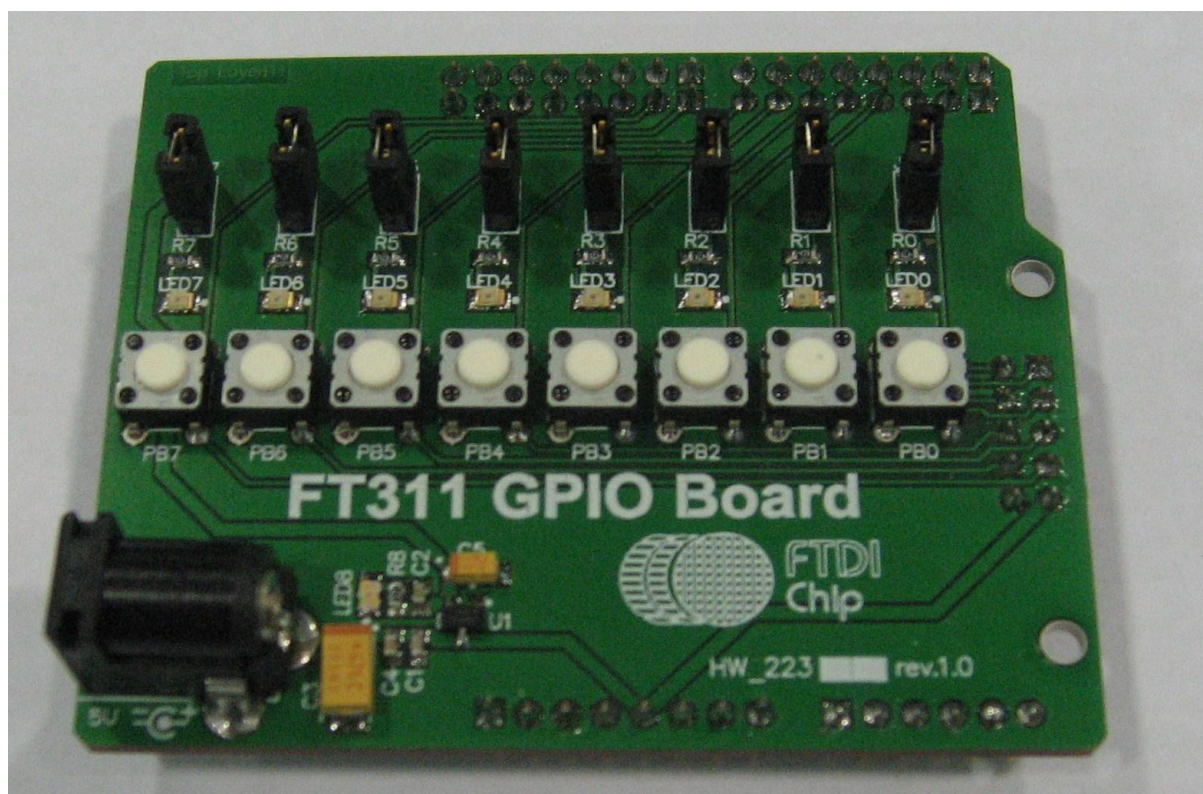


Figure 1.1 : FT311 GPIO Board

2 FT311 GPIO Board Block Diagram

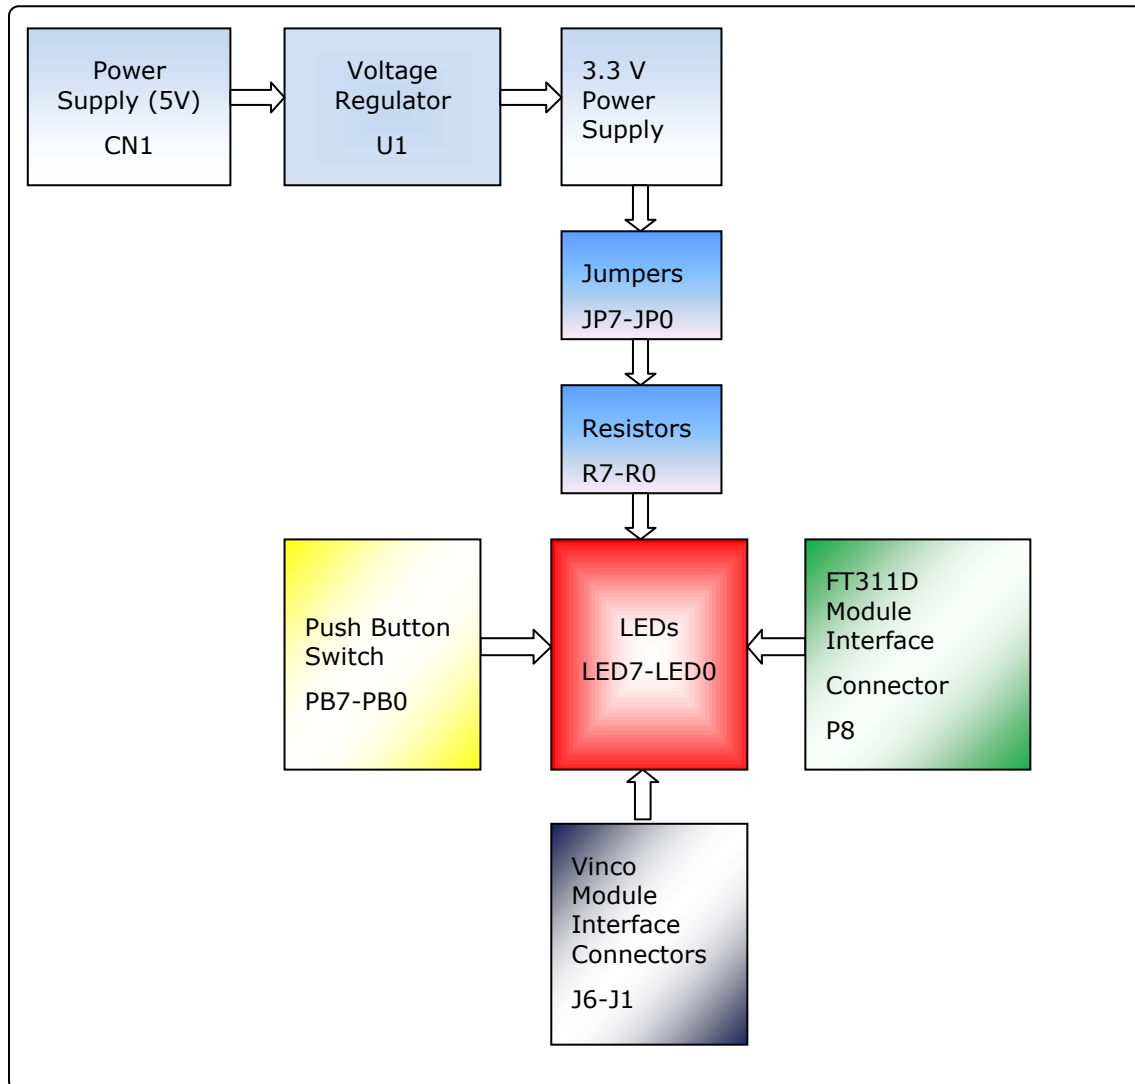


Figure 2.1 : FT311 GPIO Board Block Diagram

For a description of each function please refer to Section 3.

Table of Contents

1	Typical Applications.....	2
1.1	Part Numbers.....	2
2	FT311 GPIO Board Block Diagram	3
3	Function Description.....	5
3.1	Key Features.....	5
3.2	Functional Block Descriptions	5
3.2.1	Components.....	6
3.2.2	Interfaces	6
3.2.3	FT311 GPIO Board Layout.....	7
4	Schematics	8
5	Absolute Maximum Ratings	9
6	Contact Information	10
	Appendix A – References	11
	Appendix B - List of Figures and Tables	12
	Appendix C - Revision History.....	13

3 Function Description

The FT311 GPIO Board is intended for use as a hardware platform to enable easy evaluation of GPIO and PWM interfaces in the FT311D Development Module. The FT311 GPIO Board has LEDs and switches to validate the GPIO and PWM interface of the FT311D device by a user to begin developing Android Open Accessory applications based on the FT311D device. The FT311 GPIO Board can also be used with the Vinco Development Module as a LED and keypad interface.

3.1 Key Features

FT311 GPIO Board consists of

- 8 LEDs. They are LED7, LED6, LED5, LED4, LED3, LED2, LED1 and LED0
- 8 switches. They are PB7, PB6, PB5, PB4, PB3, PB2, PB1 and PB0
- 8 jumpers for enabling 3.3V supply for the LEDs. They are JP7, JP6, JP5, JP4, JP3, JP2, JP1 and JP0
- Connector P8 to interface with the FT311D Module
- Power supply socket CN1 to connect external 5V DC supply.
- Connectors to interface with Vinco Development Module. They are J1, J2, J3, J4, J5 and J6
- Voltage regulator U1 to convert 5V to 3.3V

3.2 Functional Block Descriptions

The following paragraphs describe each function within FT311 GPIO Board. Please refer to the block diagram shown in **Error! Reference source not found.****Error! Reference source not found.****Error! Reference source not found..**

Power Supply

The FT311 GPIO Board consists of a power supply socket CN1. External power is plugged into CN1. The 5V power is converted to 3.3V using linear voltage regulator U1.

Jumpers

The Jumpers JP7-JP0 are used to open or close a 3.3V supply to the corresponding resistors R7-R0.

Resistors

The resistors R7-R0 are the current limiting resistors limiting the current flow to the corresponding LED.

LEDs

The LED7-LED0 can be controlled from any of the 3 interfaces; Push Button Switch, FT311D Module Interface Connector and Vinco Interface connectors.

Push Button Switch

The Push Button Switches PB7-PB0 can be used to switch ON the LEDs. When a Push button switch is pressed the corresponding LED is ON. When Push button switch is not pressed the LED is OFF. The Push button will send a logic 1 in the default state and logic 0 in the pressed state to the corresponding interface pins to act as GPIO inputs to the FT311D device.

FT311D Module Interface Connector

The LEDs can be controlled from the FT311D Module. The LEDs are OFF by default. When the GPIO pin connected to the FT311D Module is driven LOW the corresponding LED is ON.

Vinco Interface Connector

The Vinco Interface Connector is used to connect the FT311 GPIO Board to the Vinco Development Module. The LEDs can be controlled using this interface. By default the LEDs are OFF. When the GPIO pin connected to the Vinco Development Module is driven LOW the corresponding LED is ON.

3.2.1 Components

Component	Board Designator	Description
LED diode	LED0, LED1, LED2, LED3, LED4, LED5, LED6, LED7	Red LED
LED diode	LED8	Yellow LED
2 contact jumper	JP0, JP1, JP2, JP3, JP4, JP5, JP6, JP7	SIP-2
Linear Voltage Regulator	U1	AIC1722-33PUTR, 300mA Low Dropout Linear Voltage Regulator
Capacitor bipolar	C1, C2, C4	0.1uF
Push button momentary switch	PB0, PB1, PB2, PB3, PB4, PB5, PB6, PB7	EVQPAC04, Push button momentary switch; 4.3 - 5.0mm height
Resistor	R0, R1, R2, R3, R4, R5, R6, R7, R8	470R
Capacitor TANTALUM	C5	4.7uF, CAP TANTALUM 4.7UF 6.3V 20% SMD
Polarized Capacitor	C3	47uF

Table 3.1 : Board Components

3.2.2 Interfaces

Interface	Board Designator	Description
FT311D Module Interface connector	P8	Female Socket 5X2. Used to connect to the FT311D Module
Vinco Development Module Interface connectors	J1, J2, J3, J4, J5	8 Pin male Header 2.54mm
	J6	6 Pin; 0.1" (2.54mm); Single Row; male header
Power Supply Connector	CN1	2.1mm Power Jack

Table 3.2 : Board Interfaces

3.2.3 FT311 GPIO Board Layout

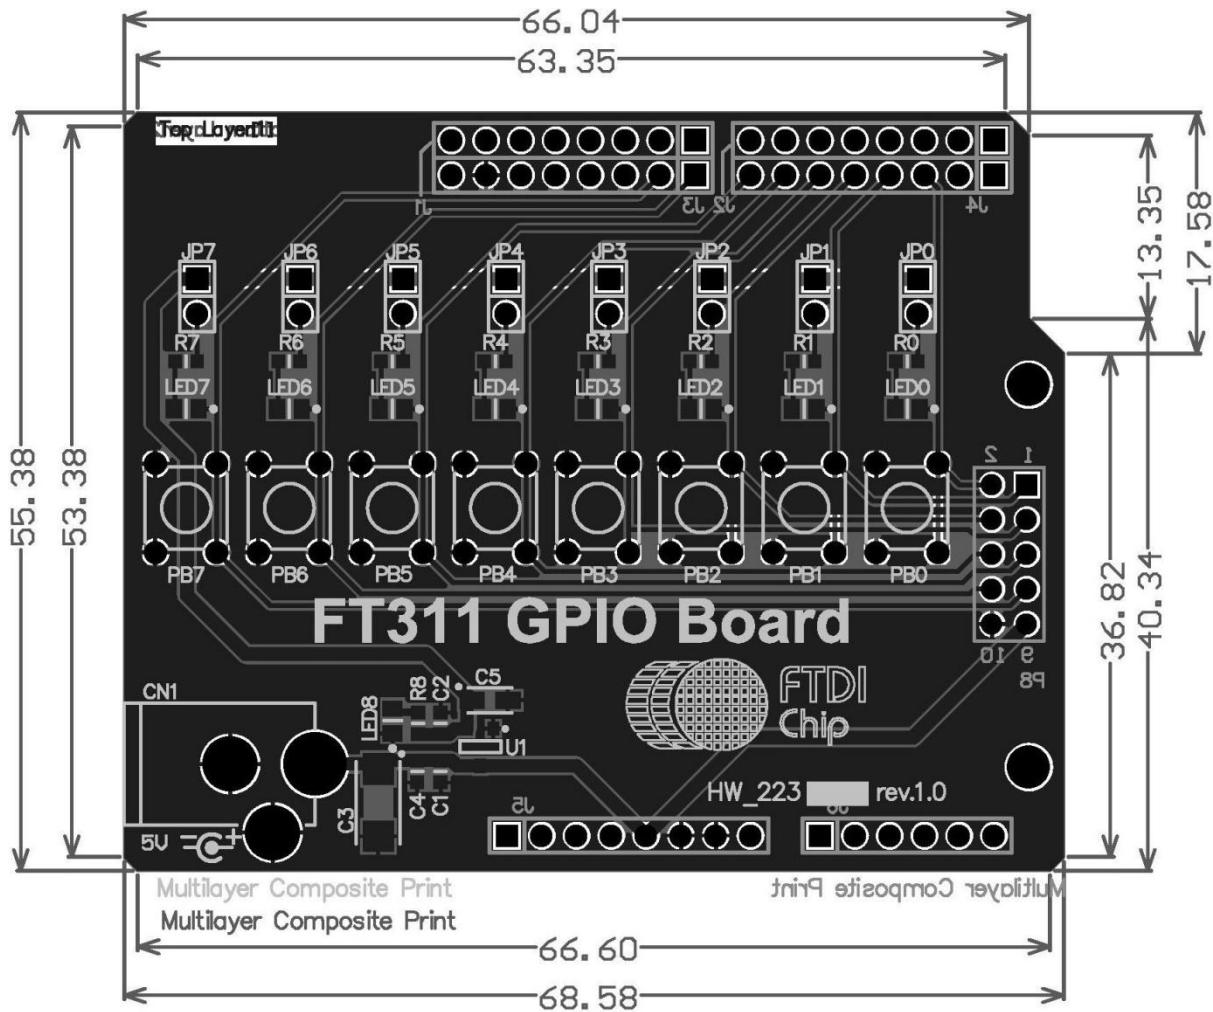


Figure 3.1 : FT311 GPIO Board Layout

4 Schematics

Schematics for the FT311 GPIO Board is shown in the figure 4.1 below.

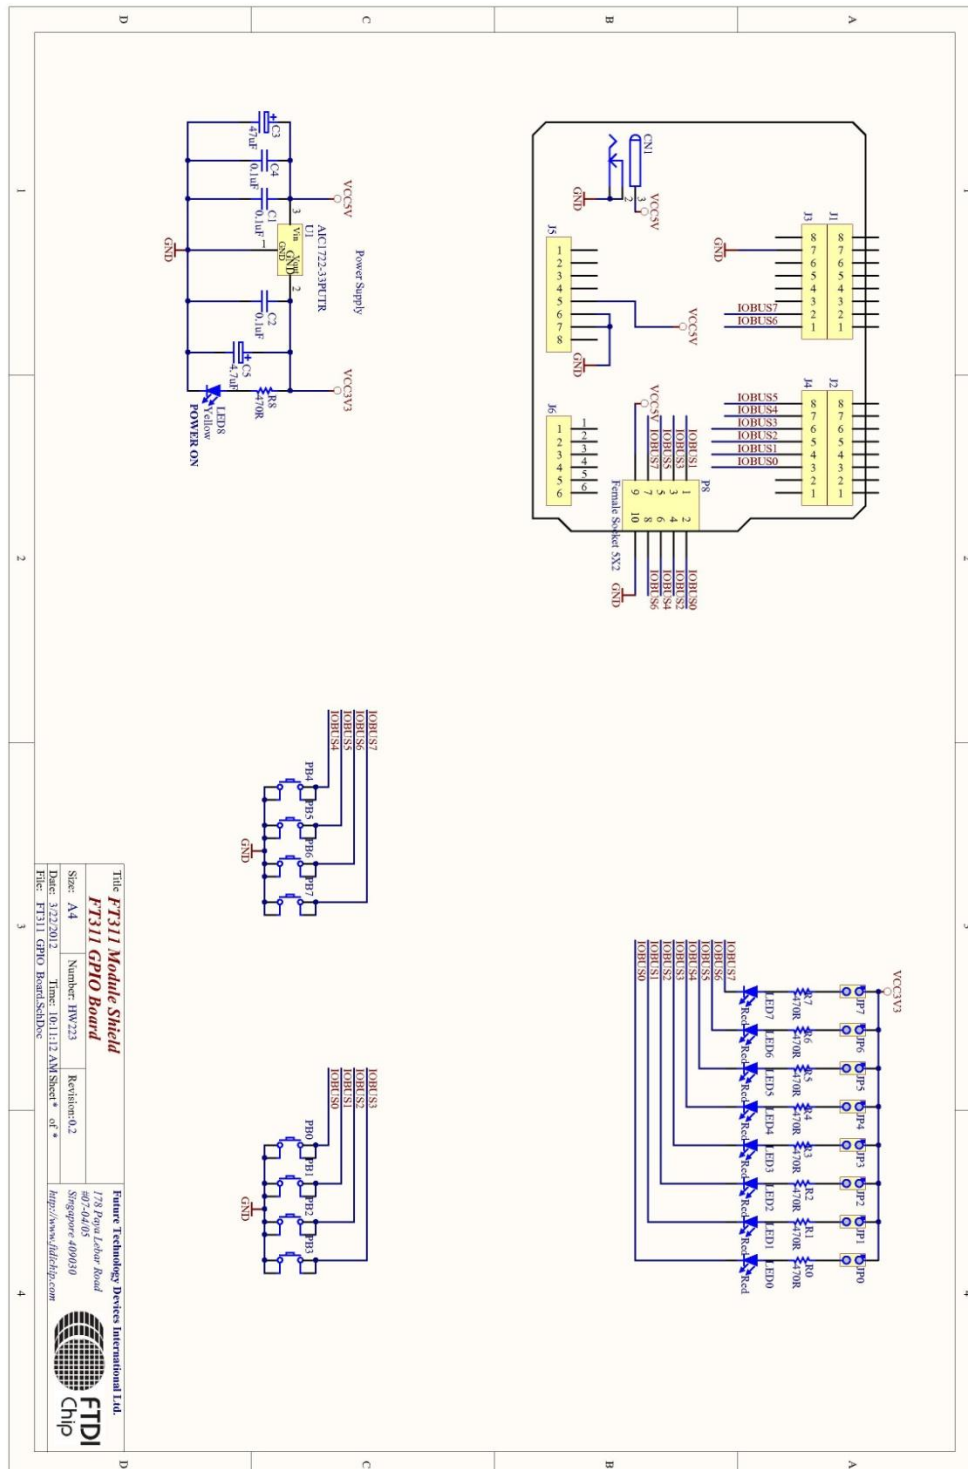


Figure 4.1 : FT311 GPIO Board Schematics

5 Absolute Maximum Ratings

The absolute maximum ratings for FT311 GPIO Board are shown in **Error! Reference source not found..** These are in accordance with the Absolute Maximum Rating System (IEC 60134). Exceeding these may cause permanent damage to the device.

Parameter	Value	Unit
Storage Temperature	-65°C to 150°C	Degrees C
Ambient Temperature (Power Applied)	-40°C to 80°C	Degrees C.
Recommended Operating Temperature	0°C to 55°C	Degrees C.
Vcc Supply Voltage	0 to +5.25	V
DC Input Voltage - All other Inputs	-0.5 to +3.3	V

Table 5.1 : Absolute Maximum Ratings

6 Contact Information

Head Office – Glasgow, UK

Future Technology Devices International Limited
Unit 1, 2 Seaward Place, Centurion Business Park
Glasgow G41 1HH
United Kingdom
Tel: +44 (0) 141 429 2777
Fax: +44 (0) 141 429 2758

E-mail (Sales) sales1@ftdichip.com
E-mail (Support) support1@ftdichip.com
E-mail (General Enquiries) admin1@ftdichip.com

Branch Office – Hillsboro, Oregon, USA

Future Technology Devices International Limited
(USA)
7235 NW Evergreen Parkway, Suite 600
Hillsboro, OR 97123-5803
USA
Tel: +1 (503) 547 0988
Fax: +1 (503) 547 0987

E-Mail (Sales) us.sales@ftdichip.com
E-Mail (Support) us.support@ftdichip.com
E-Mail (General Enquiries) us.admin@ftdichip.com

Branch Office – Taipei, Taiwan

Future Technology Devices International Limited
(Taiwan)
2F, No. 516, Sec. 1, NeiHu Road
Taipei 114
Taiwan, R.O.C.
Tel: +886 (0) 2 8791 3570
Fax: +886 (0) 2 8791 3576

E-mail (Sales) tw.sales1@ftdichip.com
E-mail (Support) tw.support1@ftdichip.com
E-mail (General Enquiries) tw.admin1@ftdichip.com

Branch Office – Shanghai, China

Future Technology Devices International Limited
(China)
Room 408, 317 Xianxia Road,
Shanghai, 200051
China
Tel: +86 21 62351596
Fax: +86 21 62351595

E-mail (Sales) cn.sales@ftdichip.com
E-mail (Support) cn.support@ftdichip.com
E-mail (General Enquiries) cn.admin@ftdichip.com

Web Site

<http://ftdichip.com>

System and equipment manufacturers and designers are responsible to ensure that their systems, and any Future Technology Devices International Ltd (FTDI) devices incorporated in their systems, meet all applicable safety, regulatory and system-level performance requirements. All application-related information in this document (including application descriptions, suggested FTDI devices and other materials) is provided for reference only. While FTDI has taken care to assure it is accurate, this information is subject to customer confirmation, and FTDI disclaims all liability for system designs and for any applications assistance provided by FTDI. Use of FTDI devices in life support and/or safety applications is entirely at the user's risk, and the user agrees to defend, indemnify and hold harmless FTDI from any and all damages, claims, suits or expense resulting from such use. This document is subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Neither the whole nor any part of the information contained in, or the product described in this document, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. Future Technology Devices International Ltd, Unit 1, 2 Seaward Place, Centurion Business Park, Glasgow G41 1HH, United Kingdom. Scotland Registered Company Number: SC136640

Appendix A – References

Useful Application Notes

[FT311D Module](#)

[Vino Development Module](#)

Appendix B - List of Figures and Tables

List of Figures

Figure 1.1 : FT311 GPIO Board.....	2
Figure 2.1 : FT311 GPIO Board Block Diagram	3
Figure 3.1 : FT311 GPIO Board Layout	7
Figure 4.1 : FT311 GPIO Board Schematics.....	8

List of Tables

Table 3.2 : Board Interfaces.....	6
Table 5.1 : Absolute Maximum Ratings.....	9

Appendix C - Revision History

Document Title: DS_UMFT311GP
Document Reference No.: FT_000690
Clearance No.: FTDI# 304
Product Page: <http://www.ftdichip.com/FTProducts.htm>
Document Feedback: [Send Feedback](#)

Version 1.0 Initial Release

July 2012



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru