

FEATURES

Single-supply operation

Output swings rail-to-rail

Input voltage range extends below ground

Single-supply capability from 3 V to 36 V

High load drive

Capacitive load drive of 500 pF, $G = +1$

Output current of 15 mA, 0.5 V from supplies

Excellent ac performance on 2.6 mA/amplifier

–3 dB bandwidth of 16 MHz, $G = +1$

350 ns settling time to 0.01% (2 V step)

Slew rate of 22 V/ μ s

Good dc performance

800 μ V maximum input offset voltage

2 μ V/ $^{\circ}$ C offset voltage drift

25 pA maximum input bias current

Low distortion: –108 dBc worst harmonic @ 20 kHz

Low noise: 16 nV/ $\sqrt{\text{Hz}}$ @ 10 kHz

No phase inversion with inputs to the supply rails

APPLICATIONS

Battery-powered precision instrumentation

Photodiode preamps

Active filters

12-bit to 16-bit data acquisition systems

Medical instrumentation

GENERAL DESCRIPTION

The AD823 is a dual precision, 16 MHz, JFET input op amp that can operate from a single supply of 3.0 V to 36 V or from dual supplies of ± 1.5 V to ± 18 V. It has true single-supply capability with an input voltage range extending below ground in single-supply mode. Output voltage swing extends to within 50 mV of each rail for $I_{\text{OUT}} \leq 100 \mu\text{A}$, providing outstanding output dynamic range.

An offset voltage of 800 μ V maximum, an offset voltage drift of 2 μ V/ $^{\circ}$ C, input bias currents below 25 pA, and low input voltage noise provide dc precision with source impedances up to a Gigaohm. It provides 16 MHz, –3 dB bandwidth, –108 dB THD @ 20 kHz, and a 22 V/ μ s slew rate with a low supply current of 2.6 mA per amplifier. The AD823 drives up to 500 pF of direct capacitive load as a follower and provides an output current of 15 mA, 0.5 V from the supply rails. This allows the amplifier to handle a wide range of load conditions.

CONNECTION DIAGRAM




Figure 1. 8-Lead PDIP and SOIC

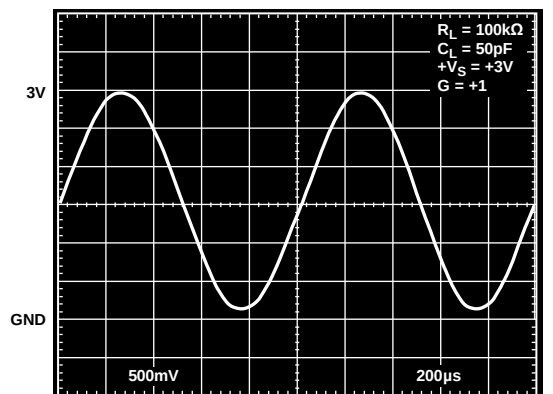


Figure 2. Output Swing, $+V_S = +3$ V, $G = +1$

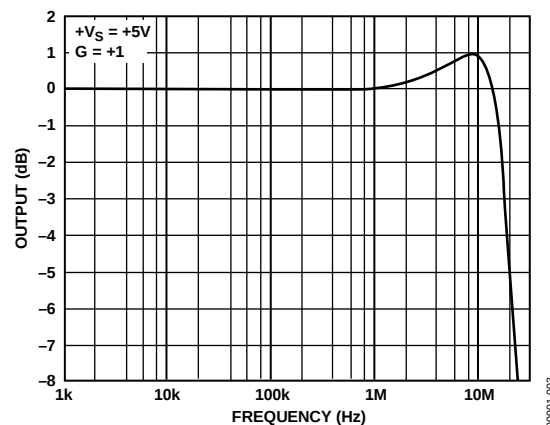


Figure 3. Small Signal Bandwidth, $G = +1$

This combination of ac and dc performance, plus the outstanding load drive capability, results in an exceptionally versatile amplifier for applications such as A/D drivers, high speed active filters, and other low voltage, high dynamic range systems.

The AD823 is available over the industrial temperature range of -40°C to $+85^{\circ}\text{C}$ and is offered in both 8-lead PDIP and 8-lead SOIC packages.

Rev. E

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

Features	1	Typical Performance Characteristics	7
Applications	1	Theory of Operation	13
General Description	1	Output Impedance	14
Connection Diagram	1	Application Notes	15
Revision History	2	Input Characteristics	15
Specifications	3	Output Characteristics	15
Absolute Maximum Ratings	6	Outline Dimensions	18
Thermal Resistance	6	Ordering Guide	19
ESD Caution	6		

REVISION HISTORY

11/11—Rev. D to Rev. E

Changes to Theory of Operation Section	13
Changes to Ordering Guide	19

6/10—Rev. C to Rev. D

Changes to Figure 34	11
Changes to Figure 36	13

5/10—Rev. B to Rev. C

Changes to Table 4	6
--------------------------	---

2/07—Rev. A to Rev. B

Updated Format	Universal
Changes to DC Performance	5
Updated Outline Dimensions	18
Changes to Ordering Guide	19

5/04—Rev. 0 to Rev. A

Changes to Specifications	2
Changes to Ordering Guide	17
Updated Outline Dimensions	17

5/95—Revision 0: Initial Version

SPECIFICATIONS

At $T_A = 25^\circ\text{C}$, $+V_S = +5\text{ V}$, $R_L = 2\text{ k}\Omega$ to 2.5 V , unless otherwise noted.

Table 1.

Parameter	Conditions	Min	Typ	Max	Unit
DYNAMIC PERFORMANCE					
–3 dB Bandwidth, $V_O \leq 0.2\text{ V p-p}$	$G = +1$	12	16		MHz
Full Power Response	$V_O = 2\text{ V p-p}$		3.5		MHz
Slew Rate	$G = -1$, $V_O = 4\text{ V Step}$	14	22		V/ μs
Settling Time to 0.1%	$G = -1$, $V_O = 2\text{ V Step}$		320		ns
to 0.01%	$G = -1$, $V_O = 2\text{ V Step}$		350		ns
NOISE/DISTORTION PERFORMANCE					
Input Voltage Noise	$f = 10\text{ kHz}$		16		nV/ $\sqrt{\text{Hz}}$
Input Current Noise	$f = 1\text{ kHz}$		1		fA/ $\sqrt{\text{Hz}}$
Harmonic Distortion	$R_L = 600\ \Omega$ to 2.5 V , $V_O = 2\text{ V p-p}$, $f = 20\text{ kHz}$		–108		dBc
Crosstalk $f = 1\text{ kHz}$	$R_L = 5\text{ k}\Omega$		–105		dB
$f = 1\text{ MHz}$	$R_L = 5\text{ k}\Omega$		–63		dB
DC PERFORMANCE					
Initial Offset			0.2	0.8	mV
Maximum Offset Over temperature			0.3	2.0	mV
Offset Drift			2		$\mu\text{V}/^\circ\text{C}$
Input Bias Current	$V_{CM} = 0\text{ V to }4\text{ V}$		3	25	pA
at T_{MAX}	$V_{CM} = 0\text{ V to }4\text{ V}$		0.5	5	nA
Input Offset Current			2	20	pA
at T_{MAX}			0.5		nA
Open-Loop Gain	$V_O = 0.2\text{ V to }4\text{ V}$, $R_L = 2\text{ k}\Omega$	20	45		V/mV
T_{MIN} to T_{MAX}		20			V/mV
INPUT CHARACTERISTICS					
Input Common-Mode Voltage Range		–0.2 to +3	–0.2 to +3.8		V
Input Resistance			10^{13}		Ω
Input Capacitance			1.8		pF
Common-Mode Rejection Ratio	$V_{CM} = 0\text{ V to }3\text{ V}$	60	76		dB
OUTPUT CHARACTERISTICS					
Output Voltage Swing			0.025 to 4.975		V
$I_L = \pm 100\ \mu\text{A}$			0.08 to 4.92		V
$I_L = \pm 2\text{ mA}$			0.25 to 4.75		V
$I_L = \pm 10\text{ mA}$					V
Output Current	$V_{OUT} = 0.5\text{ V to }4.5\text{ V}$		16		mA
Short-Circuit Current	Sourcing to 2.5 V		40		mA
	Sinking to 2.5 V		30		mA
Capacitive Load Drive	$G = +1$		500		pF
POWER SUPPLY					
Operating Range		3		36	V
Quiescent Current	T_{MIN} to T_{MAX} , total		5.2	5.6	mA
Power Supply Rejection Ratio	$V_S = 5\text{ V to }15\text{ V}$, T_{MIN} to T_{MAX}	70	80		dB

At $T_A = 25^\circ\text{C}$, $+V_S = +3.3\text{ V}$, $R_L = 2\text{ k}\Omega$ to 1.65 V , unless otherwise noted.

Table 2.

Parameter	Conditions	Min	Typ	Max	Unit
DYNAMIC PERFORMANCE					
–3 dB Bandwidth, $V_O \leq 0.2\text{ V p-p}$	$G = +1$	12	15		MHz
Full Power Response	$V_O = 2\text{ V p-p}$		3.2		MHz
Slew Rate	$G = -1$, $V_O = 2\text{ V Step}$	13	20		V/ μs
Settling Time					
to 0.1%	$G = -1$, $V_O = 2\text{ V Step}$		250		ns
to 0.01%	$G = -1$, $V_O = 2\text{ V Step}$		300		ns
NOISE/DISTORTION PERFORMANCE					
Input Voltage Noise	$f = 10\text{ kHz}$		16		nV/ $\sqrt{\text{Hz}}$
Input Current Noise	$f = 1\text{ kHz}$		1		fA/ $\sqrt{\text{Hz}}$
Harmonic Distortion	$R_L = 100\ \Omega$, $V_O = 2\text{ V p-p}$, $f = 20\text{ kHz}$		–93		dBc
Crosstalk					
$f = 1\text{ kHz}$	$R_L = 5\text{ k}\Omega$		–105		dB
$f = 1\text{ MHz}$	$R_L = 5\text{ k}\Omega$		–63		dB
DC PERFORMANCE					
Initial Offset			0.2	1.5	mV
Maximum Offset Over temperature			0.5	2.5	mV
Offset Drift			2		$\mu\text{V}/^\circ\text{C}$
Input Bias Current	$V_{CM} = 0\text{ V to } 2\text{ V}$		3	25	pA
at T_{MAX}	$V_{CM} = 0\text{ V to } 2\text{ V}$		0.5	5	nA
Input Offset Current			2	20	pA
at T_{MAX}			0.5		nA
Open-Loop Gain	$V_O = 0.2\text{ V to } 2\text{ V}$, $R_L = 2\text{ k}\Omega$	15	30		V/mV
T_{MIN} to T_{MAX}		12			V/mV
INPUT CHARACTERISTICS					
Input Common-Mode Voltage Range		–0.2 to +1	–0.2 to +1.8		V
Input Resistance			10^{13}		Ω
Input Capacitance			1.8		pF
Common-Mode Rejection Ratio	$V_{CM} = 0\text{ V to } 1\text{ V}$	54	70		dB
OUTPUT CHARACTERISTICS					
Output Voltage Swing					
$I_L = \pm 100\ \mu\text{A}$			0.025 to 3.275		V
$I_L = \pm 2\text{ mA}$			0.08 to 3.22		V
$I_L = \pm 10\text{ mA}$			0.25 to 3.05		V
Output Current	$V_{OUT} = 0.5\text{ V to } 2.5\text{ V}$		15		mA
Short-Circuit Current	Sourcing to 1.5 V		40		mA
	Sinking to 1.5 V		30		mA
Capacitive Load Drive	$G = +1$		500		pF
POWER SUPPLY					
Operating Range		3		36	V
Quiescent Current	T_{MIN} to T_{MAX} , total		5.0	5.7	mA
Power Supply Rejection Ratio	$V_S = 3.3\text{ V to } 15\text{ V}$, T_{MIN} to T_{MAX}	70	80		dB

At $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{ V}$, $R_L = 2\text{ k}\Omega$ to 0 V , unless otherwise noted.

Table 3.

Parameter	Conditions	Min	Typ	Max	Unit
DYNAMIC PERFORMANCE					
–3 dB Bandwidth, $V_O \leq 0.2\text{ V p-p}$	$G = +1$	12	16		MHz
Full Power Response	$V_O = 2\text{ V p-p}$		4		MHz
Slew Rate	$G = -1$, $V_O = 10\text{ V Step}$	17	25		V/ μs
Settling Time					
to 0.1%	$G = -1$, $V_O = 10\text{ V Step}$		550		ns
to 0.01%	$G = -1$, $V_O = 10\text{ V Step}$		650		ns
NOISE/DISTORTION PERFORMANCE					
Input Voltage Noise	$f = 10\text{ kHz}$		16		nV/ $\sqrt{\text{Hz}}$
Input Current Noise	$f = 1\text{ kHz}$		1		fA/ $\sqrt{\text{Hz}}$
Harmonic Distortion	$R_L = 600\text{ }\Omega$, $V_O = 10\text{ V p-p}$, $f = 20\text{ kHz}$		–90		dBc
Crosstalk					
$f = 1\text{ kHz}$	$R_L = 5\text{ k}\Omega$		–105		dB
$f = 1\text{ MHz}$	$R_L = 5\text{ k}\Omega$		–63		dB
DC PERFORMANCE					
Initial Offset			0.7	3.5	mV
Maximum Offset Over temperature			1.0	7	mV
Offset Drift			2		$\mu\text{V}/^\circ\text{C}$
Input Bias Current	$V_{CM} = 0\text{ V}$		5	30	pA
	$V_{CM} = -10\text{ V}$		60		pA
at T_{MAX}	$V_{CM} = 0\text{ V}$		0.5	5	nA
Input Offset Current			2	20	pA
at T_{MAX}			0.5		nA
Open-Loop Gain	$V_O = +10\text{ V to } -10\text{ V}$, $R_L = 2\text{ k}\Omega$	30	60		V/mV
T_{MIN} to T_{MAX}		30			V/mV
INPUT CHARACTERISTICS					
Input Common-Mode Voltage Range		–15.2 to +13	–15.2 to +13.8		V
Input Resistance			10^{13}		Ω
Input Capacitance			1.8		pF
Common-Mode Rejection Ratio	$V_{CM} = -15\text{ V to } +13\text{ V}$	66	82		dB
OUTPUT CHARACTERISTICS					
Output Voltage Swing					
$I_L = \pm 100\text{ }\mu\text{A}$			–14.95 to +14.95		V
$I_L = \pm 2\text{ mA}$			–14.92 to +14.92		V
$I_L = \pm 10\text{ mA}$			–14.75 to +14.75		V
Output Current	$V_{OUT} = -14.5\text{ V to } +14.5\text{ V}$		17		mA
Short-Circuit Current	Sourcing to 0 V		80		mA
	Sinking to 0 V		60		mA
Capacitive Load Drive	$G = +1$		500		pF
POWER SUPPLY					
Operating Range		3		36	V
Quiescent Current	T_{MIN} to T_{MAX} , total		7.0	8.4	mA
Power Supply Rejection Ratio	$V_S = 5\text{ V to } 15\text{ V}$, T_{MIN} to T_{MAX}	70	80		dB

ABSOLUTE MAXIMUM RATINGS

Table 4.

Parameter	Rating
Supply Voltage	36 V
Internal Power Dissipation	
PDIP (N)	1.3 W
SOIC (R)	0.9 W
Input Voltage (Common Mode)	$\pm V_S$
Differential Input Voltage	$\pm V_S$
Output Short-Circuit Duration	See Figure 4
Storage Temperature Range N, R	-65°C to +125°C
Operating Temperature Range	-40°C to +85°C
Lead Temperature Range (Soldering, 10 sec)	300°C

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

θ_{JA} is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Specification is for device in free air.

Table 5. Thermal Resistance

Package Type	θ_{JA}	Unit
8-Lead PDIP	90	°C/W
8-Lead SOIC	160	°C/W

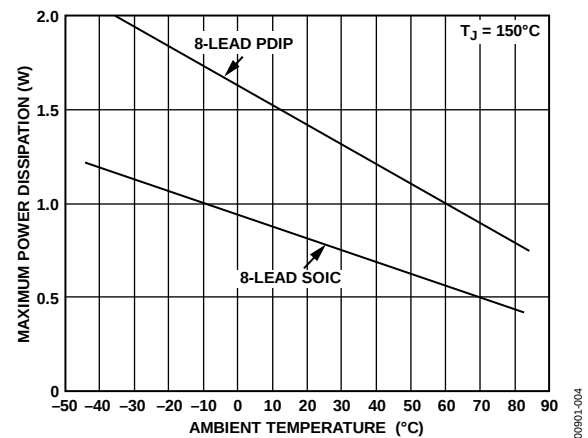


Figure 4. Maximum Power Dissipation vs. Temperature

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

TYPICAL PERFORMANCE CHARACTERISTICS

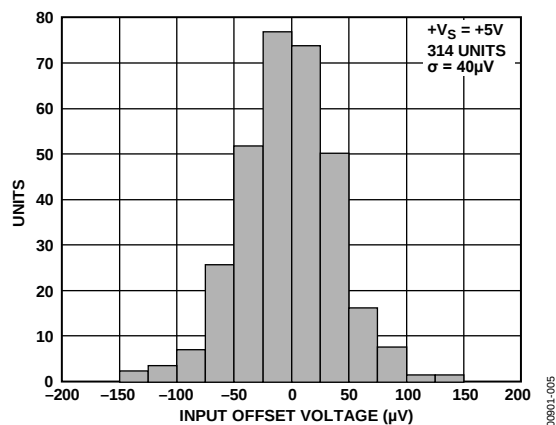


Figure 5. Typical Distribution of Input Offset Voltage

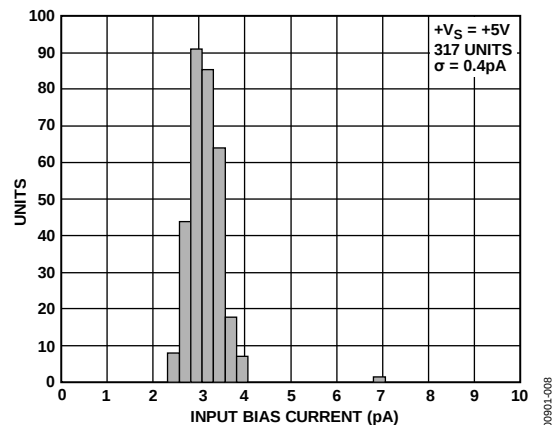


Figure 8. Typical Distribution of Input Bias Current

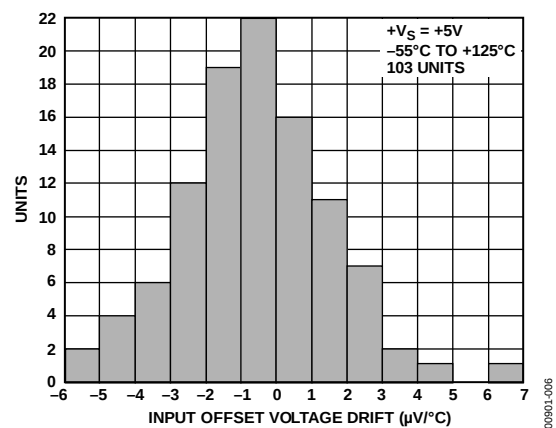


Figure 6. Typical Distribution of Input Offset Voltage Drift

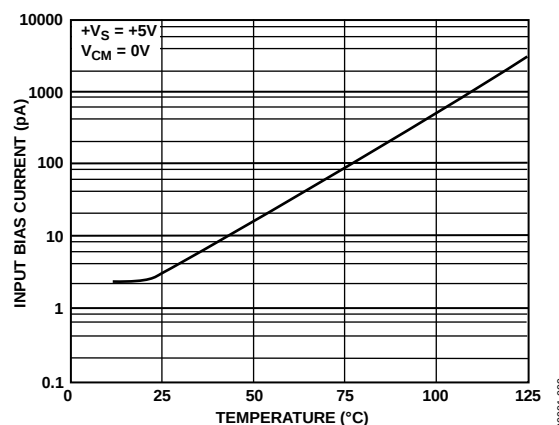


Figure 9. Input Bias Current vs. Temperature

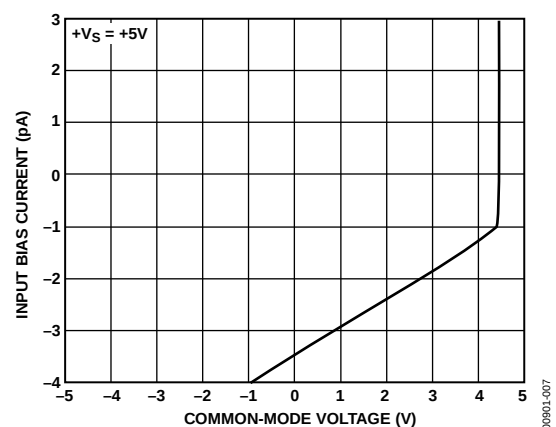


Figure 7. Input Bias Current vs. Common-Mode Voltage

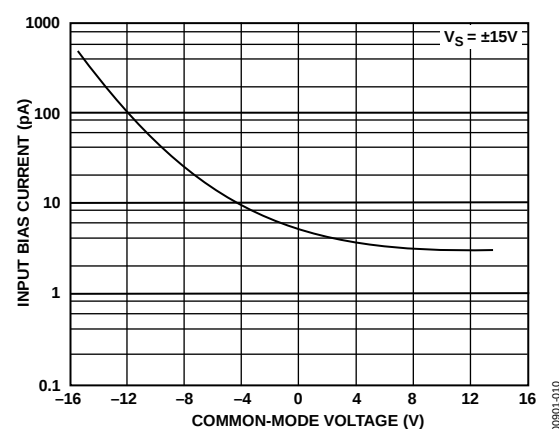


Figure 10. Input Bias Current vs. Common-Mode Voltage

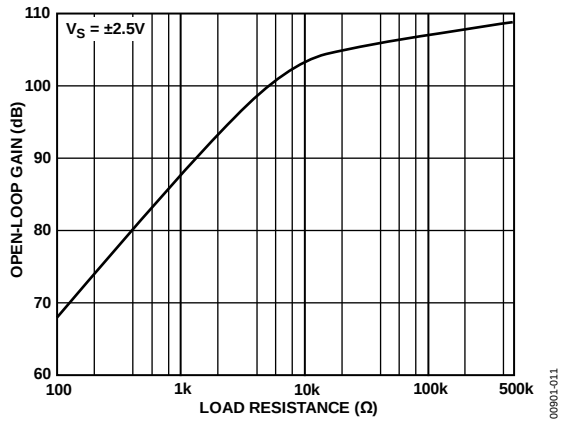


Figure 11. Open-Loop Gain vs. Load Resistance

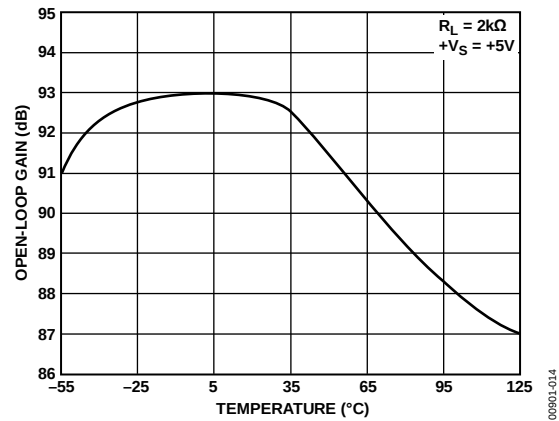


Figure 14. Open-Loop Gain vs. Temperature

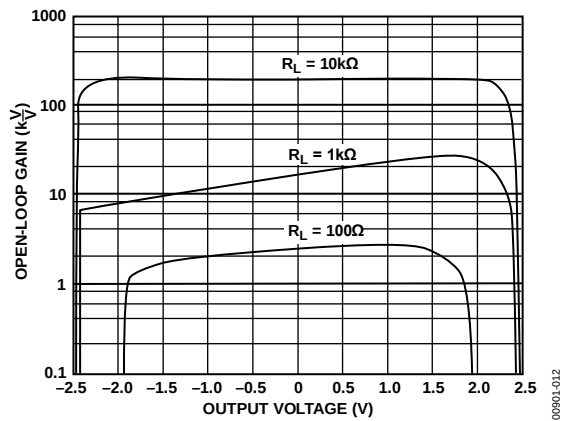
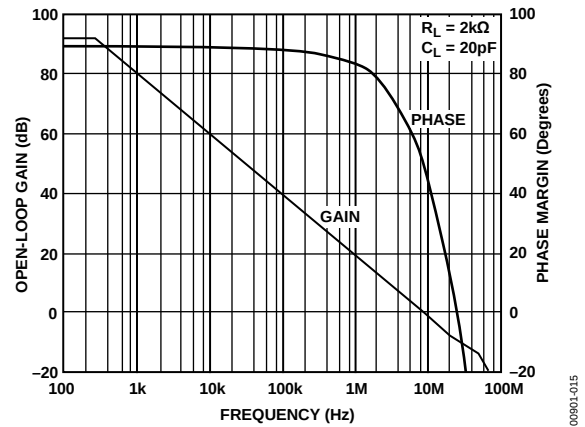
Figure 12. Open-Loop Gain vs. Output Voltage, $V_S = \pm 2.5V$ 

Figure 15. Open-Loop Gain and Phase Margin vs. Frequency

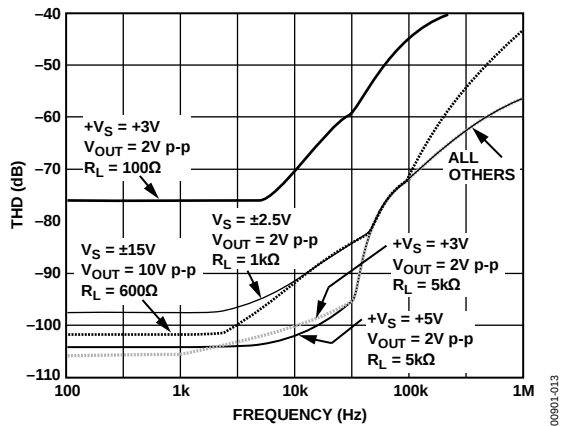


Figure 13. Total Harmonic Distortion vs. Frequency

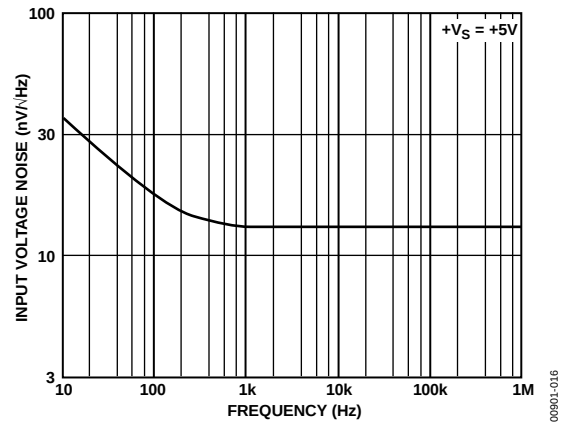


Figure 16. Input Voltage Noise vs. Frequency

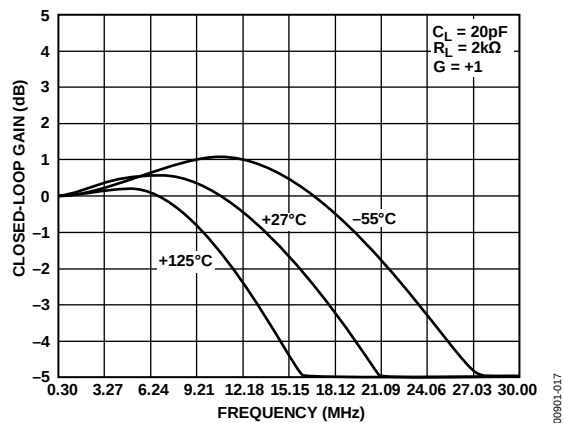


Figure 17. Closed-Loop Gain vs. Frequency

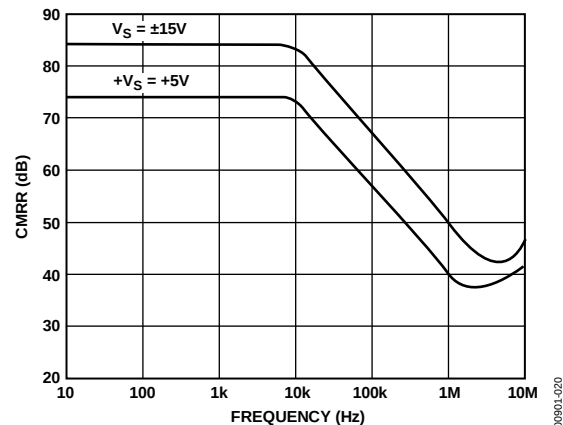


Figure 20. Common-Mode Rejection Ratio vs. Frequency

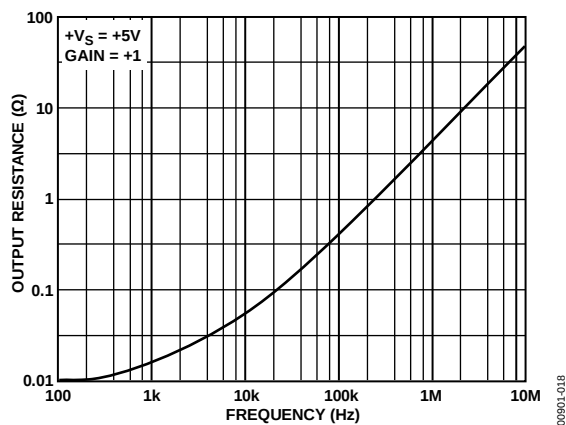
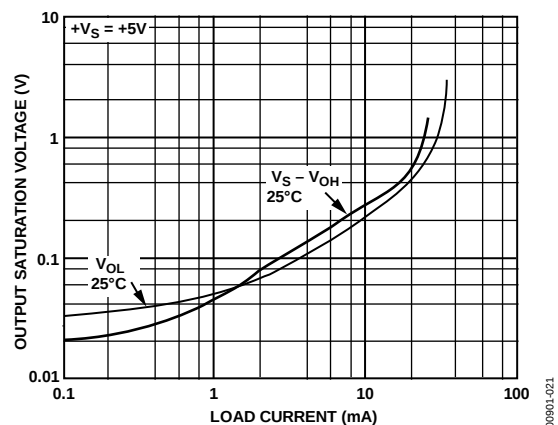
Figure 18. Output Resistance vs. Frequency, $+V_S = +5\text{V}$, Gain = +1

Figure 21. Output Saturation Voltage vs. Load Current

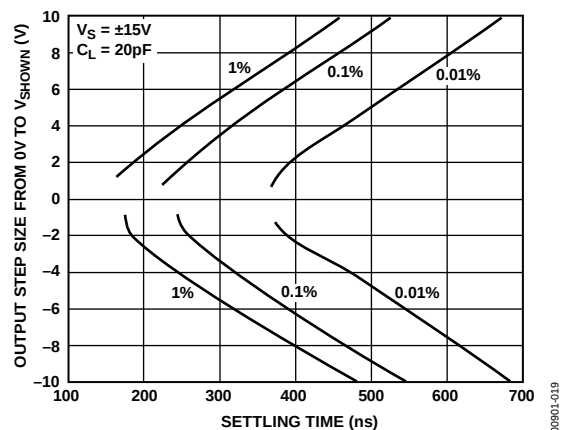


Figure 19. Output Step Size vs. Settling Time (Inverter)

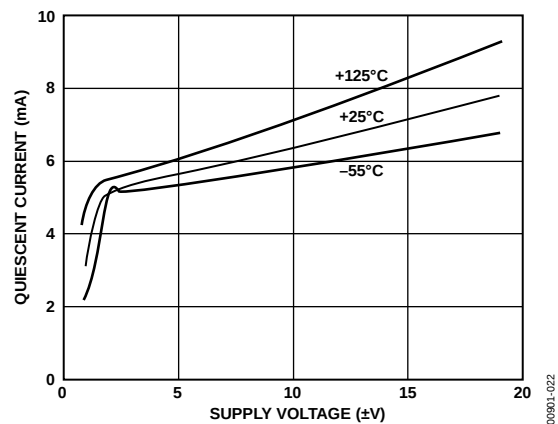


Figure 22. Quiescent Current vs. Supply Voltage

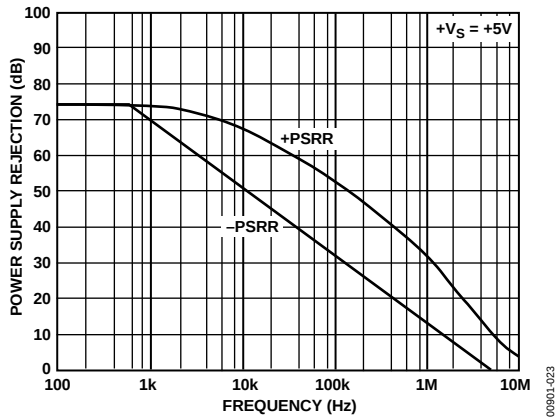


Figure 23. Power Supply Rejection vs. Frequency

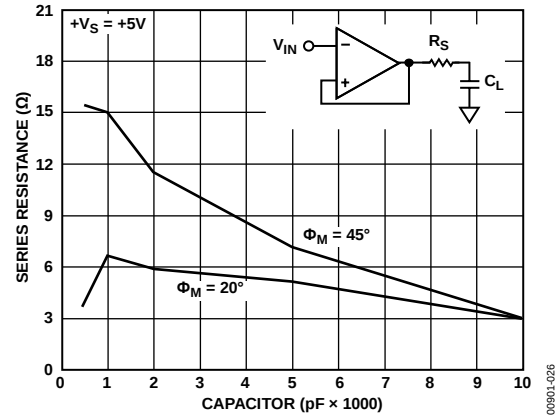


Figure 26. Series Resistance vs. Capacitive Load

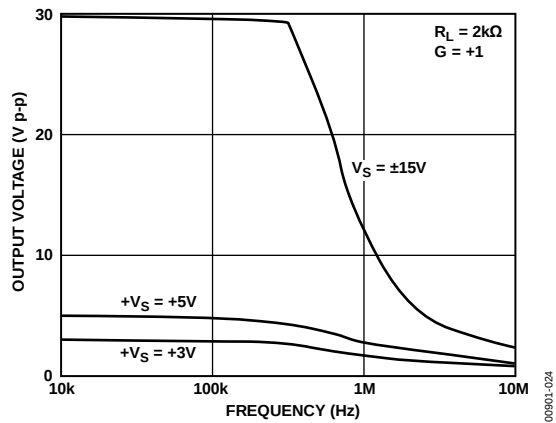


Figure 24. Large Signal Frequency Response

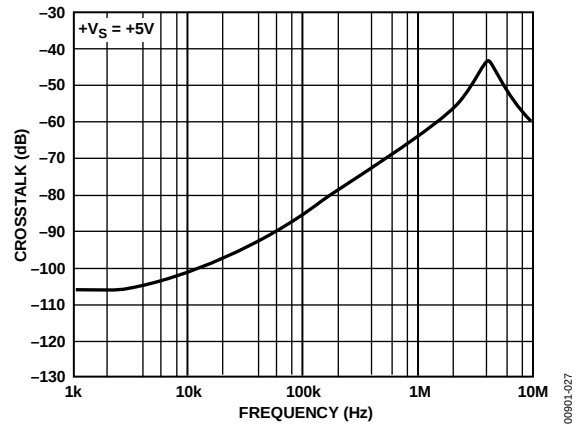
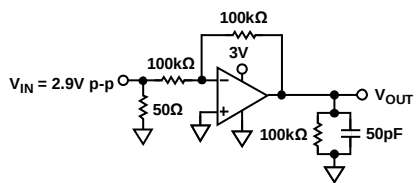
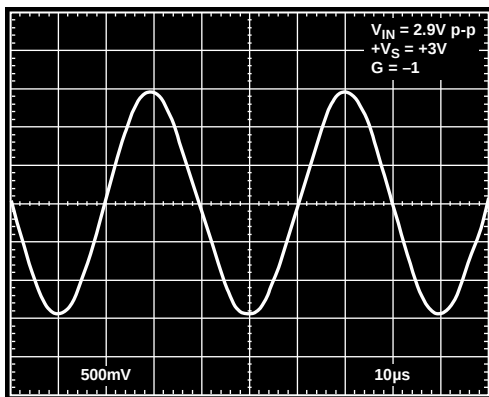
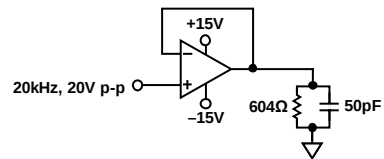
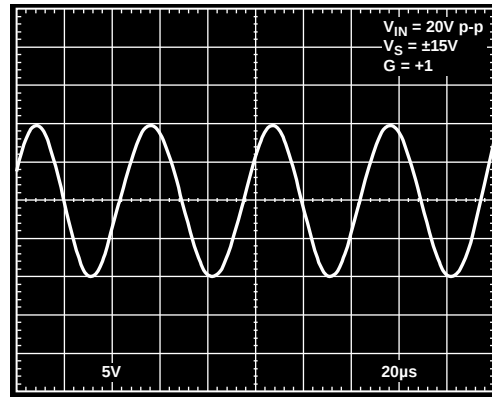
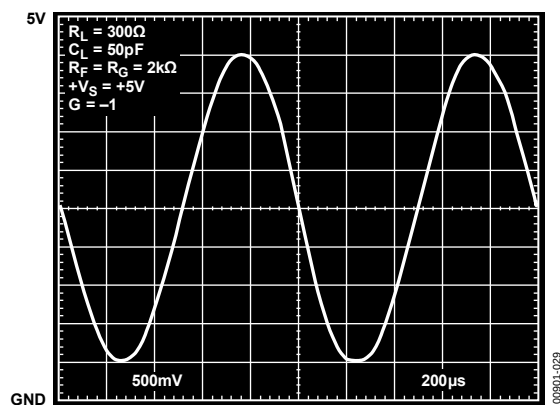
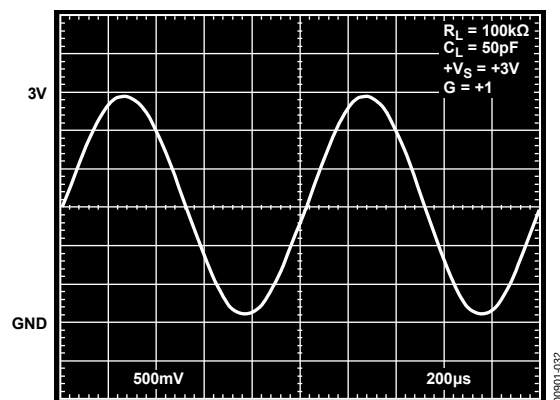
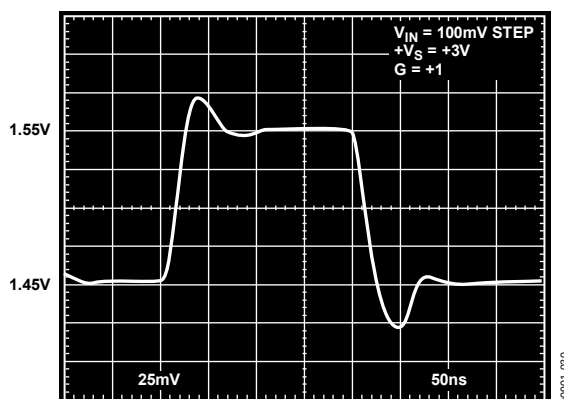
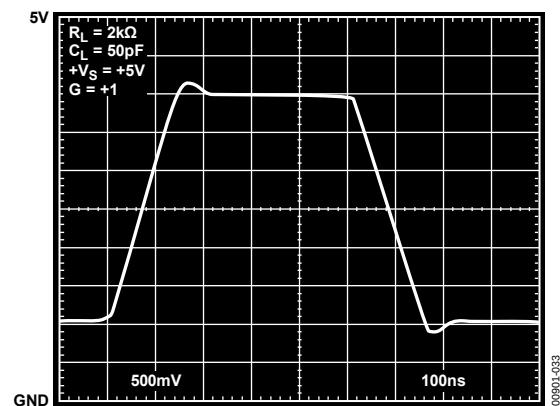
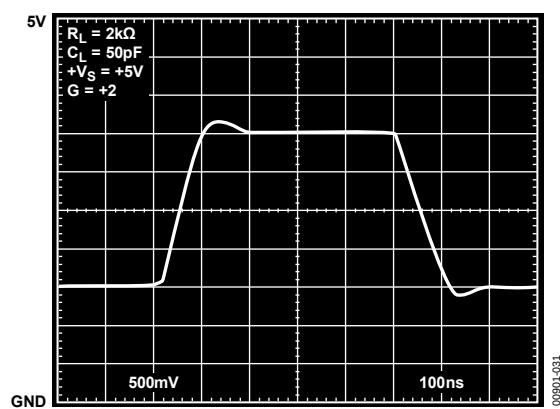
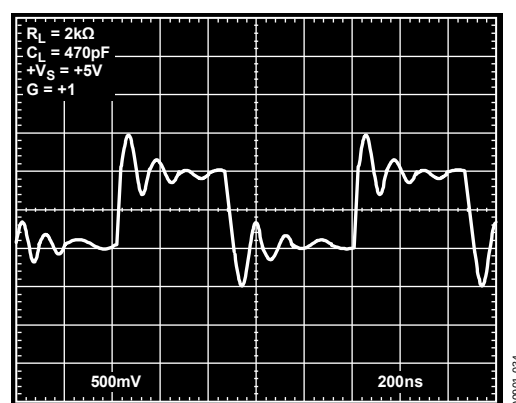


Figure 27. Crosstalk vs. Frequency

Figure 25. Output Swing, $+V_S = +3\text{ V}$, $G = -1$ Figure 28. Output Swing, $V_S = \pm 15\text{ V}$, $G = +1$

Figure 29. Output Swing, $+V_S = +5\text{ V}$, $G = -1$ Figure 32. Output Swing, $+V_S = +3\text{ V}$, $G = +1$ Figure 30. Pulse Response, $+V_S = +3\text{ V}$, $G = +1$ Figure 33. Pulse Response, $+V_S = +5\text{ V}$, $G = +1$ Figure 31. Pulse Response, $+V_S = +5\text{ V}$, $G = +2$ Figure 34. Pulse Response, $+V_S = +5\text{ V}$, $G = +1$, $C_L = 470\text{ pF}$

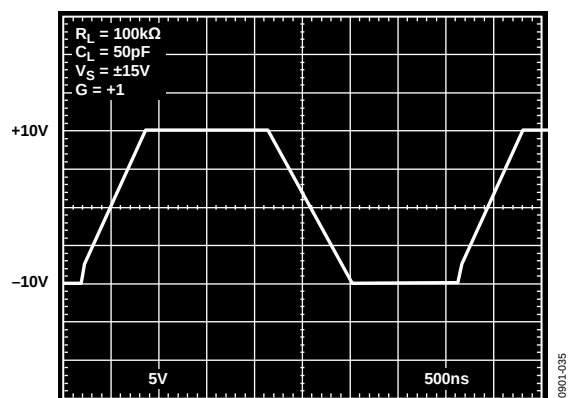


Figure 35. Pulse Response, $V_S = \pm 15V$, $G = +1$

THEORY OF OPERATION

The AD823 is fabricated on the Analog Devices, Inc. proprietary complementary bipolar (CB) process that enables the construction of PNP and NPN transistors with similar f_T 's in the 600 MHz to 800 MHz region. In addition, the process also features N-Channel JFETs that are used in the input stage of the AD823. These process features allow the construction of high frequency, low distortion op amps with picoamp input currents. This design uses a differential output input stage to maximize bandwidth and headroom (see Figure 36). The smaller signal swings required on the S1P/S1N outputs reduce the effect of the nonlinear currents due to junction capacitances and improve the distortion performance. With this design, harmonic distortion of better than -91 dB @ 20 kHz into $600\ \Omega$ with $V_{OUT} = 4$ V p-p on a single 5 V supply is achieved. The complementary common emitter design of the output stage provides excellent load drive without the need for emitter followers, thereby improving the output range of the device considerably with respect to conventional op amps. The AD823 can drive 20 mA with the outputs within 0.6 V of the supply rails. The AD823 also offers outstanding precision for a high speed op amp. Input offset voltages of 1 mV maximum and offset drift of $2\ \mu\text{V}/^\circ\text{C}$ are achieved through the use of the Analog Devices advanced thin film trimming techniques.

A nested integrator topology is used in the AD823 (see Figure 37). The output stage can be modeled as an ideal op amp with a single-pole response and a unity-gain frequency set by transconductance g_{m2} and Capacitor C2. R1 is the output impedance of the input stage; g_m is the input transconductance. C1 and C5 provide Miller compensation for the overall op amp. The unity-gain frequency occurs at $g_m/C5$. Solving the node equations for this circuit yields

$$\frac{V_{OUT}}{V_i} = \frac{A0}{(sR1[C1(A2 + 1)] + 1) \times \left(s \left[\frac{C2}{g_{m2}} \right] + 1 \right)}$$

where:

$A0 = g_m g_{m2} R2 R1$ (open-loop gain of op amp).

$A2 = g_{m2} R2$ (open-loop gain of output stage).

The first pole in the denominator is the dominant pole of the amplifier and occurs at ~ 18 Hz. This equals the input stage output impedance R1 multiplied by the Miller-multiplied value of C1. The second pole occurs at the unity-gain bandwidth of the output stage, which is 23 MHz. This type of architecture allows more open-loop gain and output drive to be obtained than a standard 2-stage architecture would allow.

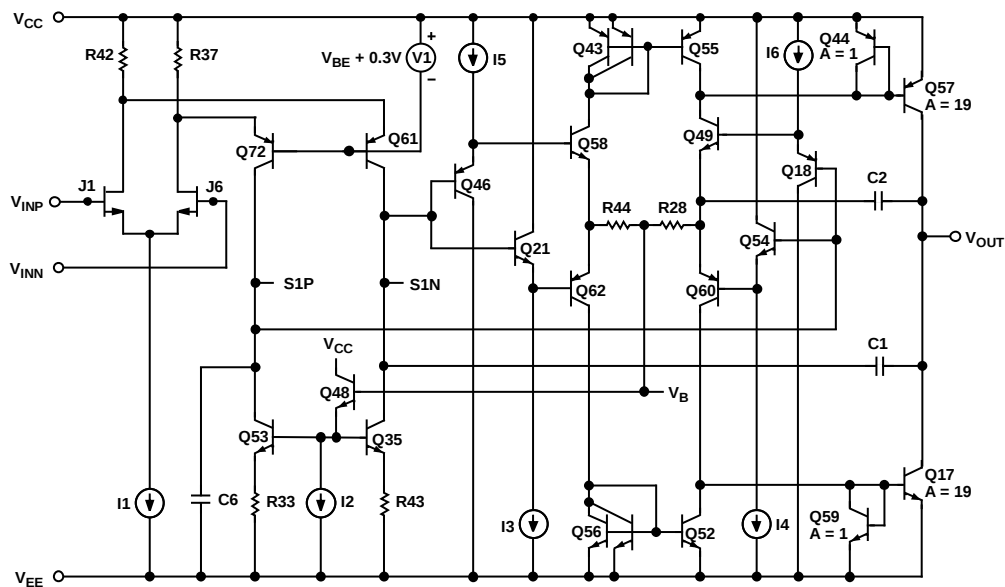


Figure 36. Simplified Schematic

OUTPUT IMPEDANCE

The low frequency open-loop output impedance of the common-emitter output stage used in this design is approximately $30\text{ k}\Omega$. Although this is significantly higher than a typical emitter follower output stage, when it is connected with feedback, the output impedance is reduced by the open-loop gain of the op amp. With 109 dB of open-loop gain, the output impedance is reduced to $<0.2\ \Omega$. At higher frequencies, the output impedance rises as the open-loop gain of the op amp drops; however, the output also becomes capacitive due to the integrator capacitors C1 and C2. This prevents the output impedance from ever becoming excessively high (see Figure 18), which can cause stability problems when driving capacitive loads. In fact, the AD823 has excellent cap-load drive capability for a high frequency op amp. Figure 34 shows the AD823 connected as a follower while driving 470 pF direct capacitive load. Under these conditions, the phase margin is approximately 20° . If greater phase margin is desired, a small resistor can be used in series with the output to decouple the effect of the load capacitance from the op amp (see Figure 26). In addition, running the part at higher gains also improves the capacitive load drive capability of the op amp.

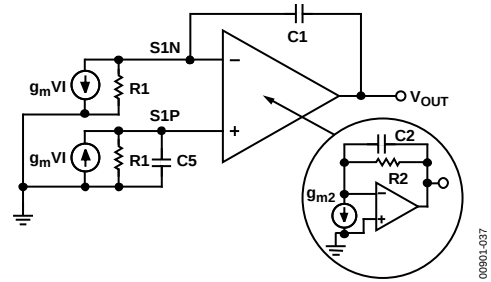


Figure 37. Small Signal Schematic

009601-037

APPLICATION NOTES

INPUT CHARACTERISTICS

In the AD823, N-Channel JFETs are used to provide a low offset, low noise, high impedance input stage. Minimum input common-mode voltage extends from 0.2 V below $-V_S$ to $1\text{ V} < +V_S$. Driving the input voltage closer to the positive rail causes a loss of amplifier bandwidth and increased common-mode voltage error.

The AD823 does not exhibit phase reversal for input voltages up to and including $+V_S$. Figure 38 shows the response of an AD823 voltage follower to a 0 V to 5 V ($+V_S$) square wave input. The input and output are superimposed. The output polarity tracks the input polarity up to $+V_S$, with no phase reversal. The reduced bandwidth above a 4 V input causes the rounding of the output wave form. For input voltages greater than $+V_S$, a resistor in series with the AD823's noninverting input prevents phase reversal, at the expense of greater input voltage noise. This is illustrated in Figure 39.

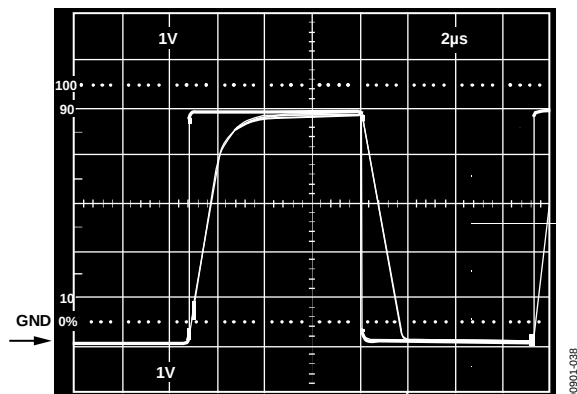


Figure 38. AD823 Input Response: $R_P = 0$, $V_{IN} = 0$ to $+V_S$

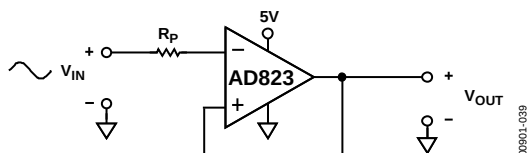
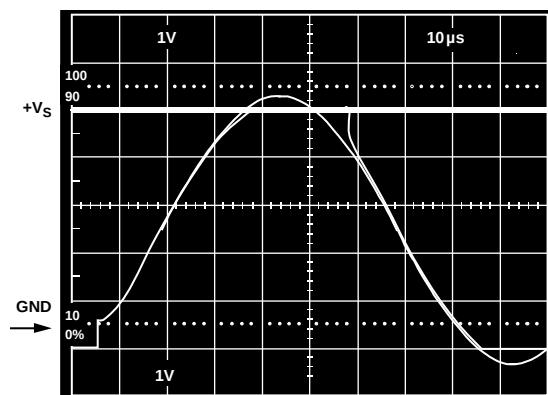


Figure 39. AD823 Input Response: $V_{IN} = 0$ to $+V_S + 200\text{ mV}$, $V_{OUT} = 0$ to $+V_S$, $R_P = 49.9\text{ k}\Omega$

Because the input stage uses N-Channel JFETs, input current during normal operation is negative; the current flows out from the input terminals. If the input voltage is driven more positive than $+V_S - 0.4\text{ V}$, the input current reverses direction as internal device junctions become forward biased. This is illustrated in Figure 7.

A current limiting resistor should be used in series with the input of the AD823 if there is a possibility of the input voltage exceeding the positive supply by more than 300 mV, or if an input voltage is applied to the AD823 when $\pm V_S = 0$. The amplifier becomes damaged if left in that condition for more than 10 seconds. A 1 k Ω resistor allows the amplifier to withstand up to 10 V of continuous overvoltage and increases the input voltage noise by a negligible amount.

Input voltages less than $-V_S$ are a completely different story. The amplifier can safely withstand input voltages 20 V below $-V_S$ as long as the total voltage from the positive supply to the input terminal is less than 36 V. In addition, the input stage typically maintains picoamp level input currents across that input voltage range.

The AD823 is designed for 16 nV/ $\sqrt{\text{Hz}}$ wideband input voltage noise and maintains low noise performance to low frequencies (see Figure 16). This noise performance, along with the AD823's low input current and current noise, means that the AD823 contributes negligible noise for applications with source resistances greater than 10 k Ω and signal bandwidths greater than 1 kHz.

OUTPUT CHARACTERISTICS

The AD823's unique bipolar rail-to-rail output stage swings within 25 mV of the supplies with no external resistive load. The AD823's approximate output saturation resistance is 25 Ω sourcing and sinking. This can be used to estimate the output saturation voltage when driving heavier current loads. For instance, when driving 5 mA, the saturation voltage to the rails is approximately 125 mV.

If the AD823's output is driven hard against the output saturation voltage, it recovers within 250 ns of the input returning to the amplifier's linear operating region.

A/D Driver

The rail-to-rail output of the AD823 makes it useful as an A/D driver in a single-supply system. Because it is a dual op amp, it can be used to drive both the analog input of the A/D as well as its reference input. The high impedance FET input of the AD823 is well suited for minimal loading of high output impedance devices.

Figure 40 shows a schematic of an AD823 being used to drive both the input and reference input of an AD1672, a 12-bit, 3-MSPS, single-supply ADC. One amplifier is configured as a unity-gain follower to drive the analog input of the AD1672, which is configured to accept an input voltage that ranges from 0 V to 2.5 V.

The other amplifier is configured as a gain of 2 to drive the reference input from a 1.25 V reference. Although the AD1672 has its own internal reference, there are systems that require greater accuracy than the internal reference provides. On the other hand, if the AD1672 internal reference is used, the second AD823 amplifier can be used to buffer the reference voltage for driving other circuitry while minimally loading the reference source.

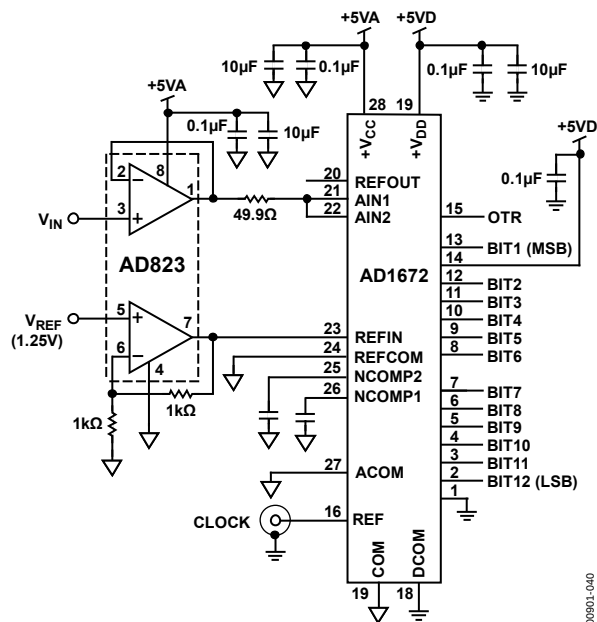


Figure 40. AD823 Driving Input and Reference of the AD1672, a 12-Bit, 3-MSPS ADC

The circuit was tested with a 500 kHz sine wave input that was heavily low-pass filtered (60 dB) to minimize the harmonic content at the input to the AD823. The digital output of the AD1672 was analyzed by performing a fast Fourier transform (FFT).

During the testing, it was observed that at 500 kHz, the output of the AD823 cannot go below ~350 mV (operating with negative supply at ground) without seriously degrading the second harmonic distortion. Another test was performed with a 200 Ω pull-down resistor to ground that allowed the output to go as low as 200 mV without seriously affecting the second harmonic distortion. There was, however, a slight increase in the third harmonic term with the resistor added, but it was still less than the second harmonic.

Figure 41 is an FFT plot of the results of driving the AD1672 with the AD823 with no pull-down resistor. The input amplitude was 2.15 V p-p and the lower voltage excursion was 350 mV. The input frequency was 490 kHz, which was chosen to spread the location of the harmonics.

The distortion analysis is important for systems requiring good frequency domain performance. Other systems may require good time domain performance. The noise and settling time performance of the AD823 provides the necessary information for its applicability for these systems.

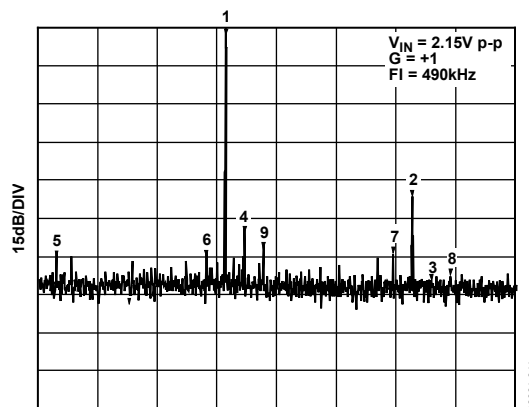


Figure 41. FFT of AD1672 Output Driven by AD823

3 V, Single-Supply Stereo Headphone Driver

The AD823 exhibits good current drive and total harmonic distortion plus noise (THD+N) performance, even at 3 V single supplies. At 20 kHz, THD+N equals -62 dB (0.079%) for a 300 mV p-p output signal. This is comparable to other single-supply op amps that consume more power and cannot run on 3 V power supplies.

In Figure 42, each channel's input signal is coupled via a 1 μ F Mylar capacitor. Resistor dividers set the dc voltage at the noninverting inputs so that the output voltage is midway between the power supplies (+1.5 V). The gain is 1.5. Each half of the AD823 can then be used to drive a headphone channel. A 5 Hz high-pass filter is realized by the 500 μ F capacitors and the headphones that can be modeled as 32 Ω load resistors to ground. This ensures that all signals in the audio frequency range (20 Hz to 20 kHz) are delivered to the headphones.

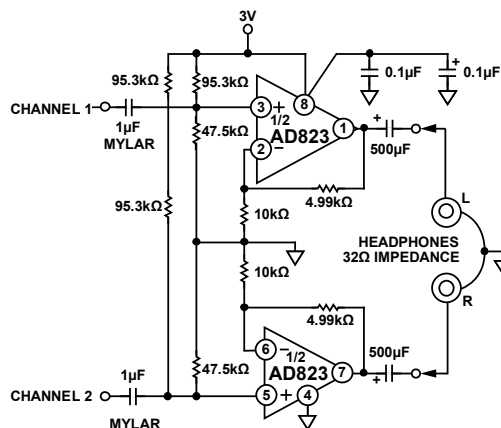


Figure 42. 3 V Single-Supply Stereo Headphone Driver

Second-Order Low-Pass Filter

Figure 43 depicts the AD823 configured as a second-order Butterworth low-pass filter. With the values as shown, the corner frequency equals 200 kHz. Component selection is shown in the following equations:

$R1 = R2 = \text{User Selected (Typical Values: 10 k}\Omega \text{ to 100 k}\Omega \text{)}$

$$C1(\text{farads}) = \frac{1.414}{2\pi f_{\text{cutoff}} \times R1}$$

$$C2 = \frac{0.707}{2\pi f_{\text{cutoff}} \times R1}$$

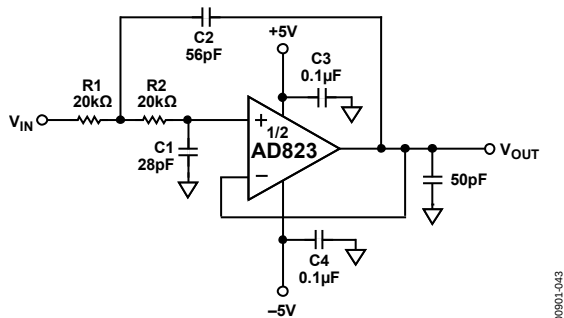


Figure 43. Second-Order Low-Pass Filter

A plot of the filter is shown in Figure 44; better than 50 dB of high frequency rejection is provided.

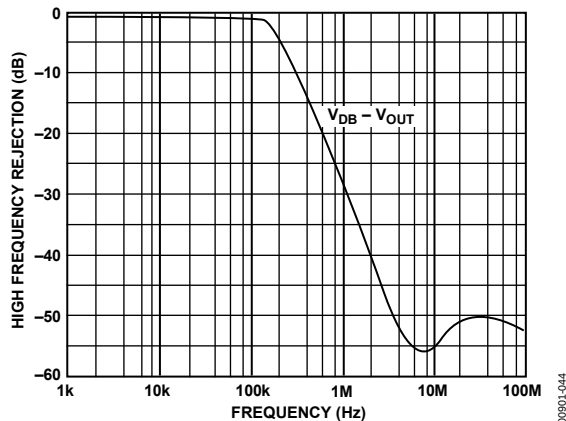


Figure 44. Frequency Response of Filter

Single-Supply Half-Wave and Full-Wave Rectifiers

An AD823 configured as a unity-gain follower and operated with a single supply can be used as a simple half-wave rectifier. The AD823 inputs maintain picoamp level input currents even when driven well below the minus supply. The rectifier puts that behavior to good use, maintaining an input impedance of over $10^{11} \Omega$ for input voltages from within 1 V of the positive supply to 20 V below the negative supply.

The full-wave and half-wave rectifier shown in Figure 45 operates as follows: when V_{IN} is above ground, $R1$ is bootstrapped through the unity-gain follower A1 and the loop of Amplifier A2. This forces the inputs of A2 to be equal, thus no current flows through $R1$ or $R2$, and the circuit output tracks the input. When V_{IN} is below ground, the output of A1 is forced to ground. The noninverting input of Amplifier A2 sees the ground level output of A1; therefore, A2 operates as a unity-gain inverter. The output at Node C is then a full-wave rectified version of the input. Node B is a buffered half-wave rectified version of the input. Input voltage supply to ± 18 V can be rectified, depending on the voltage supply used.

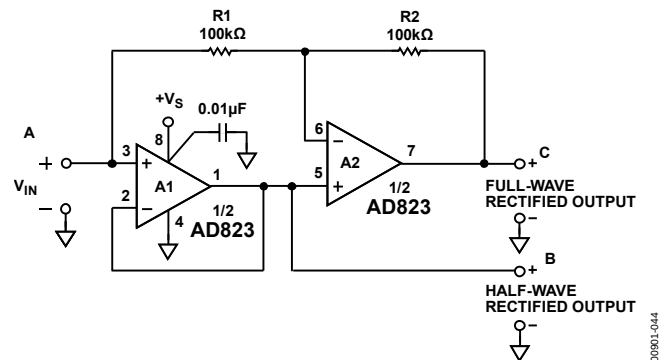


Figure 45. Full-Wave and Half-Wave Rectifier

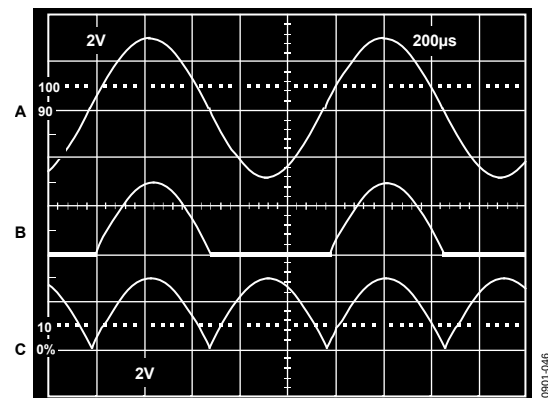


Figure 46. Single-Supply Half-Wave and Full-Wave Rectifier

Technical drawing of a 5-pin D-subminiature connector showing front, side, and detail views with dimensions in inches and millimeters.

Front View Dimensions:

- Overall Width: 0.400 (10.16)
- Pin Spacing (Pitch): 0.365 (9.27)
- Pin Diameter: 0.355 (9.02)
- Pin 1 Position: 0.280 (7.11) from left edge, 0.250 (6.35) from top edge, 0.240 (6.10) from bottom edge.
- Pin 4 Position: 0.100 (2.54) from pin 1.
- Pin 5 Position: 0.100 (2.54) from pin 4.
- Pin 8 Position: 0.100 (2.54) from pin 5.
- Pin 9 Position: 0.100 (2.54) from pin 8.
- Pin 10 Position: 0.100 (2.54) from pin 9.
- Pin 11 Position: 0.100 (2.54) from pin 10.
- Pin 12 Position: 0.100 (2.54) from pin 11.
- Pin 13 Position: 0.100 (2.54) from pin 12.
- Pin 14 Position: 0.100 (2.54) from pin 13.
- Pin 15 Position: 0.100 (2.54) from pin 14.
- Pin 16 Position: 0.100 (2.54) from pin 15.
- Pin 17 Position: 0.100 (2.54) from pin 16.
- Pin 18 Position: 0.100 (2.54) from pin 17.
- Pin 19 Position: 0.100 (2.54) from pin 18.
- Pin 20 Position: 0.100 (2.54) from pin 19.
- Pin 21 Position: 0.100 (2.54) from pin 20.
- Pin 22 Position: 0.100 (2.54) from pin 21.
- Pin 23 Position: 0.100 (2.54) from pin 22.
- Pin 24 Position: 0.100 (2.54) from pin 23.
- Pin 25 Position: 0.100 (2.54) from pin 24.
- Pin 26 Position: 0.100 (2.54) from pin 25.
- Pin 27 Position: 0.100 (2.54) from pin 26.
- Pin 28 Position: 0.100 (2.54) from pin 27.
- Pin 29 Position: 0.100 (2.54) from pin 28.
- Pin 30 Position: 0.100 (2.54) from pin 29.
- Pin 31 Position: 0.100 (2.54) from pin 30.
- Pin 32 Position: 0.100 (2.54) from pin 31.
- Pin 33 Position: 0.100 (2.54) from pin 32.
- Pin 34 Position: 0.100 (2.54) from pin 33.
- Pin 35 Position: 0.100 (2.54) from pin 34.
- Pin 36 Position: 0.100 (2.54) from pin 35.
- Pin 37 Position: 0.100 (2.54) from pin 36.
- Pin 38 Position: 0.100 (2.54) from pin 37.
- Pin 39 Position: 0.100 (2.54) from pin 38.
- Pin 40 Position: 0.100 (2.54) from pin 39.
- Pin 41 Position: 0.100 (2.54) from pin 40.
- Pin 42 Position: 0.100 (2.54) from pin 41.
- Pin 43 Position: 0.100 (2.54) from pin 42.
- Pin 44 Position: 0.100 (2.54) from pin 43.
- Pin 45 Position: 0.100 (2.54) from pin 44.
- Pin 46 Position: 0.100 (2.54) from pin 45.
- Pin 47 Position: 0.100 (2.54) from pin 46.
- Pin 48 Position: 0.100 (2.54) from pin 47.
- Pin 49 Position: 0.100 (2.54) from pin 48.
- Pin 50 Position: 0.100 (2.54) from pin 49.
- Pin 51 Position: 0.100 (2.54) from pin 50.
- Pin 52 Position: 0.100 (2.54) from pin 51.
- Pin 53 Position: 0.100 (2.54) from pin 52.
- Pin 54 Position: 0.100 (2.54) from pin 53.
- Pin 55 Position: 0.100 (2.54) from pin 54.
- Pin 56 Position: 0.100 (2.54) from pin 55.
- Pin 57 Position: 0.100 (2.54) from pin 56.
- Pin 58 Position: 0.100 (2.54) from pin 57.
- Pin 59 Position: 0.100 (2.54) from pin 58.
- Pin 60 Position: 0.100 (2.54) from pin 59.
- Pin 61 Position: 0.100 (2.54) from pin 60.
- Pin 62 Position: 0.100 (2.54) from pin 61.
- Pin 63 Position: 0.100 (2.54) from pin 62.
- Pin 64 Position: 0.100 (2.54) from pin 63.
- Pin 65 Position: 0.100 (2.54) from pin 64.
- Pin 66 Position: 0.100 (2.54) from pin 65.
- Pin 67 Position: 0.100 (2.54) from pin 66.
- Pin 68 Position: 0.100 (2.54) from pin 67.
- Pin 69 Position: 0.100 (2.54) from pin 68.
- Pin 70 Position: 0.100 (2.54) from pin 69.
- Pin 71 Position: 0.100 (2.54) from pin 70.
- Pin 72 Position: 0.100 (2.54) from pin 71.
- Pin 73 Position: 0.100 (2.54) from pin 72.
- Pin 74 Position: 0.100 (2.54) from pin 73.
- Pin 75 Position: 0.100 (2.54) from pin 74.
- Pin 76 Position: 0.100 (2.54) from pin 75.
- Pin 77 Position: 0.100 (2.54) from pin 76.
- Pin 78 Position: 0.100 (2.54) from pin 77.
- Pin 79 Position: 0.100 (2.54) from pin 78.
- Pin 80 Position: 0.100 (2.54) from pin 79.
- Pin 81 Position: 0.100 (2.54) from pin 80.
- Pin 82 Position: 0.100 (2.54) from pin 81.
- Pin 83 Position: 0.100 (2.54) from pin 82.
- Pin 84 Position: 0.100 (2.54) from pin 83.
- Pin 85 Position: 0.100 (2.54) from pin 84.
- Pin 86 Position: 0.100 (2.54) from pin 85.
- Pin 87 Position: 0.100 (2.54) from pin 86.
- Pin 88 Position: 0.100 (2.54) from pin 87.
- Pin 89 Position: 0.100 (2.54) from pin 88.
- Pin 90 Position: 0.100 (2.54) from pin 89.
- Pin 91 Position: 0.100 (2.54) from pin 90.
- Pin 92 Position: 0.100 (2.54) from pin 91.
- Pin 93 Position: 0.100 (2.54) from pin 92.
- Pin 94 Position: 0.100 (2.54) from pin 93.
- Pin 95 Position: 0.100 (2.54) from pin 94.
- Pin 96 Position: 0.100 (2.54) from pin 95.
- Pin 97 Position: 0.100 (2.54) from pin 96.
- Pin 98 Position: 0.100 (2.54) from pin 97.
- Pin 99 Position: 0.100 (2.54) from pin 98.
- Pin 100 Position: 0.100 (2.54) from pin 99.
- Pin 101 Position: 0.100 (2.54) from pin 100.
- Pin 102 Position: 0.100 (2.54) from pin 101.
- Pin 103 Position: 0.100 (2.54) from pin 102.
- Pin 104 Position: 0.100 (2.54) from pin 103.
- Pin 105 Position: 0.100 (2.54) from pin 104.
- Pin 106 Position: 0.100 (2.54) from pin 105.
- Pin 107 Position: 0.100 (2.54) from pin 106.
- Pin 108 Position: 0.100 (2.54) from pin 107.
- Pin 109 Position: 0.100 (2.54) from pin 108.
- Pin 110 Position: 0.100 (2.54) from pin 109.
- Pin 111 Position: 0.100 (2.54) from pin 110.
- Pin 112 Position: 0.100 (2.54) from pin 111.
- Pin 113 Position: 0.100 (2.54) from pin 112.
- Pin 114 Position: 0.100 (2.54) from pin 113.
- Pin 115 Position: 0.100 (2.54) from pin 114.
- Pin 116 Position: 0.100 (2.54) from pin 115.
- Pin 117 Position: 0.100 (2.54) from pin 116.
- Pin 118 Position: 0.100 (2.54) from pin 117.
- Pin 119 Position: 0.100 (2.54) from pin 118.
- Pin 120 Position: 0.100 (2.54) from pin 119.
- Pin 121 Position: 0.100 (2.54) from pin 120.
- Pin 122 Position: 0.100 (2.54) from pin 121.
- Pin 123 Position: 0.100 (2.54) from pin 122.
- Pin 124 Position: 0.100 (2.54) from pin 123.
- Pin 125 Position: 0.100 (2.54) from pin 124.
- Pin 126 Position: 0.100 (2.54) from pin 125.
- Pin 127 Position: 0.100 (2.54) from pin 126.
- Pin 128 Position: 0.100 (2.54) from pin 127.
- Pin 129 Position: 0.100 (2.54) from pin 128.
- Pin 130 Position: 0.100 (2.54) from pin 129.
- Pin 131 Position: 0.100 (2.54) from pin 130.
- Pin 132 Position: 0.100 (2.54) from pin 131.
- Pin 133 Position: 0.100 (2.54) from pin 132.
- Pin 134 Position: 0.100 (2.54) from pin 133.
- Pin 135 Position: 0.100 (2.54) from pin 134.
- Pin 136 Position: 0.100 (2.54) from pin 135.
- Pin 137 Position: 0.100 (2.54) from pin 136.

070606-A

Dimensions shown in inches and (millimeters)



Dimensions shown in millimeters and (inches)

ORDERING GUIDE

Model ¹	Temperature Range	Package Description	Package Option
AD823ANZ	–40°C to +85°C	8-Lead PDIP	N-8
AD823AR	–40°C to +85°C	8-Lead SOIC_N	R-8
AD823AR-REEL	–40°C to +85°C	8-Lead SOIC_N, 13" Tape and Reel	R-8
AD823AR-REEL7	–40°C to +85°C	8-Lead SOIC_N, 7" Tape and Reel	R-8
AD823ARZ	–40°C to +85°C	8-Lead SOIC_N	R-8
AD823ARZ-RL	–40°C to +85°C	8-Lead SOIC_N, 13" Tape and Reel	R-8
AD823ARZ-R7	–40°C to +85°C	8-Lead SOIC_N, 7" Tape and Reel	R-8
AD823AR-EBZ		Evaluation Board	

¹ Z = RoHS Compliant Part.

NOTES

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru