




## PNP Silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in bias resistor ( $R_1 = 10\text{ k}\Omega$  ,  $R_2 = 10\text{ k}\Omega$ )
- BCR183S / U: Two internally isolated transistors with good matching in one multichip package
- BCR183S / U: For orientation in reel see package information below
- Pb-free (RoHS compliant) package <sup>1)</sup>
- Qualified according AEC Q101

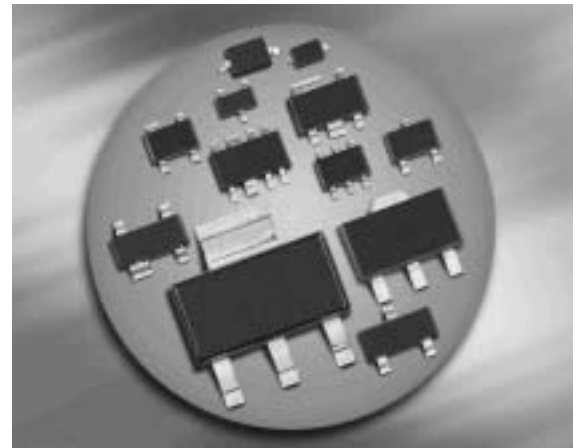

**BCR183/F**  
**BCR183W**

**BCR183S/U**



| Type    | Marking | Pin Configuration |      |      |      |      |      | Package |
|---------|---------|-------------------|------|------|------|------|------|---------|
| BCR183  | WMs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | SOT23   |
| BCR183F | WMs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | TSFP-3  |
| BCR183S | WMs     | 1=E1              | 2=B1 | 3=C2 | 4=E2 | 5=B2 | 6=C1 | SOT363  |
| BCR183U | WMs     | 1=E1              | 2=B1 | 3=C2 | 4=E2 | 5=B2 | 6=C1 | SC74    |
| BCR183W | WMs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | SOT323  |

<sup>1</sup>Pb-containing package may be available upon special request

**Maximum Ratings**

| Parameter                                                                                                                                                                                                                            | Symbol       | Value                           | Unit |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------------------|------|
| Collector-emitter voltage                                                                                                                                                                                                            | $V_{CEO}$    | 50                              | V    |
| Collector-base voltage                                                                                                                                                                                                               | $V_{CBO}$    | 50                              |      |
| Input forward voltage                                                                                                                                                                                                                | $V_{i(fwd)}$ | 40                              |      |
| Input reverse voltage                                                                                                                                                                                                                | $V_{i(rev)}$ | 10                              |      |
| Collector current                                                                                                                                                                                                                    | $I_C$        | 100                             | mA   |
| Total power dissipation-<br>BCR183, $T_S \leq 102^\circ\text{C}$<br>BCR183F, $T_S \leq 128^\circ\text{C}$<br>BCR183S, $T_S \leq 115^\circ\text{C}$<br>BCR183U, $T_S \leq 118^\circ\text{C}$<br>BCR183W, $T_S \leq 124^\circ\text{C}$ | $P_{tot}$    | 200<br>250<br>250<br>250<br>250 | mW   |
| Junction temperature                                                                                                                                                                                                                 | $T_j$        | 150                             |      |
| Storage temperature                                                                                                                                                                                                                  | $T_{stg}$    | -65 ... 150                     |      |

**Thermal Resistance**

| Parameter                                                                                      | Symbol     | Value                                                             | Unit |
|------------------------------------------------------------------------------------------------|------------|-------------------------------------------------------------------|------|
| Junction - soldering point <sup>1)</sup><br>BCR183<br>BCR183F<br>BCR183S<br>BCR183U<br>BCR183W | $R_{thJS}$ | $\leq 240$<br>$\leq 90$<br>$\leq 140$<br>$\leq 133$<br>$\leq 105$ | K/W  |

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance


**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                                                                             | Symbol                      | Values |      |      | Unit |
|-------------------------------------------------------------------------------------------------------|-----------------------------|--------|------|------|------|
|                                                                                                       |                             | min.   | typ. | max. |      |
| DC Characteristics                                                                                    |                             |        |      |      |      |
| Collector-emitter breakdown voltage<br>$I_C = 100\ \mu\text{A}$ , $I_B = 0$                           | $V_{(\text{BR})\text{CEO}}$ | 50     | -    | -    | V    |
| Collector-base breakdown voltage<br>$I_C = 10\ \mu\text{A}$ , $I_E = 0$                               | $V_{(\text{BR})\text{CBO}}$ | 50     | -    | -    |      |
| Collector-base cutoff current<br>$V_{\text{CB}} = 40\ \text{V}$ , $I_E = 0$                           | $I_{\text{CBO}}$            | -      | -    | 100  | nA   |
| Emitter-base cutoff current<br>$V_{\text{EB}} = 10\ \text{V}$ , $I_C = 0$                             | $I_{\text{EBO}}$            | -      | -    | 0.75 | mA   |
| DC current gain <sup>1)</sup><br>$I_C = 5\ \text{mA}$ , $V_{\text{CE}} = 5\ \text{V}$                 | $h_{\text{FE}}$             | 30     | -    | -    | -    |
| Collector-emitter saturation voltage <sup>1)</sup><br>$I_C = 10\ \text{mA}$ , $I_B = 0.5\ \text{mA}$  | $V_{\text{CEsat}}$          | -      | -    | 0.3  | V    |
| Input off voltage<br>$I_C = 100\ \mu\text{A}$ , $V_{\text{CE}} = 5\ \text{V}$                         | $V_{\text{i(off)}}$         | 0.8    | -    | 1.8  |      |
| Input on voltage<br>$I_C = 2\ \text{mA}$ , $V_{\text{CE}} = 0.3\ \text{V}$                            | $V_{\text{i(on)}}$          | 1      | -    | 2.5  |      |
| Input resistor                                                                                        | $R_1$                       | 7      | 10   | 13   | kΩ   |
| Resistor ratio                                                                                        | $R_1/R_2$                   | 0.9    | 1    | 1.1  | -    |
| AC Characteristics                                                                                    |                             |        |      |      |      |
| Transition frequency<br>$I_C = 10\ \text{mA}$ , $V_{\text{CE}} = 5\ \text{V}$ , $f = 100\ \text{MHz}$ | $f_{\text{T}}$              | -      | 200  | -    | MHz  |
| Collector-base capacitance<br>$V_{\text{CB}} = 10\ \text{V}$ , $f = 1\ \text{MHz}$                    | $C_{\text{cb}}$             | -      | 3    | -    | pF   |

<sup>1)</sup>Pulse test:  $t < 300\ \mu\text{s}$ ;  $D < 2\%$


### DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5 \text{ V}$  (common emitter configuration)

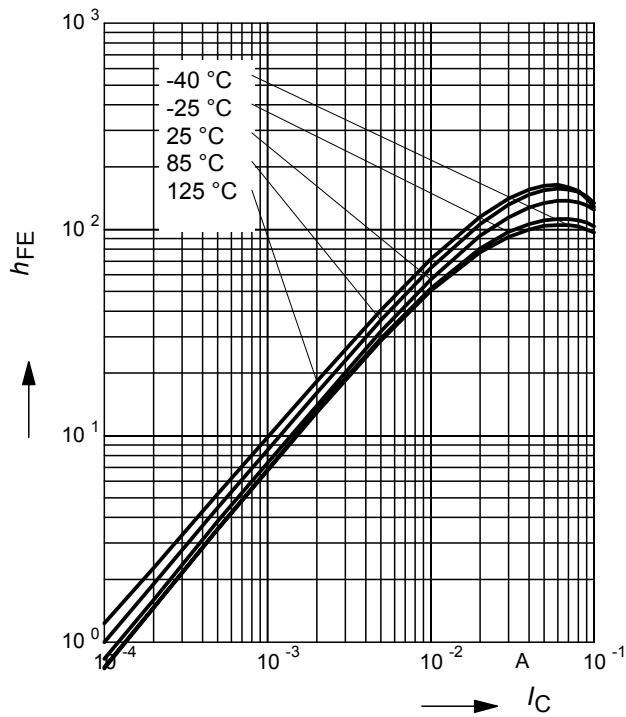


### Collector-emitter saturation voltage

$V_{CEsat} = f(I_C)$ ,  $I_C/I_B = 20$

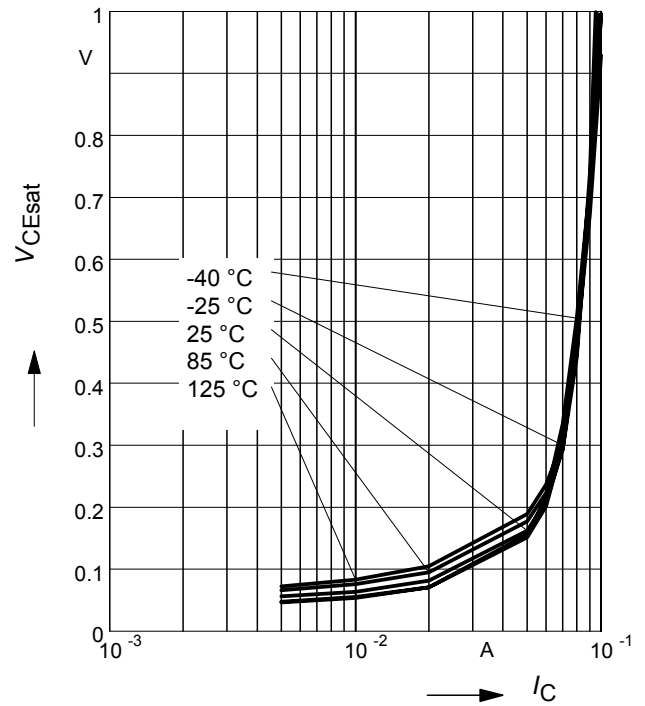


### Input on Voltage $V_{i(on)} = f(I_C)$

$V_{CE} = 0.3 \text{ V}$  (common emitter configuration)

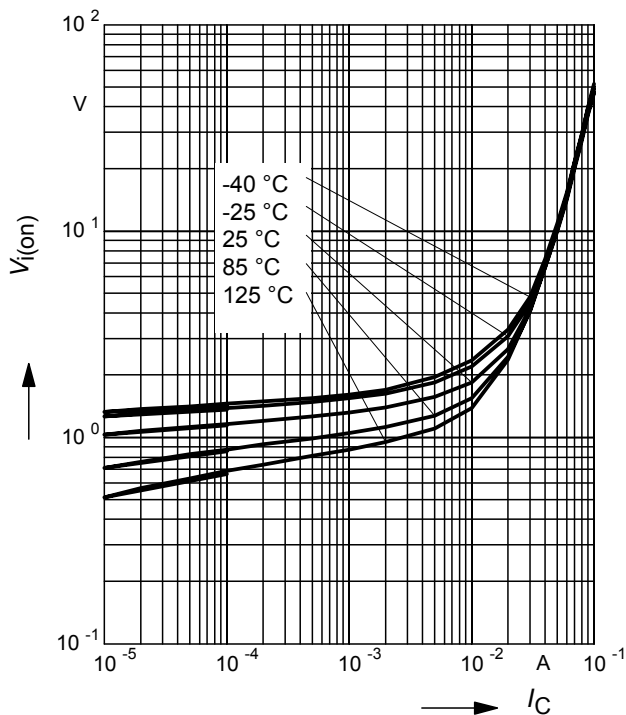


### Input off voltage $V_{i(off)} = f(I_C)$

$V_{CE} = 5 \text{ V}$  (common emitter configuration)

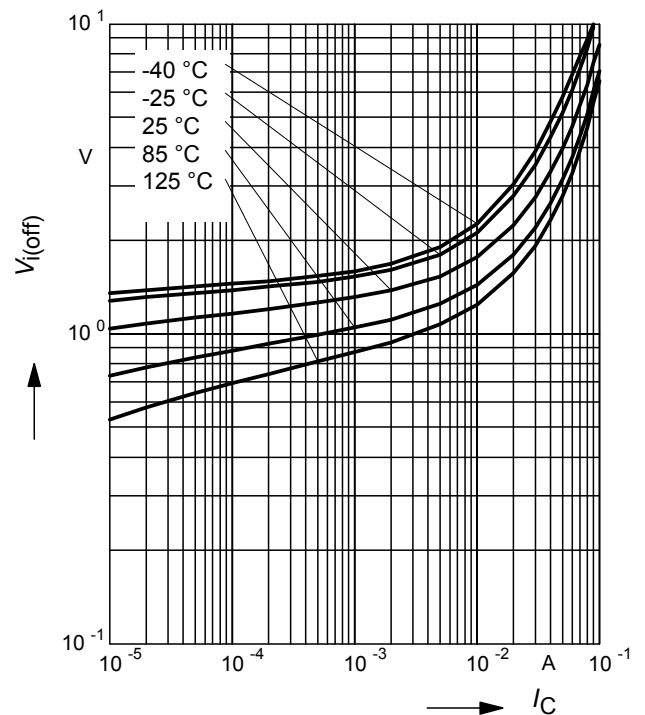


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

BCR183

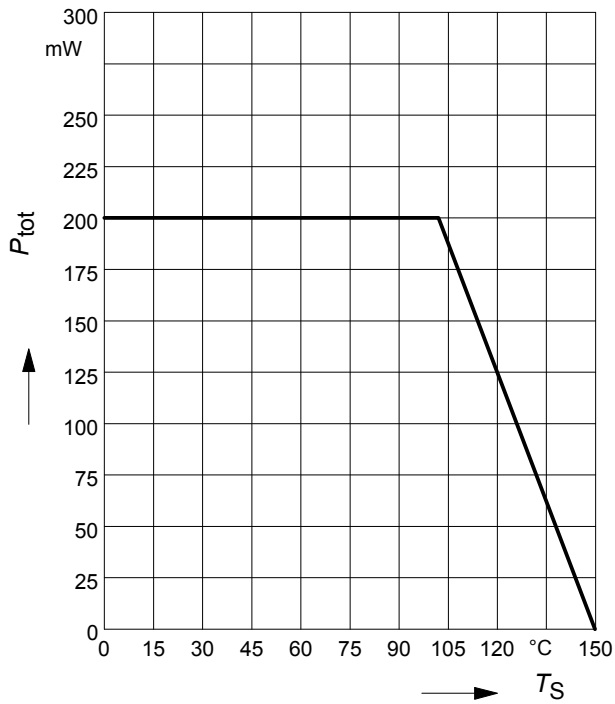


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

BCR183F

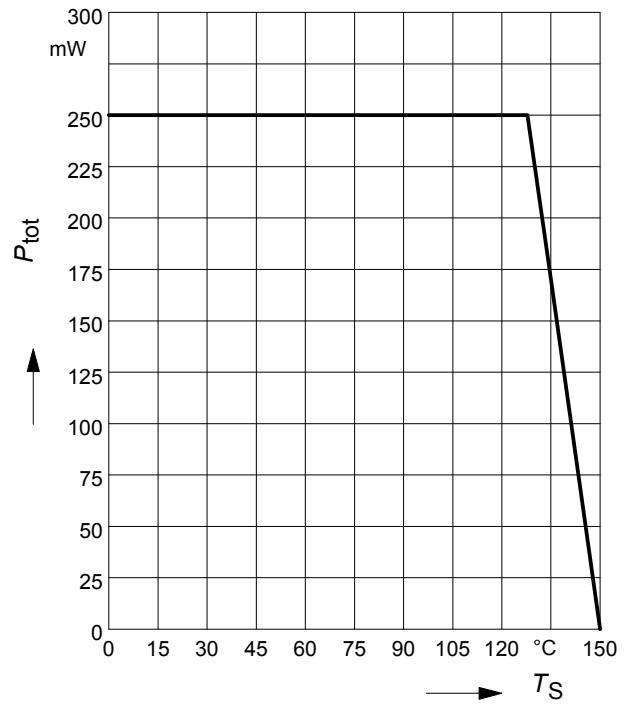


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

BCR183S

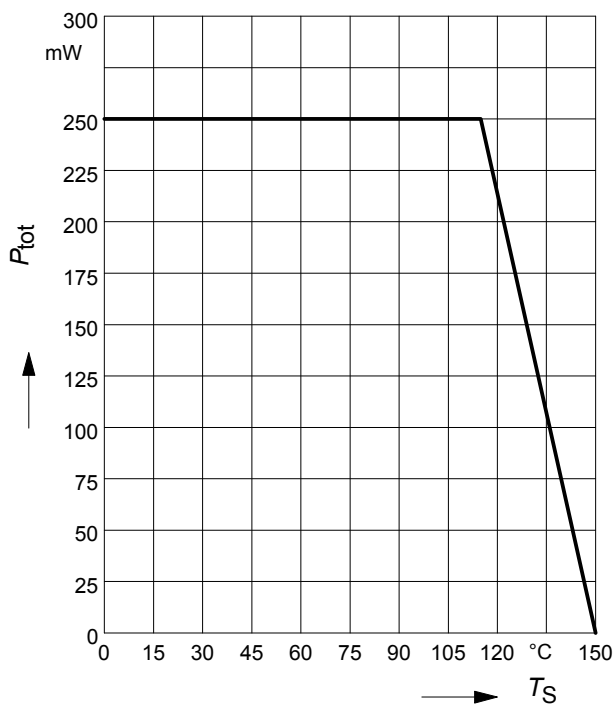


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

BCR183U

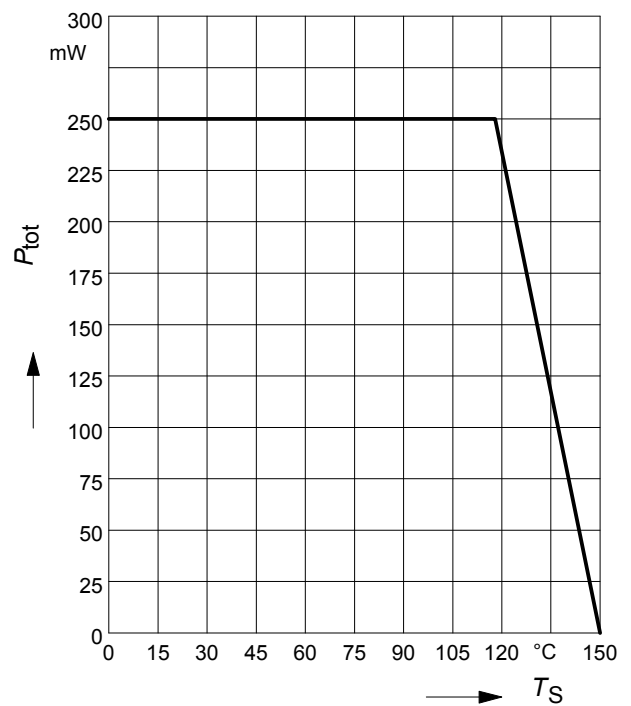


**Total power dissipation**  $P_{\text{tot}} = f(T_S)$

BCR183W

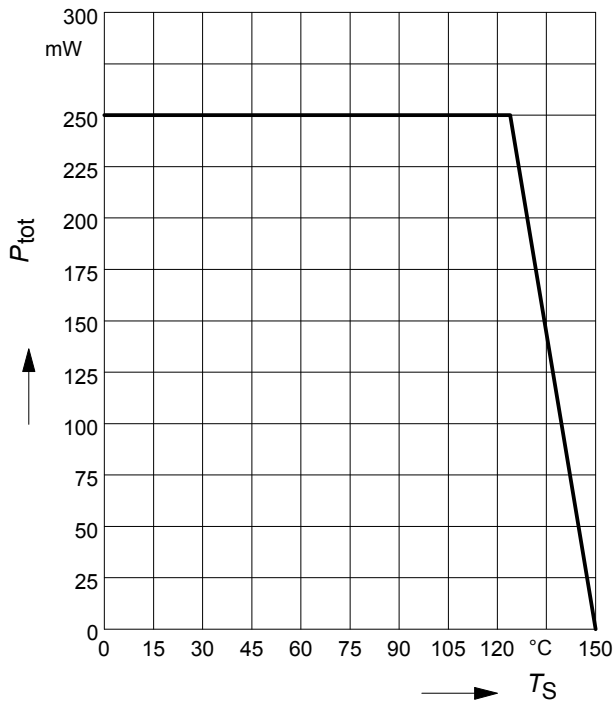

**Permissible Pulse Load**  $R_{\text{thJS}} = f(t_p)$


BCR183

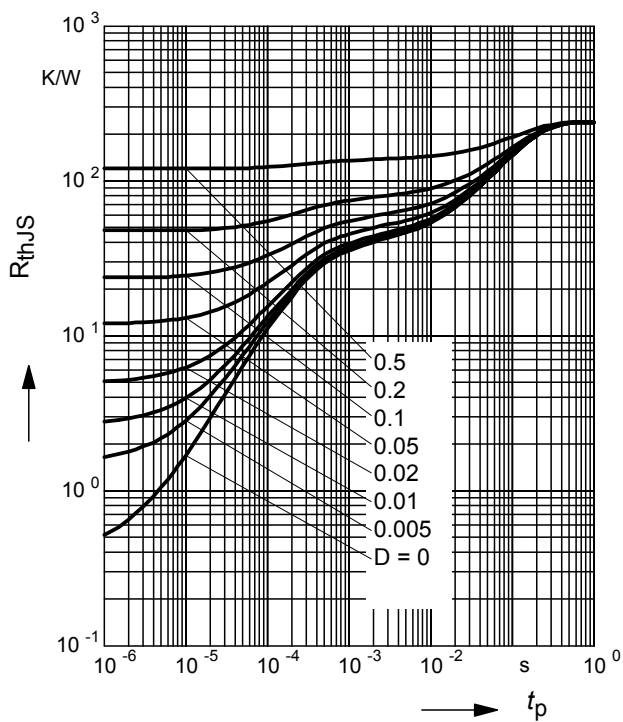

**Permissible Pulse Load**

$P_{\text{totmax}}/P_{\text{totDC}} = f(t_p)$

BCR183

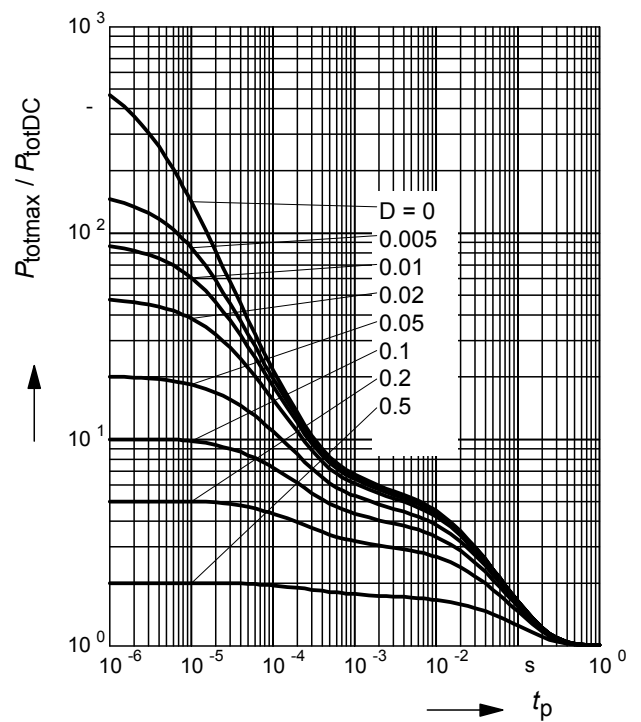

### Permissible Puls Load $R_{thJS} = f(t_p)$

BCR183F



### Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR183F



### Permissible Puls Load $R_{thJS} = f(t_p)$


BCR183S

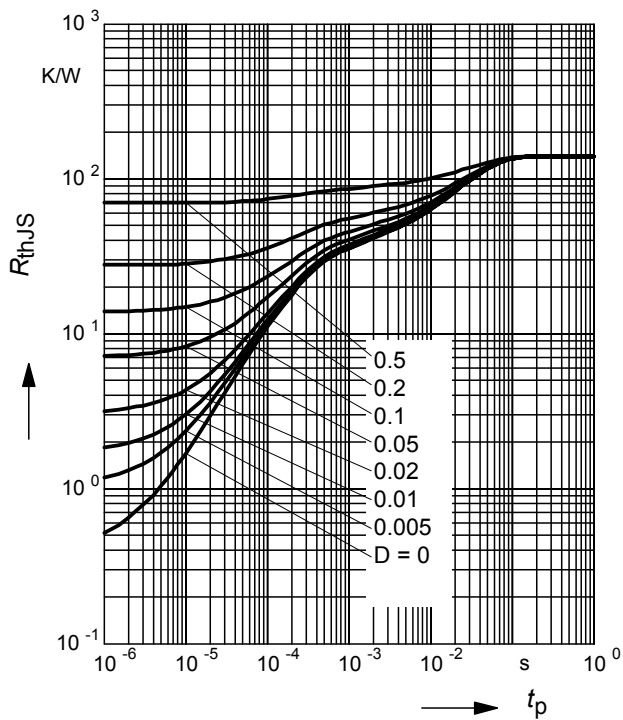

### Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR183S

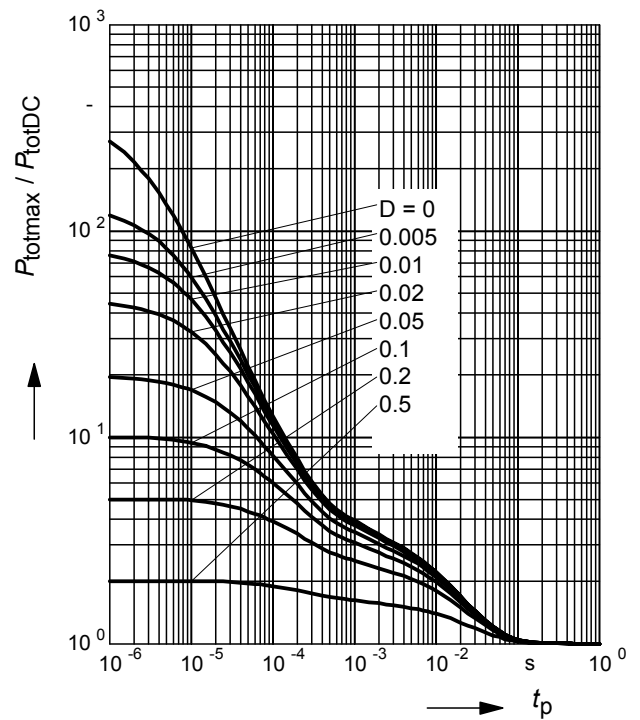

### Permissible Puls Load $R_{thJS} = f(t_p)$


BCR183U

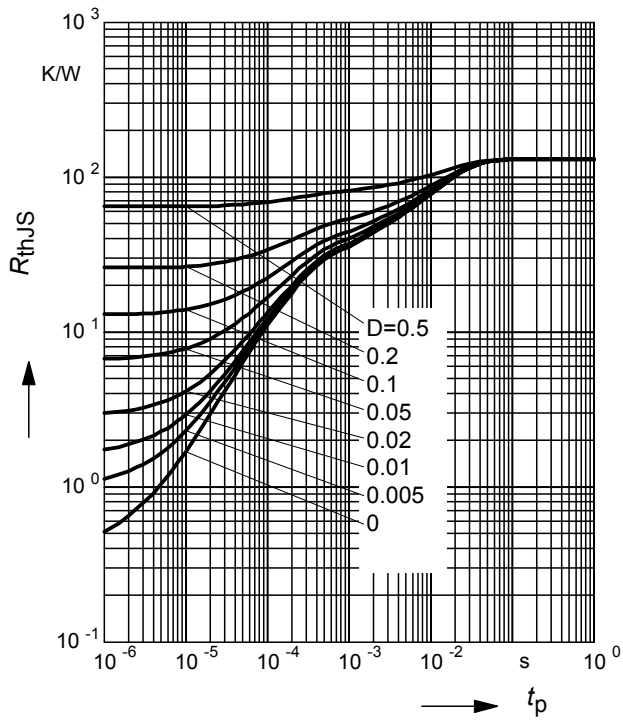

### Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR185U

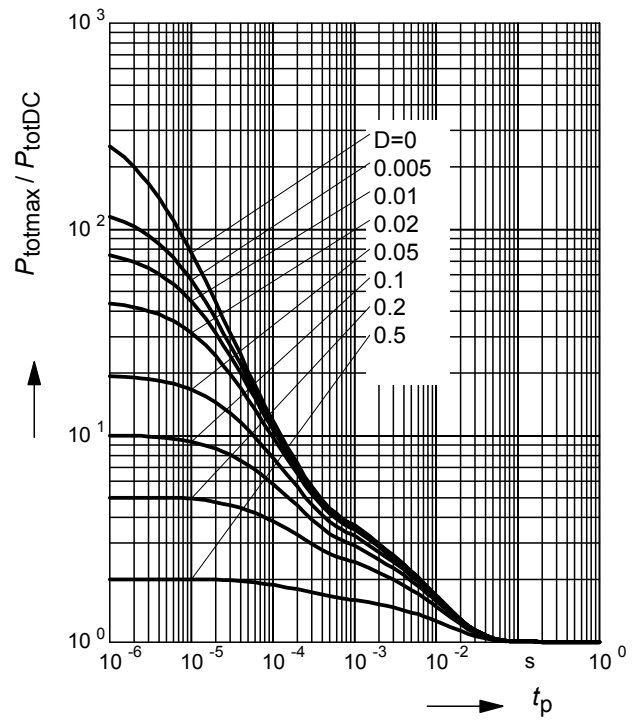

### Permissible Puls Load $R_{thJS} = f(t_p)$


BCR183W

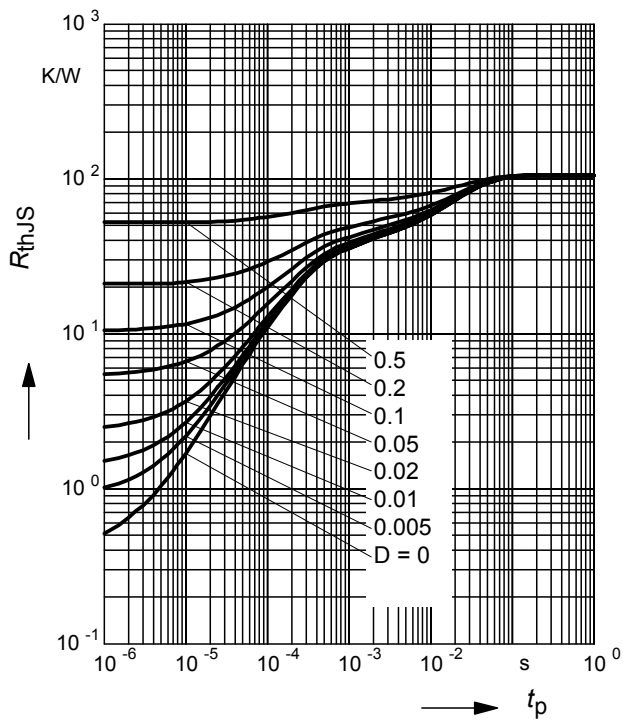


### Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$


BCR183W

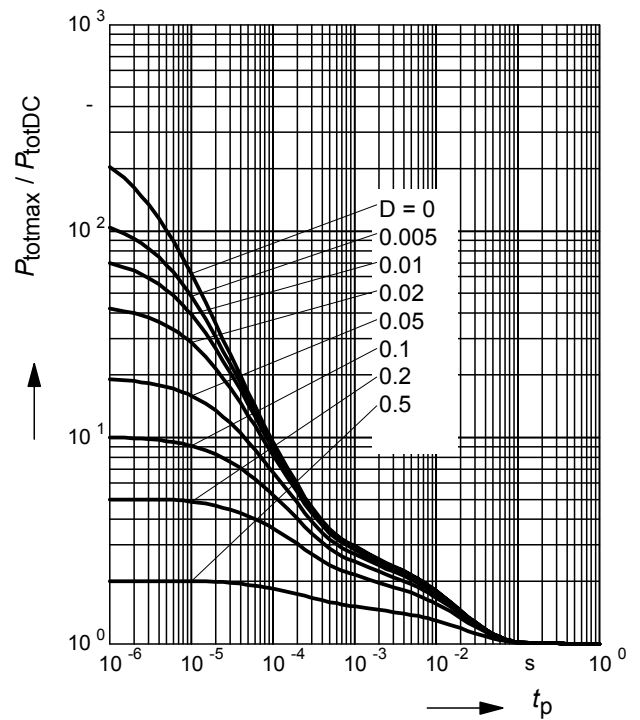

## Package Outline

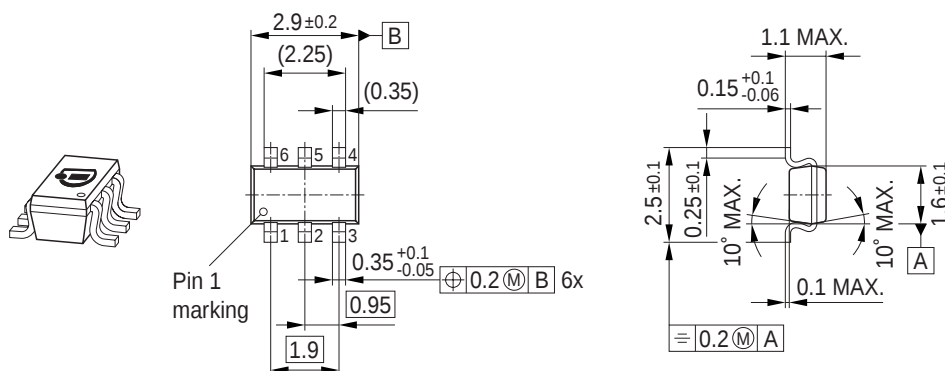


## Foot Print



## Marking Layout (Example)


Small variations in positioning of Date code, Type code and Manufacture are possible.

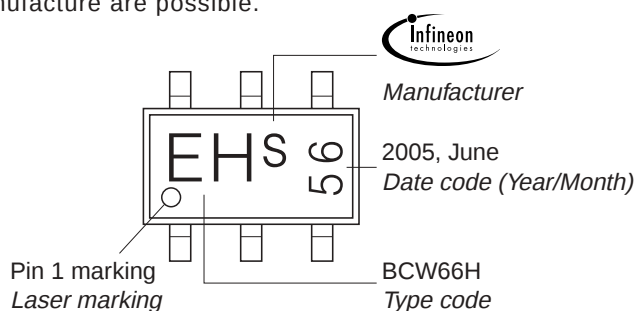


## Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
Reel ø330 mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

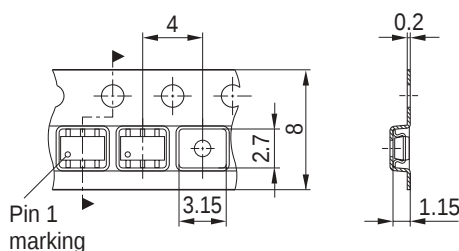


## Package Outline

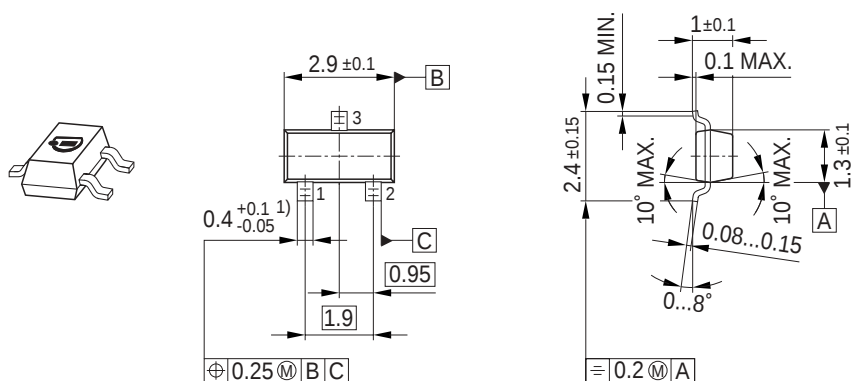


1) Lead width can be 0.6 max. in dambar area

## Foot Print




## Marking Layout (Example)

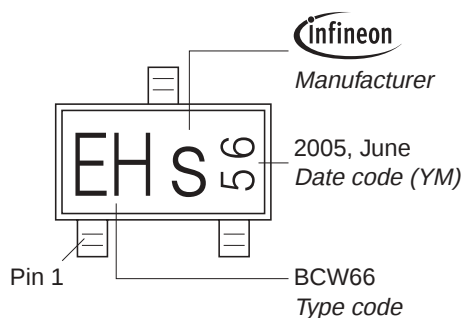


## Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel  
Reel ø330 mm = 10.000 Pieces/Reel

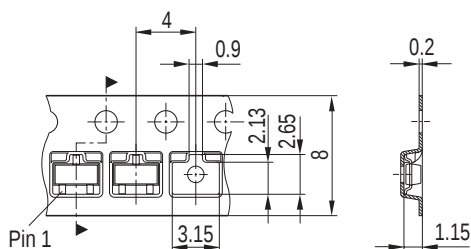


## Package Outline

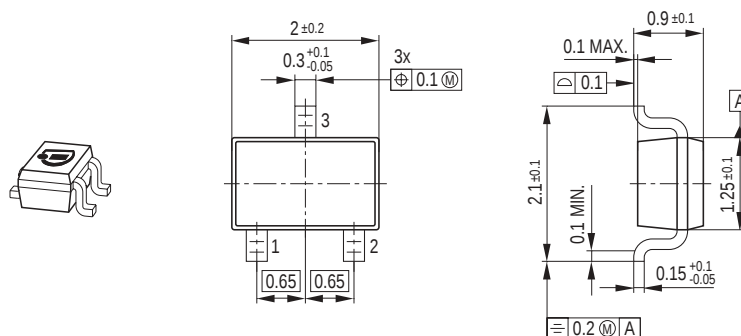

## Foot Print




## Marking Layout (Example)

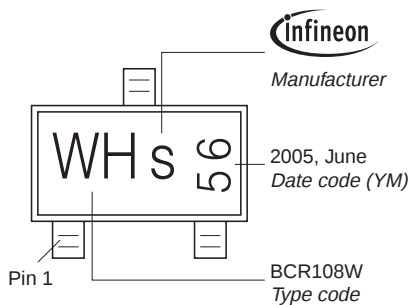


## Standard Packing


Reel  $\varnothing 180$  mm = 3.000 Pieces/Reel  
 Reel  $\varnothing 330$  mm = 10.000 Pieces/Reel

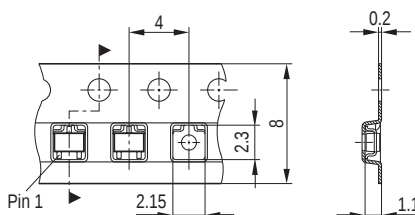

## Package Outline

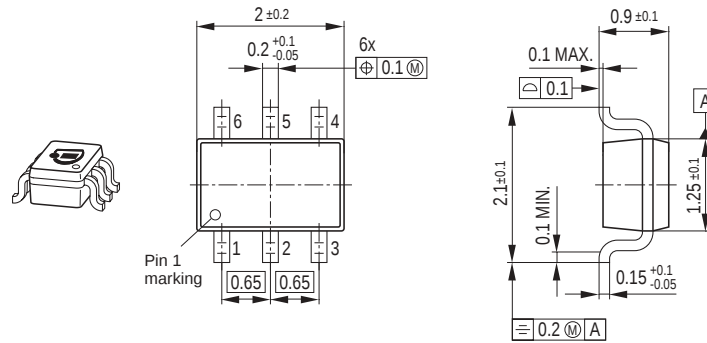


## Foot Print



## Marking Layout (Example)


Small variations in positioning of  
Date code, Type code and Manufacture are possible.

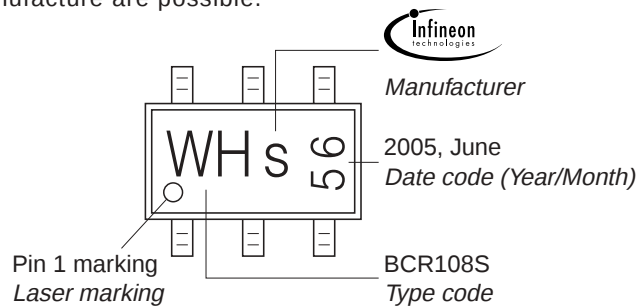

## Standard Packing

Reel  $\varnothing 180$  mm = 3.000 Pieces/Reel  
Reel  $\varnothing 330$  mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

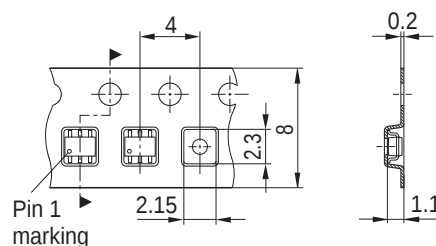

[illegible]

Technical drawing of a mechanical part with dimensions: 0.4, 0.45, 1.05, and 0.4.

Diagram illustrating the marking on the BCR847BF diode:

- infineon**: Manufacturer
- 1F S**: Type code
- Pin 1**: Pin 1

Technical drawing of a mechanical part showing a top view and a side view. The top view includes dimensions: 4, 0.3, 1.2, 1.5, 8, 1.35, and Pin 1. The side view includes dimensions: 0.2 and 0.7.

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

### **Attention please!**

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)