


# **Future Technology Devices International Ltd.**

## **FT4232H-56Q Mini Module**

### **USB Hi-Speed FT4232H Evaluation**

### **Module**


### **Datasheet**

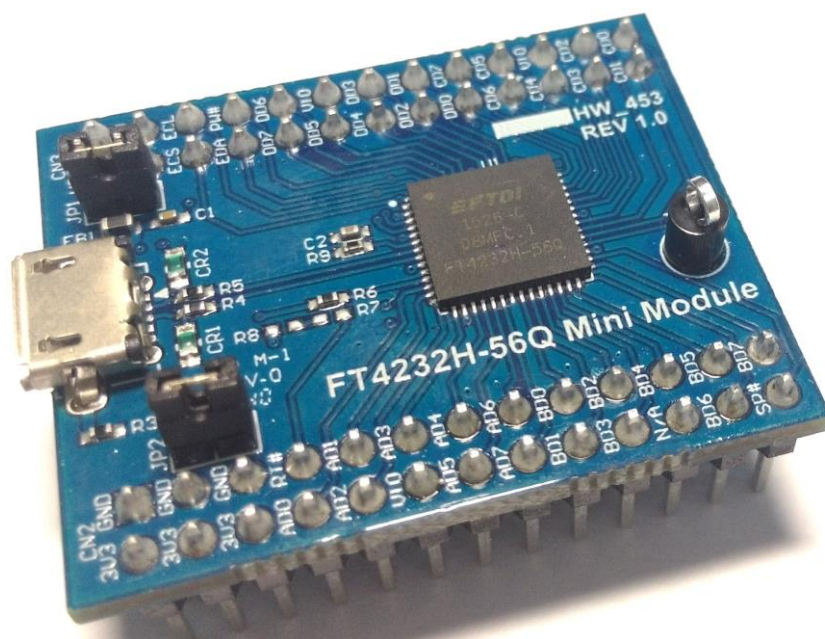

Neither the whole nor any part of the information contained in, or the product described in this manual, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. This product and its documentation are supplied on an as-is basis and no warranty as to their suitability for any particular purpose is either made or implied. Future Technology Devices International Ltd will not accept any claim for damages howsoever arising as a result of use or failure of this product. Your statutory rights are not affected. This product or any variant of it is not intended for use in any medical appliance, device or system in which the failure of the product might reasonably be expected to result in personal injury. This document provides preliminary information that may be subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Future Technology Devices International Ltd, Unit 1, 2 Seaward Place, Centurion Business Park, Glasgow, G41 1HH, United Kingdom. Scotland Registered Number: SC136640

## 1 Introduction

The FT4232H-56Q Mini Module is a USB-serial/FIFO development module in the FTDI product range which utilizes the FT4232H-56Q USB Hi-Speed four-port bridge chip which handles all the USB signalling and protocols. It is ideal for development purposes to quickly prove the functionality of adding USB to a target design. Refer to [FT4232H](#) datasheet for more details.

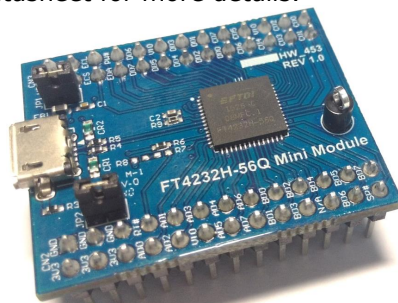


**Figure 1.1 FT4232H-56Q Mini Module**

The FT4232H-56Q on the Mini Module is FTDI's 5th generation of USB devices. The FT4232H is a USB 2.0 High Speed (480Mb/s) to UART/MPSSE IC. The device features four interfaces that can be independently configured for asynchronous or synchronous serial interfaces. Two of these have an option to independently configure an MPSSE engine. This allows the FT4232H to operate as two UART/Bit-Bang ports plus two MPSSE engines used to emulate JTAG, SPI, I<sup>2</sup>C, Bit-bang or other synchronous serial modes. All components used, including the FT4232H-56Q are Pb-free (RoHS compliant).

The FT4232H-56Q Mini Module connects the signals of the FT4232H-56Q IC to two 26-pin dual-row headers which allow easy connection to PCB header sockets and ribbon cables.

The FT4232H-56Q Mini Module requires USB device drivers, available free from <http://www.ftdichip.com>, which are used to make the FT4232H-56Q on the Mini Module appear as a four virtual COM ports (VCP). This then allows the user to communicate with the USB interface via a standard PC serial emulation port (TTY). Another FTDI USB driver, the D2XX driver, can also be used with application software to directly access the FT4232H on the Mini Module through a DLL. This is illustrated in Figure 1.2.

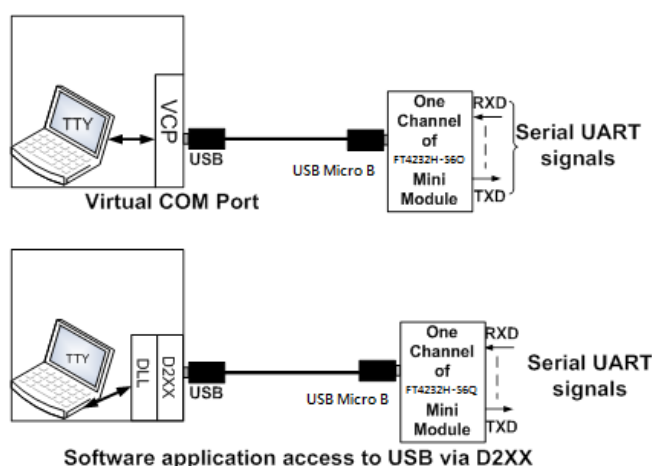

**Figure 1.2 Using the FT4232H-56Q Mini Module**

Device Drivers for the FT4232H-56Q Mini Module are available free from <http://www.ftdichip.com>.

## **1.1 USB Compliant**

The FT4232H-56Q Mini Modules are fully compliant with the USB 2.0 specification.



## **Table of Contents**

|          |                                                       |           |
|----------|-------------------------------------------------------|-----------|
| <b>1</b> | <b>Introduction .....</b>                             | <b>1</b>  |
| 1.1      | USB Compliant .....                                   | 2         |
| <b>2</b> | <b>Typical Applications .....</b>                     | <b>4</b>  |
| 2.1      | Driver Support .....                                  | 4         |
| 2.2      | Features.....                                         | 4         |
| <b>3</b> | <b>Electrical Details .....</b>                       | <b>5</b>  |
| <b>4</b> | <b>Mechanical details.....</b>                        | <b>7</b>  |
| <b>5</b> | <b>Schematic Diagram .....</b>                        | <b>8</b>  |
| <b>6</b> | <b>Contact Information.....</b>                       | <b>9</b>  |
|          | <b>Appendix A – References .....</b>                  | <b>12</b> |
|          | Document References .....                             | 12        |
|          | Acronyms and Abbreviations .....                      | 12        |
|          | <b>Appendix B – List Table and List Figures.....</b>  | <b>13</b> |
|          | List of Tables .....                                  | 13        |
|          | List of Figures .....                                 | 13        |
|          | <b>Appendix C – FT4232H EEPROM Configuration.....</b> | <b>14</b> |
|          | <b>Appendix D – Revision History .....</b>            | <b>15</b> |

## 2 Typical Applications

- Rapid USB integration into existing electronic systems.
- Prototyping platform for USB interface on new systems.
- USB to multi-port JTAG, SPI and I<sup>2</sup>C interfaces (Two Multi-Protocol Synchronous Serial Engines – MPSSE – available with the FT4232H)
- USB to multi-port asynchronous serial interfaces (up to 4 ports available).
- Four independent ports available, two of which may be configured for MPSSE mode.

### 2.1 Driver Support

#### **Royalty free VIRTUAL COM PORT (VCP) DRIVERS for...**

- Windows 10 32,64-bit
- Windows 8/8.1 32,64-bit
- Windows 7 32,64-bit
- Windows Vista and Vista 64-bit
- Windows XP and XP 64-bit
- Windows 98, 98SE, ME, 2000, Server 2003, XP, Server 2008 and server 2012 R2
- Windows XP Embedded
- Windows CE 4.2, 5.0 and 6.0
- Mac OS 8/9, OS-X
- Linux 2.4 and greater

#### **Royalty free D2XX Direct Drivers (USB Drivers + DLL S/W Interface)**

- Windows 10 32,64-bit
- Windows 8/8.1 32,64-bit
- Windows 7 32,64-bit
- Windows Vista and Vista 64-bit
- Windows XP and XP 64-bit
- Windows 98, 98SE, ME, 2000, Server 2003, XP, Server 2008 and server 2012 R2
- Windows XP Embedded
- Windows CE 4.2, 5.0 and 6.0
- Linux 2.4 and greater
- Android(J2xx)

The drivers listed above are all available to download for free from [www.ftdichip.com](http://www.ftdichip.com).


### 2.2 Features

The FT4232H-56Q Mini Module has the following features:

- USB 2.0 Hi-Speed compatible
- Reduced development time
- Rapid integration into existing systems
- USB powered – no external power supply needed
- Based on the USB Hi-Speed FT4232H-56Q device
- Entire USB protocol handled by USB module
- Small USB Micro B connector common on many commercial devices
- Asynchronous Serial data transfer rates from 300 baud to 12 Mbaud at TTL levels
- Synchronous Serial (MPSSE) data rates of up to 30Mbps on JTAG, SPI and I<sup>2</sup>C
- Support for USB suspend and resume
- UHCI / OHCI / EHCI host controller compatible
- -40°C to +85°C operating temperature range
- The FT4232H-56Q is the QFN-56 pin package.

### 3 Electrical Details

The electrical details and connections to the FT4232H-56Q Mini Module are shown in Figure 3.1 and Table 3.1 and Table 3.2.

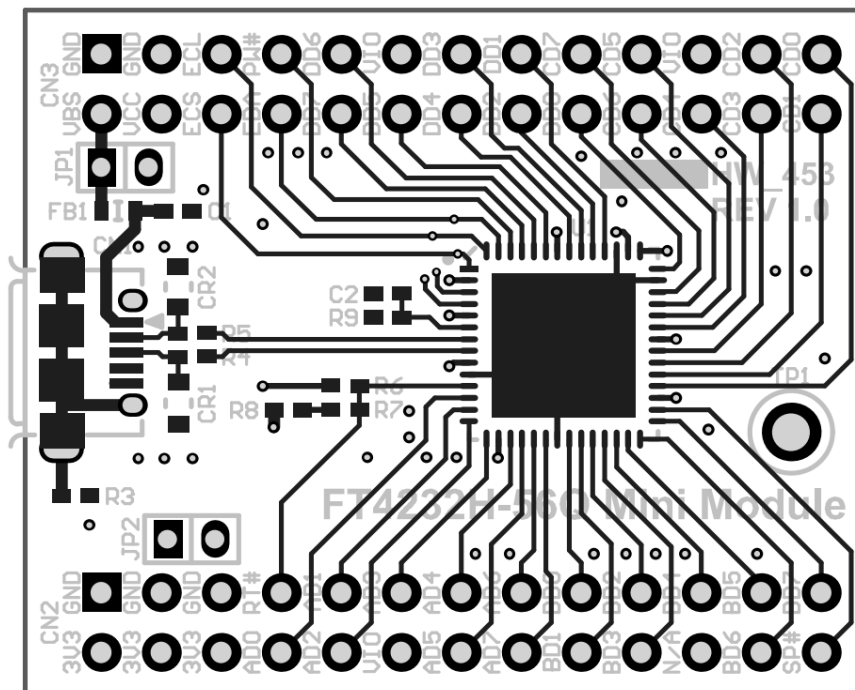

**Figure 3.1 FT4232H-56Q Mini Module Electrical Connections (Top View)**

| Connector Pin | Name     | Description                                     |
|---------------|----------|-------------------------------------------------|
| CN2-1         | GND      | 0V Power pin                                    |
| CN2-2         | V3V3     | 3.3VDC generated from VCC (output)              |
| CN2-3         | GND      | 0V Power pin                                    |
| CN2-4         | V3V3     | 3.3VDC generated from VCC (output)              |
| CN2-5         | GND      | 0V Power pin                                    |
| CN2-6         | V3V3     | 3.3VDC generated from VCC (output)              |
| CN2-7         | RESET#   | FT4232H-56Q RESET# pin                          |
| CN2-8         | AD0      | FT4232H-56Q AD0 pin                             |
| CN2-9         | AD1      | FT4232H-56Q AD1 pin                             |
| CN2-10        | AD2      | FT4232H-56Q AD2 pin                             |
| CN2-11        | AD3      | FT4232H-56Q AD3 pin                             |
| CN2-12        | VIO      | Connected to all FT4232H-56Q VCCIO pins (input) |
| CN2-13        | AD4      | FT4232H-56Q AD4 pin                             |
| CN2-14        | AD5      | FT4232H-56Q AD5 pin                             |
| CN2-15        | AD6      | FT4232H-56Q AD6 pin                             |
| CN2-16        | AD7      | FT4232H-56Q AD7 pin                             |
| CN2-17        | BD0      | FT4232H-56Q BD0 pin                             |
| CN2-18        | BD1      | FT4232H-56Q BD1 pin                             |
| CN2-19        | BD2      | FT4232H-56Q BD2 pin                             |
| CN2-20        | BD3      | FT4232H-56Q BD3pin                              |
| CN2-21        | BD4      | FT4232H-56Q BD4 pin                             |
| CN2-22        | N/A      | 0                                               |
| CN2-23        | BD5      | FT4232H-56Q BD5 pin                             |
| CN2-24        | BD6      | FT4232H-56Q BD6 pin                             |
| CN2-25        | BD7      | FT4232H-56Q BD7 pin                             |
| CN2-26        | SUSPEND# | FT4232H-56Q SUSPEND# pin                        |

**Table 3.1 FT4232H-56Q Mini Module Connection – CN2**

| Connector Pin | Name   | Description                                                |
|---------------|--------|------------------------------------------------------------|
| CN3-1         | GND    | 0V Power pin                                               |
| CN3-2         | VBUS   | USB VBUS power pin (output)                                |
| CN3-3         | GND    | 0V Power pin                                               |
| CN3-4         | VCC    | +5V Power pin (input) used to generate V3V3, VPLL and VUSB |
| CN3-5         | CLK    | FT4232H-56Q EECLK pin                                      |
| CN3-6         | CS     | FT4232H-56Q EECS pin                                       |
| CN3-7         | PWREN# | FT4232H-56Q PWREN#                                         |
| CN3-8         | DATA   | FT4232H-56Q EEDATA pin                                     |
| CN3-9         | DD6    | FT4232H-56Q DD6 pin                                        |
| CN3-10        | DD7    | FT4232H-56Q DD7 pin                                        |
| CN3-11        | VIO    | Connected to all FT4232H-56Q VCCIO pins (input)            |
| CN3-12        | DD5    | FT4232H-56Q DD5 pin                                        |
| CN3-13        | DD3    | FT4232H-56Q DD3 pin                                        |
| CN3-14        | DD4    | FT4232H-56Q DD4 pin                                        |
| CN3-15        | DD1    | FT4232H-56Q DD1 pin                                        |
| CN3-16        | DD2    | FT4232H-56Q DD2 pin                                        |
| CN3-17        | CD7    | FT4232H-56Q CD7 pin                                        |
| CN3-18        | DD0    | FT4232H-56Q DD0 pin                                        |
| CN3-19        | CD5    | FT4232H-56Q CD5 pin                                        |
| CN3-20        | CD6    | FT4232H-56Q CD6 pin                                        |
| CN3-21        | VIO    | Connected to all FT4232H-56Q VCCIO pins (input)            |
| CN3-22        | CD4    | FT4232H-56Q CD4 pin                                        |
| CN3-23        | CD2    | FT4232H-56Q CD2 pin                                        |
| CN3-24        | CD3    | FT4232H-56Q CD3 pin                                        |
| CN3-25        | CD0    | FT4232H-56Q CD0 pin                                        |
| CN3-26        | CD1    | FT4232H-56Q CD1 pin                                        |

**Table 3.2 FT4232H-56Q Mini Module Connection – CN3**

In most cases, the FT4232H-56Q pin is connected directly to the associated pin on CN2 or CN3. The FT4232H-56Q Mini Module allows configuration with both USB Bus-powered designs and USB Self-powered designs:

#### **USB Bus-powered:**

- 1) JP1 is connected VBUS to VCC (CN3, pin 2 to CN3, pin 4).** This connection takes the power from the USB bus (VBUS) and connects it to the voltage regulator input on the FT4232H-56Q Mini Module. The voltage regulator, in turn, provides V3V3, VPLL and VUSB power inputs to the FT4232H-56Q chip.
- 2) JP2 is connected V3V3 to VIO (CN2, pins 2, 4 & 6 to CN2, pins 12 and CN3, pins 11 & 21).** This connection provides the correct 3.3VDC operating voltage for VCCIO on the FT4232H-56Q chip.

#### **USB Self-Powered:**

- 1) Remove the JP1 and JP2 jumper.**
- 2) Leave VBUS (CN3, pin 2) unconnected.**
- 3) Connect an external 5.0VDC power supply to VCC (5.0VDC to CN3, pin 4).** This connection takes power from an external power supply and connects it to the voltage regulator input on the FT4232H-56Q Mini Module. See the FT4232H data sheet for allowable VCC input voltage ranges.
- 4) Connect V3V3 to VIO (CN2, pins 2, 4 & 6 to CN2, pins 12 and CN3, pins 11 & 21).** This connection provides the correct 3.3VDC operating voltage for VCCIO on the FT4232H-56Q chip.
- 5) Use FT\_Prog to change the USB power descriptor to "Self-Powered".** This setting indicates to the host system that the USB Host port does not need to supply power to the device. FT\_Prog is a utility provided by FTDI to program various features of the FT-series USB client ICs. In order to access settings for the FT4232H-56Q, FT\_Prog is required. [FT\\_PROG](#) is available via the [Utilities](#) section of the [FTDI web site](#).

The mechanical details of the FT4232H-560 Mini Module are shown in Figure 4.1:



The Micro-B USB connector has a height of 2.8mm.

## 5 Schematic Diagram

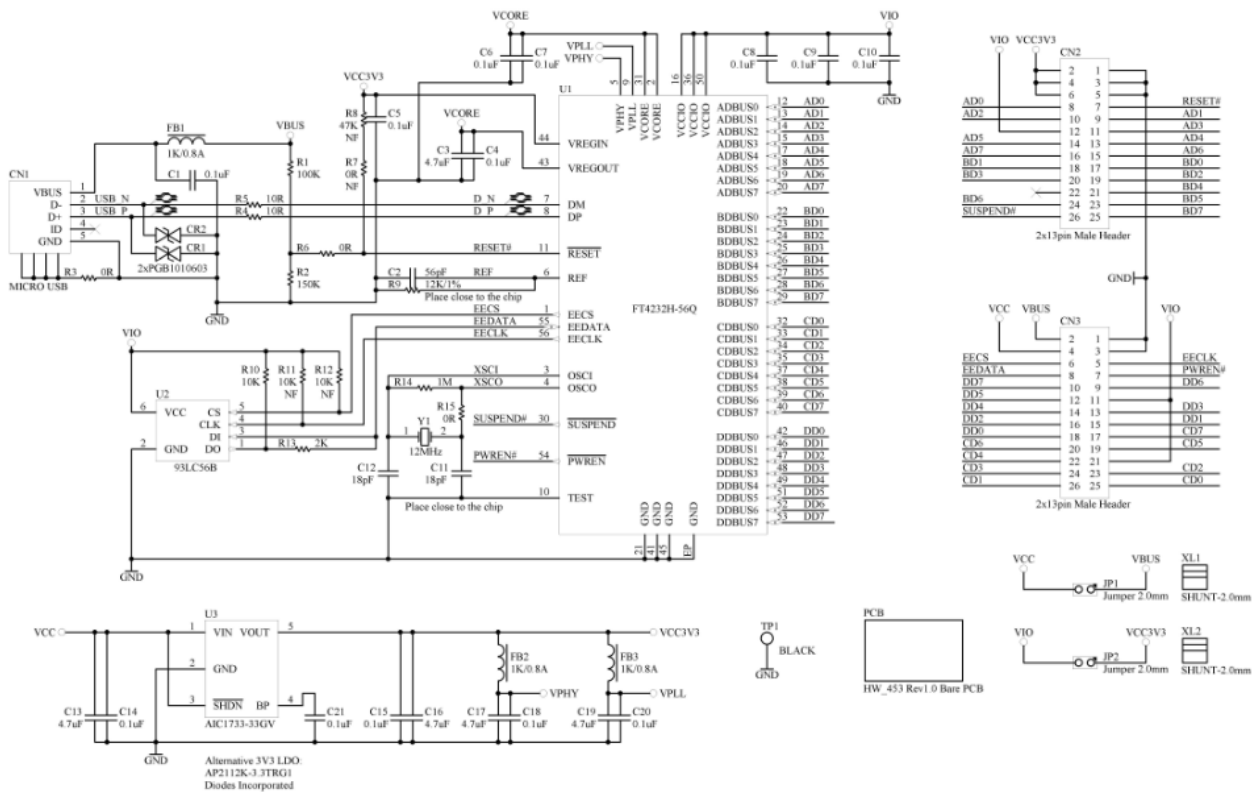


Figure 5.1 FT4232H-56Q Mini Module Schematic

## 6 Contact Information

### Head Office – Glasgow, UK

Future Technology Devices International Limited  
Unit 1, 2 Seaward Place, Centurion Business Park  
Glasgow G41 1HH  
United Kingdom  
Tel: +44 (0) 141 429 2777  
Fax: +44 (0) 141 429 2758

E-mail (Sales) [sales1@ftdichip.com](mailto:sales1@ftdichip.com)  
E-mail (Support) [support1@ftdichip.com](mailto:support1@ftdichip.com)  
E-mail (General Enquiries) [admin1@ftdichip.com](mailto:admin1@ftdichip.com)

### Branch Office – Taipei, Taiwan

Future Technology Devices International Limited (Taiwan)  
2F, No. 516, Sec. 1, NeiHu Road  
Taipei 114  
Taiwan, R.O.C.  
Tel: +886 (0) 2 8797 1330  
Fax: +886 (0) 2 8751 9737

E-mail (Sales) [asia.sales1@ftdichip.com](mailto:asia.sales1@ftdichip.com)  
E-mail (Support) [asia.support1@ftdichip.com](mailto:asia.support1@ftdichip.com)  
E-mail (General Enquiries) [asia.admin1@ftdichip.com](mailto:asia.admin1@ftdichip.com)

### Branch Office – Hillsboro, Oregon, USA

Future Technology Devices International Limited (USA)  
7235 NW Evergreen Parkway, Suite 600  
Hillsboro, OR 97123-5803  
USA  
Tel: +1 (503) 547 0988  
Fax: +1 (503) 547 0987

E-Mail (Sales) [us.sales@ftdichip.com](mailto:us.sales@ftdichip.com)  
E-Mail (Support) [us.support@ftdichip.com](mailto:us.support@ftdichip.com)  
E-Mail (General Enquiries) [us.admin@ftdichip.com](mailto:us.admin@ftdichip.com)

### Branch Office – Shanghai, China

Future Technology Devices International Limited (China)  
Room 1103, No. 666,  
West Huaihai Road,  
Shanghai, 200052  
China  
Tel: +86 21 62351596  
Fax: +86 21 62351595

E-mail (Sales) [cn.sales@ftdichip.com](mailto:cn.sales@ftdichip.com)  
E-mail (Support) [cn.support@ftdichip.com](mailto:cn.support@ftdichip.com)  
E-mail (General Enquiries) [cn.admin@ftdichip.com](mailto:cn.admin@ftdichip.com)

### Web Site

<http://ftdichip.com>

### Distributor and Sales Representatives

Please visit the Sales Network page of the [FTDI Web site](#) for the contact details of our distributor(s) and sales representative(s) in your country.

System and equipment manufacturers and designers are responsible to ensure that their systems, and any Future Technology Devices International Ltd (FTDI) devices incorporated in their systems, meet all applicable safety, regulatory and system-level performance requirements. All application-related information in this document (including application descriptions, suggested FTDI devices and other materials) is provided for reference only. While FTDI has taken care to assure it is accurate, this information is subject to customer confirmation, and FTDI disclaims all liability for system designs and for any applications assistance provided by FTDI. Use of FTDI devices in life support and/or safety applications is entirely at the user's risk, and the user agrees to defend, indemnify and hold harmless FTDI from any and all damages, claims, suits or expense resulting from such use. This document is subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Neither the whole nor any part of the information contained in, or the product described in this document, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. Future Technology Devices International Ltd, Unit 1, 2 Seaward Place, Centurion Business Park, Glasgow G41 1HH, United Kingdom. Scotland Registered Company Number: SC136640

## Appendix A – References

### Document References

#### FT\_PROG Utility

[http://www.ftdichip.com/Support/Utilities.htm#FT\\_Prog](http://www.ftdichip.com/Support/Utilities.htm#FT_Prog)

### Acronyms and Abbreviations

| Terms  | Description                                         |
|--------|-----------------------------------------------------|
| DLL    | Dynamic Link Library                                |
| EEPROM | Electrically Erasable Programmable Read Only Memory |
| EHCI   | Extensible Host Controller Interface                |
| FIFO   | First In First Out                                  |
| IC     | Integrated Circuit                                  |
| I2C    | Inter-Integrated Circuit                            |
| JTAG   | Joint Test Action Group                             |
| MPSSE  | Multi-Protocol Synchronous Serial Engines           |
| OHCI   | Open Host Controller Interface                      |
| PCB    | Printed Circuit Board                               |
| RoHS   | Restriction of Hazardous Substances Directive       |
| SPI    | Serial Peripheral Interface                         |
| UART   | Universal Asynchronous Receiver/Transmitter         |
| UHCI   | Universal Host Controller Interface                 |
| USB    | Universal Serial Bus                                |
| VBUS   | Virtual BUS                                         |
| VCC    | Voltage at the Common Collector                     |
| VCP    | Virtual COM Ports                                   |

## **Appendix B – List Table and List Figures**

### **List of Tables**

|                                                                            |   |
|----------------------------------------------------------------------------|---|
| Figure 1.1 FT4232H-56Q Mini Module.....                                    | 1 |
| Figure 1.2 Using the FT4232H-56Q Mini Module.....                          | 1 |
| Figure 3.1 FT4232H-56Q Mini Module Electrical Connections (Top View) ..... | 5 |
| Figure 4.1 FT4232H-56Q Mini Module Dimensions.....                         | 7 |
| Figure 5.1 FT4232H-56Q Mini Module Schematic.....                          | 8 |

### **List of Figures**

|                                                                            |   |
|----------------------------------------------------------------------------|---|
| Figure 1.1 FT4232H-56Q Mini Module.....                                    | 1 |
| Figure 1.2 Using the FT4232H-56Q Mini Module.....                          | 1 |
| Figure 3.1 FT4232H-56Q Mini Module Electrical Connections (Top View) ..... | 5 |
| Figure 4.1 FT4232H-56Q Mini Module Dimensions.....                         | 7 |
| Figure 5.1 FT4232H-56Q Mini Module Schematic.....                          | 8 |

## Appendix C – FT4232H EEPROM Configuration

The FT4232H Mini Module utilizes an EEPROM which contains the USB configuration descriptors for the FT4232H. When the Mini Module is plugged into a PC or a USB reset is performed, the PC will read these descriptors. The default values stored into the EEPROM are defined in Table 0.1.

| Parameter                         | Value                   | Notes                                                                                                                                                                  |
|-----------------------------------|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| USB Vendor ID (VID)               | 0403h                   | FTDI default VID (hex)                                                                                                                                                 |
| USB Product ID (PID)              | 6011h                   | FTDI default PID (hex)                                                                                                                                                 |
| Serial Number Enabled?            | Yes                     |                                                                                                                                                                        |
| Serial Number                     | See Note                | A unique serial number is generated and programmed into the EEPROM during device final test.                                                                           |
| Pull down I/O Pins in USB Suspend | Disabled                | Enabling this option will make the device pull down on the UART interface lines when the power is shut off (PWREN# is high).                                           |
| Manufacturer Name                 | FTDI                    |                                                                                                                                                                        |
| Product Description               | FT4232H-56Q Mini Module |                                                                                                                                                                        |
| Max Bus Power Current             | 500mA                   |                                                                                                                                                                        |
| Power Source                      | Bus Powered             |                                                                                                                                                                        |
| Device Type                       | FT4232H                 |                                                                                                                                                                        |
| USB Version                       | 0200                    | Returns USB 2.0 device description to the host.<br>Note: The device is being a USB 2.0 Full Speed device (12Mb/s) as opposed to a USB 2.0 High Speed device (480Mb/s). |
| Remote Wake Up                    | Enabled                 | Taking RI# low will wake up the USB host controller from suspend.                                                                                                      |
| High Current I/Os                 | Enabled                 | Enables the high drive level on the UART and CBUS I/O pins.                                                                                                            |
| Load VCP Driver                   | Disabled                | Makes the device load the VCP driver interface for the device.                                                                                                         |

**Table 0.1 Default Internal EEPROM Configuration**

The EEPROM on the FT4232H-56Q Mini Module can be re-programmed over USB using the utility program FT\_PROG. FT\_PROG can be downloaded from [www.ftdichip.com/Support/Utilities.htm](http://www.ftdichip.com/Support/Utilities.htm). Users who do not have their own USB Vendor ID but who would like to use a unique Product ID in their design can apply to FTDI for a free block of unique PIDs. Contact FTDI support for this service.

## Appendix D – Revision History

Document Title: FT4232H-56Q Mini Module Datasheet

Document Reference No.: FT\_001273

Clearance No.: FTDI#491

Product Page: <http://www.ftdichip.com/Products/>

Document Feedback: [Send Feedback](#)

| Revision | Changes                                                                 | Date       |
|----------|-------------------------------------------------------------------------|------------|
| 1.0      | Initial Release                                                         | 16-03-2016 |
| 1.1      | Updated tables 3.1 and 3.2. Added additional measurements to table 4.1. | 08-05-2018 |
| 1.2      | Updated Table 3.2 CN3 label.                                            | 24-01-2019 |
| 1.3      | Updated Figure 5.1                                                      | 16-01-2020 |
| 1.4      | Changed to pin numbers on page 7-8.                                     | 04-07-2020 |

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)