

V3 83161 High release force 831611 Part number 83161118



- Nominal ratings 0.1 A to 20 A / 250 VAC
- Operating temperature up to +125 °C
- Conforming to EN 61058 and UL 1054
- Choice of actuators with 4 possible fixing positions

Part numbers

	Type	Function	Connections
83161118	High release force 831611	I (changeover)	W3

Specifications

Electrical characteristics

Rating nominal / 250 VAC (A)	16
Rating thermal / 250 VAC (A)	20

Mechanical characteristics

Maximum operating force (N)	3
Min. Release force (N)	1
Maximum total travel force (N)	4,5
Max. permitted overtravel force (N)	20
Maximum rest position (mm)	16,1
Operating position (mm)	14,7 ^{+0,4}
Maximum differential travel (mm)	0,35
Min. overtravel CRA (mm)	1,1
Ambient operating temperature (°C)	-20 → +125
Mechanical life for 2/3 CRA (operations)	10 ⁷
Contact gap (mm)	0,4
Weight (g)	5,6

Additional specifications

Components

Material


- Housings : polyamide or polyester
- Button : polyamide
- Contacts : AgNi

Levers

- Flat : stainless steel
- Roller : stainless steel, glass-filled polyamide roller
- Other polyamides

Approvals : NF


Principles

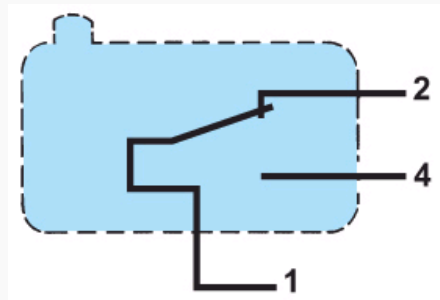

Dimensions (mm)

Product

83161

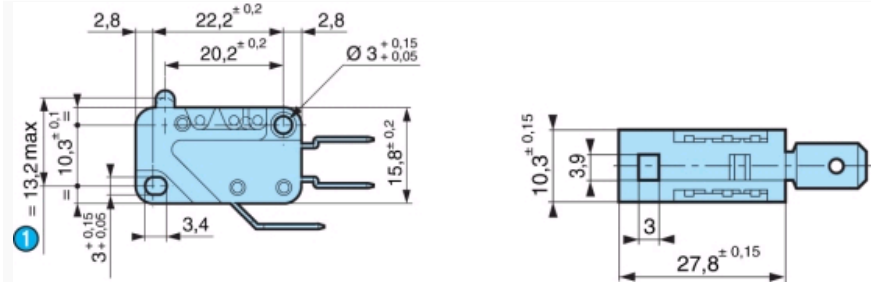


N°	Legend
1	OL

Dimensions (mm)

Connections


W2 solder

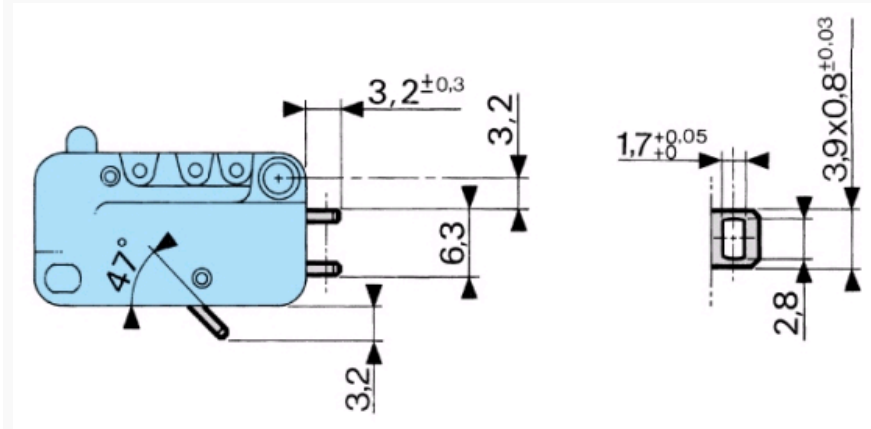

Dimensions (mm)

Connections


W3 for 6.35 mm clips (6.3 x 0.8)

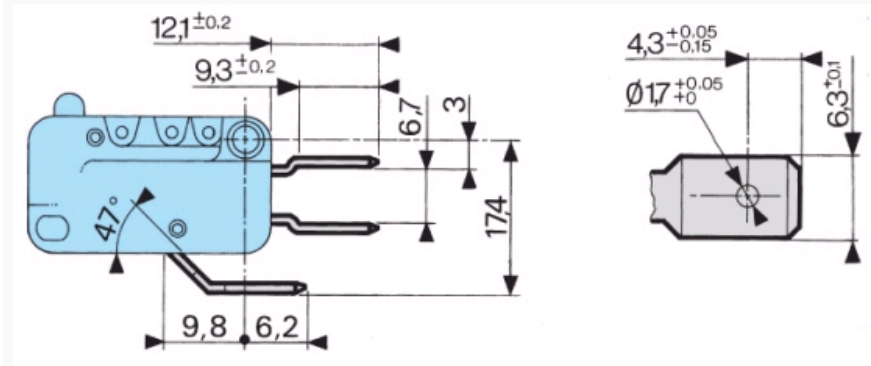

Dimensions (mm)

Connections


W3R5 for 6.35 mm clips (6.3 x 0.8)

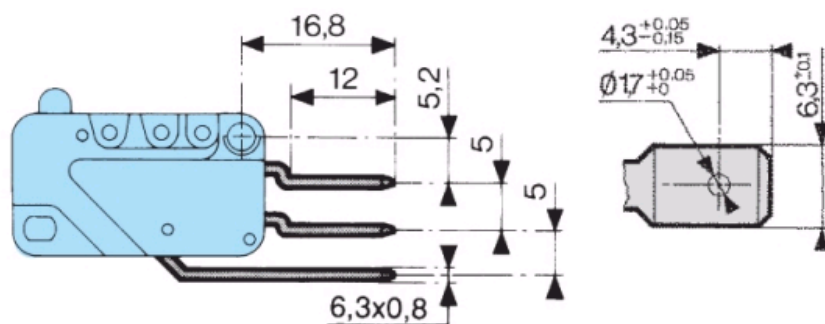

Dimensions (mm)

Connections


W5 screw

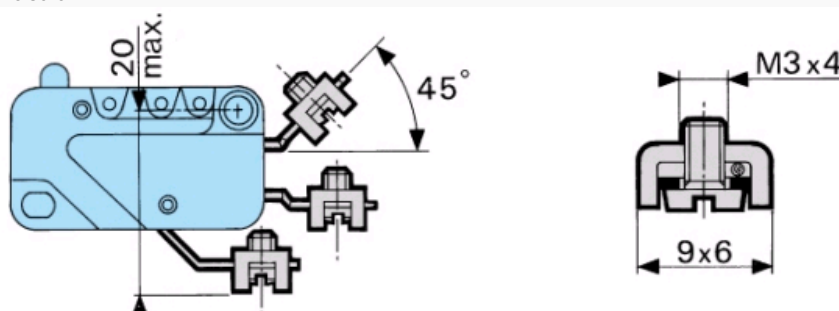

Dimensions (mm)

Connections


W6A5 for 4.8 mm clips (4.8 x 0.5)

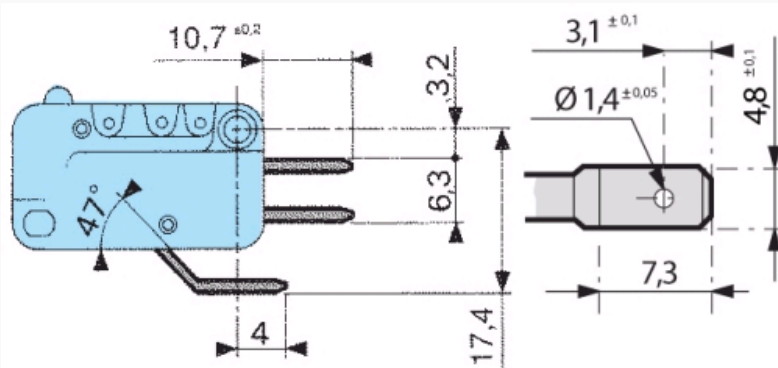

Dimensions (mm)

Connections


W6D8 for 4.8 mm clips (4.8 x 0.8)

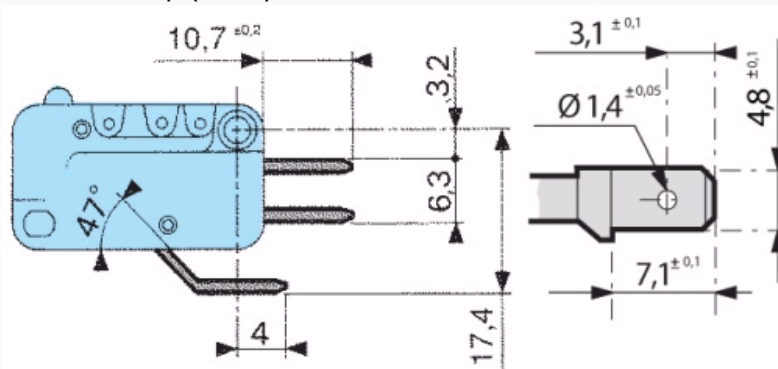

Dimensions (mm)

Connections


W7A5 for 2.8 mm clips (2.8 x 0.5)

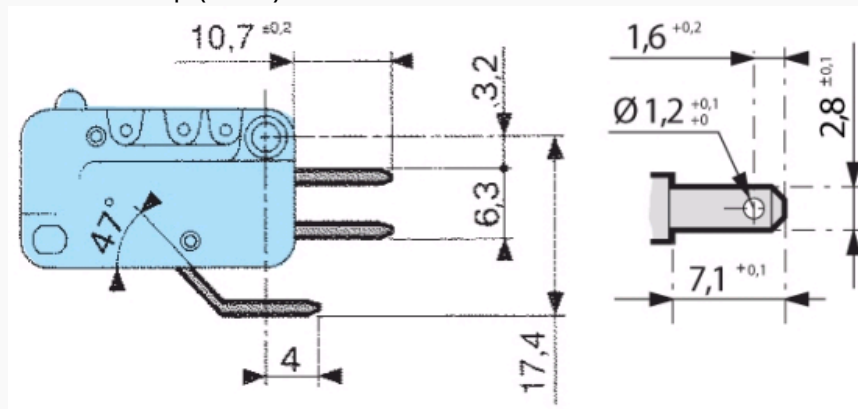

Dimensions (mm)

Connections


2W7A8 for 2.8 mm clips (2.8 x 0.8)

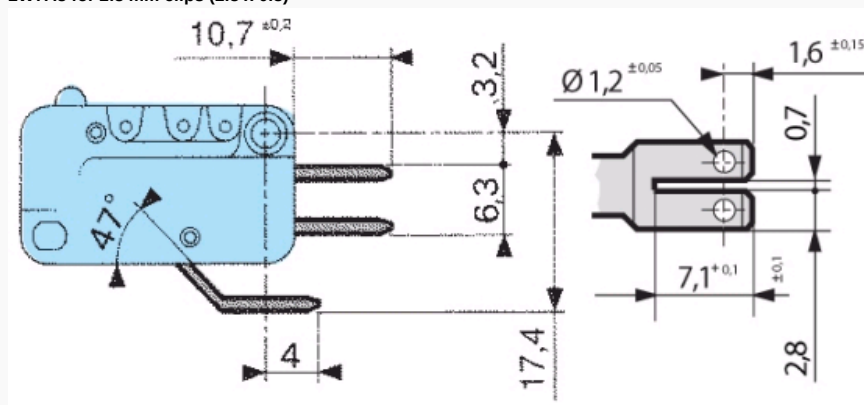

Dimensions (mm)

Actuator mounting positions


Levers

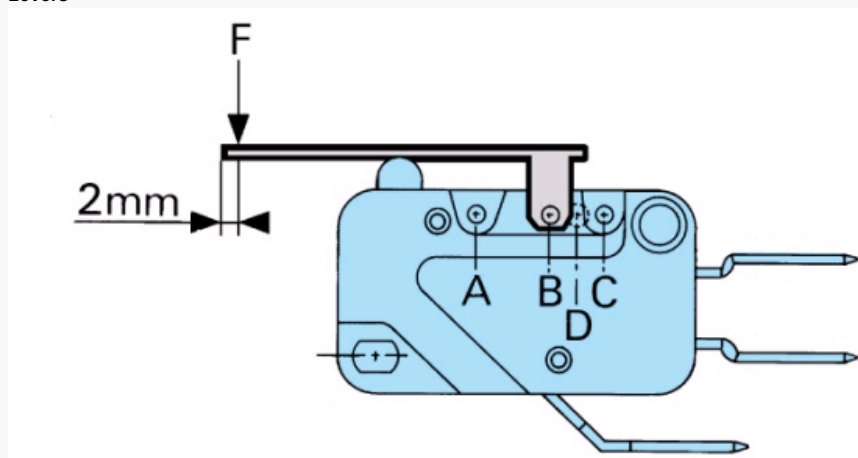

To calculate force Divide the switch force by the coefficient given in the table. To calculate travel Multiply the switch travel by the same coefficient. Example : 83 161 3 with lever 161 A - R 25.4 position A (coeff. 4) Operating force : $0.8 : 4 = 0.2$ N Pre-travel : $1.4 \times 4 = 5.6$ mm

Dimensions (mm)

Actuator mounting positions

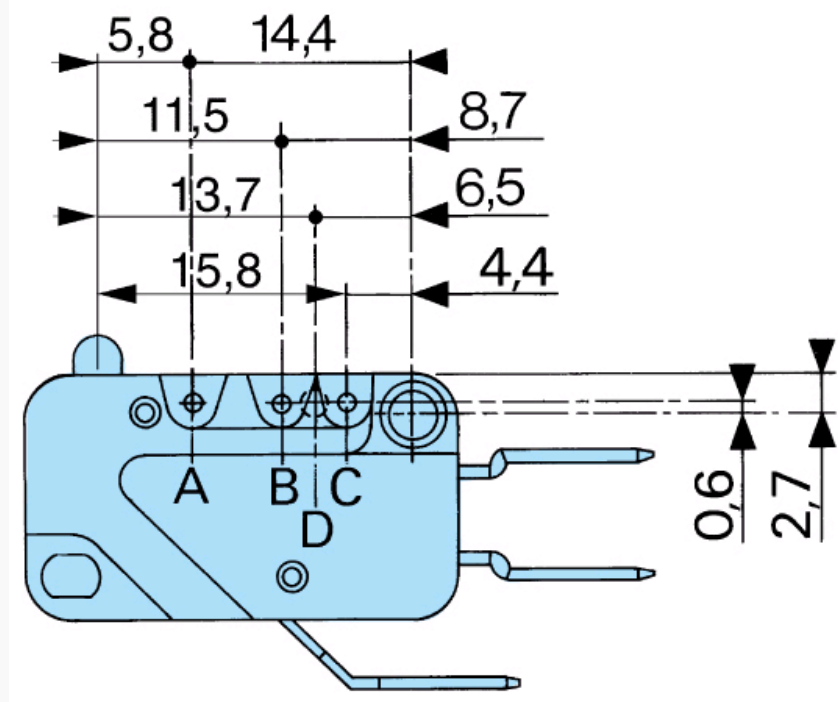


To calculate force Divide the switch force by the coefficient given in the table. To calculate travel Multiply the switch travel by the same coefficient. Example : 83 161 3 with lever 161 A - R 25.4 position A (coeff. 4) Operating force : $0.8 : 4 = 0.2$ N Pre-travel : $1.4 \times 4 = 5.6$ mm

Dimensions (mm)

Actuators

161 E

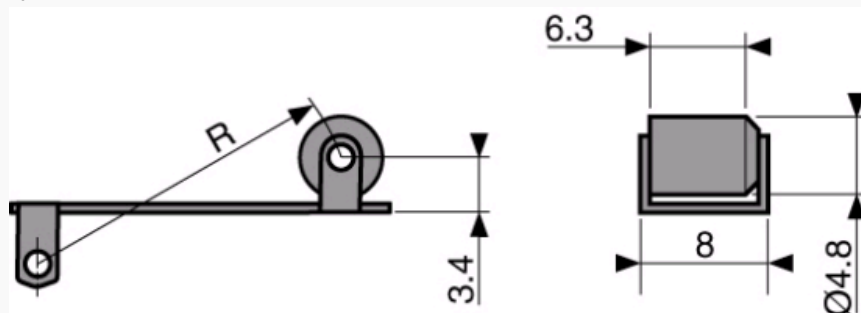


To calculate force Divide the switch force by the coefficient given in the table. To calculate travel Multiply the switch travel by the same coefficient. Example : 83 161 3 with lever 161 A - R 25.4 position A (coeff. 4) Operating force : $0.8 : 4 = 0.2$ N Pre-travel : $1.4 \times 4 = 5.6$ mm

Dimensions (mm)

Actuators

161 A

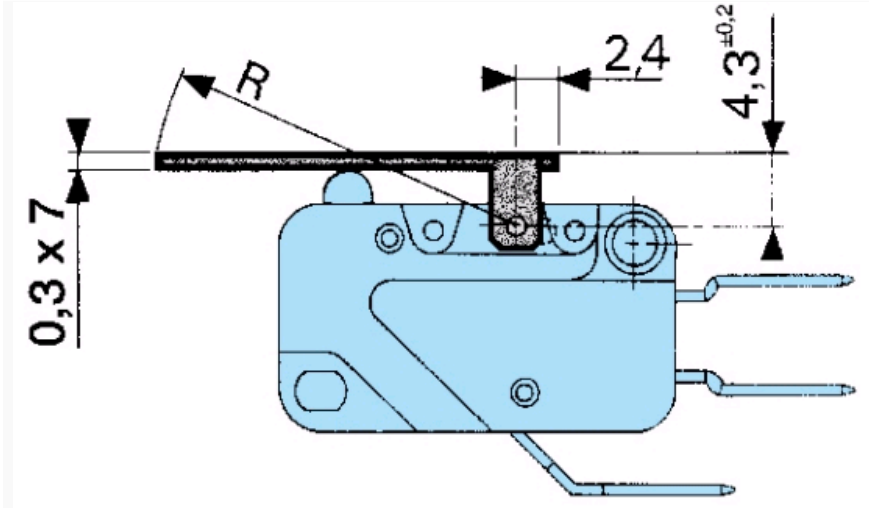


To calculate force Divide the switch force by the coefficient given in the table. To calculate travel Multiply the switch travel by the same coefficient. Example : 83 161 3 with lever 161 A - R 25.4 position A (coeff. 4) Operating force : 0.8 : 4 = 0.2 N Pre-travel : 1.4 x 4 = 5.6 mm

Dimensions (mm)

Actuators

161 L

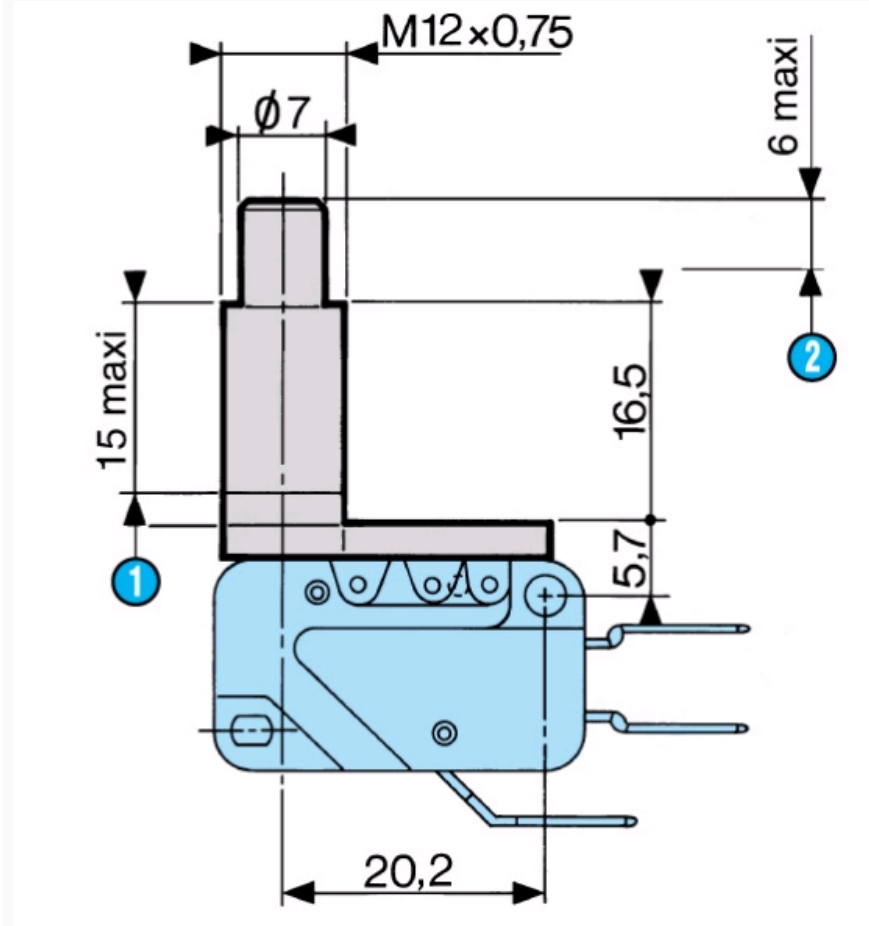


Nut thickness Max. torque 1.5 mm 5 Cm N 2 mm 7 Cm N 2.5 mm 10 Cm N

N°	Legend
1	Thread
2	Total travel

Dimensions (mm)

161 V

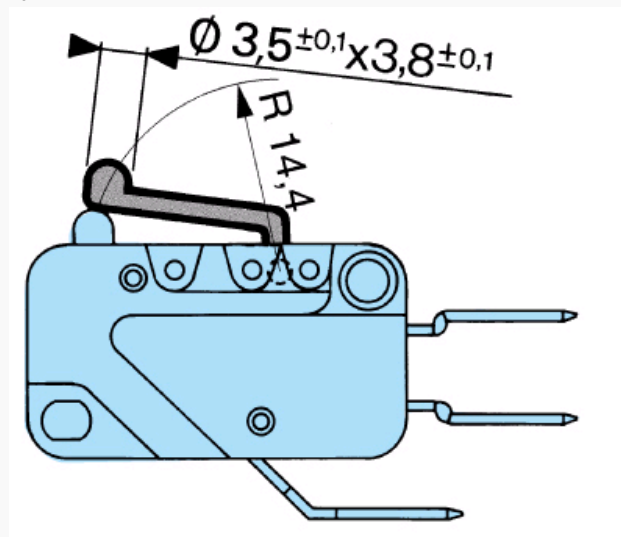


Nut thickness Max. torque 1.5 mm 5 Cm N 2 mm 7 Cm N 2.5 mm 10 Cm N

Dimensions (mm)

Actuators

161 F

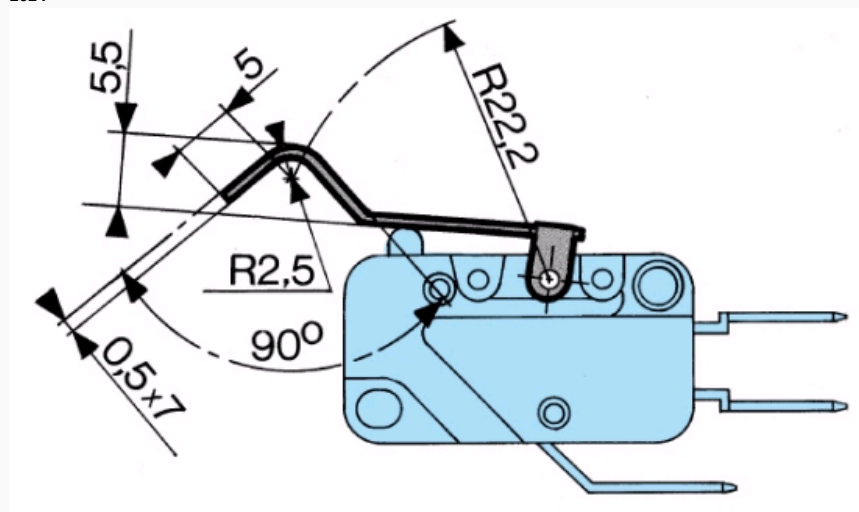


Nut thickness Max. torque 1.5 mm 5 Cm N 2 mm 7 Cm N 2.5 mm 10 Cm N

Dimensions (mm)

Actuators

161 G

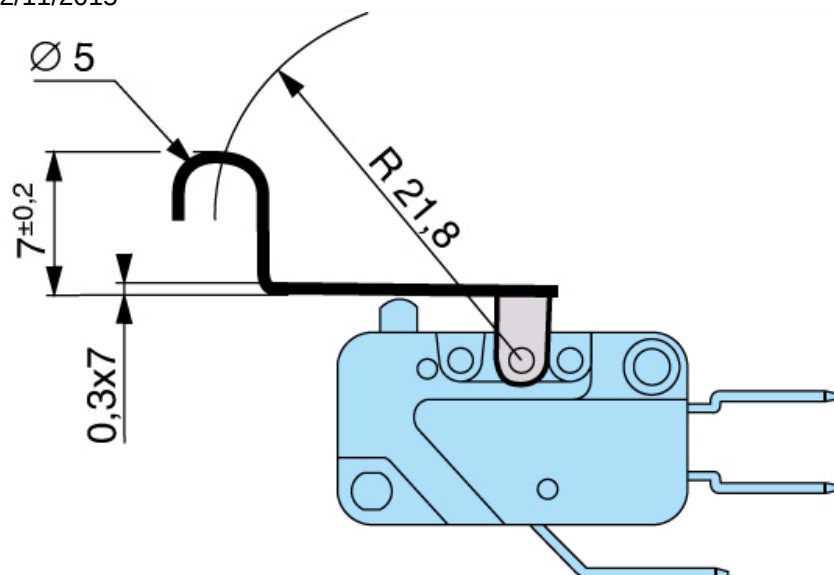


Nut thickness Max. torque 1.5 mm 5 Cm N 2 mm 7 Cm N 2.5 mm 10 Cm N

Dimensions (mm)

Mounting accessories

Nut 70602118

M12x0,75

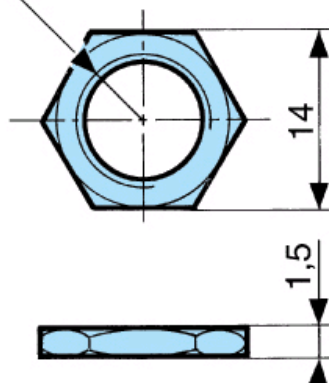


Nut thickness Max. torque 1.5 mm 5 Cm N 2 mm 7 Cm N 2.5 mm 10 Cm N

Dimensions (mm)

Mounting accessories


Housing 161 J for connections W3 R5

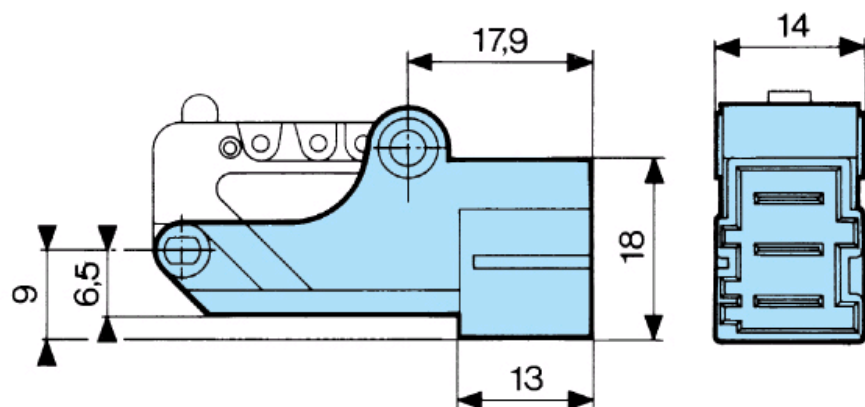

Nut thickness Max. torque 1.5 mm 5 Cm N 2 mm 7 Cm N 2.5 mm 10 Cm N

Curves

Operating curve for types 831611 / 831613 / 831616

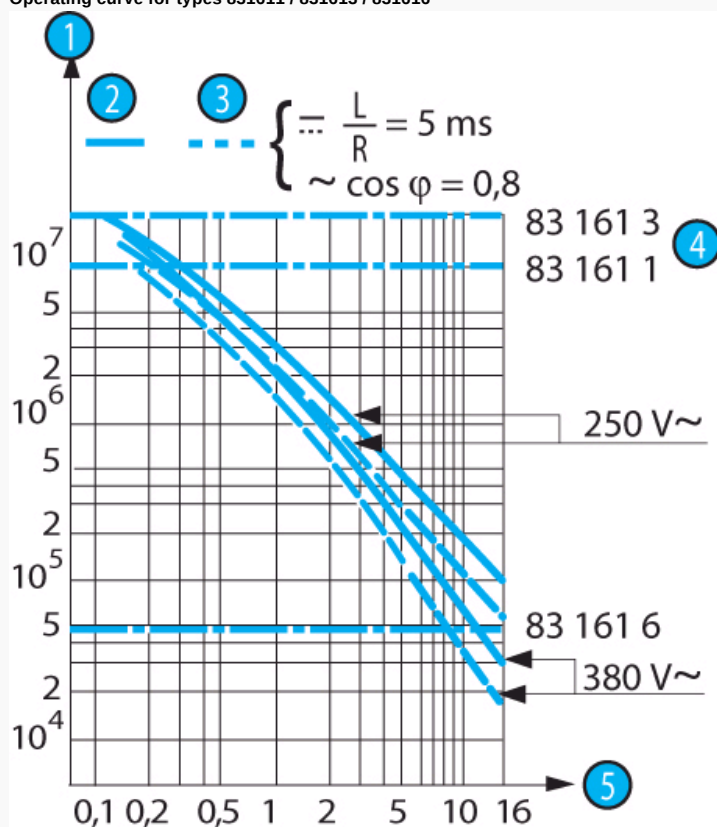

N°	Legend
1	Number of cycles
2	Resistive circuit
3	Inductive circuit
4	Mechanical life limit
5	Current in Amps

Connections

Actuators and fixing positions

Part numbers for standard actuators	79 215 740	70 507 524	79 215 742	70 507 529	70 507 528
Actuators	Plain 161A R14,2	Plain 161A R25,4	Roller 161E R13,6	Roller 161E R24,1	Dummy roller 161F R22,2
Fixing positions	A B	A B C	A B	A B C	A B
Coefficient	2 1	4 2 1,5	2 1	4 2 1,5	3 1,8
Tripping point (except 83 161 6)	15,2 ⁺¹ 15,2 ^{+0,45}	15,2 ^{+0,5} 15,2 ^{+0,1} 15,2 ^{+0,8}	20,5 ^{+0,5} 20,5 ^{+0,8}	20,5 ^{+0,8} 20,5 ^{+0,5} 20,5 ^{+0,2}	20,4 ^{+0,2} 20,4 ^{+0,7}
Tripping point 83 161 6	14,8 ⁺¹ 15 ^{+0,45}	14,4 ^{+0,5} 14,8 ^{+0,1} 14,9 ^{+0,8}	20,1 ^{+0,5} 20,3 ^{+0,8}	19,7 ^{+0,8} 20,1 ^{+0,5} 20,2 ^{+0,2}	20,2 ^{+0,2} 20,2 ^{+0,7}
Part numbers for standard actuators	79 218 651				
Actuators	Dummy roller 161G R21,8	**Telescopic plunger 161 L	Manual action	161V	Housing 161J
Fixing positions	A B	D	D		
Coefficient	3 1,8	1	1		
Tripping point (except 83 161 6)	21,7 ^{+0,2} 21,7 ^{+0,7}	21,5 ^{+0,1}	18,35 ^{+0,05}		
Tripping point 83 161 6	21,5 ^{+0,2} 21,5 ^{+0,7}	21,5 ^{+0,1}			

Except where otherwise indicated, plain and roller levers are supplied unmounted.
For factory mounting, specify fixing position A, B or C.
** For 83 161 1, 83 161 2, 83 161 3, 83 161 6 mounted in factory (supplied without nut)

Other information

Unless otherwise specified, the characteristics given are applicable to all or part of the product range selected

Mounting - Operation

See basic technical concepts

Product adaptations

- Special levers
- Special connections
- Specific fixing
- High operating temperature
- Special operating force
- Approvals : UL - cUL

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru