

Using the TPS51727EVM, a Dual-Phase, Eco-mode™ Step-Down Power Management IC for 40-A+ Application

The TPS51727EVM evaluation module (EVM) is a dual-phase, ECO-mode™ synchronous buck converter providing a fixed 1.5-V or 4-bit VID with 0.875-V to 1.25-V output range at up to 40 A from a 12-V input bus. The EVM uses the TPS51727 synchronous buck controller with selectable 200/300/400/500 kHz.

Contents

1	Description	2
2	Electrical Performance Specifications	3
3	Schematic	4
4	Test Setup	6
5	Configuration	7
6	Test Procedure	9
7	Performance Data and Typical Characteristic Curves	10
8	EVM Assembly Drawing and PCB Layout	15
9	Bill of Materials	19

List of Figures

1	TPS51727EVM Schematic, Sheet 1.....	5
2	TPS51727EVM Schematic, Sheet 2.....	5
3	Tip and Barrel Measurement for Vout Ripple	6
4	TPS51727EVM Recommended Test Setup	7
5	TPS51727EVM Efficiency	10
6	TPS51727 Load Regulation.....	11
7	TPS51727 Line Regulation.....	11
8	TPS51727EVM PMON Curve	12
9	TPS51727EVM Phase 1 and Phase 2 Current Share.....	12
10	TPS51727EVM Output Ripple	13
11	Switching Node	13
12	Output Transient.....	14
13	Enable Turnon Waveform	14
14	Enable Turnoff Waveform	15
15	TPS51727EVM Top Layer Assembly Drawing, Top View	16
16	TPS51727EVM Bottom Assembly Drawing, Bottom View	16
17	TPS51727EVM Top Copper, Top View	17
18	TPS51727EVM Internal Layer 2, Top View.....	17
19	TPS51727EVM Internal Layer 3, Top View.....	18
20	TPS51727EVM Internal Layer 4, Top View.....	18
21	TPS51727EVM Internal Layer 5, Top View.....	19
22	TPS51727EVM Bottom Copper, Top View	19

List of Tables

1	TPS51727EVM Electrical Performance Specifications	3
---	---	---

2	Current Limit Trip Selection.....	8
3	Frequency Selection.....	8
4	Overshoot Reduction Selection	8
5	VID Bits Selection	8
6	Phase Control Selection	9
7	1.5-V Output Option Selection	9
8	Functions of Each Test Points	9
9	EVM Bill of Materials	19

1 Description

The TPS51727EVM is designed to use a regulated 12-V (8-V to 14-V) bus to produce a high-current, regulated 1.5 V or 4-bit digital-to-analog converter (DAC) with a 0.875-V to 1.25-V output range at up to 40 A of the load current. The TPS51727EVM is designed to demonstrate the TPS51727 in a typical, low-voltage application while providing a number of test points to evaluate the performance of the TPS51727.

1.1 2.1 Typical Applications

- High-current, low-voltage application for adapter and battery
- Distributed power supplies
- General dc-dc converters

1.2 Features

The TPS51727EVM features:

- Fixed 1.5 V or 4-bit VID with 0.875-V to 1.25-V output range
- 40-Adc steady-state current
- Auto-phase control to optimize efficiency depending on the load requirement
- Selectable 200/300/400/500-kHz switching frequency
- Selectable current limit
- Selectable output overshoot reduction (OSR™)
- J11 for enable function
- Convenient test points for probing critical waveforms
- Six-layer printed-circuit board with 2-oz copper on the outside layers

2 Electrical Performance Specifications

Table 1. TPS51727EVM Electrical Performance Specifications

Parameter	Test Conditions	Min	Typ	Max	Units
Input Characteristics					
Voltage range	VIN	8	12	14	V
Maximum input current	VIN = 8 V, IO = 40 A			8.5	A
No load input current	Vin = 14 V, IO = 0 A			20	mA
Output Characteristics					
Output voltage VOUT	1.5 V or 0.875–1.250 V		1.25		V
Output voltage regulation	Line regulation			0.1%	
	Load regulation (Load line Rout = –1.8 mΩ)		–3.0% +6.7%		
Output voltage ripple	Vin = 12 V, IO = 20 A			30	mVpp
Output load current		0		40	A
Output over current			50		A
System Characteristics					
Switching frequency	Selectable	200	300	500	kHz
Peak efficiency	Vin = 12 V, 1.25 V/15 A		91.66%		
Full load efficiency	Vin = 12 V, 1.25 V/40 A		88.79%		
Operating temperature			25		°C

3 Schematic

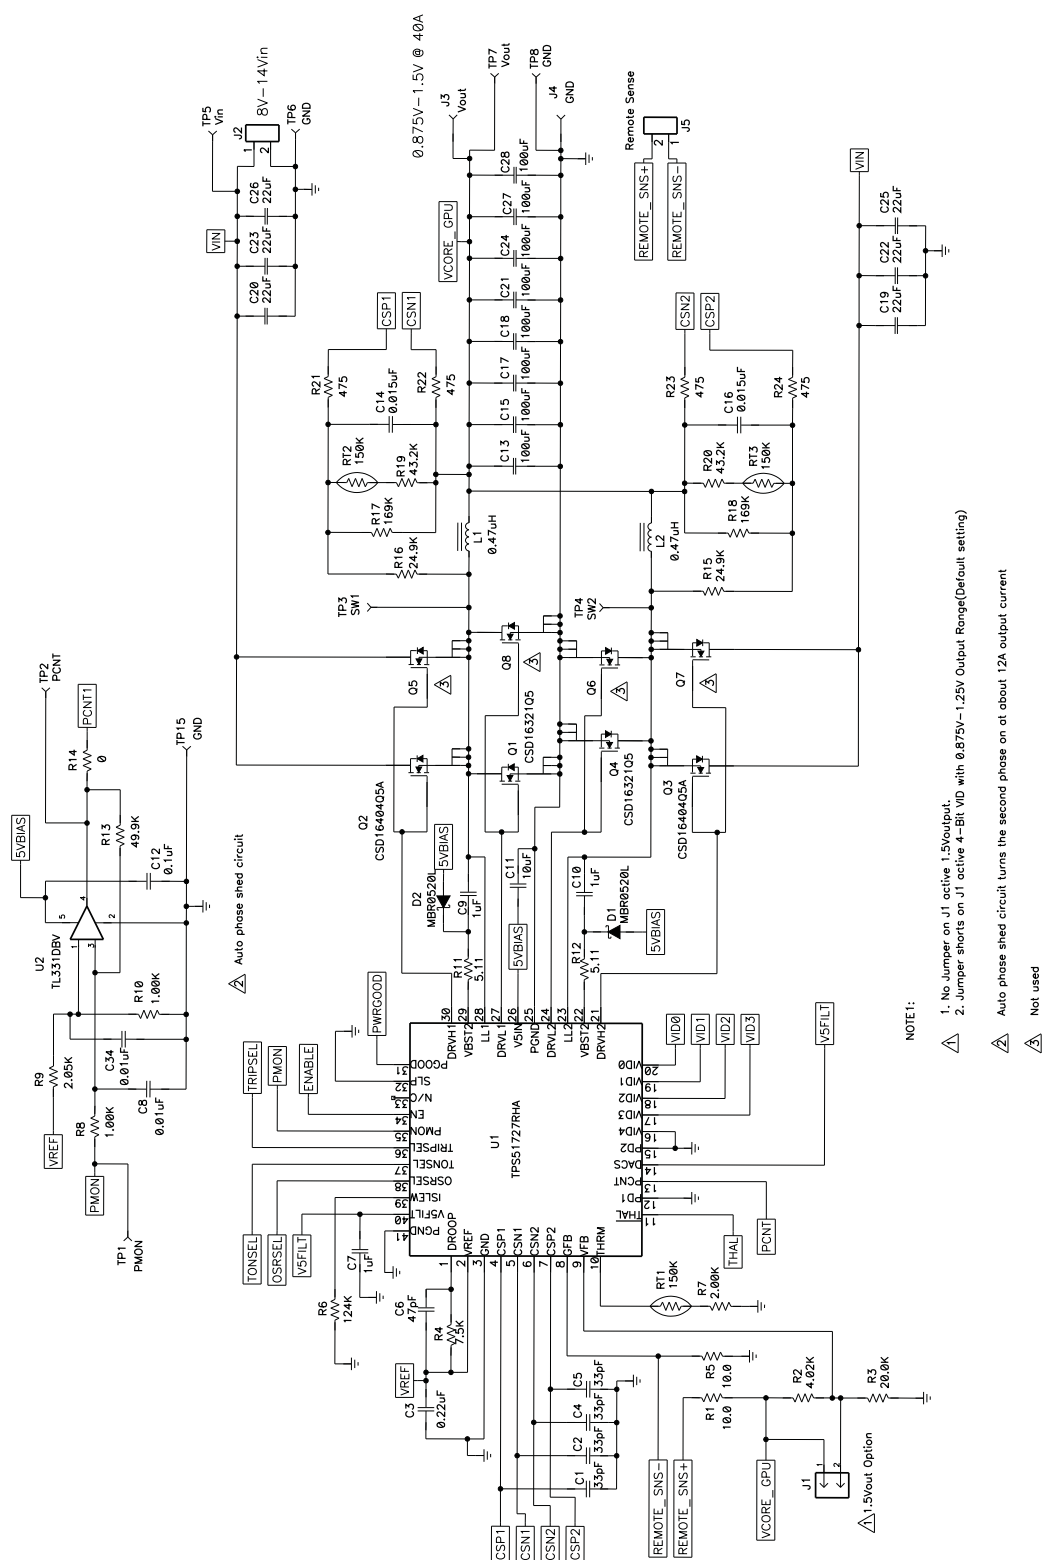


Figure 1. TPS51727EVM Schematic, Sheet 1

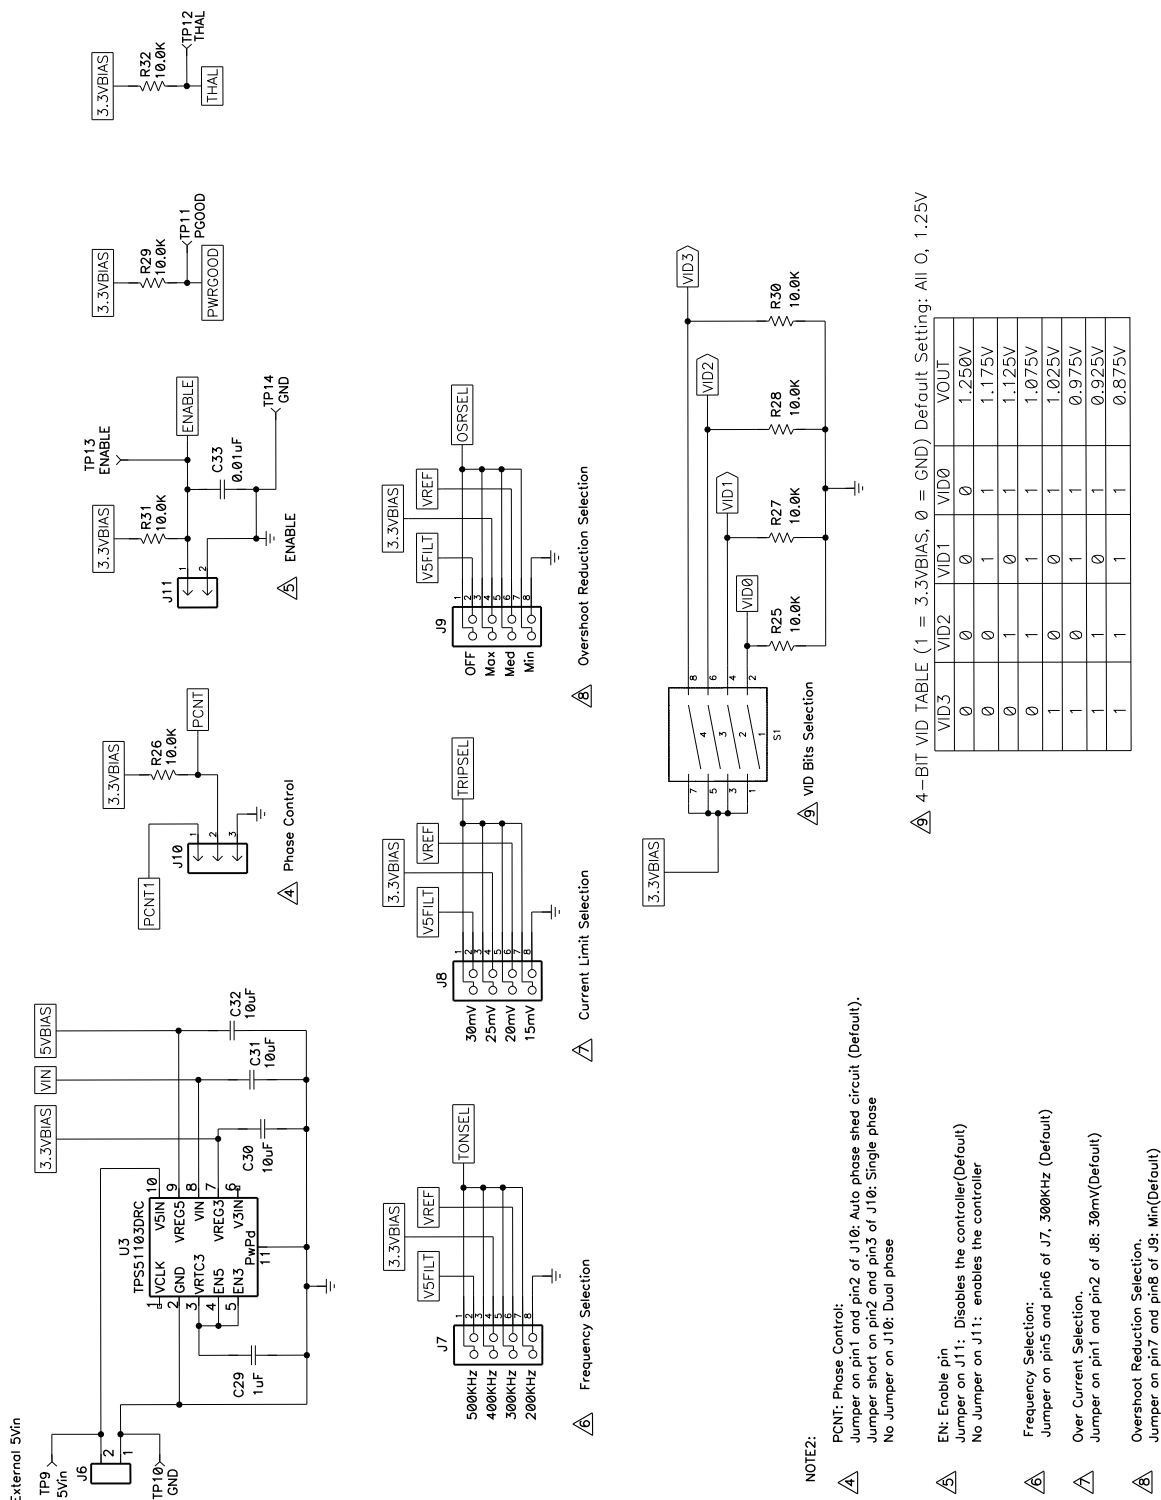


Figure 2. TPS51727EVM Schematic, Sheet 2

4 Test Setup

4.1 Test Equipment

Voltage Source: The input voltage source V_{in} must be a 0-V to 14-V variable dc source capable of supplying 20 A dc. Connect V_{in} to J2 as shown in [Figure 4](#).

Multimeters: A 0-V to 14-V voltmeter must be used to measure V_{in} at TP5 (V_{in}) and TP6 (GND). A 0-V to 5-V voltmeter must be used for V_{out} measurement at TP7 (V_{out}) and TP8 (GND). A 0-A to 20-A current meter (A1) as shown in [Figure 4](#) is used for input current measurements.

Output Load: The output load must be an electronic constant resistance mode load capable of 0 A to 50 A dc at 1.5 V.

Oscilloscope: A digital or analog oscilloscope can be used to measure the output ripple. The oscilloscope must be set for 1-M Ω impedance, 20-MHz bandwidth, ac coupling, 1- μ s/division horizontal resolution, 20-mV/division vertical resolution. Test points TP7 and TP8 can be used to measure the output ripple voltage by placing the oscilloscope probe tip through TP7 and holding the ground barrel TP8 as shown in [Figure 3](#). Using a leaded ground connection may induce additional noise due to the large ground loop.

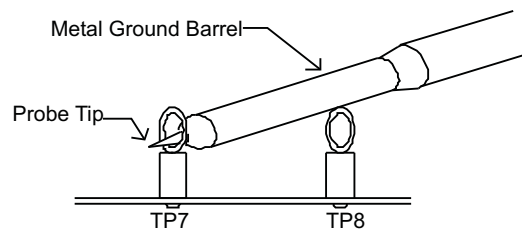


Figure 3. Tip and Barrel Measurement for Vout Ripple

Fan: Some of the components in this EVM may get hot and approach temperatures of 60°C during operation. A small fan capable of 200-400 LFM is recommended to reduce component temperatures while the EVM is operating. The EVM must not be probed while the fan is not running.

Recommended Wire Gauge: For V_{IN} to J2 (12-V input) the recommended wire size is 2x AWG 14 per input connection, with the total length of wire less than 4 feet (2-foot input, 2-foot return). For J3, J4 to LOAD, the minimum recommended wire size is 4x AWG 14, with the total length of wire less than 4 feet (2-foot output, 2-foot return).

4.2 Recommended Test Setup

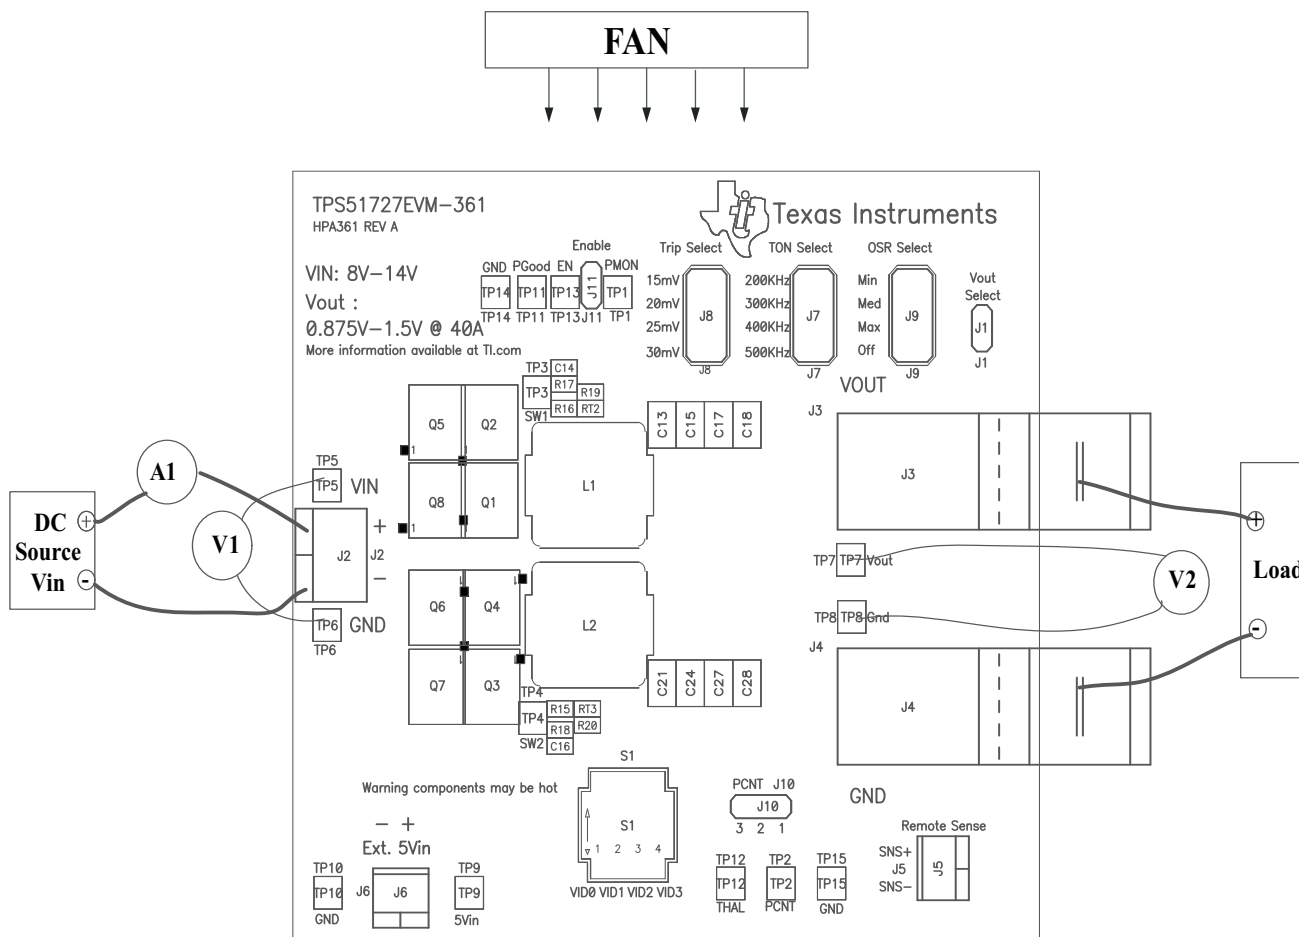


Figure 4. TPS51727EVM Recommended Test Setup

Figure 4 is the recommended test setup to evaluate the TPS51727EVM. Working at an ESD workstation, ensure that any wrist straps, bootstraps, or mats are connected, referencing the user to earth ground before power is applied to the EVM.

Input Connections:

1. Prior to connecting the dc input source Vin, it is advisable to limit the source current from Vin to 15 A maximum. Ensure that Vin is initially set to 0 V and connected as shown in Figure 4.
2. Connect a voltmeter V1 at TP5 (Vin) and TP6 (GND) to measure the input voltage.

Output Connections:

1. Connect Load to J3 and J4, and set Load to constant resistance mode to sink 0 A before Vin is applied.
2. Connect a voltmeter V2 at TP7 (Vout) and TP8 (GND) to measure the output voltage.

Other Connections:

Place a fan as shown in Figure 4 and turn it on, ensuring that air is flowing across the EVM.

5 Configuration

The user can configure this EVM per the following configurations

5.1 Current Limit Trip Selection (J8: Trip Select)

The overcurrent protection (OCP) can be set by J8 Trip Select.

Default setting is 30 mV.

Table 2. Current Limit Trip Selection

Jumper Set To	Trip Select	OCP Limit per Phase (Typical)
Top (7-8 pin shorted)	GND (15 mV)	15.1 A
Second (5-6 pin shorted)	VREF (20 mV)	18.4 A
Third (3-4 pin shorted)	3.3VBIAS (25 mV)	22.3 A
Bottom (1-2 pin shorted)	V5FILT(30 mV)	27.9 A

5.2 Frequency Selection (J7: TON Select)

The operating frequency can be set by J7 TON Select.

Default setting is 300 kHz.

Table 3. Frequency Selection

Jumper Set To	TON Select	Frequency (kHz)
Top (7-8 pin shorted)	GND	200
Second (5-6 pin shorted)	VREF	300
Third (3-4 pin shorted)	3.3VBIAS	400
Bottom (1-2 pin shorted)	V5FILT	500

5.3 Overshoot Reduction Selection (J9: OSR™ Select)

The overshoot reduction can be set by J9 OSR™ Select.

Default setting is Minimum.

Table 4. Overshoot Reduction Selection

Jumper Set To	OSR	Overshoot Voltage
Top (7-8 pin shorted)	GND (Minimum)	Minimum
Second (5-6 pin shorted)	VREF (Medium)	Medium
Third (3-4 pin shorted)	3.3VBIAS (Maximum)	Maximum
Bottom (1-2 pin shorted)	V5FILT (Off)	OSR Off

5.4 VID Bits Selection (S1)

The output voltage can be set by Switch S1(VID Bits).

Default setting is 0000.

Table 5. VID Bits Selection⁽¹⁾

VID3	VID2	VID1	VID0	Vout(V)
0	0	0	0	1.250
0	0	1	1	1.175
0	1	0	1	1.125
0	1	1	1	1.075
1	0	0	1	1.025
1	0	1	1	0.975

⁽¹⁾ 4-Bit VID Table (1=3.3VBIAS=on, 0=GND=off)

Table 5. VID Bits Selection⁽¹⁾ (continued)

VID3	VID2	VID1	VID0	Vout(V)
1	1	0	1	0.925
1	1	1	1	0.875

5.5 Phase Control Selection (PCNT)

The phase control can be set by J10 (PCNT).

Default setting is jumper on pin1 and pin 2 of J10 for Auto phase control.

Table 6. Phase Control Selection

JUMPER SET TO	PHASE CONTROL
1-2 pin shorted	Auto phase control (around 12-A change to dual phase)
2-3 pin shorted	Single phase
No Jumper	Dual phase

5.6 1.5-V Output Voltage Selection (J1: 1.5-Vout Selection)

The 1.5-V output can be set by J1 (Vout Select).

Default setting: Jumper shorts on J1 to set 1.25-V output.

Table 7. 1.5-V Output Option Selection

JUMPER SET TO	OUTPUT RANGE
No Jumper	1.5-V output
Jumper shorted	4-bits VID with 0.875 V – 1.25 V

6 Test Procedure

6.1 Line/Load Regulation and Efficiency Measurement Procedure

1. Ensure that Load is set to constant resistance mode and to sink 0 Adc.
2. Ensure that the jumper provided in the EVM is set to short on J11 before Vin is applied.
3. Increase Vin from 0 V to 12 V. Using V1 to measure input voltage.
4. Remove the jumper on J11 to enable the controller.
5. Vary Load from 0 Adc to 40 Adc; Vout must remain in load regulation.
6. Vary Vin from 8 V to 14 V; Vout must remain in line regulation.
7. Put the jumper on J11 to disable the controller.
8. Decrease Load to 0 A
9. Decrease Vin to 0 V.

6.2 List of Test Points

Table 8. Functions of Each Test Points

Test Points	Name	Description
TP1	PMON	Power Monitor Output, See Figure 8 .
TP2	PCNT	Phase Control Input
TP3	SW1	Phase 1 Switching Node
TP4	SW2	Phase 2 Switching Node

Table 8. Functions of Each Test Points (continued)

Test Points	Name	Description
TP5	Vin	12 Vin
TP6	GND	12 Vin GND
TP7	Vout	Vout
TP8	GND	Vout GND
TP9	5Vin	External 5 Vin(optional)
TP10	GND	External 5 Vin GND
TP11	PGOOD	Power Good, Active High
TP12	THAL	Thermal Alarm, Active Low
TP13	ENABLE	Enable, Active High
TP14	GND	PGOOD GND
TP15	GND	PCNT GND


6.3 Equipment Shutdown

1. Shut down Load.
2. Shut down Vin.
3. Shut down fan.

7 Performance Data and Typical Characteristic Curves

Figure 5 through Figure 14 present typical performance curves for TPS51727EVM.

7.1 Efficiency

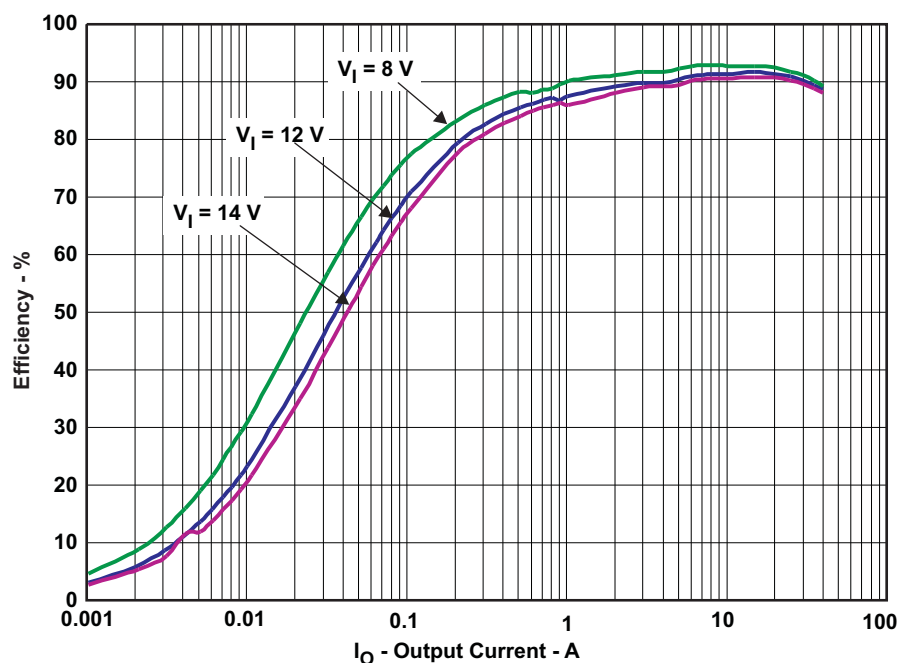
Figure 5. TPS51727EVM Efficiency

7.2 Load Regulation

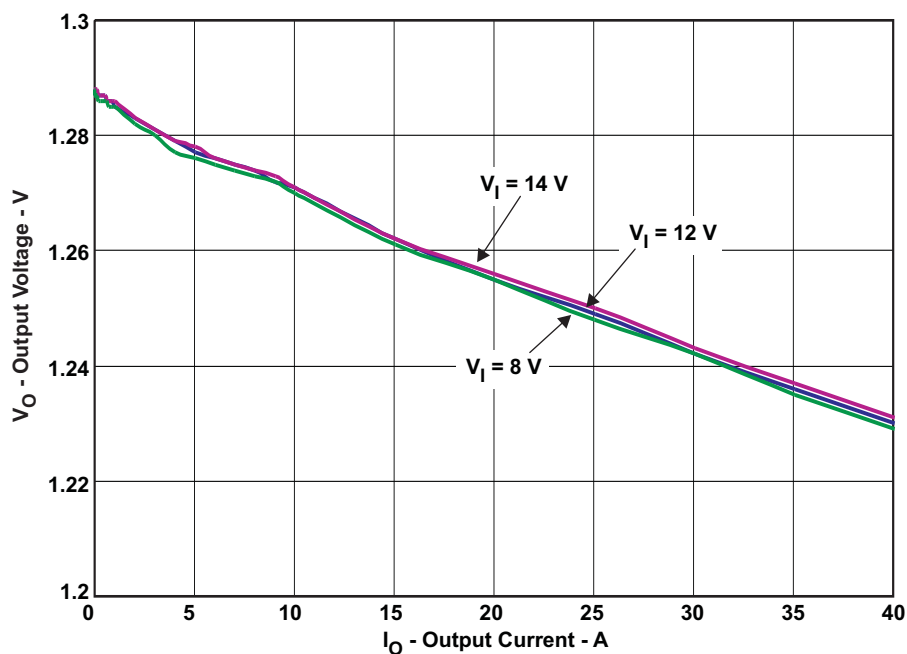


Figure 6. TPS51727 Load Regulation

7.3 Line Regulation

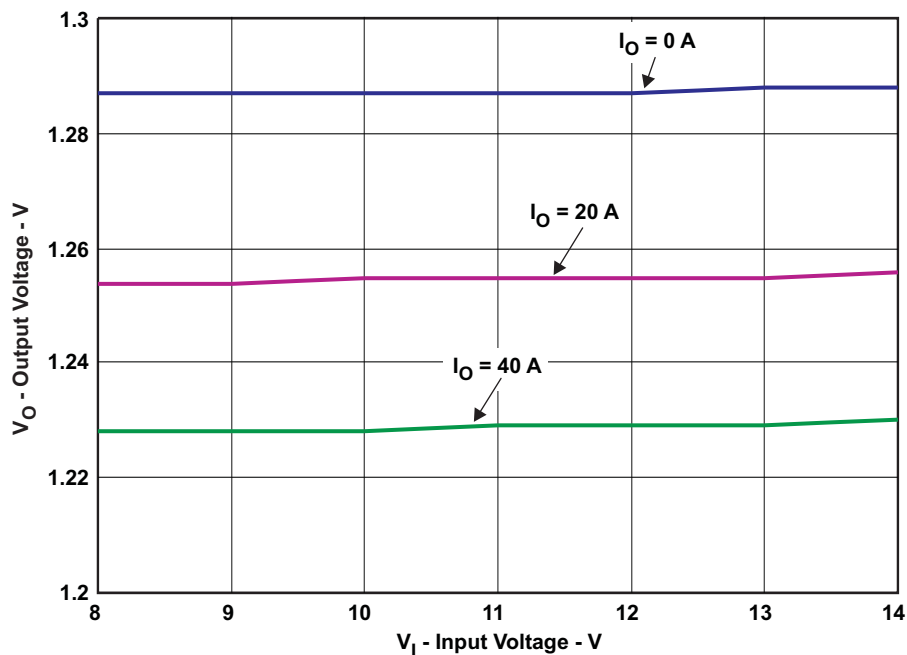


Figure 7. TPS51727 Line Regulation

7.4 Power Monitor Voltage Curve

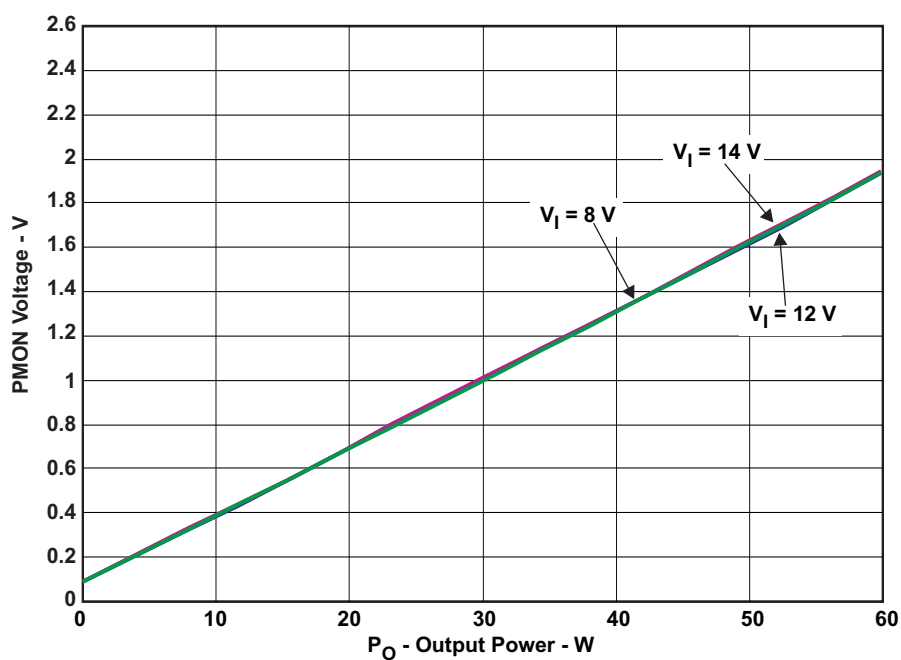


Figure 8. TPS51727EVM PMON Curve

7.5 Phase 1 and Phase 2 Current Share

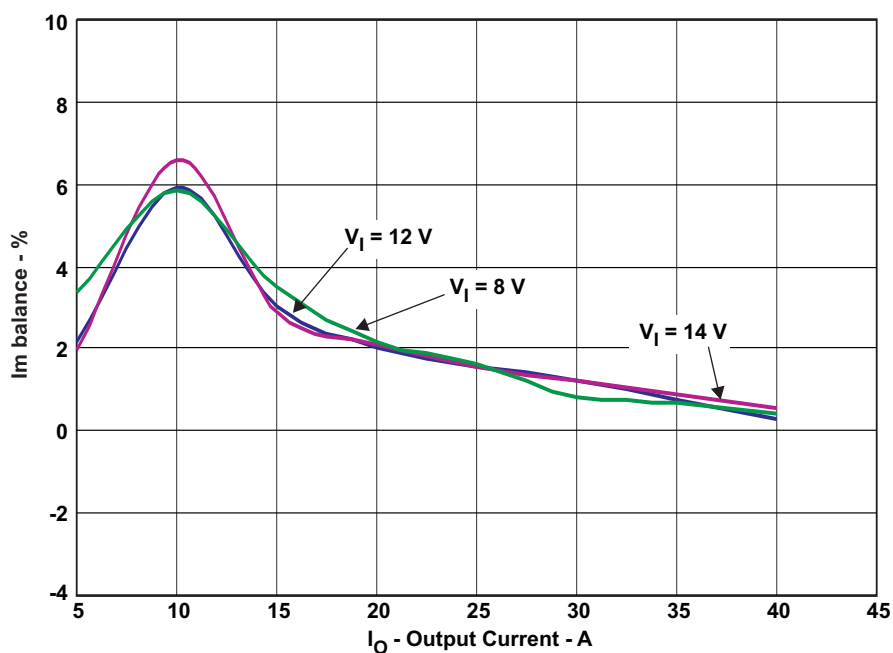


Figure 9. TPS51727EVM Phase 1 and Phase 2 Current Share

7.6 Output Ripple

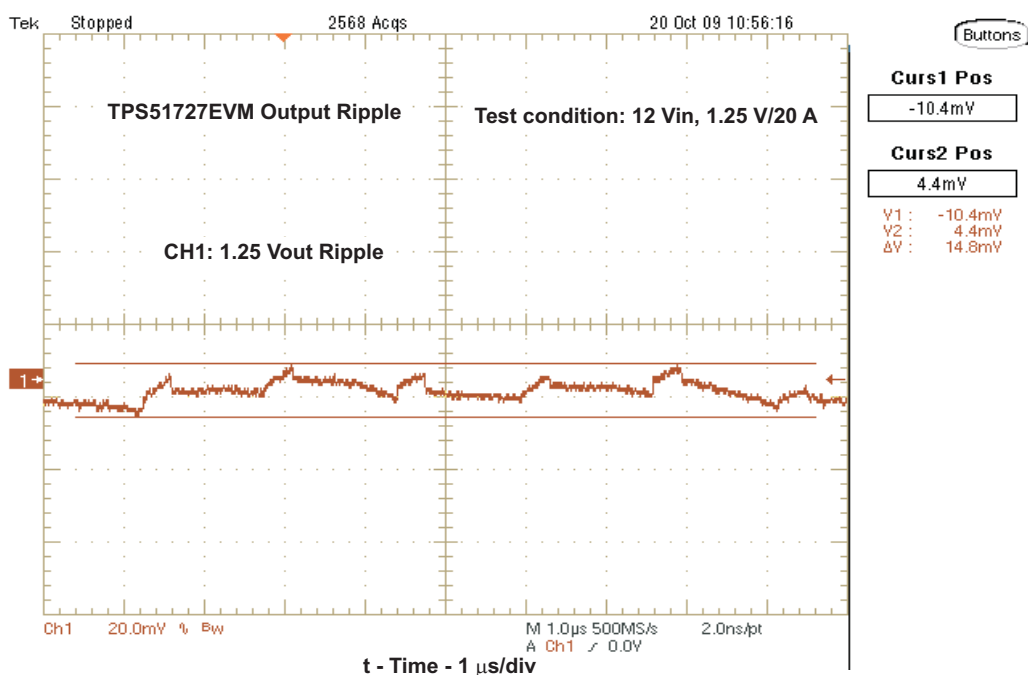


Figure 10. TPS51727EVM Output Ripple

7.7 Switching Node

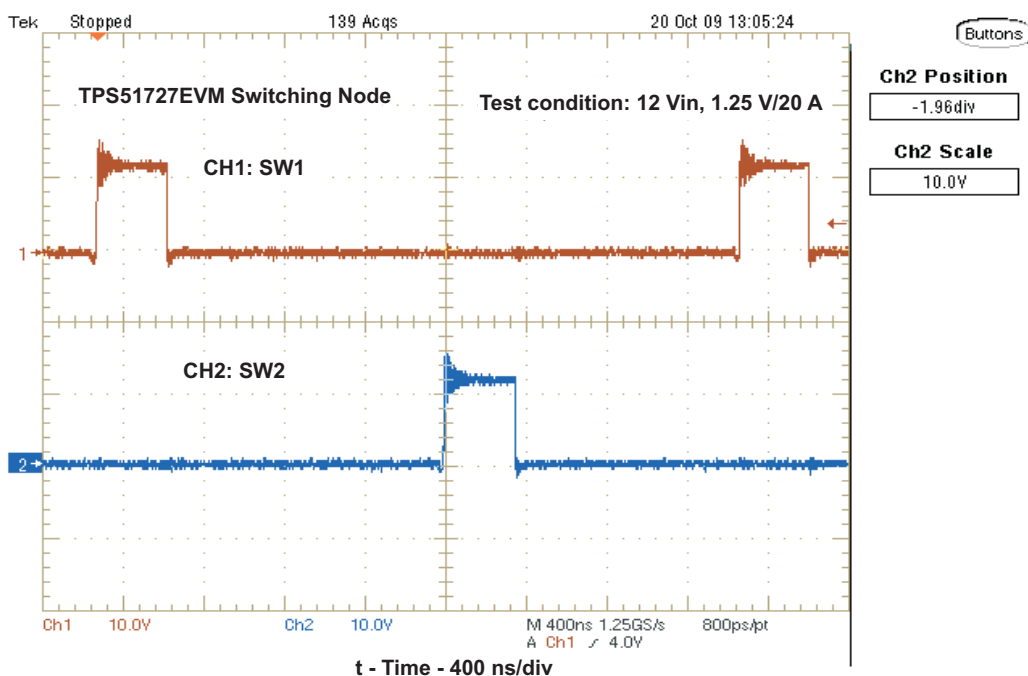


Figure 11. Switching Node

7.8 Output Transient

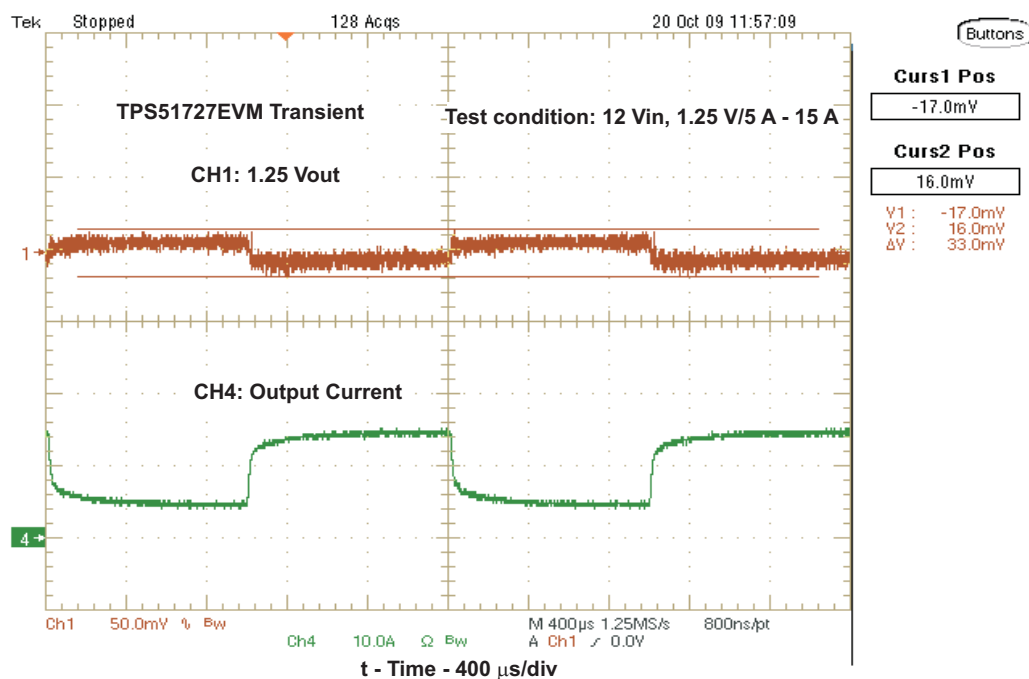


Figure 12. Output Transient

7.9 Turnon Waveform

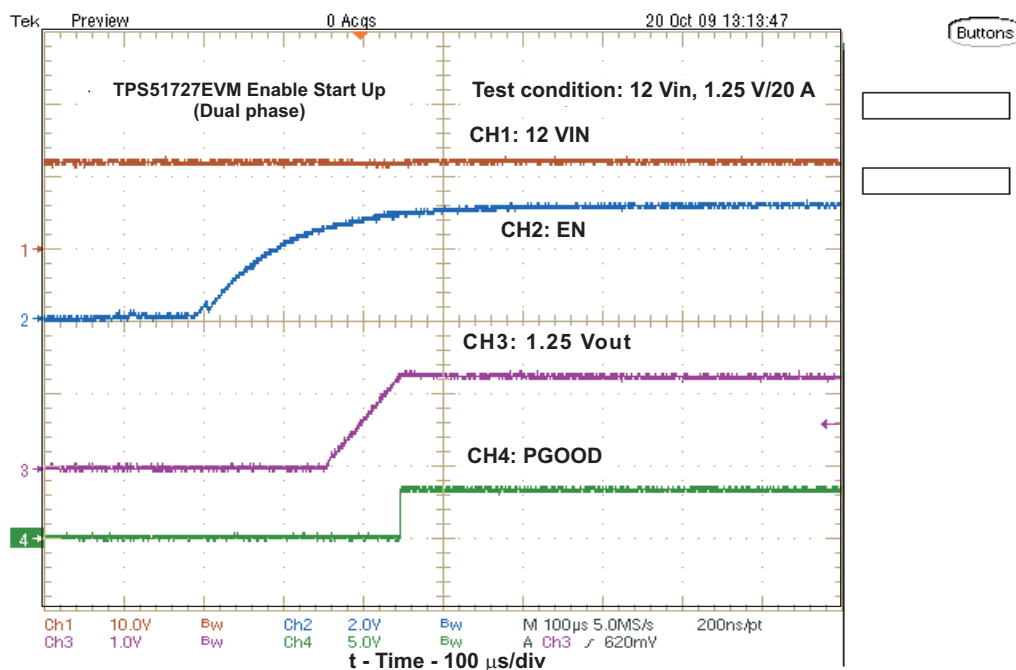


Figure 13. Enable Turnon Waveform

7.10 Turnoff Waveform

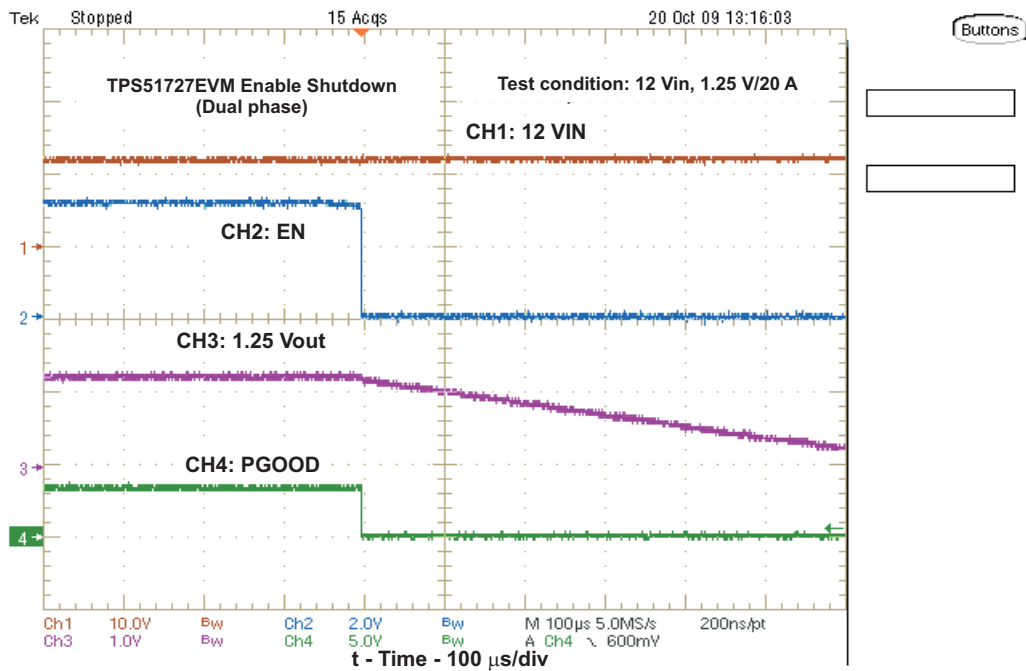


Figure 14. Enable Turnoff Waveform

8 EVM Assembly Drawing and PCB Layout

Figure 15 through Figure 22 show the design of the TPS51727EVM printed-circuit board. The EVM has been designed using a six-layer circuit board with 2-oz copper on outside layers.

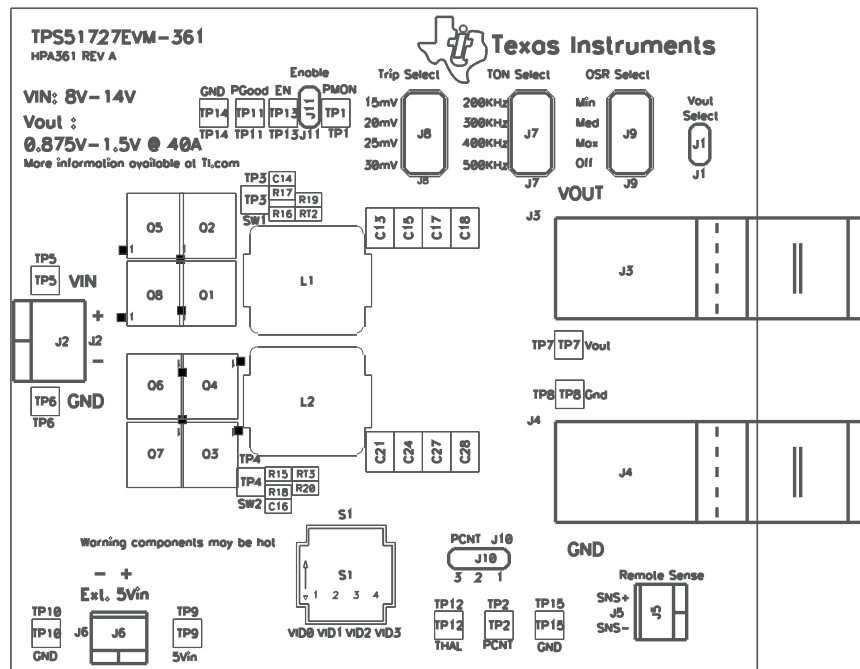


Figure 15. TPS51727EVM Top Layer Assembly Drawing, Top View

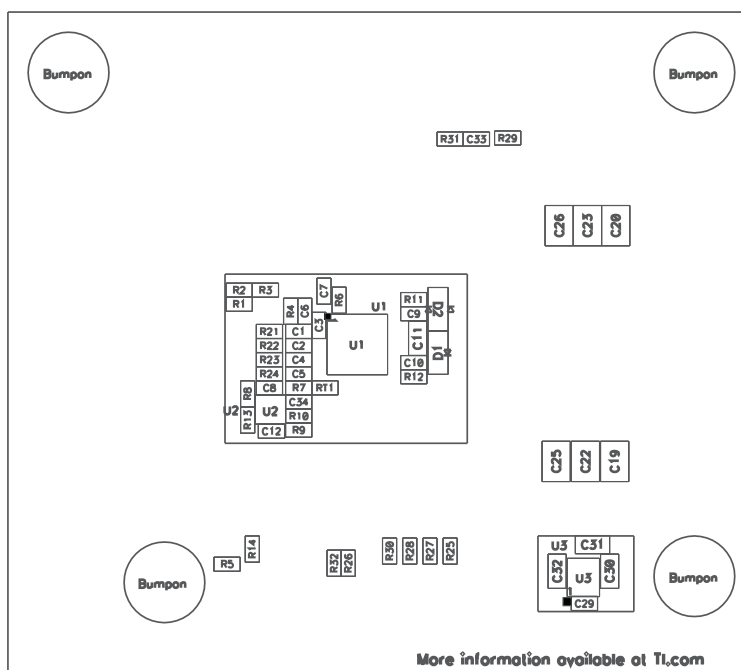


Figure 16. TPS51727EVM Bottom Assembly Drawing, Bottom View

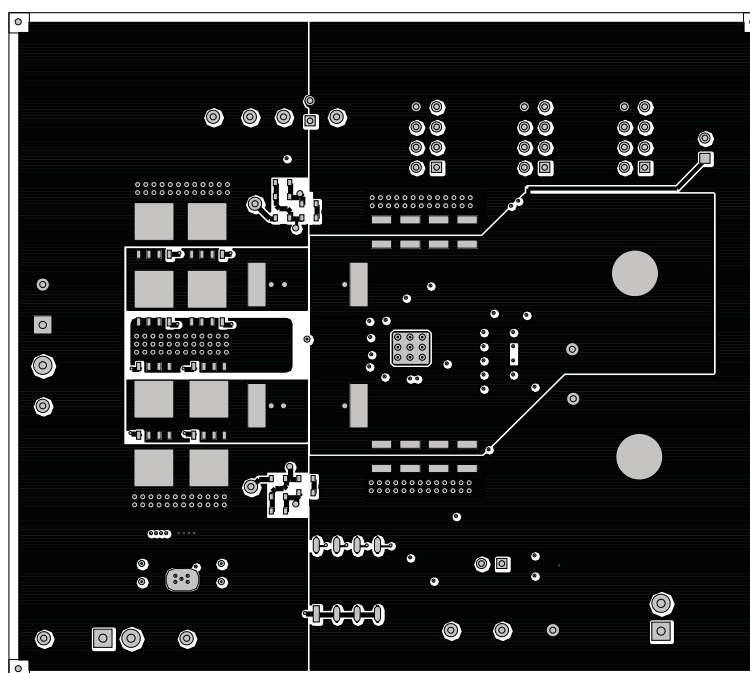


Figure 17. TPS51727EVM Top Copper, Top View

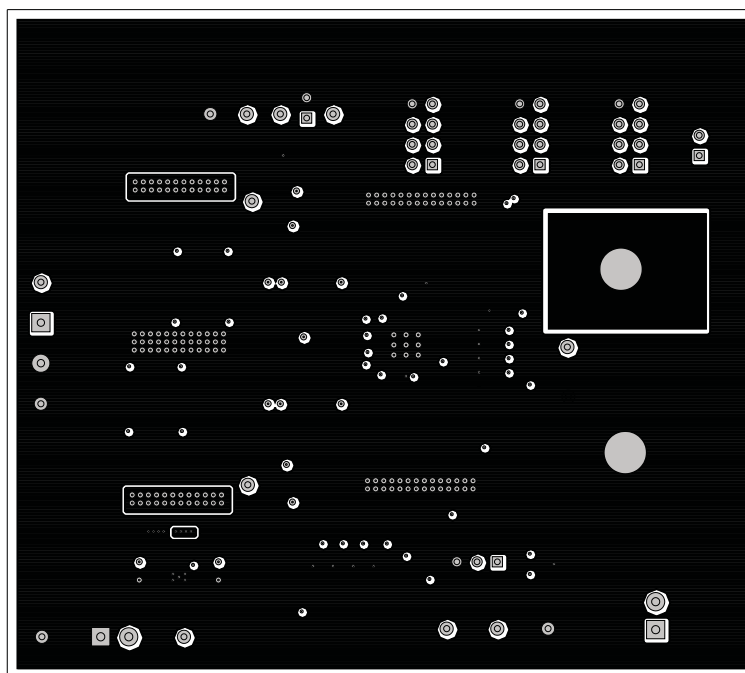


Figure 18. TPS51727EVM Internal Layer 2, Top View

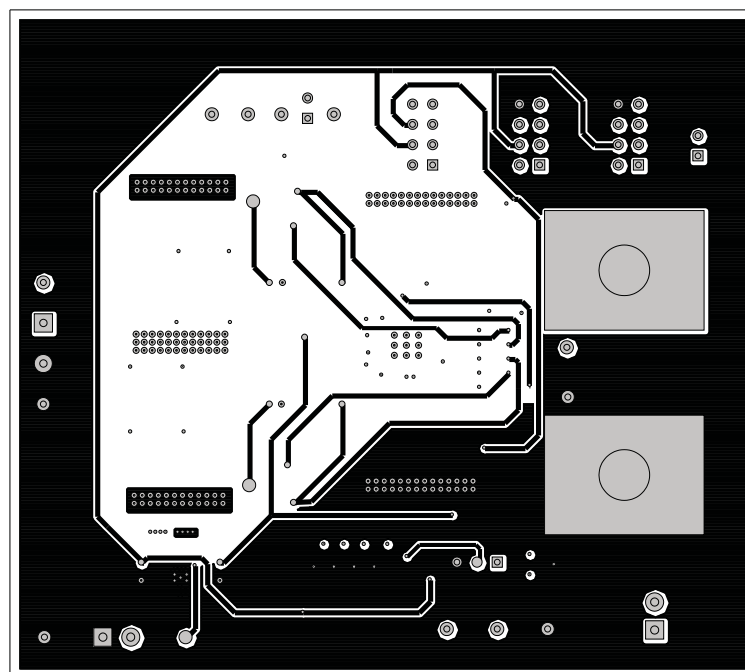


Figure 19. TPS51727EVM Internal Layer 3, Top View

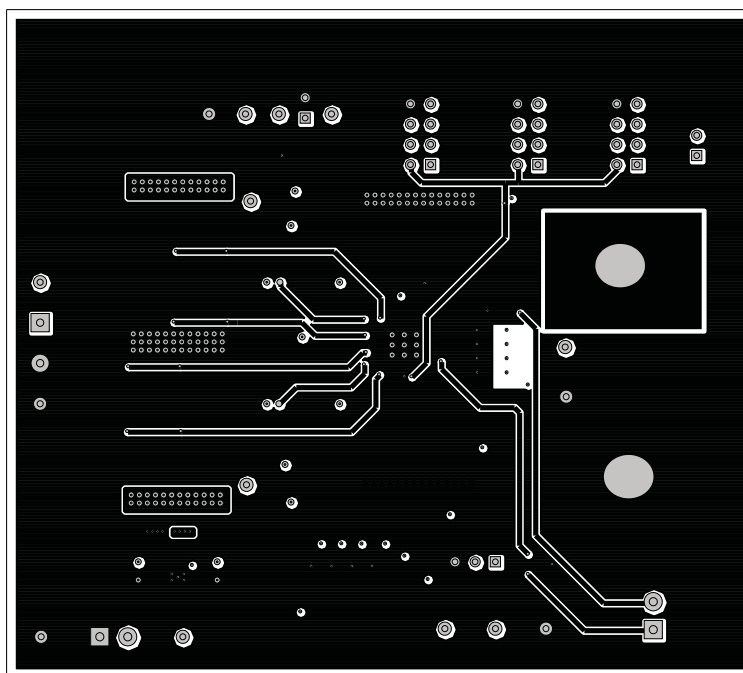


Figure 20. TPS51727EVM Internal Layer 4, Top View

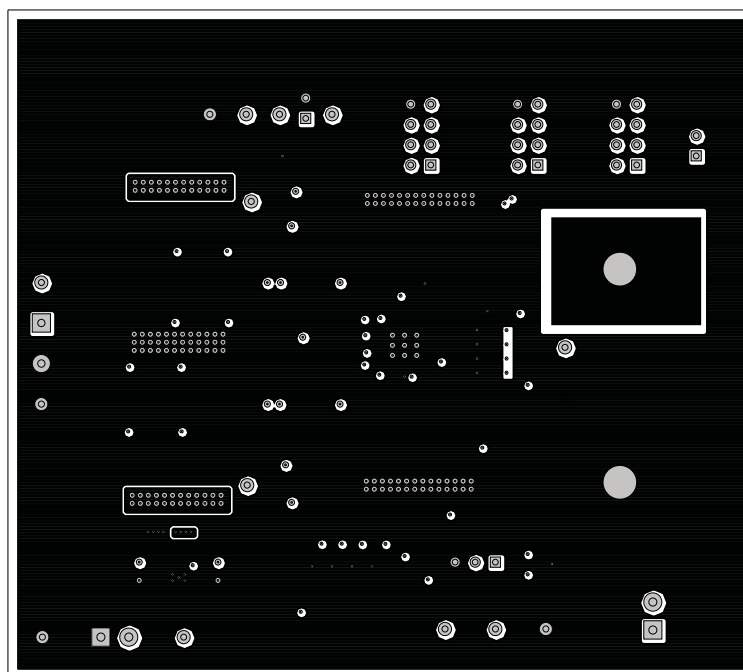


Figure 21. TPS51727EVM Internal Layer 5, Top View

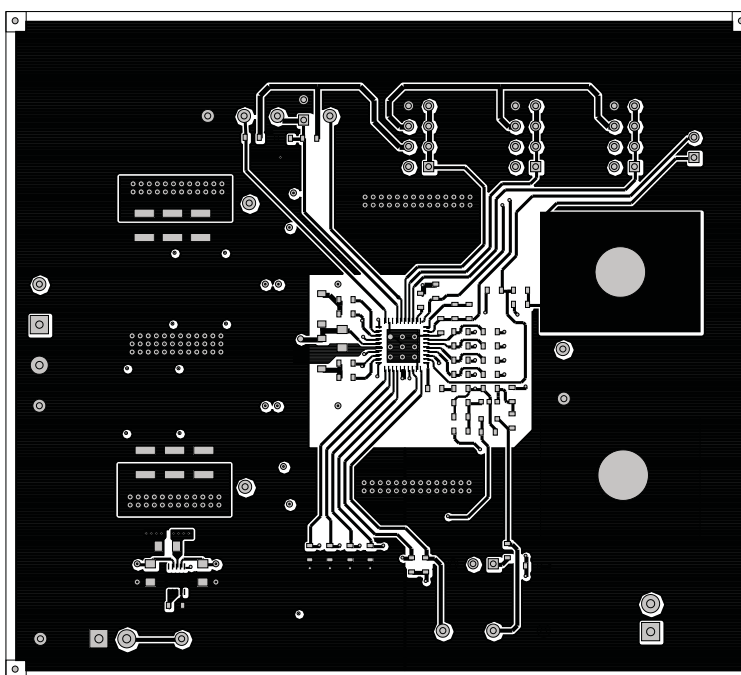


Figure 22. TPS51727EVM Bottom Copper, Top View

9 Bill of Materials

Table 9 presents the EVM bill of materials according to the schematic shown in Figure 1 and Figure 2.

Table 9. EVM Bill of Materials

QTY	REFDES	DESCRIPTION	MFR	PART NUMBER
6	C19, C20, C22, C23, C25, C26	Capacitor, Ceramic, 22 μ F, 16V, X5R, 10%, 1210	MuRata	GRM32ER61C226KE20L
1	C6	Capacitor, Ceramic, 47 pF, 25V, COG or NPO, 10%, 0603	STD	STD
4	C1, C2, C4, C5	Capacitor, Ceramic, 33 pF, 25V, COG or NPO, 10%, 0603	STD	STD
1	C12	Capacitor, Ceramic, 0.1 μ F, 10V, X7R, 10%, 0603	STD	STD
2	C14, C16	Capacitor, Ceramic, 0.015 μ F, 25V, X7R, 10%, 0603	STD	STD
1	C3	Capacitor, Ceramic, 0.22 μ F, 6.3V, X7R, 10%, 0603	STD	STD
4	C11, C30, C31, C32	Capacitor, Ceramic, 10 μ F, 16V, X5R, 10%, 0805	STD	STD
4	C7, C9, C10, C29	Capacitor, Ceramic, 1 μ F, 10V, X7R, 10%, 0603	STD	STD
8	C13, C15, C17, C18, C21, C24, C27, C28	Capacitor, Ceramic, 100 μ F, 6.3V, X5R, 20%, 1210	Murata	GRM32ER60J107ME20L
3	C8, C33, C34	Capacitor, Ceramic, 0.01 μ F, 10V, X7R, 10%, 0603	STD	STD
2	D1, D2	Diode, Schottky, 0.5A, 20V	Fairchild	MBR0520L
2	L1, L2	Inductor, SMT, 0.47 μ H, 41A, 0.001 Ω	Vishay	IHLP5050FDERR47M01
2	R1, R5	Resistor, Chip, 10.0, 1/16W, 1%, 0603	STD	STD
2	R11, R12	Resistor, Chip, 5.11, 1/16W, 1%, 0603	STD	STD
1	R13	Resistor, Chip, 49.9K, 1/16W, 1%, 0603	STD	STD
1	R14	Resistor, Chip, 0, 1/16W, 1%, 0603	STD	STD
2	R15, R16	Resistor, Chip, 24.9K, 1/16W, 1%, 0603	STD	STD
2	R17, R18	Resistor, Chip, 169K, 1/16W, 1%, 0603	STD	STD
2	R19, R20	Resistor, Chip, 43.2K, 1/16W, 1%, 0603	STD	STD
1	R2	Resistor, Chip, 4.02K, 1/16W, 1%, 0603	STD	STD

Table 9. EVM Bill of Materials (continued)

QTY	REFDES	DESCRIPTION	MFR	PART NUMBER
1	R3	Resistor, Chip, 20.0K, 1/16W, 1%, 0603	STD	STD
1	R4	Resistor, Chip, 7.5K, 1/16W, 1%, 0603	STD	STD
1	R6	Resistor, Chip, 124K, 1/16W, 1%, 0603	STD	STD
1	R7	Resistor, Chip, 2.00K, 1/16W, 1%, 0603	STD	STD
2	R8, R10	Resistor, Chip, 1.00K, 1/16W, 1%, 0603	STD	STD
1	R9	Resistor, Chip, 2.05K, 1/16W, 1%, 0603	STD	STD
3	RT1,RT2,RT3	NTC, Chip, Thermistor, 150K, 5%, 0603	Panasonic-ECG	ERT-J1VV154J
4	R21, R22, R23, R24	Resistor, Chip, 475, 1/16W, 1%, 0603	STD	STD
8	R25, R26, R27, R28, R29, R30, R31, R32	Resistor, Chip, 10.0K, 1/16W, 1%, 0603	STD	STD
2	Q2, Q3	MOSFET, Nch, 25V, 21A, 5.7 mΩ, TDSO8	Ciclon	CSD16404Q5A
2	Q1, Q4	MOSFET, Nch, 25V, 31A, 2.1 mΩ, TDSO8	Ciclon	CSD16321Q5
1	U1	IC, Dual-phase, ECO-mode, Step-down Synchronous Buck Controller, QFN40	TI	TPS51727RHA
1	U2	IC, Comparator, Differential, single, SOT_23_5(DBV)	TI	TL331IDBV
1	U3	IC, Integrated LDO with switch-over circuit, DGS10	TI	TPS51103DRC

Evaluation Board/Kit Important Notice

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive**.

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.**

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please contact the TI application engineer or visit www.ti.com/esh.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

FCC Warning

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

EVM Warnings and Restrictions

It is important to operate this EVM within the input voltage range of 8 V to 14 V and the output voltage range of 0.875 V to 1.5 V .

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 60° C. The EVM is designed to operate properly with certain components above 60° C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2009, Texas Instruments Incorporated

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2009, Texas Instruments Incorporated

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru