

DESCRIPTION

The **MMP757141-36** is part of a family of smart motor control boards for servo motor applications. This design is capable of delivering 141W continuous power, and is designed to fit NEMA 23 format, 57mm motors.

The board features: an embedded angular sensor; FOC control; selectable position, speed, and torque loop mode; and RS485 and PULSE/DIR input interfaces.

Easy-to-use GUI software provides flexibility by allowing users to flexibly the design online through the RS485 control interface. The parameters are saved in the control board's non-volatile memory.

Users can also order a complete motor (**MSM957141-36**). A datasheet for the MSM957141-36 is available for download at www.monolithicpower.com.

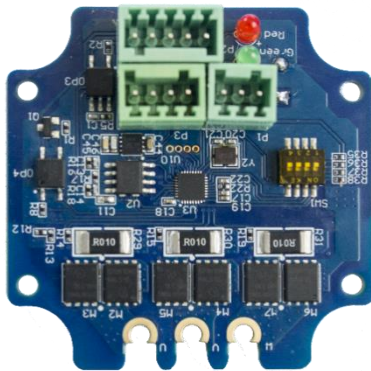


Figure 1: Motor Control PCBA

FEATURES

- 18V to 70V Input Voltage Range
- Max 141W Continuous Power Output
- 0.3° Position Resolution
- RS485 Interface and PULSE/DIR Interface
- Position Control and Speed Control
- Operating Temperature: 0°C to 70°C (Power Derated > 40°C)
- Storage Temperature: -40°C to +125°C

ORDERING INFORMATION

| | |
|---------------------|------------------|
| Part Number | MMP757141-36-C |
| Diameter (mm) | 57 |
| Power (W) | 141 |
| Typical Voltage (V) | 36 |
| Control Mode | Speed/Position |
| Interface | RS485, PULSE/DIR |

RECOMMENDED OPERATING CONDITIONS

Input voltage 18V to 70V
 Control interface voltage 0V to 5.5V
 Max pulse frequency 500kHz
 RS485 A/B voltage 0V to 5.5V
 RS485 common mode voltage ±15V
 Operation temperature 0°C to 70°C
 Storage temperature -40°C to +125°C

| Motor Control Board | | | |
|---------------------|-------------|-------|-------|
| Parameters | Condition | Value | Units |
| Input voltage | | 36 | V |
| Output power | 0°C to 40°C | 141 | W |
| Position resolution | | 0.3 | ° |

INSTALLATION OF PCB ASSEMBLY IN SMART MOTOR

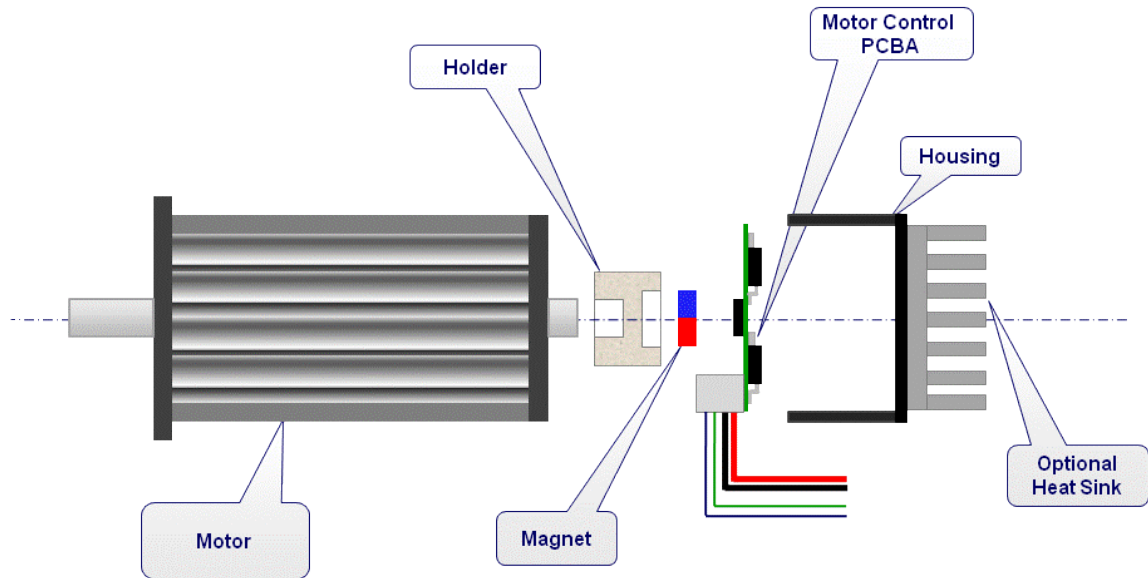


Figure 2: Smart Motor PCB Assembly

The motor control PCB assembly can be installed into a motor (see Figure 2). Users can manufacture their own control board housing and magnet holder based on the actual motor dimension. MPS will supply the magnet.

Table 1 shows some examples of recommended magnets for use with the MMP module. A sintered NdFeB or SmCo magnet of a 6mm to 8mm diameter and 2.5mm to 3mm height with remanent field strength in the 1.0T to 1.2T range is suggested (see Figure 3). The diameter of the magnet depends on the specific motor shaft and holder design used. It is important that the magnetization is diametrically polarized.

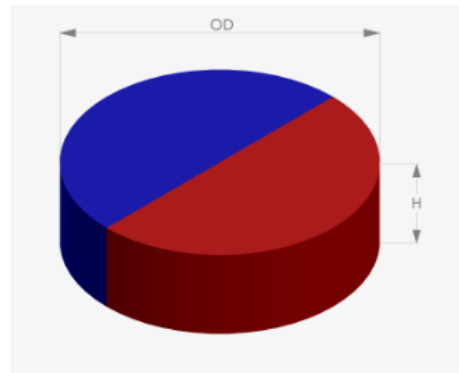


Figure 3: Magnet Height and Diameter

The magnet air gap spacing to the sensor surface should be set to achieve a field strength between 30mT min and 80mT max (see Figure 4). The MPS magnetic simulation tool at <http://sensors.monolithicpower.com/> can be used to find the correct air gap spacing for the particular magnet used.

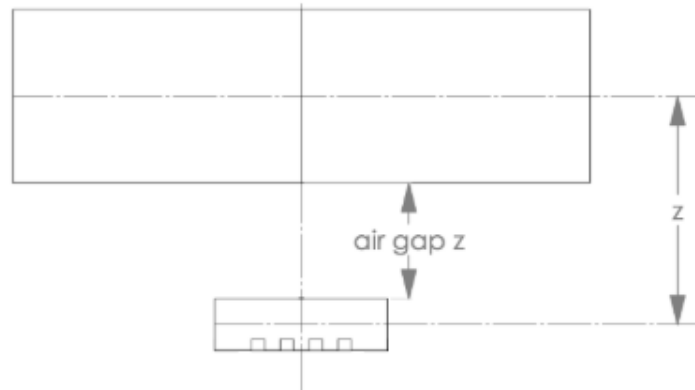

Figure 4: Magnet Air Gap Spacing

Table 1 shows the recommended minimum and maximum air gap spacing for the suggested magnets.

Table 1: Examples and Recommended Magnets for Use with the MMP Module

| OD (mm) | H (mm) | Material | Remanence (Br) (T) | Magnetization | Recommended “Air Gap Z” Min/Max (mm) |
|---------|--------|----------|--------------------|---------------|--------------------------------------|
| 6.0 | 2.5 | N35 | 1.2 | Diametrical | 1.5 to 3.5 |
| 6.0 | 2.5 | Sm26/16 | 1.08 | Diametrical | 1.3 to 3.3 |
| 6.0 | 3.0 | N35 | 1.2 | Diametrical | 1.8 to 3.8 |
| 6.0 | 3.0 | Sm26/16 | 1.08 | Diametrical | 1.5 to 3.6 |
| 8.0 | 2.5 | N35 | 1.2 | Diametrical | 1.8 to 4.5 |
| 8.0 | 2.5 | Sm26/16 | 1.08 | Diametrical | 1.5 to 4.1 |
| 8.0 | 3.0 | N35 | 1.2 | Diametrical | 2.1 to 4.8 |
| 8.0 | 3.0 | Sm26/16 | 1.08 | Diametrical | 1.8 to 4.5 |


The choice of neodymium or samarium cobalt material depends on the target motor’s end application. Neodymium magnets are strong and resistant to demagnetization, but samarium cobalt magnets have a higher working temperature range and better corrosion resistance.

The choice of holder material is important. It should be of a nonmagnetic material such as aluminum, brass, or plastic so as not to influence or distort the sensor magnet’s field. The user can determine the choice of attachment method to the shaft based on the design criteria for the motor. To avoid detachment due to the different coefficients of thermal expansion for magnet, holder, and shaft, use of a high-temperature industrial adhesive is recommended.



The magnet holder requires a motor with a shaft that extends from the rear of the motor. Contact the individual motor supplier to discuss options for shaft diameter and length. This will determine the required holder size and housing depth.

The PCB housing design should take into account any heatsinking requirements for the motor driver components, additional bulk motor supply capacitance, and EMC filtering as needed to meet the target application’s specifications. The housing should center the central angle sensor IC to align to the motor shaft magnet holder with no more than $\pm 0.4\text{mm}$ of axial misalignment.

HARDWARE CONNECTION FOR PROGRAMMING SMART MOTOR

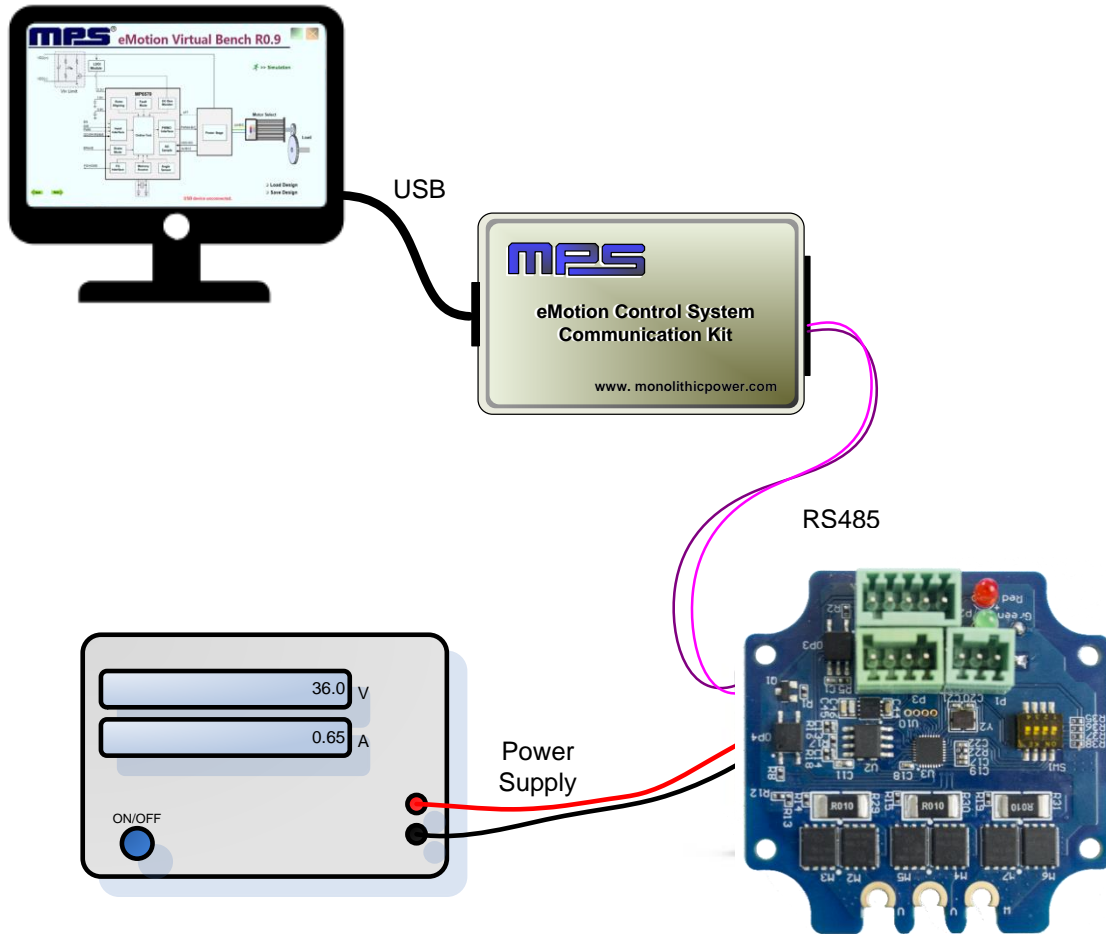


PIN CONFIGURATION

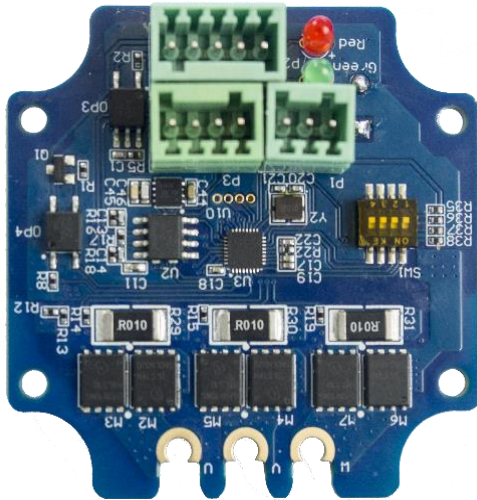


| Pin Number | Designation | Pin Description |
|--------------------------|-------------|-----------------------------------|
| RS485 Interface | | |
| 1 | EXT_5V | 5V input for firmware programming |
| 2 | B | RS485 node B |
| 3 | AGND | RS485 ground |
| 4 | A | RS485 node A |
| Power Interface | | |
| 5 | GND | Power ground |
| 6 | R- | Shunt resistor return node |
| 7 | VIN | Input power supply |
| Control Interface | | |
| 8 | COM- | Common return |
| 9 | EN+ | Enable input |
| 10 | PEND+ | Position end output |
| 11 | PUL+ | Pulse input |
| 12 | DIR+ | Direction input |

TYPICAL PERFORMANCE CHARACTERISTICS

$T_A = 25^\circ\text{C}$, $V_{IN} = 36\text{V}$, unless otherwise noted.

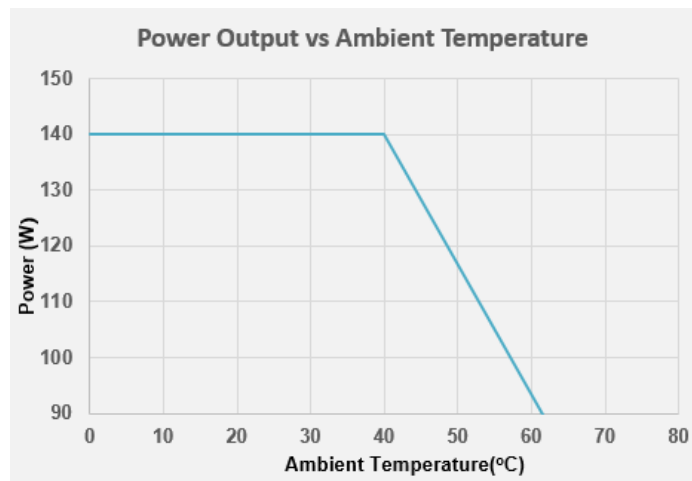

DRIVER MODULE MECHANICAL DRAWING

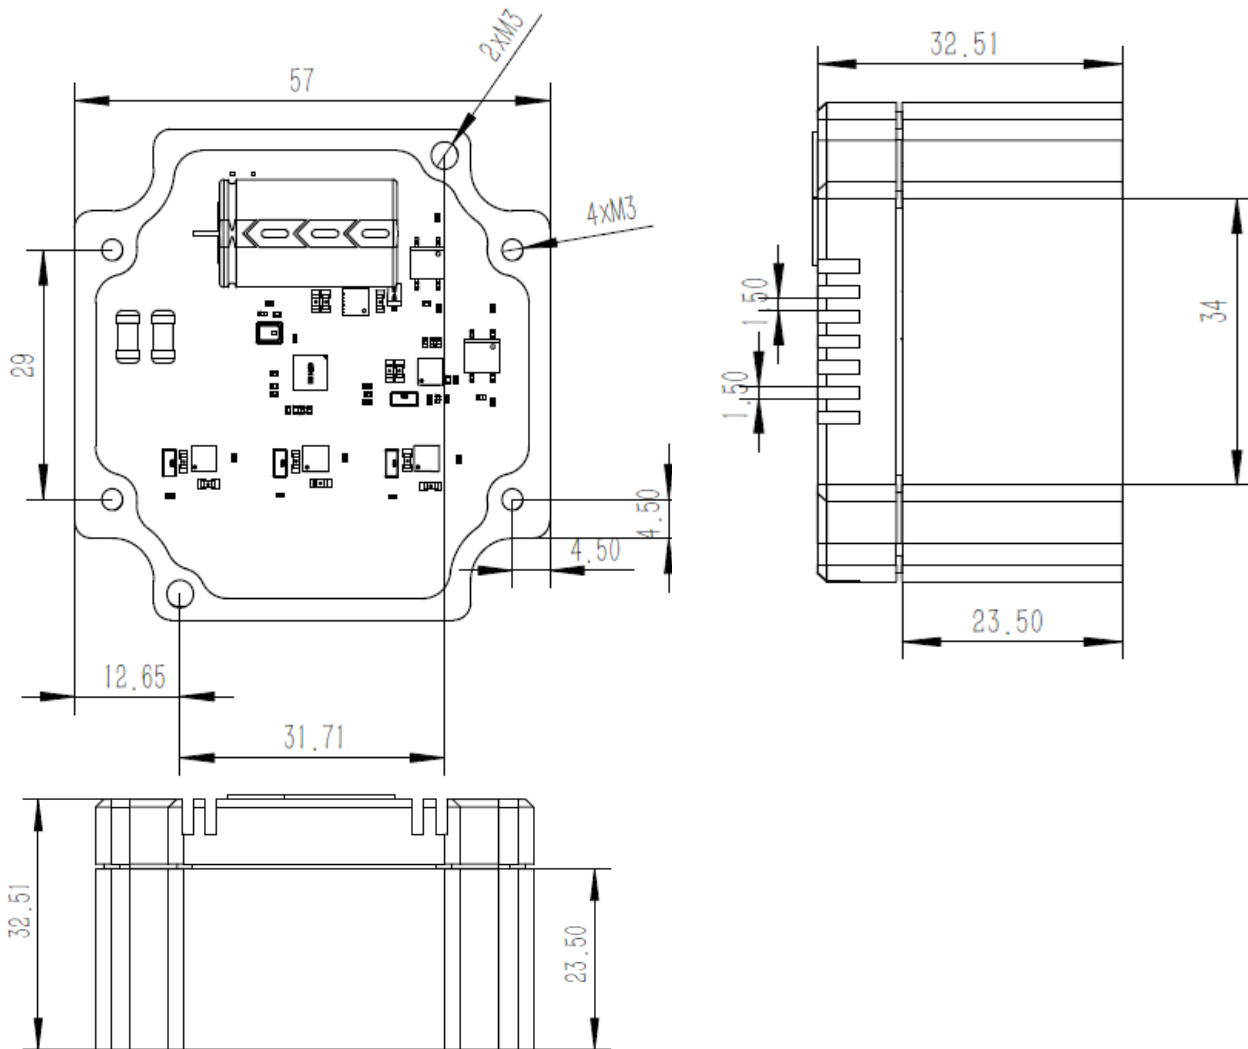

Note that no housing is supplied with the MMP75141-36 PCB.

The above drawings are for illustration only, and are based on dimensions for a NEMA 23 format motor. Contact the individual motor supplier for the particular mounting hole positions and dimension information.

NOTICE: The information in this document is subject to change without notice. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru