

General Description

The MAX6627/MAX6628 precise digital temperature sensors report the temperature of a remote sensor. The remote sensor is a diode-connected transistor, typically a low-cost, easily mounted 2N3904 NPN type that replaces conventional thermistors or thermocouples. The MAX6627/MAX6628 can also measure the die temperature of other ICs, such as microprocessors (uPs) or microcontrollers (µCs) that contain an on-chip, diodeconnected transistor.

Remote accuracy is $\pm 1^{\circ}$ C when the temperature of the remote diode is between 0°C and +125°C and the temperature of the MAX6627/MAX6628 is +30°C. The temperature is converted to a 12-bit + sign word with 0.0625°C resolution. The architecture of the device is capable of interpreting data as high as +145°C from the remote sensor. The MAX6627/MAX6628 temperature should never exceed +125°C.

These sensors are 3-wire serial interface SPI™ compatible, allowing the MAX6627/MAX6628 to be readily connected to a variety of µCs. The MAX6627/MAX6628 are read-only devices, simplifying their use in systems where only temperature data is required.

Two conversion rates are available, one that continuously converts data every 0.5s (MAX6627), and one that converts data every 8s (MAX6628). The slower version provides minimal power consumption under all operating conditions (30µA, typ). Either device can be read at any time and provide the data from the last conversion.

Both devices operate with supply voltages between +3.0V and +5.5V, are specified between -55°C and +125°C, and come in space-saving 8-pin SOT23 and lead-free TDFN packages.

Applications

Hard Disk Drive **Smart Battery Packs** Automotive Industrial Control Systems Notebooks, PCs

SPI is a trademark of Motorola, Inc.

Pin Configurations appears at end of data sheet.

Features

- **♦** Accuracy ±1°C (max) from 0°C ≤ T_{RJ} ≤ +125°C, T_A = +30°C
 - ± 2.4 °C (max) from -55°C \leq T_{RJ} \leq +100°C, 0°C ≤ TA ≤ +70°C
- ♦ 12-Bit + Sign, 0.0625°C Resolution
- **♦** Low Power Consumption 30μA (typ) (MAX6628) 200μA (typ) (MAX6627)
- ♦ Operating Temperature Range (-55°C to +125°C)
- **♦** Measurement Temperature Range, Remote Junction (-55°C to +145°C)
- ♦ 0.5s (MAX6627) or 8s (MAX6628) Conversion Rate
- **♦ SPI-Compatible Interface**
- ♦ +3.0V to +5.5V Supply Range
- ♦ 8-Pin SOT23 and TDFN Packages
- **♦** Lead(Pb)-Free Version Available (TDFN Package)

Ordering Information


PART	PIN-PACKAGE	TOP MARK
MAX6627MKA#TG16	8 SOT23	AEQD
MAX6627MTA+T	8 TDFN-EP*	AUT
MAX6628MTA+T	8 TDFN-EP*	AUU

Note: All devices are specified over the -55°C to +125°C operating temperature range.

#Denotes a RoHS-compliant device that may include lead(Pb) that is exempt under the RoHS requirements.

- +Denotes a lead-free/RoHS-compliant package.
- T = Tape and reel.
- *EP = Exposed pad.

Typical Operating Circuit



ABSOLUTE MAXIMUM RATINGS

(All voltages referenced to GND.)		Continuous Power Dissipati
VCC	0.3V to +6V	SOT23 (derate 9.7mW/°C
SDO, SCK, DXP, CS	0.3V to $(V_{CC} + 0.3V)$	TDFN (derate 18.5mW/°C
DXN	0.3V to +0.8V	Operating Temperature Rar
SDO Pin Current Range	1mA to +50mA	Junction Temperature
Current Into All Other Pins	10mA	Storage Temperature Range
ESD Protection (Human Body Model)±2000V	Lead Temperature (soldering
		Caldarina Taranaratura (rafl

Continuous Power Dissipation ($T_A = +70^{\circ}C$)	
SOT23 (derate 9.7mW/°C above +70°C)	777mW
TDFN (derate 18.5mW/°C above +70°C)	1481.5mW
Operating Temperature Range	55°C to +125°C
Junction Temperature	+150°C
Storage Temperature Range	65°C to +150°C
Lead Temperature (soldering, 10s)	+300°C
Soldering Temperature (reflow)	+260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

 $(3.0 \text{V} \le \text{V}_{CC} \le 5.5 \text{V}, -55 ^{\circ}\text{C} \le \text{T}_{A} \le +125 ^{\circ}\text{C}, \text{ unless otherwise noted.}$ Typical values are at $\text{T}_{A} = +25 ^{\circ}\text{C}, \text{ V}_{CC} = +3.3 \text{V}, \text{ unless otherwise noted.})$

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS	
TEMPERATURE	•		•				
		$0^{\circ}\text{C} \le T_{\text{RJ}} \le +125^{\circ}\text{C}, T_{\text{A}} = +30^{\circ}\text{C},$ $V_{\text{CC}} = +3.3\text{V}$	-1.0	±0.5	±1		
Accuracy (Nata 1)		$-55^{\circ}\text{C} \le T_{\text{RJ}} \le +100^{\circ}\text{C}, \ 0^{\circ}\text{C} \le T_{\text{A}} \le +70^{\circ}\text{C},$ $V_{\text{CC}} = +3.3\text{V}$	-2.4		+2.4	°C	
Accuracy (Note 1)		$-55^{\circ}\text{C} \le T_{\text{RJ}} \le +145^{\circ}\text{C}, \ 0^{\circ}\text{C} \le T_{\text{A}} \le +70^{\circ}\text{C},$ $V_{\text{CC}} = +3.3\text{V}$	-4.5		+4.5		
		$-55^{\circ}\text{C} \le T_{\text{RJ}} \le +125^{\circ}\text{C}, -55^{\circ}\text{C} \le T_{\text{A}} \le +125^{\circ}\text{C},$ $V_{\text{CC}} = +3.3\text{V}$	-5.5		+5.5		
Power-Supply Sensitivity				0.25	0.7	°C/V	
Resolution				0.0625		°C	
Time Between Conversion Starts	tSAMPLE	MAX6627	0.5				
Time between Conversion Starts		MAX6628		8		S	
Conversion Time	tCONV		180	250	320	ms	
POWER SUPPLY							
Supply Voltage Range	VCC		3.0		5.5	V	
	I _{SDO}	Shutdown, $V_{CC} = +0.8V$			5		
Supply Current, SCK Idle	I _{IDLE}	ADC idle, \overline{CS} = low			20	μΑ	
	ICONV	ADC converting		360	600		
A	1	MAX6627		200	400	^	
Average Operating Current	Icc	MAX6628		30	50	μA	
Power-On Reset (POR) Threshold		V _{CC} , falling edge		1.6		V	
Comment Coursing for Dia-1-		High level	80	100	120		
Current Sourcing for Diode		Low level	8	10	12	μΑ	

ELECTRICAL CHARACTERISTICS (continued)

 $(3.0V \le V_{CC} \le 5.5V, -55^{\circ}C \le T_{A} \le +125^{\circ}C$, unless otherwise noted. Typical values are at $T_{A} = +25^{\circ}C$, $V_{CC} = +3.3V$, unless otherwise noted.)


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
LOGIC INPUTS (CS, SCK)			·			
Logic Input Low Voltage	VIL				0.3 x V _C C	V
Logic Input High Voltage	VIH		0.7 x V _C C			V
Input Leakage Current	ILEAK	$V_{\overline{CS}} = V_{SCK} = GND \text{ or } V_{CC}$			1	μΑ
LOGIC OUTPUTS (SDO)						
Output Low Voltage	VoL	I _{SINK} = 1.6mA			0.4	
Output High Voltage	Voh	ISOURCE = 1.6mA	V _{CC} - 0.4			V
TIMING CHARACTERISTICS (N	ote 2, Figure	2)				
Serial-Clock Frequency	fscl				5	MHz
SCK Pulse Width High	tсн		100			ns
SCK Pulse Width Low	tCL		100			ns
CS Fall to SCK Rise	tcss	C _{LOAD} = 10pF	80			ns
CS Fall to Output Enable	t _{DV}	C _{LOAD} = 10pF			80	ns
CS Rise to Output Disable	t _{TR}	C _{LOAD} = 10pF			50	ns
SCK Fall to Output Data Valid	tDO	C _{LOAD} = 10pF		•	80	ns

Note 1: T_{RJ} is the temperature of the remote junction.

Note 2: Serial timing characteristics guaranteed by design.

Typical Operating Characteristics

 $(V_{CC} = +3.3V, T_A = +25^{\circ}C, unless otherwise noted.)$

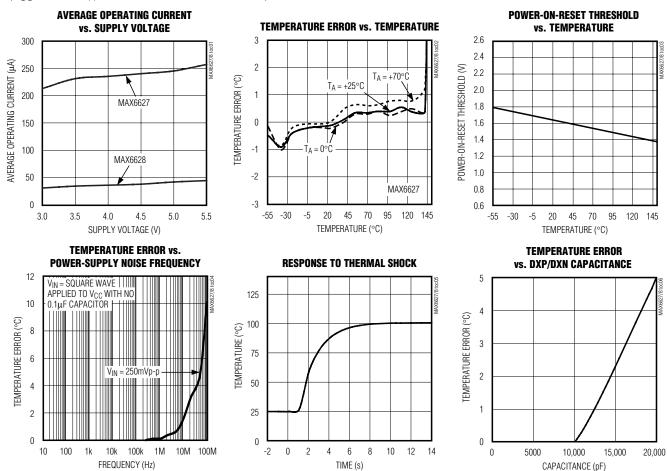

PIN	NAME	FUNCTION
1	GND	Ground
2	DXN	Combined Current Sink and ADC Negative Input for Remote Diode. DXN is normally biased to a diode voltage above ground.
3	DXP	Combined Current Source and ADC Positive Input for Remote Diode. Place a 2200pF capacitor between DXP and DXN for noise filtering.
4	Vcc	Supply Voltage Input. Bypass with a 0.1µF to GND.
5	SCK	SPI Clock Input
6	CS	Chip Select Input. Pulling $\overline{\text{CS}}$ low initiates an idle state, but the SPI interface is still enabled. A rising edge of $\overline{\text{CS}}$ initiates the next conversion.
7	SDO	SPI Data Output
8	N.C.	No Connect. Internally not connected. Can be connected to GND for improved thermal conductivity.
_	EP	Exposed Pad. Internally connected to GND. Connect to a large ground plane to maximize thermal performance. Not intended as an electrical connection point.

Pin Description

Detailed Description

The MAX6627/MAX6628 remote digital thermometers report the temperature of a remote sensor. The remote sensor is a diode-connected transistor—typically, a low-cost, easily mounted 2N3904 NPN type—that replaces conventional thermistors or thermocouples. The MAX6627/MAX6628 can also measure the die temperature of other ICs, such as μ Ps or μ Cs, that contain an on-chip, diode-connected transistor.

Remote accuracy is $\pm 1^{\circ}\text{C}$ when the temperature of the remote diode is between 0°C and $+125^{\circ}\text{C}$ and the temperature of the MAX6627/MAX6628 is $+30^{\circ}\text{C}$. Data is available as a 12-bit + sign word with 0.0625°C resolution. The operating range of the device extends from -55°C to $+125^{\circ}\text{C}$, although the architecture of the device is capable of interpreting data up to $+145^{\circ}\text{C}$. The device itself should never exceed $+125^{\circ}\text{C}$.

The MAX6627/MAX6628 are designed to work in conjunction with an external μC or other intelligent device serving as the master in thermostatic, process-control, or monitoring applications. The μC is typically a power management or keyboard controller, generating SPI serial commands by "bit-banging" GPIO pins.

Two conversion rates are available; the MAX6627 continuously converts data every 0.5s, and the MAX6628 continuously converts data every 8s. Either device can be read at any time and provide the data from the last conversion. The slower version provides minimal power consumption under all operating conditions. Or, by tak-

ing $\overline{\text{CS}}$ low, any conversion in progress is stopped, and the rising edge of $\overline{\text{CS}}$ always starts a fresh conversion and resets the interface. This permits triggering a conversion at any time so that the power consumption of the MAX6627 can be overcome, if needed. Both devices operate with input voltages between +3.0V and +5.5V and are specified between -55°C and +125°C. The MAX6627/MAX6628 come in space-saving 8-pin SOT23 and TDFN packages.

ADC Conversion Sequence

The device powers up as a free-running data converter (Figure 1). The $\overline{\text{CS}}$ pin can be used for conversion control. The rising edge of $\overline{\text{CS}}$ resets the interface and starts a conversion. The falling edge of $\overline{\text{CS}}$ stops any conversion in progress, overriding the latency of the part. Temperature data from the previous completed conversion is available for read (Tables 1 and 2). It is required to maintain $\overline{\text{CS}}$ high for a minimum of 320ms to complete a conversion.

Idle Mode

Pull CS low to enter idle mode. In idle mode, the ADC is not converting. The serial interface is still active and temperature data from the last completed conversion can still be read.

Power-On Reset

The POR supply voltage of the MAX6627/MAX6628 is typically 1.6V. Below this supply voltage, the interface is inactive and the data register is set to the POR state,

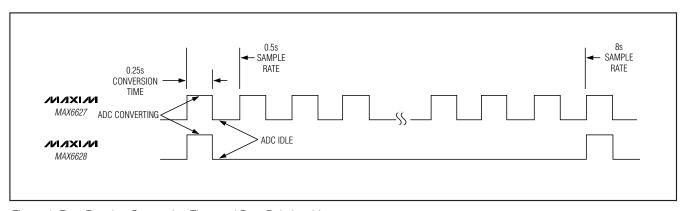


Figure 1. Free-Running Conversion Time and Rate Relationships

Table 1. Data Output Format

D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
Sign	MSB Data											LSB Data	Low	High-Z	High-Z

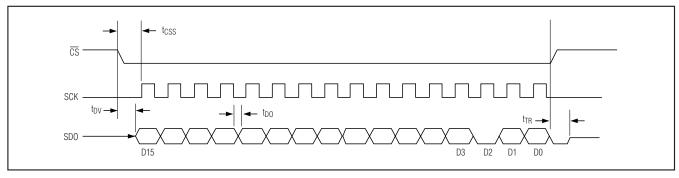


Figure 2. SPI Timing Diagram

Table 2. Temperature Data Format (Two's Complement)

TEMPERATURE	DIGITAL OUTF	UT (BINA	RY)
(°C)	D15-D3	D2	D1, D0
150	0,1001,0110,0000	0	XX
125	0,0111,1101,0000	0	XX
25	0,0001,1001,0000	0	XX
0.0625	0,0000,0000,0001	0	XX
0	0,0000,0000,0000	0	XX
-0.0625	1,1111,1111,1111	0	XX
-25	1,1110,0111,0000	0	XX
-55	1,1100,1001,0000	0	XX

0°C. When power is first applied and V_{CC} rises above 1.6V (typ), the device starts to convert, although temperature reading is not recommended at V_{CC} levels below 3.0V.

Serial Interface

Figure 2 is the serial interface timing diagram. The data is latched into the shift register on the falling edge of the $\overline{\text{CS}}$ signal and then clocked out at the SDO pin on the falling edge of SCK with the most-significant bit (MSB) first. There are 16 edges of data per frame. The last 2 bits, D0 and D1, are always in high-impedance mode. The falling edge of $\overline{\text{CS}}$ stops any conversion in progress, and the rising edge of $\overline{\text{CS}}$ always starts a new conversion and resets the interface. It is required to maintain a 320ms minimum pulse width of high $\overline{\text{CS}}$ signal before a conversion starts.

Applications Information

Remote-Diode Selection

Temperature accuracy depends upon having a good-quality, diode-connected, small-signal transistor.

Accuracy has been experimentally verified for all of the devices listed in Table 3. The MAX6627/MAX6628 can also directly measure the die temperature of CPUs and other ICs with on-board temperature-sensing diodes.

The transistor must be a small-signal type with a relatively high forward voltage. This ensures that the input voltage is within the A/D input voltage range. The forward voltage must be greater than 0.25V at 10µA at the highest expected temperature. The forward voltage must be less than 0.95V at 100µA at the lowest expected temperature. The base resistance has to be less than 100 Ω . Tight specification of forward-current gain (+50 to +150, for example) indicates that the manufacturer has good process control and that the devices have consistent characteristics.

ADC Noise Filtering

The integrating ADC has inherently good noise rejection, especially of low-frequency signals such as 60Hz/120Hz power-supply hum. Micropower operation places constraints on high-frequency noise rejection. Lay out the PCB carefully with proper external noise filtering for high-accuracy remote measurements in electrically noisy environments.

Table 3. SOT23-Type Remote-Sensor Transistor Manufacturers

MANUFACTURER	MODEL			
Central Semiconductor (USA)	CMPT3904			
Motorola (USA)	MMBT3904			
Rohm Semiconductor (Japan)	SST3904			
Siemens (Germany)	SMBT3904			
Zetex (England)	FMMT3904CT-ND			

Note: Transistors must be diode connected (short the base to the collector).

6 ______ NIAXI/N

Filter high-frequency electromagnetic interference (EMI) at DXP and DXN with an external 2200pF capacitor connected between the two inputs. This capacitor can be increased to about 3300pF (max), including cable capacitance. A capacitance higher than 3300pF introduces errors due to the rise time of the switched-current source.

PCB Layout

- Place the MAX6627/MAX6628 as close as practical to the remote diode. In a noisy environment, such as a computer motherboard, this distance can be 4in to 8in, or more, as long as the worst noise sources (such as CRTs, clock generators, memory buses, and ISA/PCI buses) are avoided.
- 2) Do not route the DXP/DXN lines next to the deflection coils of a CRT. Also, do not route the traces across a fast memory bus, which can easily introduce +30°C error, even with good filtering. Otherwise, most noise sources are fairly benign.
- 3) Route the DXP and DXN traces parallel and close to each other, away from any high-voltage traces such as +12VDC. Avoid leakage currents from PCB contamination. A $20M\Omega$ leakage path from DXP to ground causes approximately +1°C error.
- 4) Connect guard traces to GND on either side of the DXP/DXN traces (Figure 3). With guard traces in place, routing near high-voltage traces is no longer an issue.
- 5) Route as few vias and crossunders as possible to minimize copper/solder thermocouple effects.
- 6) When introducing a thermocouple, make sure that both the DXP and the DXN paths have matching thermocouples. In general, PCB-induced thermocouples are not a serious problem. A copper solder thermocouple exhibits 3μV/°C, and it takes approximately 200μV of voltage error at DXP/DXN to cause a +1°C measurement error, so most parasitic thermocouple errors are swamped out.
- 7) Use wide traces. Narrow traces are more inductive and tend to pick up radiated noise. The 10mil

- widths and spacings recommended in Figure 3 are not absolutely necessary (as they offer only a minor improvement in leakage and noise), but use them where practical.
- 8) Placing an electrically clean copper ground plane between the DXP/DXN traces and traces carrying high-frequency noise signals helps reduce EMI.

Twisted Pair and Shielded Cables

For remote-sensor distances longer than 8in, or in particularly noisy environments, a twisted pair is recommended. Its practical length is 6ft to 12ft (typ) before noise becomes a problem, as tested in a noisy electronics laboratory. For longer distances, the best solution is a shielded twisted pair like that used for audio microphones. For example, Belden #8451 works well for distances up to 100ft in a noisy environment. Connect the twisted pair to DXP and DXN and the shield to ground, and leave the shield's remote end unterminated. Excess capacitance at DXN or DXP limits practical remote-sensor distances (see *Typical Operating Characteristics*).

For very long cable runs, the cable's parasitic capacitance often provides noise filtering, so the recommended 2200pF capacitor can often be removed or reduced in value. Cable resistance also affects remote-sensor accuracy. A 1Ω series resistance introduces about $+1/2^{\circ}C$ error.






Figure 3. Recommended DXP/DXN PC Traces

Functional Diagram

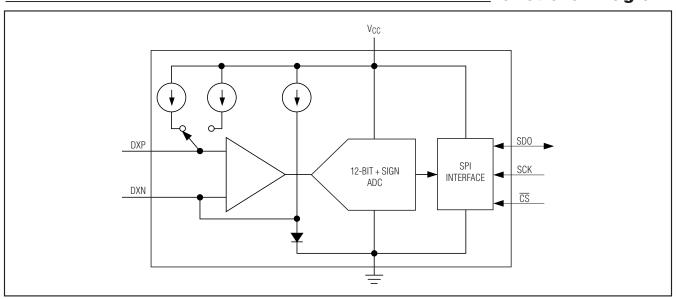

Pin Configurations

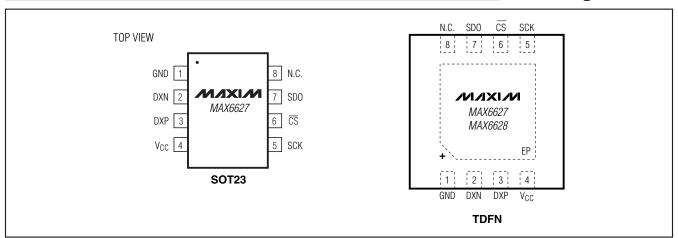

Chip Information

PROCESS: BICMOS

_Package Information

For the latest package outline information and land patterns (footprints), go to **www.maxim-ic.com/packages**. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
8 SOT23	K8F#4	<u>21-0078</u>	<u>90-0176</u>
8 TDFN-EP	T833+2	<u>21-0137</u>	90-0059

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION					
0	4/01	Initial release	_				
1	7/01	Removed future status from the MAX6628; changed I _{CONV} from 600µA (max) to 650µA (max) in the <i>Electrical Characteristics</i> table; replaced TOC1 in the <i>Typical Operating Characteristics</i> section	1, 2, 4				
2 4/04		Updated the lead temperature information in the <i>Absolute Maximum Ratings</i> section; updated the notes for the <i>Electrical Characteristics</i> table					
3	4/06	Added the TDFN package; updated Table 3; removed transistor count from the <i>Chip Information</i> section	1, 2, 5, 6, 7, 8, 10				
4 8/08		Added missing exposed pad description, updated ordering part numbers, and updated pin name for pin 7	1–4, 6, 8–11				
5	6/11	Corrected the top mark information and SOT23 part number in the <i>Ordering Information</i> table; added the soldering information to the <i>Absolute Maximum Ratings</i> section; added the land pattern numbers to the <i>Package Information</i> table	1, 2, 8				

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru