

Helping Customers Innovate, Improve & Grow



Description

The OX-402 is part of a series of oscillators specifically designed to support Timing Over Packet applications, in particular 1588-2008 based frequency and phase reference systems. The OX-402 is stratum 3E compliant.

Features

- Standard Frequencies: 10MHz, 19.44MHz, 20MHz, 38.88MHz, 40MHz
- Excellent temperature stability
- Superior long term stability
- Optimized to support Timing Over Packet applications
- Stratum 3E compliant according to GR1244

Applications

- SETS clock support
- Wireless Base Stations
- Edge and Core Routers


Performance Specifications

| Frequency Stability ¹ | | | | | |
|---|-----|------|--------|--------|---|
| Parameter | Min | Typ | Max | Units | Notes |
| Over all stability (df/f ₀) | | | ±4.6 | ppm | Free run accuracy |
| Holdover | | | 10 | ppb | Over 24 hours and 40°C window |
| Drift | | | ±1 | ppb | Over 24 hours and ±2.8°C |
| Temperature stability (df/f) | | | ±10 | ppb | -40 to 85°C |
| Initial Tolerance (df/f ₀) | | | ±500 | ppb | @25°C |
| vs. supply voltage change (df/f) | | | ±10 | ppb | static; 3.3V ± 5% |
| vs. load change (df/f) | | | ±10 | ppb | static; Load ± 5% |
| vs. aging / daily (df/f) | | | ± 1 | ppb | after 30 days; @25°C |
| vs. aging / month (df/f) | | | ± 25 | ppb | after 30 days; @25°C |
| vs. aging / year (df/f) | | | ± 100 | ppb | after 30 days; @25°C |
| vs. aging / 10 years (df/f) | | | ± 1 | ppm | after 30 days; @25°C |
| Phase Stability | | | | | |
| Parameter | Min | Typ | Max | Units | Notes |
| Jitter | | | < 1.00 | ps rms | @12kHz to 20MHz |
| MTIE 1s | | 0.2 | | ns | Wander Generation per GR1244, system performance when locked through a 1mHz loop bandwidth, see typical performance data. |
| MTIE 10s | | 2.0 | | ns | |
| MTIE 100s | | 10.0 | | ns | |
| MTIE 1000s | | 40.0 | | ns | |


Performance Specifications

| Phase Stability (continued) | | | | | |
|----------------------------------|--|-------|------|---------|---|
| Parameter | Min | Typ | Max | Units | Notes |
| TDEV 1s | | 0.015 | | ns | Wander Generation per GR1244, system performance when locked through a 1mHz loop bandwidth, see typical performance data. |
| TDEV 10s | | 0.13 | | ns | |
| TDEV 100s | | 1.5 | | ns | |
| TDEV 1000s | | 5.0 | | ns | |
| Phase Noise | | | | | |
| Parameter | Min | Typ | Max | Units | Notes |
| Phase Noise at 1 Hz Offset | | -85 | -60 | dBc/Hz | At 20MHz |
| Phase Noise at 10 Hz Offset | | -110 | -90 | dBc/Hz | |
| Phase Noise at 100 Hz Offset | | -130 | -115 | dBc/Hz | |
| Phase Noise 1 kHz Offset | | -143 | -130 | dBc/Hz | |
| Phase Noise at 10 kHz Offset | | -150 | -145 | dBc/Hz | |
| RF Output | | | | | |
| Signal | LVCMOS | | | | |
| Load | 15 | | | pF | ±10% |
| Rise Time | < 10 | | | ns | @ 10% to 90% V _{out} |
| Fall Time | <10 | | | ns | @90% to 10% V _{out} |
| Duty Cycle | 45/55 | | | % | @ 1.65 V |
| V Low | x < 0.4 | | | V | |
| V High | x > 2.4 | | | V | |
| Supply | | | | | |
| Supply Voltage (V _s) | 3.3±10% | | | V | |
| Current consumption | < 330 | | | mA | Steady state, @ V _s nom, 25°C |
| Current consumption | < 757 | | | mA | During warm up, @ V _s |
| Additional Parameters | | | | | |
| Warm Up Time | < 3 | | | minutes | @ 25°C to final frequency |
| ROHS | 100% ROHS 6 compliant | | | | |
| Washable | Washable device (hermetically sealed). | | | | |
| Absolute Maximum Ratings | | | | | |
| | Min | | Max | | Units |
| Operating temperature range | -40 | | 85 | | °C |
| Storage temperature range | -50 | | 85 | | °C |
| Supply Voltage | | | 5.5 | | V |

FREQUENCY STABILITY

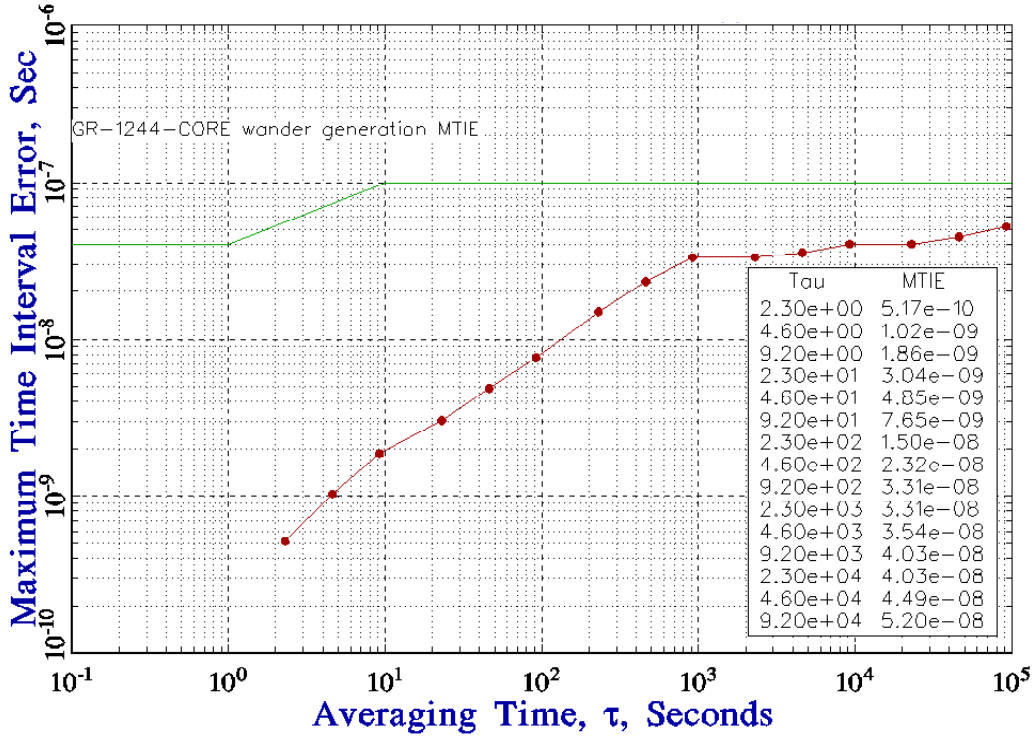


TIME STABILITY

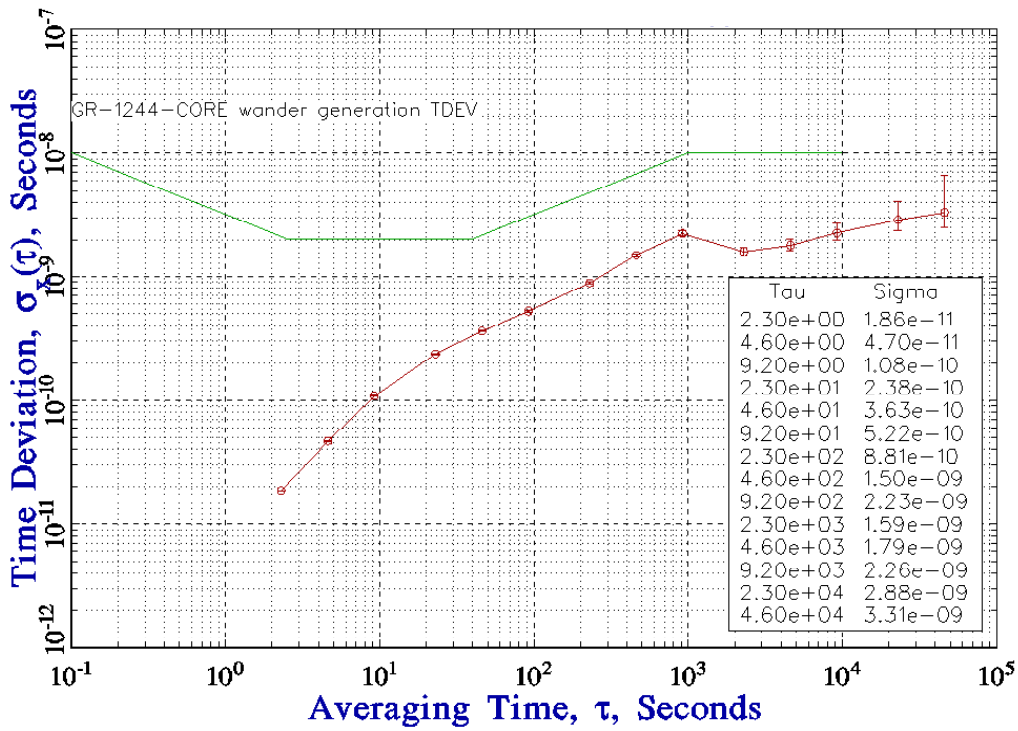

Wander Generation per GR1244, system performance when locked through a 1mHz loop bandwidth.

Outline Drawing / Enclosure OX-402

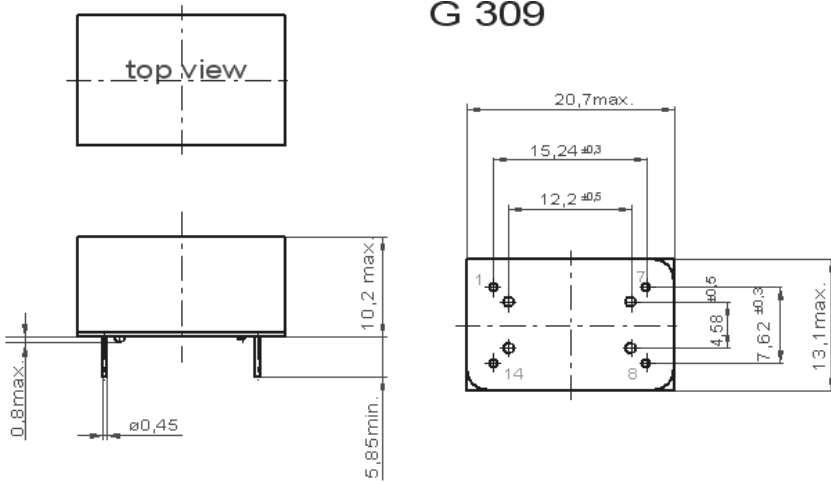


Dimensions in mm

| Height Codes | | |
|--------------|------------|----------------|
| Code | Height "H" | Pin Length "L" |
| 2 | 10.2 | 5.85 |

| Pin Assignment | |
|----------------|-----------------------|
| Pin | Connection |
| 1 | I.C. (do not connect) |
| 7 | GND |
| 8 | RF Out |
| 14 | V_s (Supply) |

Outline Drawing / Enclosure OX-403

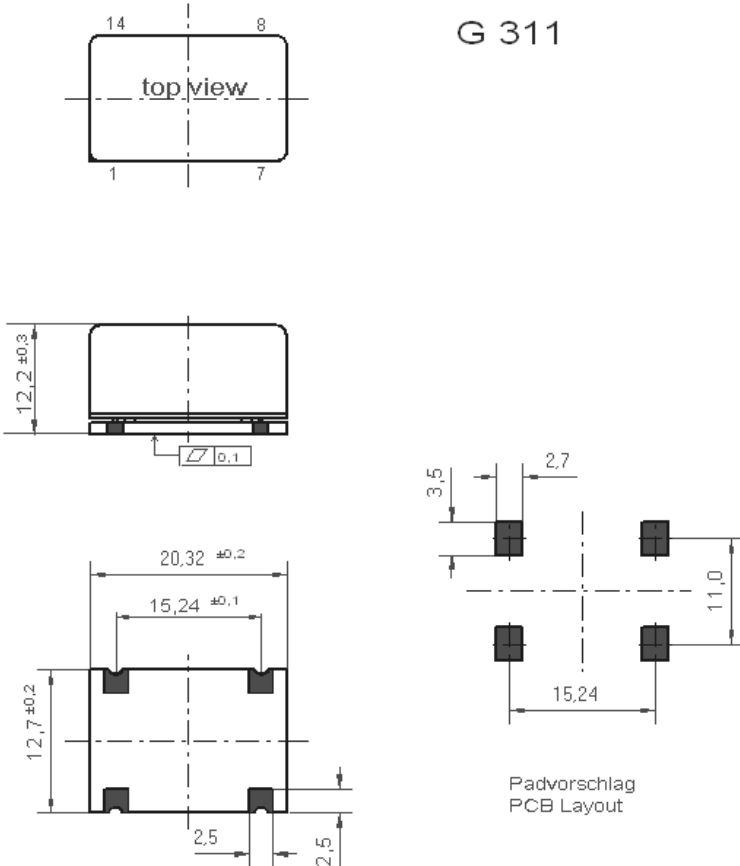


Dimensions in mm

| Height Codes | | |
|--------------|------------|----------------|
| Code | Height "H" | Pin Length "L" |
| 3 | 12.2 | NA |

| Pin Assignment | |
|----------------|-----------------------|
| Pin | Connection |
| 1 | I.C. (do not connect) |
| 7 | GND |
| 8 | RF Out |
| 14 | V_s (Supply) |


Tape and Reel Dimensions (OX-403)

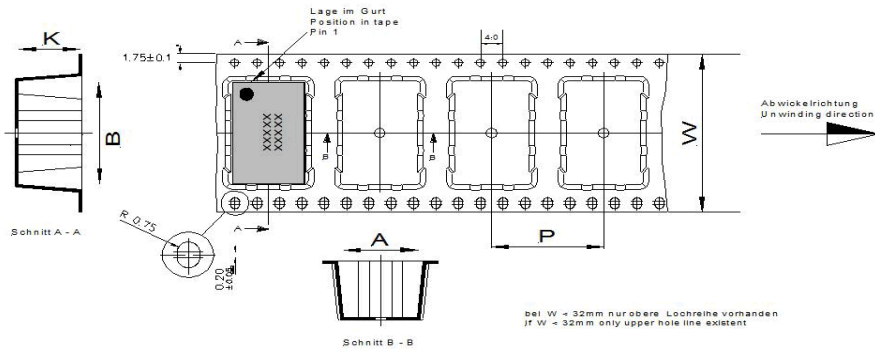

| | |
|--|--|
| Maßangaben in mm : A, B und K Maße vom Bauelement abhängig, Fertigungstoleranzen entsprechen der DIN IEC 286-3 | Dimension in mm : A, B und K are dependent upon component dimensions, production tolerance complying DIN IEC 286-3 |
|--|--|

| Enclosure Type | Tape Width W (mm) | Quantity per meter | Quantity per reel | Dimension P |
|----------------|-------------------|--------------------|-------------------|-------------|
| OX-403 | 44 | 50 | 300 | 20 |

Recommended Reflow Profile

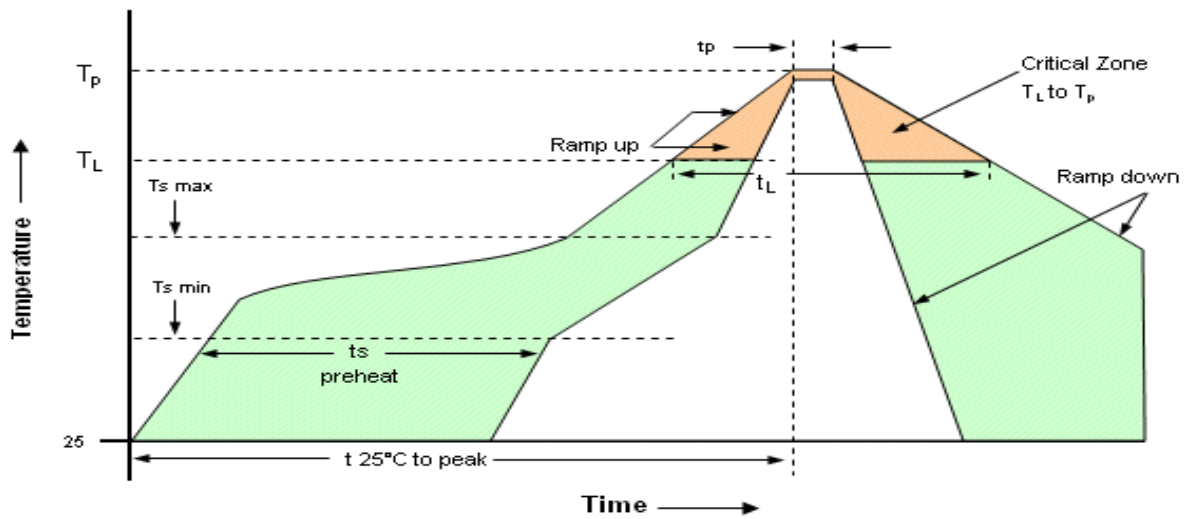

| Profile Feature | Pb-Free Assembly/ Sn-Pb Assembly | Profile Feature | Pb-Free Assembly/ Sn-Pb Assembly |
|---|-------------------------------------|--|-------------------------------------|
| Average ramp-up rate (T_L to T_p) | 3°C/second max. | Time 25°C to Peak Temperature | 8 minutes max. |
| Preheat -Temperature Min T_{Smin} -Temperature Min T_{Smax} -Time (min to max) t_s | 150°C 200°C 60-180 seconds | Time maintained above -Temperature (T_L) -Time (t_L) | 217°C 60-150 seconds |
| T_{Smax} to T_L -Ramp-up Rate | 3°C/second max | | |
| Time maintained above -Temperature (T_L) -Time (t_L) | 217°C 60-150 seconds | Time within 5°C of actual Peak Temperature (t_p) | 20-40 seconds |
| Peak Temperature (T_p) | max 260°C | Ramp-down Rate | 6°C/ second max |

Note: All temperatures refer to topside of the package, measured on the package body surface.

Ordering Information

OX - 402 2 - E A J - 108 0 - 20M0000000

Product Family
OX: OCXO

Package
THT: 4022
SMT: 4033

Height
2: 10.2mm
3: 12.2mm

Supply Voltage
E: +3.3V

RF Output Code
A: HCMOS

Temperature Range
E: -40°C to +85°C
J: -20°C to +70°C

Stability Code
108: ±10ppb

Frequency Control
0: Fixed Frequency

Frequency

Notes:

1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
3. Phase noise degrades with increasing output frequency.
4. Subject to technical modification.
5. Contact factory for availability.

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 3328.4784.17
Fax: +49 (0) 3328.4784.30

Asia:

Vectron International
1F-2F, No 8 Workshop, No 308 Fenju Road
WaiGaoQiao Free Trade Zone
Pudong, Shanghai, China 200131
Tel: 86.21.5048.0777
Fax: 86.21.5048.1881

Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev: 08/2011

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru