



**Hittite**  
MICROWAVE PRODUCTS  
FROM ANALOG DEVICES

# Analog Devices Welcomes Hittite Microwave Corporation

NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



**THIS PAGE INTENTIONALLY LEFT BLANK**

## GaAs PHEMT MMIC 2 WATT POWER AMPLIFIER, 6 - 10 GHz

### Typical Applications


The HMC591 is ideal for use as a power amplifier for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios
- Test Equipment & Sensors
- Military End-Use
- Space

### Features

Saturated Output Power: +34 dBm @ 24% PAE  
Output IP3: +43 dBm  
Gain: 23 dB  
DC Supply: +7.0 V @ 1340 mA  
50 Ohm Matched Input/Output  
2.47 mm x 2.49 mm x 0.1 mm

### Functional Diagram

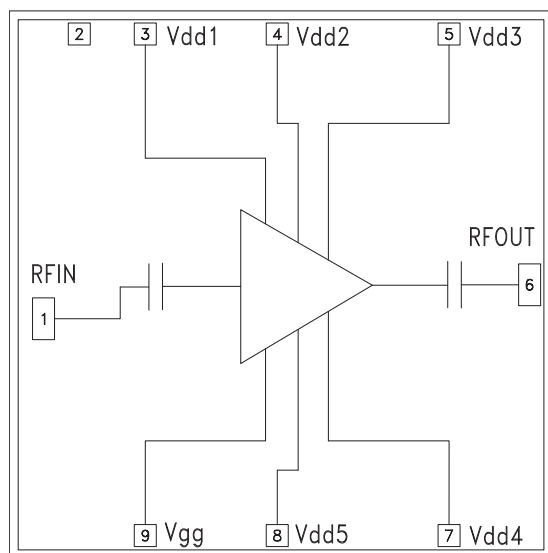

### General Description

The HMC591 is a high dynamic range GaAs PHEMT MMIC 2 Watt Power Amplifier which operates from 6 to 10 GHz. This amplifier die provides 23 dB of gain and +34 dBm of saturated power, at 24% PAE from a +7.0V supply. Output IP3 is +43 dBm typical. The RF I/Os are DC blocked and matched to 50 Ohms for ease of integration into Multi-Chip-Modules (MCMs). All data is taken with the chip in a 50 ohm test fixture connected via 0.025mm (1 mil) diameter wire bonds of length 0.31mm (12 mils). For applications which require optimum OIP3, Idd should be set for 940 mA, to yield +43 dBm OIP3. For applications which require optimum output P1dB, Idd should be set for 1340 mA, to yield +33 dBm Output P1dB.

### Electrical Specifications, $T_A = +25^\circ \text{C}$ , $V_{dd} = +7\text{V}$ , $I_{dd} = 1340 \text{ mA}$ <sup>[1]</sup>


| Parameter                                         | Min.   | Typ. | Max. | Min.    | Typ. | Max. | Units  |
|---------------------------------------------------|--------|------|------|---------|------|------|--------|
| Frequency Range                                   | 6 - 10 |      |      | 6.8 - 9 |      |      | GHz    |
| Gain                                              | 20     | 23   |      | 20      | 23   |      | dB     |
| Gain Variation Over Temperature                   |        | 0.05 |      |         | 0.05 |      | dB/ °C |
| Input Return Loss                                 |        | 12   |      |         | 14   |      | dB     |
| Output Return Loss                                |        | 11   |      |         | 10   |      | dB     |
| Output Power for 1 dB Compression (P1dB)          | 30     | 33   |      | 30.5    | 33.5 |      | dBm    |
| Saturated Output Power (Psat)                     |        | 33.5 |      |         | 34   |      | dBm    |
| Output Third Order Intercept (IP3) <sup>[2]</sup> |        | 43   |      |         | 43   |      | dBm    |
| Supply Current (Idd)                              |        | 1340 |      |         | 1340 |      | mA     |

[1] Adjust Vgg between -2 to 0V to achieve Idd= 1340 mA typical.


[2] Measurement taken at 7V @ 940mA, Pin / Tone = -15 dBm

**GaAs PHEMT MMIC 2 WATT  
POWER AMPLIFIER, 6 - 10 GHz**


**Broadband Gain & Return Loss**

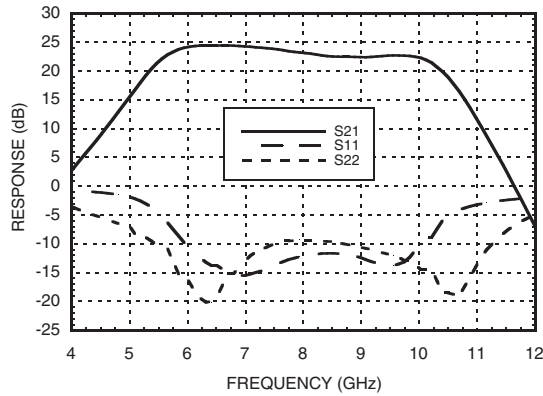


**Gain vs. Temperature**

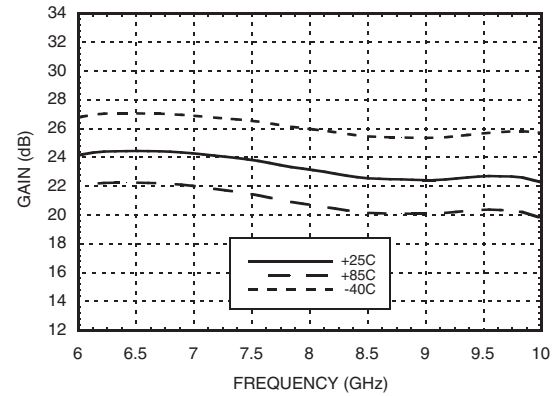


**Input Return Loss vs. Temperature**

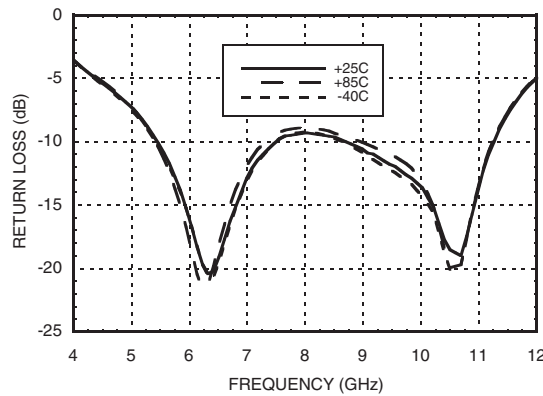


**Output Return Loss vs. Temperature**

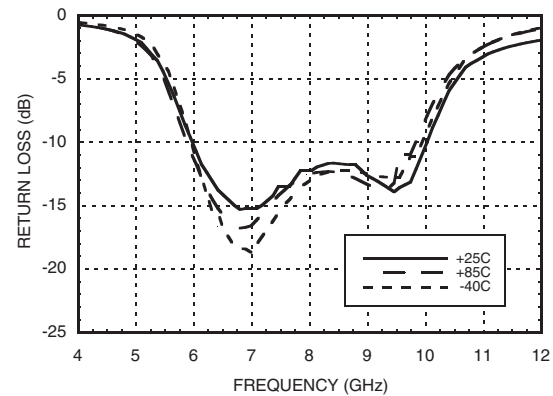

**P1dB vs. Temperature**

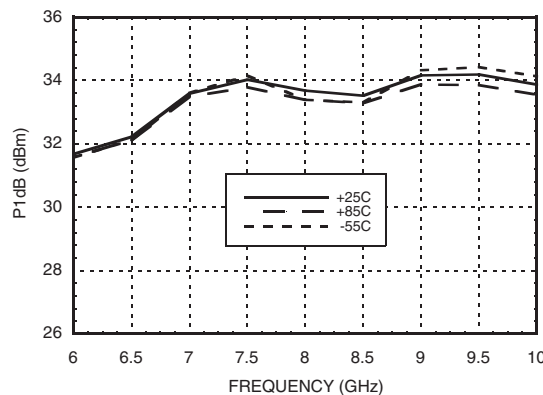


**Psat vs. Temperature**

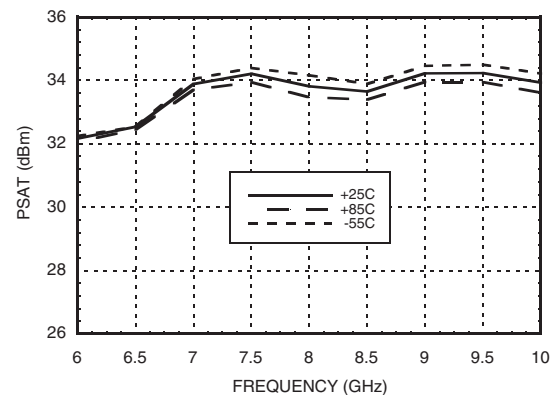


**GaAs PHEMT MMIC 2 WATT  
POWER AMPLIFIER, 6 - 10 GHz**


**P1dB vs. Current**

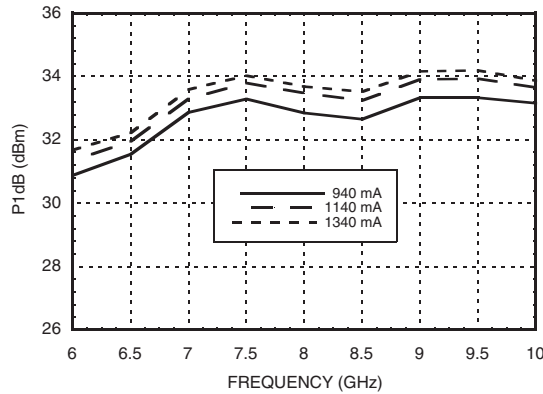


**Psat vs. Current**

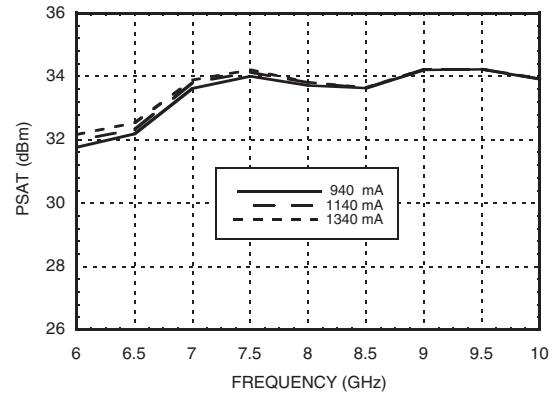


**Output IP3 vs. Temperature**  
7V @ 940 mA, Pin/Tone = -15 dBm

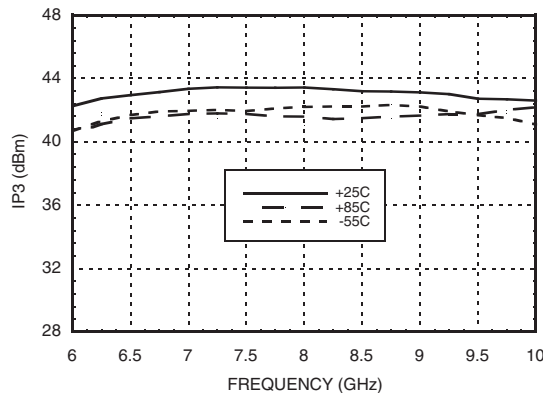


**Power Compression @ 8 GHz,**  
7V @ 1340 mA

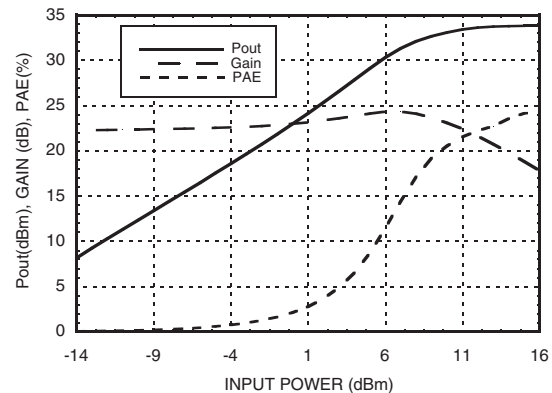

**Output IM3, 7V @ 940 mA**

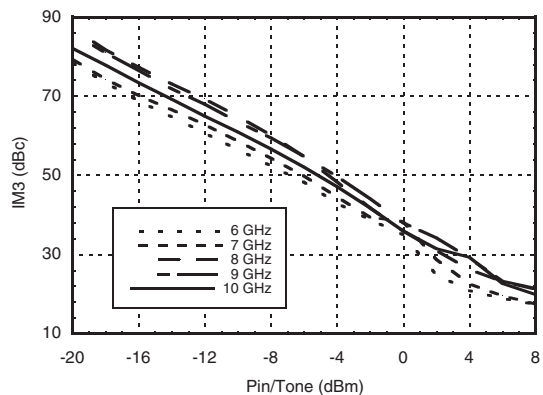


**Output IM3, 7V @ 1340 mA**

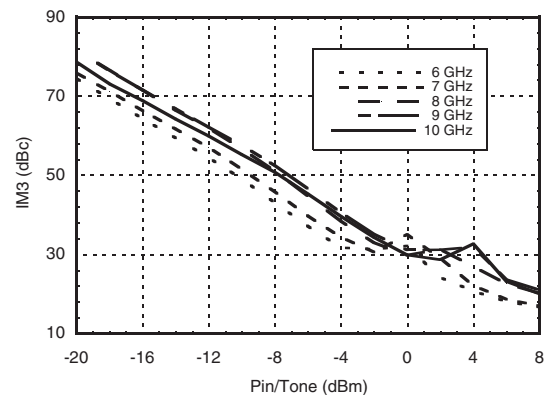


**GaAs PHEMT MMIC 2 WATT  
POWER AMPLIFIER, 6 - 10 GHz**


**Gain & Power vs. Supply Voltage @ 8 GHz**

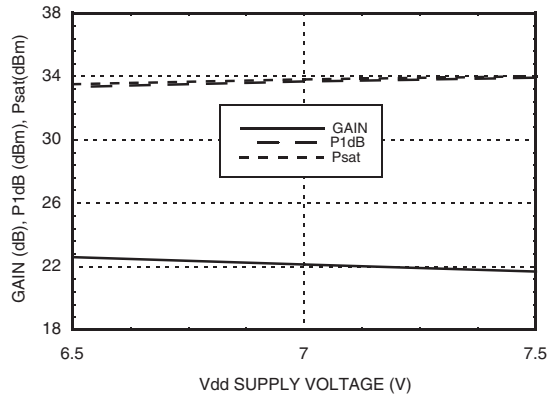


**Gain & Power vs. Supply Current @ 8 GHz**

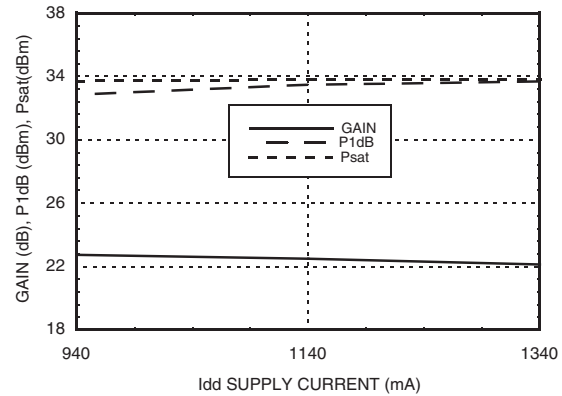

**Reverse Isolation  
vs. Temperature, 7V @ 1340 mA**

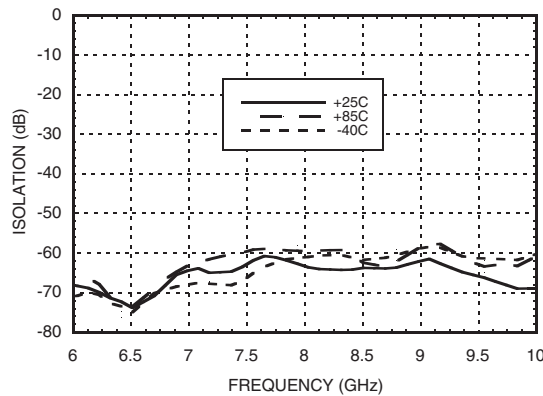

**Power Dissipation**

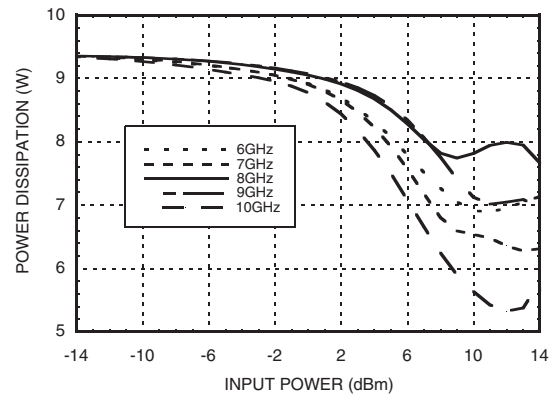

**Absolute Maximum Ratings**

|                                                                |                |
|----------------------------------------------------------------|----------------|
| Drain Bias Voltage (Vdd)                                       | +8 Vdc         |
| Gate Bias Voltage (Vgg)                                        | -2 to 0 Vdc    |
| RF Input Power (RFIN)(Vdd = +7.0 Vdc)                          | +15 dBm        |
| Channel Temperature                                            | 175 °C         |
| Continuous Pdis (T= 85 °C)<br>(derate 117.6 mW/°C above 85 °C) | 10.59 W        |
| Thermal Resistance<br>(channel to die bottom)                  | 8.5 °C/W       |
| Storage Temperature                                            | -65 to +150 °C |
| Operating Temperature                                          | -55 to +85 °C  |

**Typical Supply Current vs. Vdd**

| Vdd (V) | Idd (mA) |
|---------|----------|
| +6.5    | 1355     |
| +7.0    | 1340     |
| +7.5    | 1325     |


Note: Amplifier will operate over full voltage ranges shown above Vgg adjusted to achieve Idd = 1340 mA at +7.0V



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

**GaAs PHEMT MMIC 2 WATT  
POWER AMPLIFIER, 6 - 10 GHz**

**Outline Drawing**

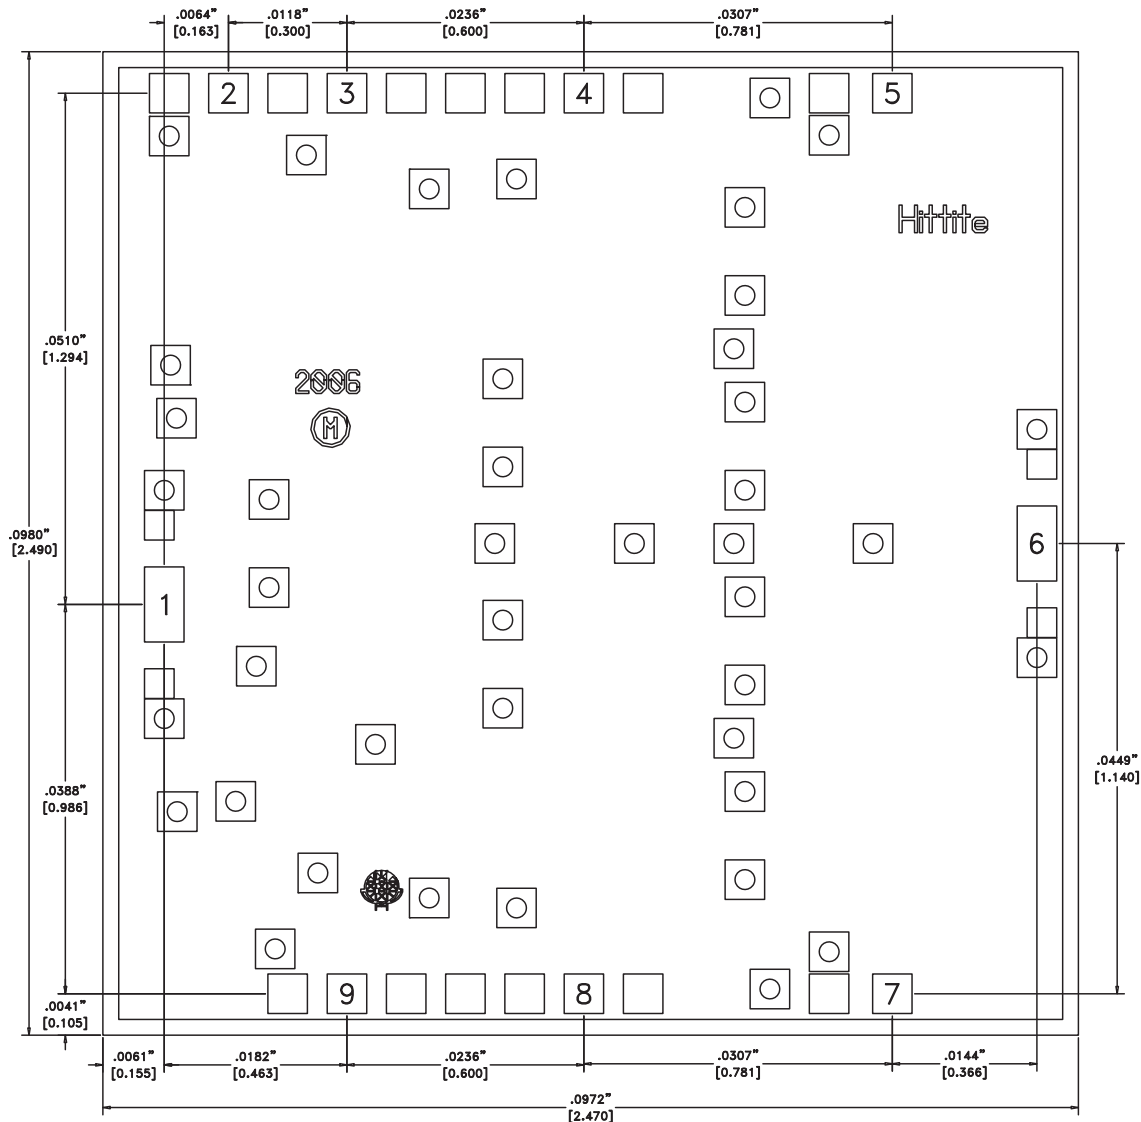

**Die Packaging Information** [1]

| Standard        | Alternate |
|-----------------|-----------|
| GP-1 (Gel Pack) | [2]       |

[1] Refer to the "Packaging Information" section for die packaging dimensions.




[2] For alternate packaging information contact Hittite Microwave Corporation.

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MM]
2. DIE THICKNESS IS .004"
3. TYPICAL BOND PAD IS .004" SQUARE
4. BACKSIDE METALLIZATION: GOLD
5. BOND PAD METALLIZATION: GOLD
6. BACKSIDE METAL IS GROUND.
7. CONNECTION NOT REQUIRED FOR UNLABELED BOND PADS.
8. OVERALL DIE SIZE  $\pm .002$


## GaAs PHEMT MMIC 2 WATT POWER AMPLIFIER, 6 - 10 GHz

### Pad Descriptions

| Pad Number  | Function | Description                                                                                                                                                                                         | Interface Schematic                                                                 |
|-------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 1           | RFIN     | This pad is AC coupled and matched to 50 Ohms.                                                                                                                                                      |  |
| 3 - 5, 7, 8 | Vdd 1-5  | Power Supply Voltage for the amplifier. External bypass capacitors of 100 pF and 0.1 $\mu$ F are required.                                                                                          |  |
| 6           | RFOUT    | This pad is AC coupled and matched to 50 Ohms.                                                                                                                                                      |  |
| 9           | Vgg      | Gate control for amplifier. Adjust to achieve Idd of 1340 mA. Please follow "MMIC Amplifier Biasing Procedure" Application Note. External bypass capacitors of 100 pF and 0.1 $\mu$ F are required. |  |
| Die Bottom  | GND      | Die bottom must be connected to RF/DC ground.                                                                                                                                                       |  |

**GaAs PHEMT MMIC 2 WATT  
POWER AMPLIFIER, 6 - 10 GHz**

**Assembly Diagram**

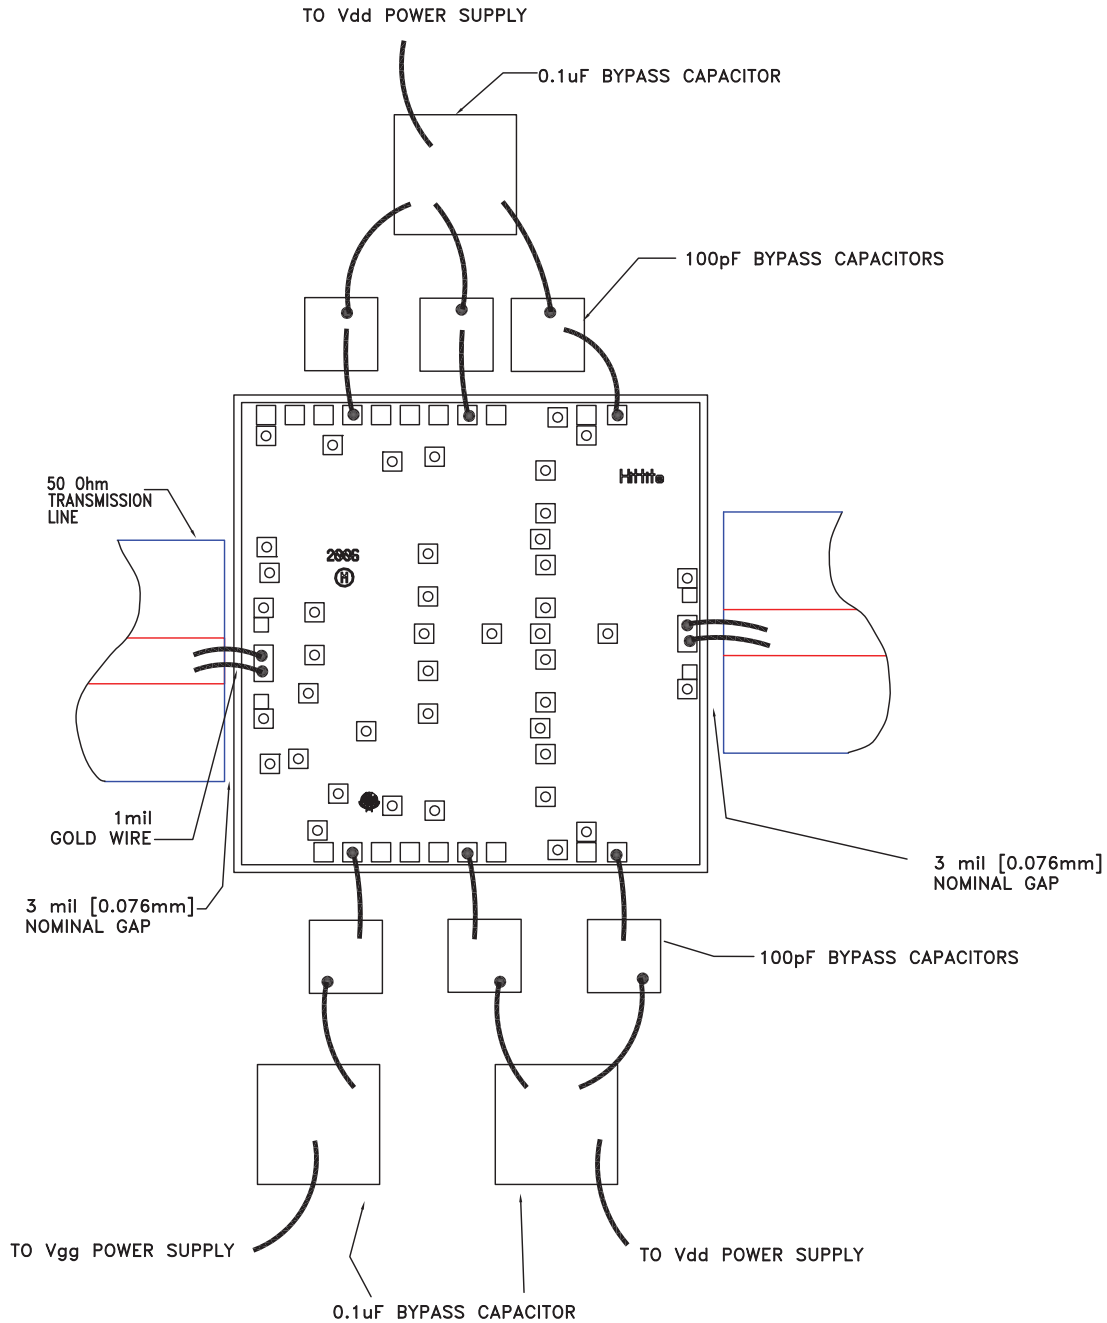

## **GaAs PHEMT MMIC 2 WATT POWER AMPLIFIER, 6 - 10 GHz**

### **Mounting & Bonding Techniques for Millimeterwave GaAs MMICs**

The die should be attached directly to the ground plane eutectically or with conductive epoxy (see HMC general Handling, Mounting, Bonding Note).

50 Ohm Microstrip transmission lines on 0.127mm (5 mil) thick alumina thin film substrates are recommended for bringing RF to and from the chip (Figure 1). If 0.254mm (10 mil) thick alumina thin film substrates must be used, the die should be raised 0.150mm (6 mils) so that the surface of the die is coplanar with the surface of the substrate. One way to accomplish this is to attach the 0.102mm (4 mil) thick die to a 0.150mm (6 mil) thick molybdenum heat spreader (moly-tab) which is then attached to the ground plane (Figure 2).

Microstrip substrates should be located as close to the die as possible in order to minimize bond wire length. Typical die-to-substrate spacing is 0.076mm to 0.152 mm (3 to 6 mils).

### **Handling Precautions**

*Follow these precautions to avoid permanent damage.*

**Storage:** All bare die are placed in either Waffle or Gel based ESD protective containers, and then sealed in an ESD protective bag for shipment. Once the sealed ESD protective bag has been opened, all die should be stored in a dry nitrogen environment.

**Cleanliness:** Handle the chips in a clean environment. DO NOT attempt to clean the chip using liquid cleaning systems.

**Static Sensitivity:** Follow ESD precautions to protect against  $> \pm 250V$  ESD strikes.

**Transients:** Suppress instrument and bias supply transients while bias is applied. Use shielded signal and bias cables to minimize inductive pick-up.

**General Handling:** Handle the chip along the edges with a vacuum collet or with a sharp pair of bent tweezers. The surface of the chip may have fragile air bridges and should not be touched with vacuum collet, tweezers, or fingers.



### **Mounting**

The chip is back-metallized and can be die mounted with electrically conductive epoxy. The mounting surface should be clean and flat.

**Epoxy Die Attach:** Apply a minimum amount of epoxy to the mounting surface so that a thin epoxy fillet is observed around the perimeter of the chip once it is placed into position. Cure epoxy per the manufacturer's schedule.

### **Wire Bonding**

Ball or wedge bond with 0.025mm (1 mil) diameter pure gold wire. Thermosonic wirebonding with a nominal stage temperature of 150 °C and a ball bonding force of 40 to 50 grams or wedge bonding force of 18 to 22 grams is recommended. Use the minimum level of ultrasonic energy to achieve reliable wirebonds. Wirebonds should be started on the chip and terminated on the package or substrate. All bonds should be as short as possible  $< 0.31mm$  (12 mils).

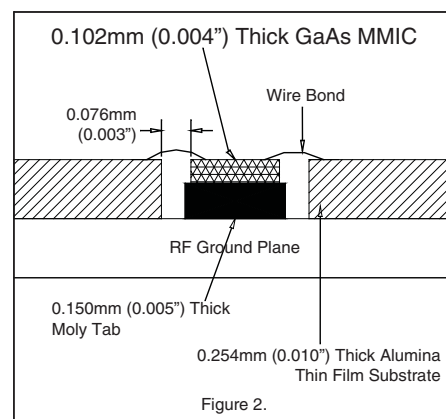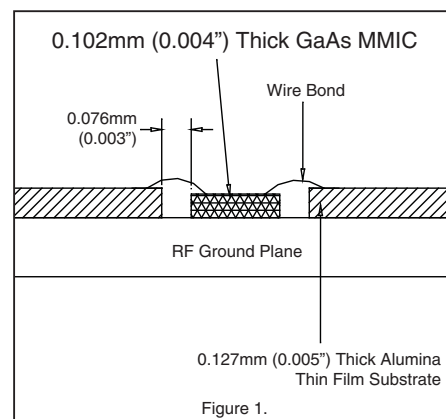

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)