




- **Designed for SDARS IF Receiver**
- **Low Insertion Loss**
- **5.0 X 7.0 mm Surface-Mount Case**
- **Differential or Single Ended Input and Output**
- **Complies with Directive 2002/95/EC (RoHS)**

**SF2040B****80.460 MHz  
SAW Filter****SMP-03****Absolute Maximum Ratings**

| Rating                                  | Value          | Units |
|-----------------------------------------|----------------|-------|
| Maximum Incident Power in Passband      | +10            | dBm   |
| Max. DC voltage between any 2 terminals | 30             | VDC   |
| Storage Temperature Range               | -40 to +85     | °C    |
| Max Soldering Profile                   | 265°C for 10 s |       |

**Electrical Characteristics**

| Characteristic                                           | Sym                | Notes | Min                               | Typ | Max  | Units             |
|----------------------------------------------------------|--------------------|-------|-----------------------------------|-----|------|-------------------|
| Nominal Center Frequency                                 | $f_c$              | 1     | 80.460                            |     |      | MHz               |
| Passband Insertion Loss                                  | IL                 |       |                                   | 9.5 | 12.0 | dB                |
| 1dB Passband                                             | BW <sub>1</sub>    | 1     | 3.7                               | 4.1 |      | MHz               |
| 15dB Bandwidth                                           | BW <sub>15</sub>   |       |                                   | 6.6 | 6.7  | MHz               |
| 30dB Bandwidth                                           | BW <sub>30</sub>   |       |                                   | 7.6 | 7.7  | MHz               |
| Amplitude Ripple over $f_c \pm 1.85$ MHz                 |                    |       |                                   | 0.5 | 1.10 | dB <sub>P-P</sub> |
| Group Delay Variation over $f_c \pm 1.85$ MHz            | GDV                |       |                                   | 60  | 150  | ns <sub>P-P</sub> |
| Rejection                                                | 50 to 74.39 MHz    | 1, 3  | 40                                | 44  |      | dB                |
|                                                          | 74.39 to 75.99 MHz |       | 38                                | 40  |      |                   |
|                                                          | 85.21 to 86.5 MHz  |       | 40                                | 44  |      |                   |
|                                                          | 86.5 to 91.50 MHz  |       | 45                                | 48  |      |                   |
|                                                          | 91.50 to 100 MHz   |       | 45                                | 53  |      |                   |
| Operating Temperature Range                              | T <sub>A</sub>     | 1     | -40                               |     | +85  | °C                |
| Frequency Temperature Coefficient                        | FTC                |       |                                   | -18 |      | ppm/°C            |
| Differential Input                                       | 175 ohms           |       |                                   |     |      |                   |
| Differential Output                                      | 1000 ohms          |       |                                   |     |      |                   |
| Case Style                                               |                    | 6     | SMP-03 7 x 5 mm Nominal Footprint |     |      |                   |
| Lid Symbolization (YY=year, WW=week, S=shift) See note 4 |                    |       | RFM SF2040B YYWWS                 |     |      |                   |

**Electrical Connections**

| Connection           | Terminals  |
|----------------------|------------|
| Port 1 Hot           | 10         |
| Port 1 Ground Return | 1          |
| Port 2 Hot           | 5          |
| Port 2 Ground Return | 6          |
| Case Ground          | All Others |


**Notes:**

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50  $\Omega$  and measured with 50  $\Omega$  network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency,  $f_c$ .
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Tape and Reel Standard ANSI / EIA 481.
7. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
8. US and international patents may apply.
9. RFM, stylized RFM logo, and RF Monolithics, Inc. are registered trademarks of RF Monolithics, Inc.
10. ©Copyright 1999, RF Monolithics Inc.
11. Electrostatic Sensitive Device. Observe precautions for handling.



## Matching Circuit and Matching Component Values Used in G3 Sirius Radios

(Refer to Sirius Radio G3 Chipset Application Note, Doc. #RX000104-B, Sec. 4.2.5)

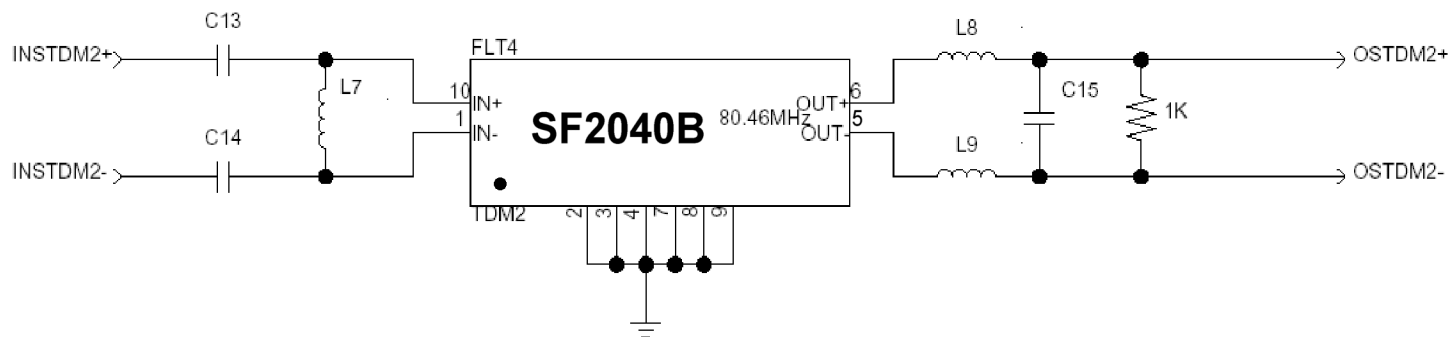


**TDM2 Narrowband SAW Matching Circuit**

### TDM2 Narrowband SAW Matching Values


| Reference Designator | Value  |
|----------------------|--------|
| C13                  | 12 pF  |
| C14                  | 12 pF  |
| L7                   | 240 nH |
| L8                   | 390 nH |
| L9                   | 390 pF |
| C15                  | 10 pF  |


## Matching Circuit and Matching Component Values Used on Filter Demo Board

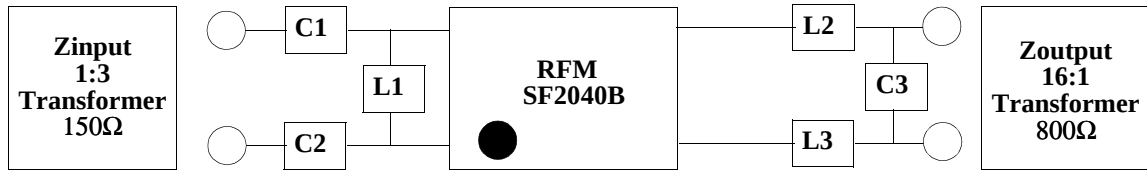

**SF2040B**  
80.460 MHz

**C1 = 9pF**  
**C2 = 9pF**  
**L1 = 270nH**  
**L2 = 330nH**  
**L3 = 330pF**  
**C3 = 12pF**

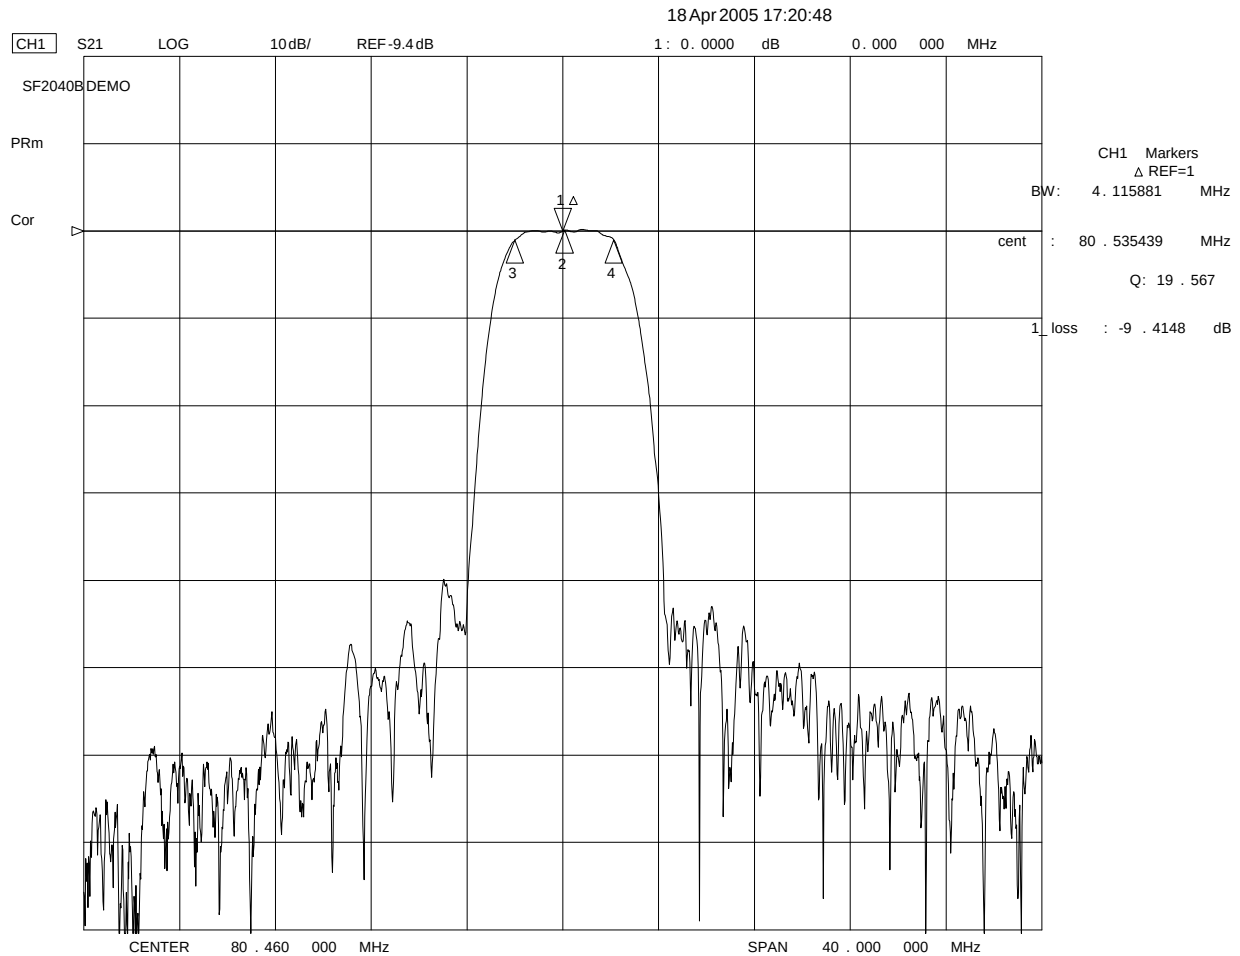

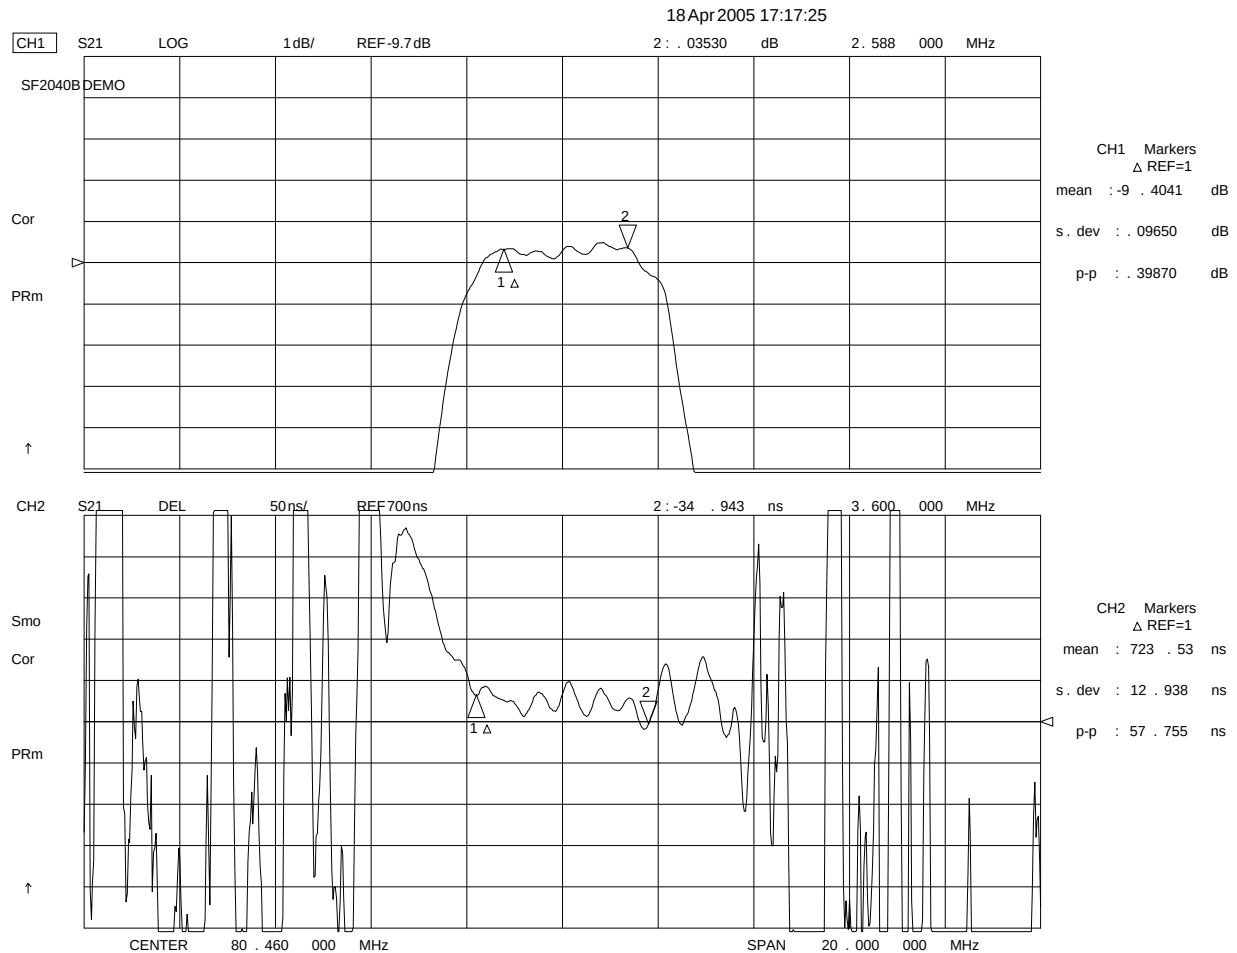


18Apr2005 17:09:52

CH1 S11 1UFS

1: 46.854  $\Omega$  -23.961  $\Omega$  82.554 pF 80.460 000 MHz

SF2040B DEMO

PRm

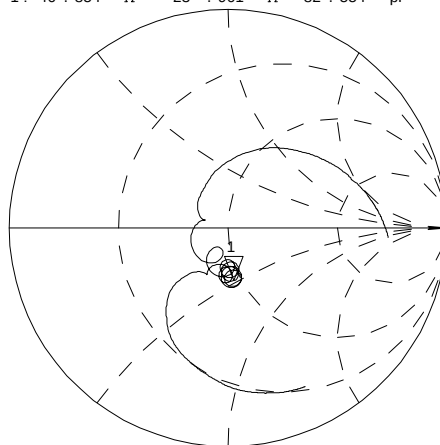


↑

CH2 S22 1UFS

1: 41.250  $\Omega$  9.5586  $\Omega$  18.908 nH 80.460 000 MHz

PRm

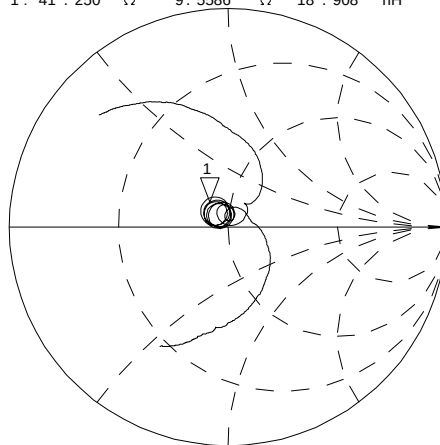


↑



CENTER 80.460 000 MHz

SPAN 20.000 000 MHz



## SMP-03 Case

10-Terminal Ceramic Surface-Mount Case  
7 x 5 mm Nominal Footprint

## Recommended PCB Footprint

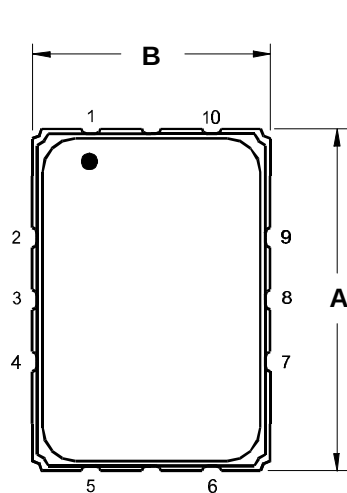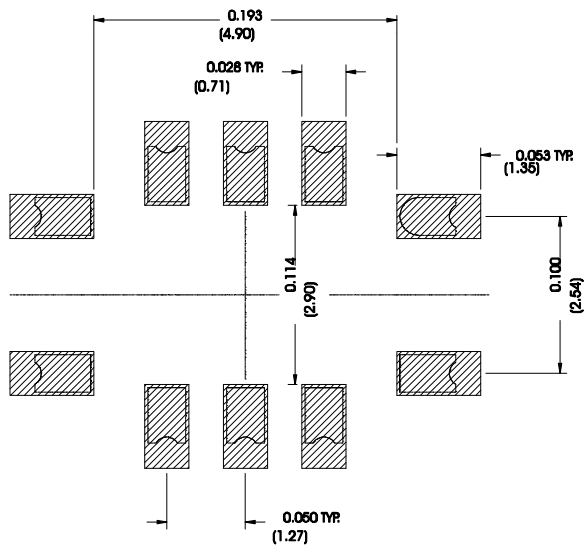

TOP VIEW

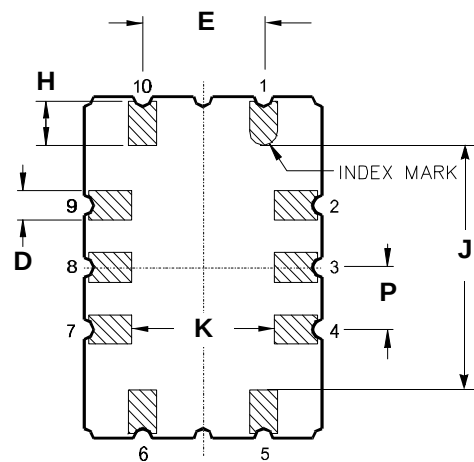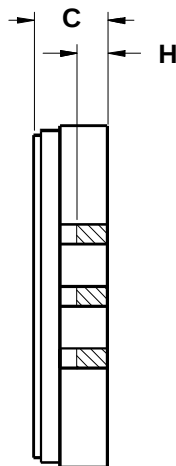

BOTTOM VIEW

## Case Dimensions

| Dimension | mm   |      |      | Inches |       |       |
|-----------|------|------|------|--------|-------|-------|
|           | Min  | Nom  | Max  | Min    | Nom   | Max   |
| A         | 6.80 | 7.00 | 7.20 | 0.268  | 0.276 | 0.283 |
| B         | 4.80 | 5.00 | 5.20 | 0.189  | 0.197 | 0.205 |
| C         |      | 1.65 | 2.00 |        | 0.065 | 0.079 |
| D         | .47  | 0.60 | .73  | 0.019  | 0.024 | 0.029 |
| E         | 2.41 | 2.54 | 2.67 | 0.095  | 0.100 | 0.105 |
| H         | 0.87 | 1.0  | 1.13 | 0.034  | 0.039 | 0.044 |
| J         | 4.87 | 5.00 | 5.13 | 0.192  | 0.197 | 0.202 |
| K         | 2.87 | 3.00 | 3.13 | 0.113  | 0.118 | 0.123 |
| P         | 1.14 | 1.27 | 1.40 | 0.045  | 0.050 | 0.055 |


## Materials

|                        |                                                                                  |
|------------------------|----------------------------------------------------------------------------------|
| Solder Pad Termination | Au plating 30 - 60 ulnches (76.2-152 uM) over 80-200 ulnches (203-508 uM) Ni.    |
| Lid                    | Fe-Ni-Co Alloy Electroless Nickel Plate (8-11% Phosphorus) 100-200 ulnches Thick |
| Body                   | Al <sub>2</sub> O <sub>3</sub> Ceramic                                           |
| Pb Free                |                                                                                  |

## Electrical Connections

| Connection             |                  | Terminals        |
|------------------------|------------------|------------------|
| Port 1                 | Input or Return  | 10               |
|                        | Return or Input  | 1                |
| Port 2                 | Output or Return | 5                |
|                        | Return or Output | 6                |
| Ground                 |                  | All others       |
| Single Ended Operation |                  | Return is ground |
| Differential Operation |                  | Return is hot    |



## Tape and Reel Specifications

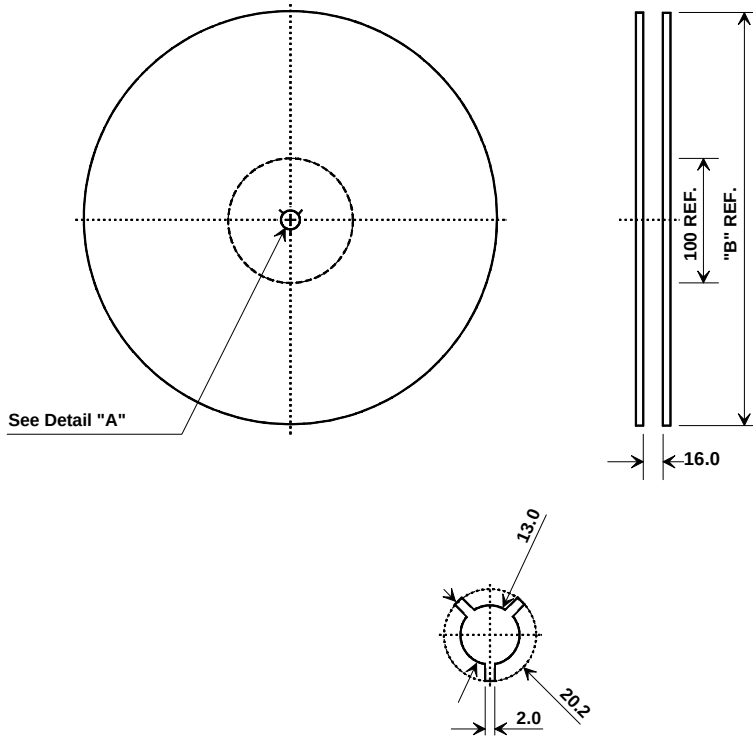

| "B "   |             | Quantity Per Reel |
|--------|-------------|-------------------|
| Inches | millimeters |                   |
| 7      | 178         | 500               |
| 13     | 330         | 2000              |

## COMPONENT ORIENTATION and DIMENSIONS

| Carrier Tape Dimensions |         |
|-------------------------|---------|
| Ao                      | 5.5 mm  |
| Bo                      | 7.5 mm  |
| Ko                      | 2.0 mm  |
| Pitch                   | 8.0 mm  |
| W                       | 16.0 mm |

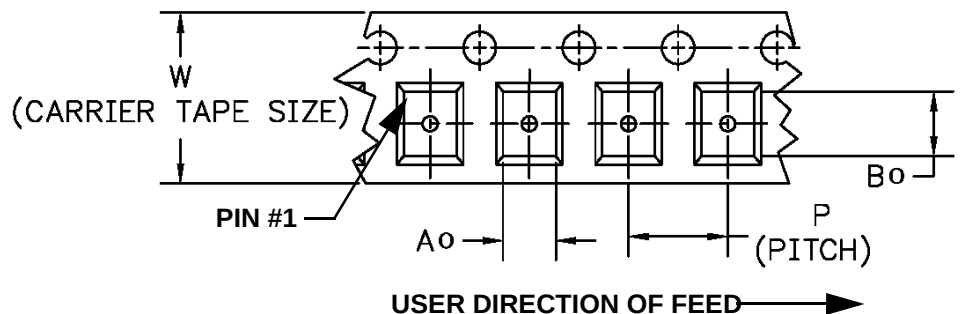

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)