


## SPECIFICATION

- Part No. : **AGGP.35F.07.0060A**
- Product Name : 35mm Two Stage 28dB GPS-GLONASS-GALILEO  
GNSS Active Patch  
Antenna Module with Front-end Saw Filter
- Features : Industry leading GPS/GLONASS/GALILEO antenna  
performance  
35\*35\*6.9mm (Ground Plane)  
60mm Ø1.13 IPEX MHFI (U.FL)  
28dB LNA  
Wide Input Voltage 1.8V to 5.5V  
Low Power Consumption  
RoHS Compliant

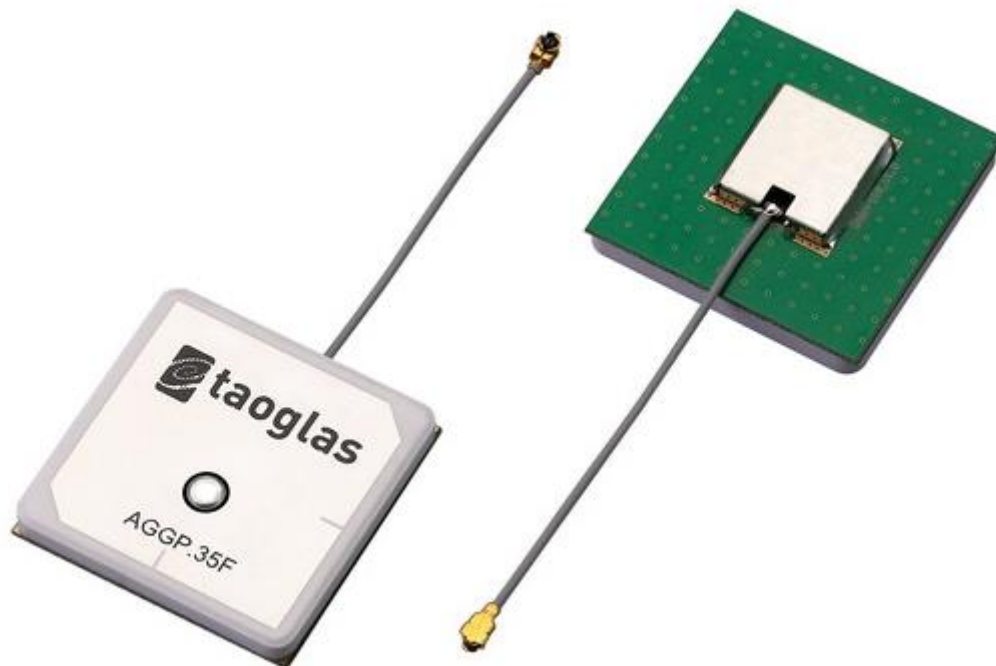


## 1. Introduction

The AGGP.35F GPS/GLONASS/GALILEO GNSS active patch antenna (along with the AGGP.25 model) is the best choice to use as an embedded antenna with the latest generation of GPS/GLONASS/GALILEO GNSS receivers. It utilizes a 35\*35\*3.5mm advanced wide-band ceramic patch antenna with optimized gain, radiation pattern and axial ratio at GPS, GALILEO and GLONASS centre frequencies.

The AGGP.35F also includes a two stage LNA and a front-end SAW filter to reduce out of band noise such as from nearby cellular transceiver, and improve probability of the wireless device passing radiated spurious emissions certification. Produced in TS16949 automotive quality approved facility and 100% tested for gain (S21), return loss (S11) to ensure total consistency of performance.

Cable type, length and connectors can be customized and samples offered according to requirement, subject to minimum order quantities in production. Taoglas also offers custom tuning service based on minimum order quantities, contact your local regional sales office for details.


The AGGP.35F consists of 2 functional blocks – the LNA and also the patch antenna.

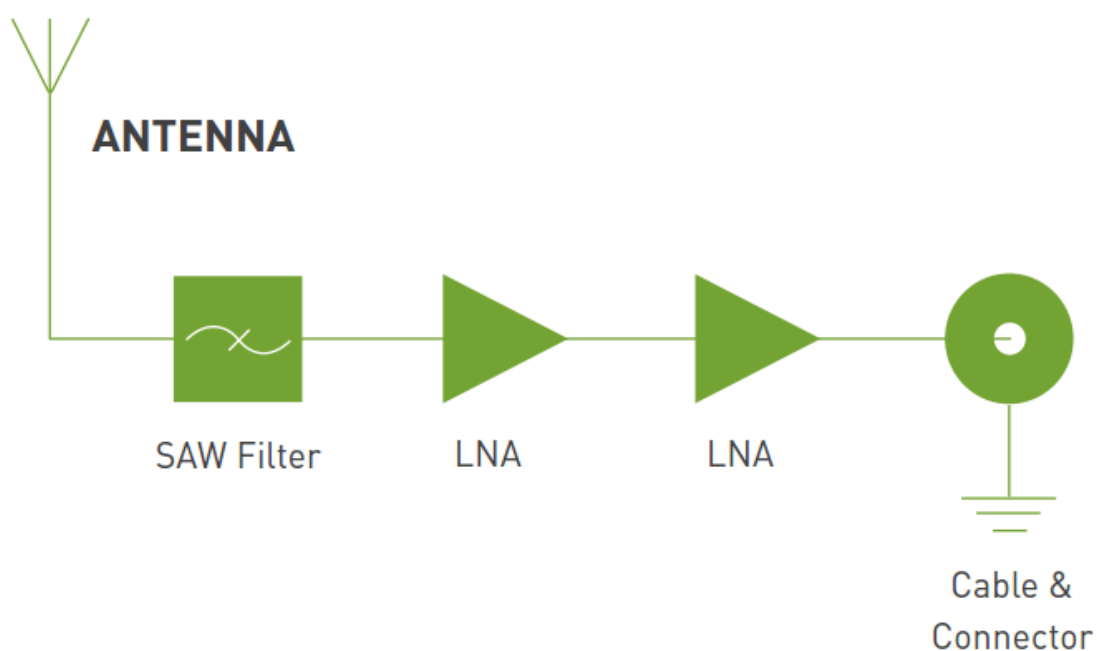

## 2. Specification


| ELECTRICAL            |                                                                             |       |           |
|-----------------------|-----------------------------------------------------------------------------|-------|-----------|
| Operation Frequency   | 1574 ~ 1610MHz                                                              |       |           |
| Patch Gain            | 1575.42MHz, 1dBic typ. @ zenith<br>1602MHz, 0.5dBic typ. @ zenith           |       |           |
| Overall Gain          | 1575.42MHz, 27 ± 3dBic typ. @ zenith<br>1602MHz, 28.5 ± 3dBic typ. @ zenith |       |           |
| Axial Ratio           | 3.0dB max @ zenith.                                                         |       |           |
| Polarization          | Right Hand Circular                                                         |       |           |
| VSWR                  | 2.0 :1 max                                                                  |       |           |
| Impedance             | 50Ω                                                                         |       |           |
| DC input              | 1.8V min.                                                                   | 3.0V  | 5.5V max. |
| LNA Gain              | 22dB                                                                        | 28dB  | 31dB      |
| Noise Figure          | 2.6dB                                                                       | 2.6dB | 2.9dB     |
| Power Consumption     | 5mA                                                                         | 10mA  | 23mA      |
| Band Attenuation      | 15dB @ 1592 ± 140MHz                                                        |       |           |
| MECHANICAL            |                                                                             |       |           |
| Antenna Dimensions    | 35 x 35 x 3.7mm                                                             |       |           |
| Material              | Ceramic                                                                     |       |           |
| Cable                 | 60mm 1.13 co-axial                                                          |       |           |
| Connector             | IPEX MHF1                                                                   |       |           |
| ENVIRONMENTAL         |                                                                             |       |           |
| Operation Temperature | -40°C to 85°C                                                               |       |           |
| Storage Temperature   | -40°C to 105°C                                                              |       |           |
| Relative Humidity     | 40% to 95%                                                                  |       |           |

### 3. LNA Gain and Out Band Rejection @3.0V

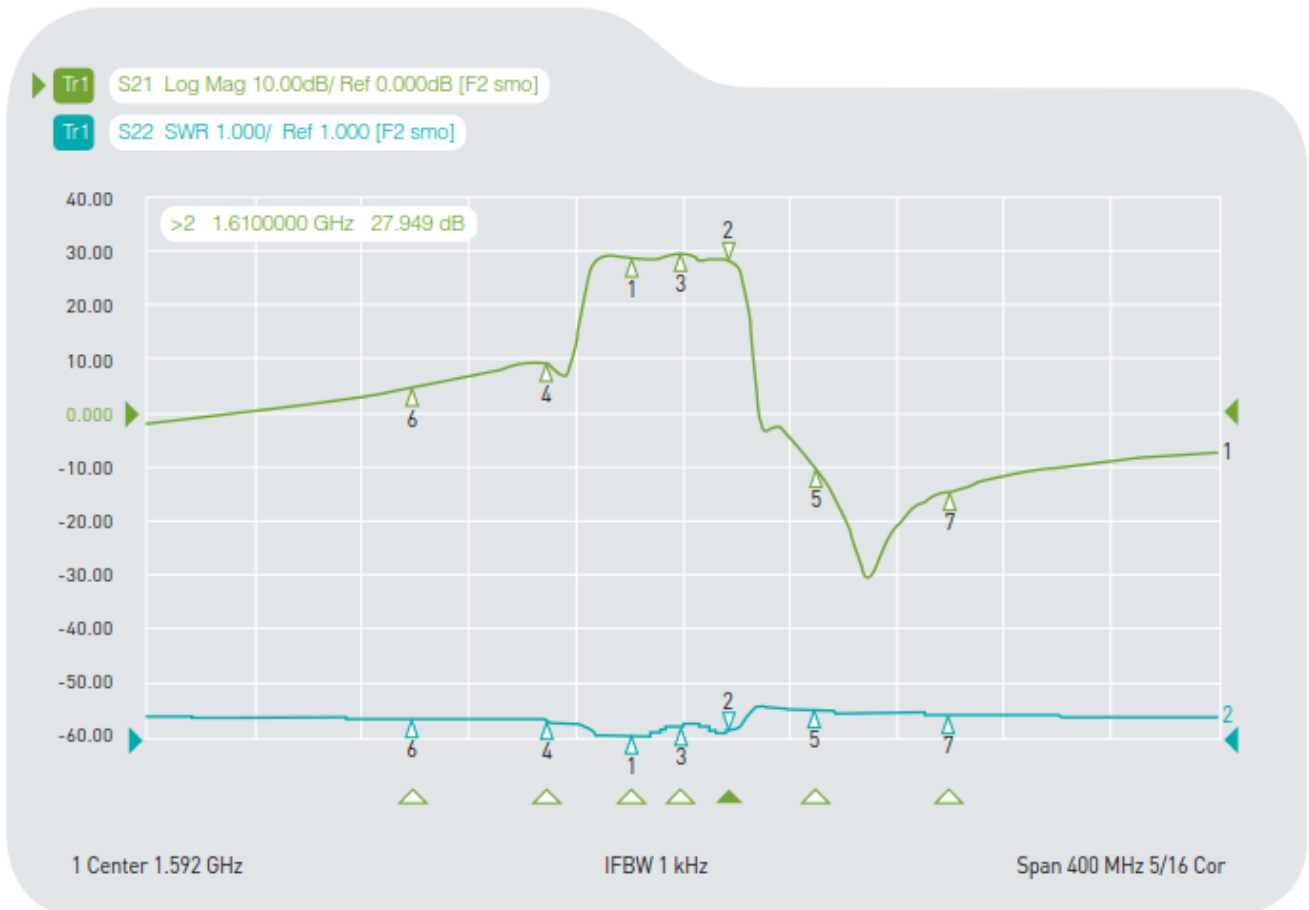

|     |     |     |    |               |            |
|-----|-----|-----|----|---------------|------------|
| Ch1 | Tr1 | S21 | 1  | 1.5740000 GHz | 28.186 dB  |
| Ch1 | Tr1 | S21 | >2 | 1.6100000 GHz | 27.949 dB  |
| Ch1 | Tr1 | S21 | 3  | 1.5920000 GHz | 29.044 dB  |
| Ch1 | Tr1 | S21 | 4  | 1.5420000 GHz | 9.0245 dB  |
| Ch1 | Tr1 | S21 | 5  | 1.6420000 GHz | -10.035 dB |
| Ch1 | Tr1 | S21 | 6  | 1.4920000 GHz | 4.4105 dB  |
| Ch1 | Tr1 | S21 | 7  | 1.6920000 GHz | -14.431 dB |


## 4. LNA Noise Figure @3.0V

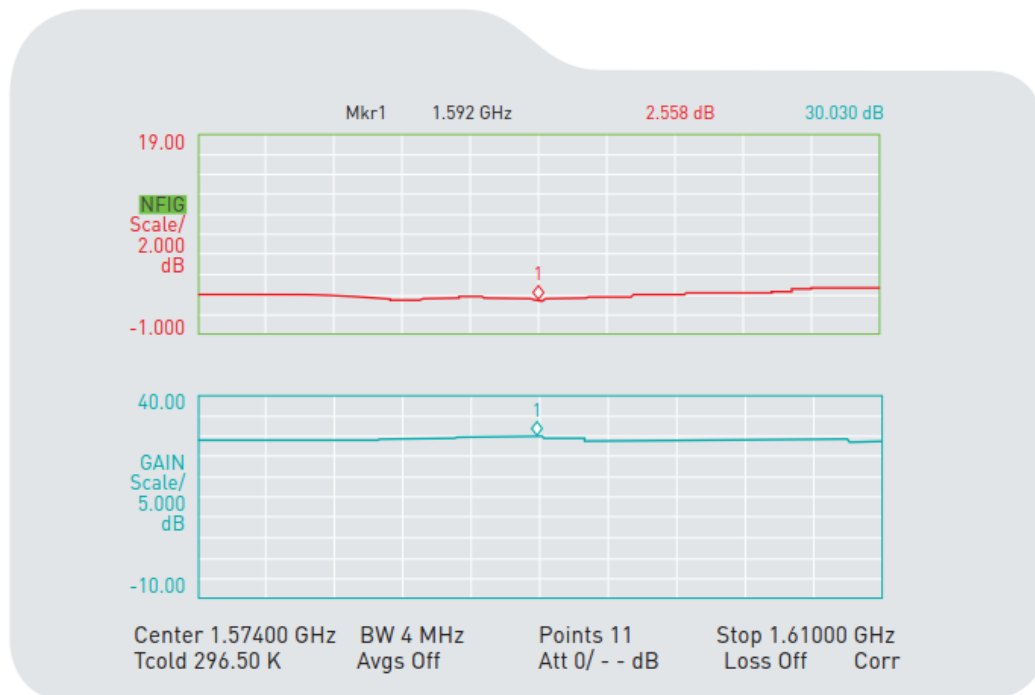

## 5. Total Specification (through Antenna, LNA, Cable and Connector)


| Parameter             | Specification                                   |
|-----------------------|-------------------------------------------------|
| Frequency             | 1574~1610MHz                                    |
| Gain at 90°           | 1575.42MHz: 27 ± 3dBic<br>1602MHz: 28.5 ± 3dBic |
| Output Impedance      | 50Ω                                             |
| Polarization          | RHCP                                            |
| Output VSWR           | Max 2.0                                         |
| Operation Temperature | -40°C to + 85°C                                 |
| Storage Temperature   | -40°C to + 85°C                                 |
| Relative Humidity     | 40% to 95%                                      |
| Input Voltage         | Min. 1.8V, Typ. 3.0V, Max. 5V                   |
| Antenna               | 35*35*6.9mm                                     |

## 6. Radiation Patterns

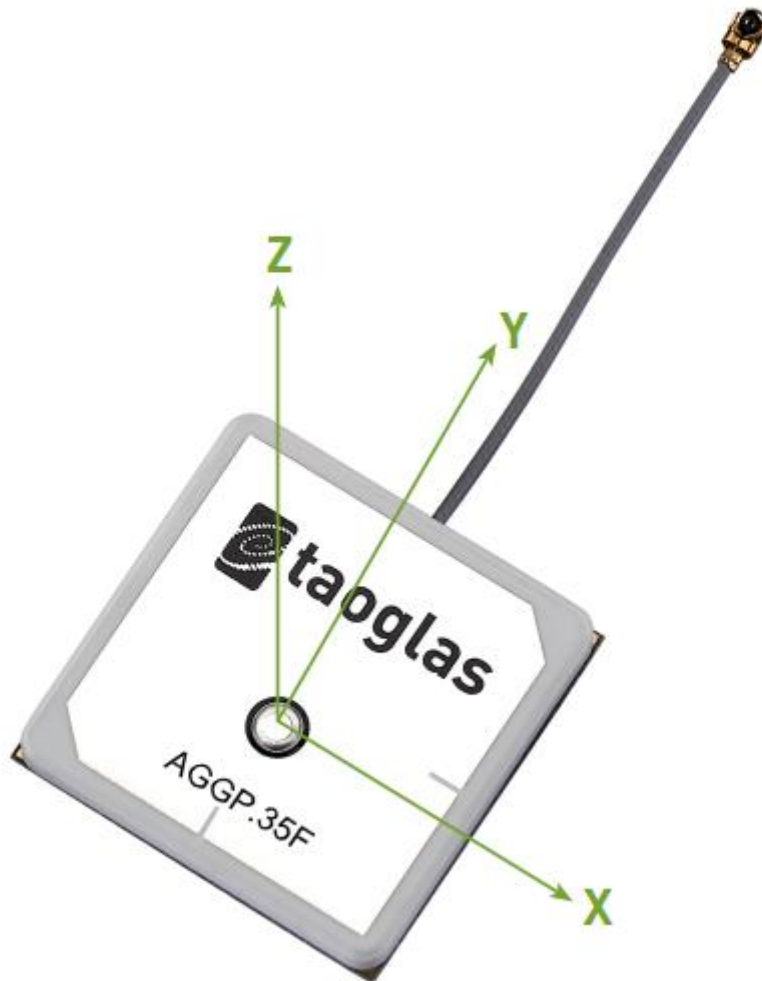


## 6.1. 1575.42MHz

### 6.1.1. XZ & YZ Plane

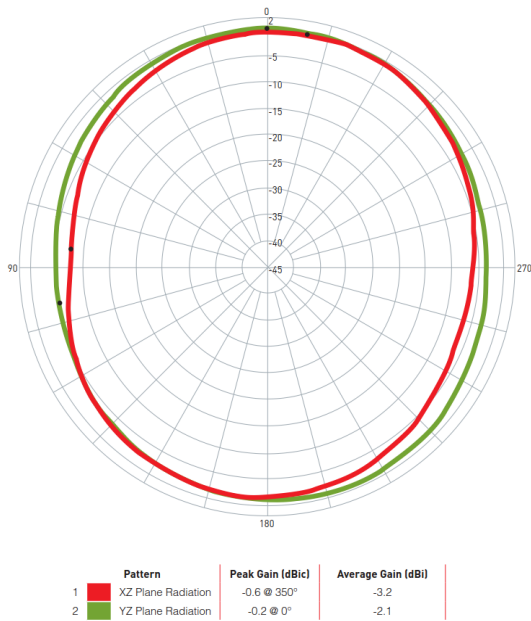


### 6.1.2. XY Plane

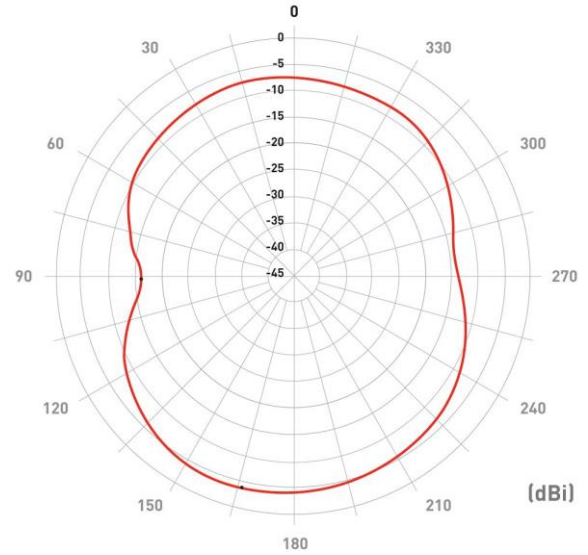


## 6.2. 1602MHz

### 6.2.1. XZ & YZ Plane

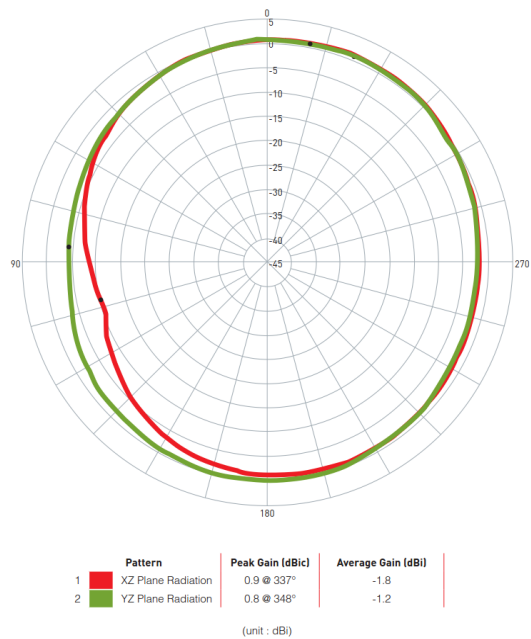


### 6.2.2. XY Plane

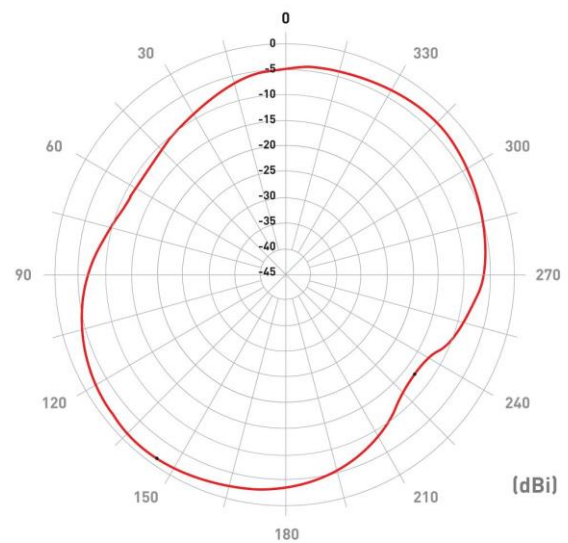

## 7. Plugs Usage Precautions


### 7.1. Mating / Unmating

- (1) To disconnect connectors, insert the end portion of I-PEX under the connector flanges and pull off vertically, in the direction of the connector mating axis.
- (2) To mate the connectors, the mating axes of both connectors must be aligned and the connectors can be mated. The "click" will confirm fully mated connection. Do not attempt to insert on an extreme angle.

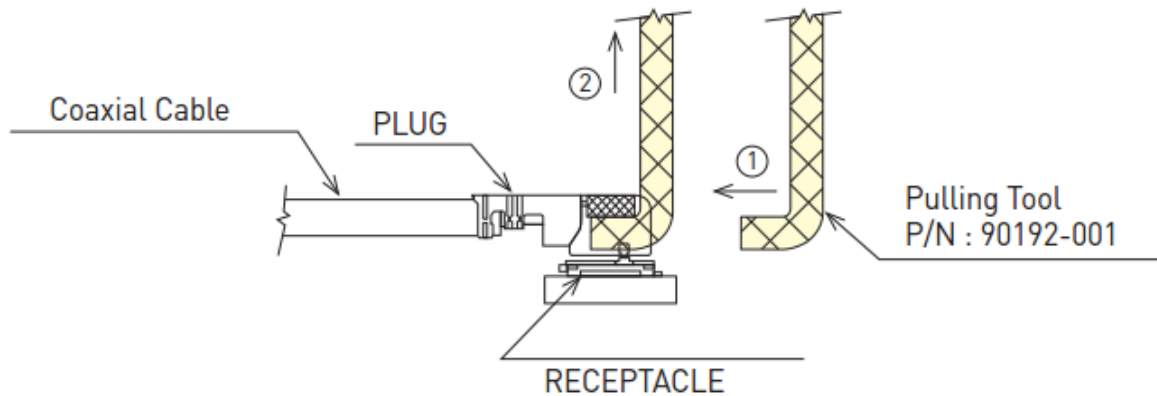


### 7.2. Pull forces on the cable after connectors are mated

After the connectors are mated, do not apply a load to the cable in excess of the values indicated in the diagram below.

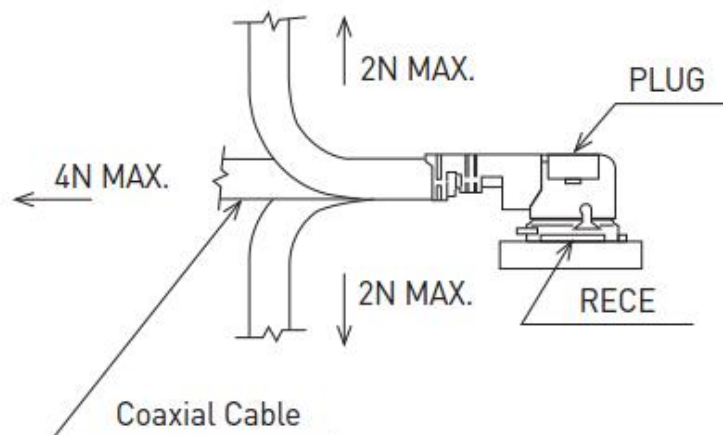



## 8. Technical Drawing

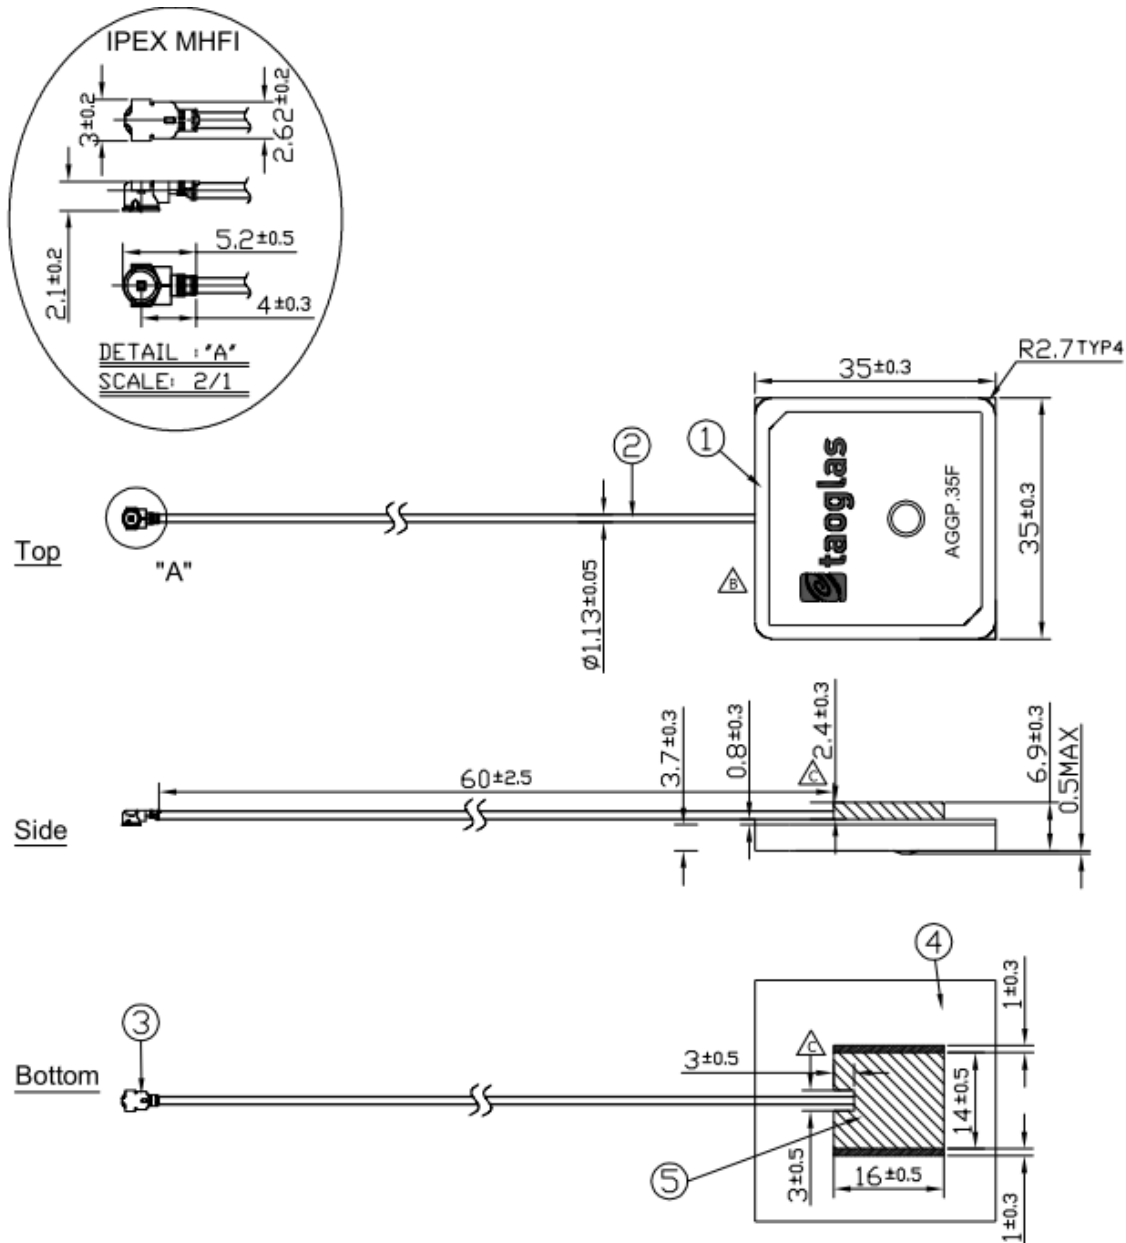


### NOTE:

1. Soldered area 
2. Shielding case area 
3. All material must be RoHS compliant.
4. The connector orientation has a fixed position to the antenna as per drawing.

|   | Name                         | P/N           | Material  | Finish     | QTY |
|---|------------------------------|---------------|-----------|------------|-----|
| 1 | AGGP.35F Patch (35*35*3.7mm) | AGGP.35F      | Ceramic   | Clear      | 1   |
| 2 | 1.13 Coaxial Cable           | OD.113.CM     | FEP       | Gray       | 1   |
| 3 | IPEX MHF1 Connector          | IPEX.MHF1.113 | Brass     | Gold       | 1   |
| 4 | PCB                          |               | FR4 0.8t  | Green      | 1   |
| 5 | Shielding Case               |               | (Tin)SPTE | Tin Plated | 1   |

## 9. Packaging

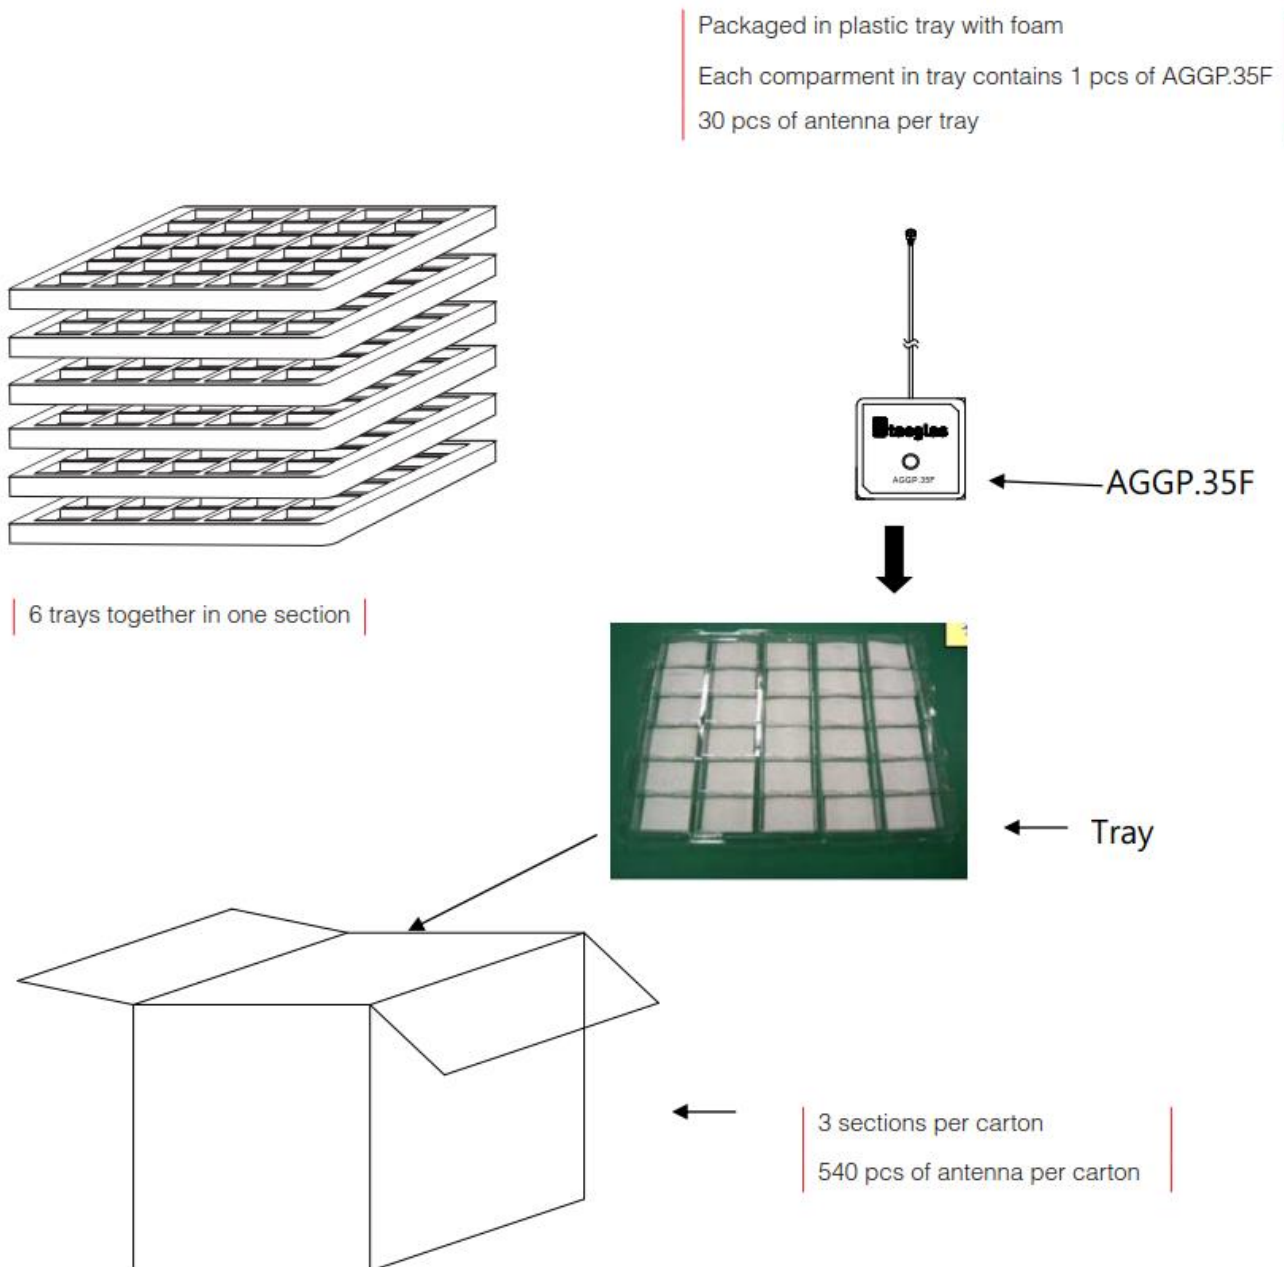

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)