Ultra-Low Power RS485 Low EMI Transceiver with Shutdown

FEATURES

- **Low Power: I_{CC} = 120μA Max with Driver Disabled**
- I_{CC} = 500μA Max with Driver Enabled, No Load
- **1μA Quiescent Current in Shutdown Mode**
- Controlled Slew Rate Driver for Reduced EMI
- Single 5V Supply
- **Drivers/Receivers Have ±10kV ESD Protection**
- –7V to 12V Common-Mode Range Permits ±7V Ground Difference Between Devices on the Data Line
- Thermal Shutdown Protection
- Power Up/Down Glitch-Free Driver Outputs Permit Live Insertion or Removal of Transceiver
- Driver Maintains High Impedance in Three-State or with the Power Off
- Up to 32 Transceivers on the Bus
- Pin Compatible with the LTC485

APPLICATIONS

- Battery-Powered RS485/RS422 Applications
- Low Power RS485/RS422 Transceiver
- Level Translator

DESCRIPTION

The LTC®1483 is an ultra-low power differential line transceiver designed for data transmission standard RS485 applications with extended common-mode range (–7V to 12V). It will also meet the requirements of RS422. The LTC1483 features output drivers with controlled slew rate, decreasing the EMI radiated from the RS485 lines, and improving signal fidelity with misterminated lines. The CMOS design offers significant power savings over its bipolar counterparts without sacrificing ruggedness against overload or ESD damage. Typical quiescent current is only 80μA while operating and less than 1μA in shutdown.

The driver and receiver feature three-state outputs, with the driver outputs maintaining high impedance over the entire common-mode range. Excessive power dissipation caused by bus contention or faults is prevented by a thermal shutdown circuit which forces the driver outputs into a high impedance state. The receiver has a fail-safe feature which guarantees a high output state when the inputs are left open. I/O pins are protected against multiple ESD strikes of over ±10kV.

The LTC1483 is fully specified over the commercial and extended industrial temperature range and is available in 8-pin DIP and SO packages.

LT, LTC and LT are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

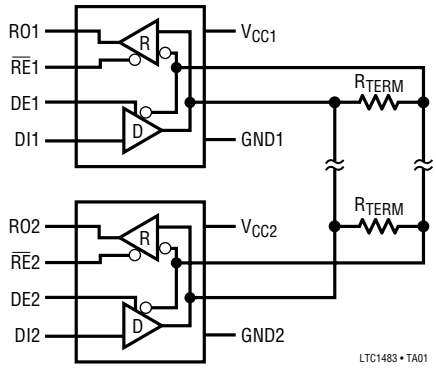

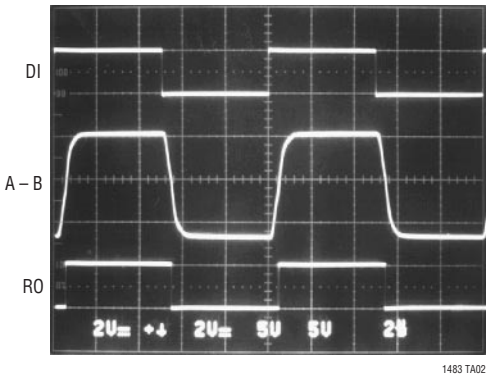

ABSOLUTE MAXIMUM RATINGS

(Note 1)

Supply Voltage (V_{CC}) 12V
Control Input Voltage ..... $-0.5V$ to $V_{CC} + 0.5V$
Driver Input Voltage ..... $-0.5V$ to $V_{CC} + 0.5V$
Driver Output Voltage ..... $\pm 14V$
Receiver Input Voltage ..... $\pm 14V$
Receiver Output Voltage ..... $-0.5V$ to $V_{CC} + 0.5V$
Operating Temperature Range
LTC1483C ..... $0°C \le T_A \le 70°C$
LTC1483I ..... $-40°C \le T_A \le 85°C$
Storage Temperature Range ..... $-65°C$ to $150°C$
Lead Temperature (Soldering, 10 sec) ..... 300°C

PACKAGE/ORDER INFORMATION



N8 PACKAGE
8-LEAD PDIP

S8 PACKAGE
8-LEAD PLASTIC SO

$T_{JMAX} = 125°C$, $\theta_{JA} = 130°C/W$ (N8)
$T_{JMAX} = 125°C$, $\theta_{JA} = 150°C/W$ (S8)

ORDER PART NUMBER
LTC1483CN8 LTC1483IN8 LTC1483CS8 LTC1483IS8
S8 PART MARKING
1483 1483I

Consult factory for Military grade parts.

ELECTRICAL CHARACTERISTICS

V_{CC} = 5V, (Notes 2, 3) unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
V_{OD1}	Differential Driver Output Voltage (Unloaded)	$I_O = 0$	●			5	V
V_{OD2}	Differential Driver Output Voltage (with Load)	R = 50Ω (RS422) R = 27Ω (RS485), Figure 1	● ●	2 1.5		 5	V V
ΔV_{OD}	Change in Magnitude of Driver Differential Output Voltage for Complementary Output States	R = 27Ω or R = 50Ω, Figure 1	●			0.2	V
V_{OC}	Driver Common-Mode Output Voltage	R = 27Ω or R = 50Ω, Figure 1	●			3	V
$\Delta \lvert V_{OC} \rvert$	Change in Magnitude of Driver Common-Mode Output Voltage for Complementary Output States	R = 27Ω or R = 50Ω, Figure 1	●			0.2	V
V_{IH}	Input High Voltage	DE, DI, $\overline{RE}$	●	2			V
V_{IL}	Input Low Voltage	DE, DI, $\overline{RE}$	●			0.8	V
I_{IN1}	Input Current	DE, DI, $\overline{RE}$	●			±2	µA
I_{IN2}	Input Current (A, B)	DE = 0, V_{CC} = 0V or 5.25V, V_{IN} = 12V DE = 0, V_{CC} = 0V or 5.25V, V_{IN} = −7V	● ●			1.0 −0.8	mA mA
V_{TH}	Differential Input Threshold Voltage for Receiver	$-7V \le V_{CM} \le 12V$	●	−0.2		0.2	V
ΔV_{TH}	Receiver Input Hysteresis	V_{CM} = 0V	●		45		mV
V_{OH}	Receiver Output High Voltage	$I_O = -4mA$, V_{ID} = 200mV	●	3.5			V
V_{OL}	Receiver Output Low Voltage	I_O = 4mA, $V_{ID} = -200mV$	●			0.4	V
I_{OZR}	Three-State (High Impedance) Output Current at Receiver	V_{CC} = Max, $0.4V \le V_O \le 2.4V$	●			±1	µA
R_{IN}	Receiver Input Resistance	$-7V \le V_{CM} \le 12V$	●	12	25		kΩ
I_{CC}	Supply Current	No Load, Output Enabled No Load, Output Disabled	● ●		300 80	500 120	µA µA
I_{SHDN}	Supply Current in Shutdown Mode	DE = 0, $\overline{RE} = V_{CC}$			1	10	µA
I_{OSD1}	Driver Short-Circuit Current, V_{OUT} = HIGH	$-7V \le V_O \le 12V$	●	35		250	mA
I_{OSD2}	Driver Short-Circuit Current, V_{OUT} = LOW	$-7V \le V_O \le 12V$	●	35		250	mA
I_{OSR}	Receiver Short-Circuit Current	$0V \le V_O \le V_{CC}$	●	7		85	mA

SWITCHING CHARACTERISTICS

V_{CC} = 5V, (Notes 2, 3) unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		LTC1483 MIN	LTC1483 TYP	LTC1483 MAX	UNITS
t_{PLH}	Driver Input to Output	R_{DIFF} = 54Ω, C_{L1} = C_{L2} = 100pF, (Figures 3, 5)	●	150		1200	ns
t_{PHL}	Driver Input to Output		●	150		1200	ns
t_{SKEW}	Driver Output to Output		●		100	600	ns
t_r, t_f	Driver Rise or Fall Time		●	150		1200	ns
t_{ZH}	Driver Enable to Output High	C_L = 100pF (Figures 4, 6), S2 Closed	●	100		1500	ns
t_{ZL}	Driver Enable to Output Low	C_L = 100pF (Figures 4, 6), S1 Closed	●	100		1500	ns
t_{LZ}	Driver Disable Time from Low	C_L = 15pF (Figures 4, 6), S1 Closed	●	150		1500	ns
t_{HZ}	Driver Disable Time from High	C_L = 15pF (Figures 4, 6), S2 Closed	●	150		1500	ns
t_{PLH}	Receiver Input to Output	R_{DIFF} = 54Ω, C_{L1} = C_{L2} = 100pF, (Figures 3, 7)	●	30	140	200	ns
t_{PHL}	Receiver Input to Output		●	30	140	200	ns
t_{SKD}	$\lvert t_{PLH} - t_{PHL} \rvert$ Differential Receiver Skew		●		13		ns
t_{ZL}	Receiver Enable to Output Low	C_{RL} = 15pF (Figures 2, 8), S1 Closed	●		20	50	ns
t_{ZH}	Receiver Enable to Output High	C_{RL} = 15pF (Figures 2, 8), S2 Closed	●		20	50	ns
t_{LZ}	Receiver Disable from Low	C_{RL} = 15pF (Figures 2, 8), S1 Closed	●		20	50	ns
t_{HZ}	Receiver Disable from High	C_{RL} = 15pF (Figures 2, 8), S2 Closed	●		20	50	ns
f_{MAX}	Maximum Data Rate		●	250			kbits/s
t_{SHDN}	Time to Shutdown	DE = 0, $\overline{RE}$ = ⊓	●	50	200	600	ns
$t_{ZH(SHDN)}$	Driver Enable from Shutdown to Output High	C_L = 100pF (Figures 4, 6), S2 Closed	●			2000	ns
$t_{ZL(SHDN)}$	Driver Enable from Shutdown to Output Low	C_L = 100pF (Figures 4, 6), S1 Closed	●			2000	ns
$t_{ZH(SHDN)}$	Receiver Enable from Shutdown to Output High	C_L = 15pF (Figures 2, 8), S2 Closed	●			3500	ns
$t_{ZL(SHDN)}$	Receiver Enable from Shutdown to Output Low	C_L = 15pF (Figures 2, 8), S1 Closed	●			3500	ns

The ● denotes specifications which apply over the full operating temperature range.

Note 1: Absolute maximum ratings are those beyond which the safety of the device cannot be guaranteed.

Note 2: All currents into device pins are positive; all currents out ot device pins are negative. All voltages are referenced to device ground unless otherwise specified.

Note 3: All typicals are given for V_{CC} = 5V and T_A = 25°C.

TYPICAL PERFORMANCE CHARACTERISTICS

Supply Current vs Temperature

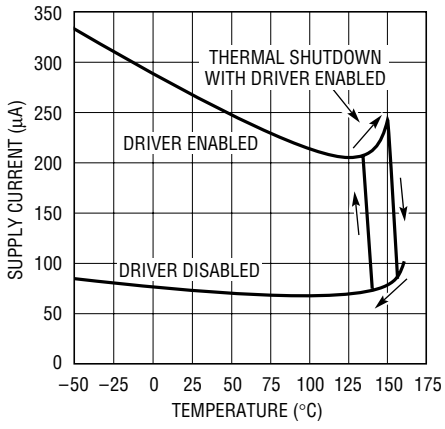

Receiver $\lvert t_{PLH} - t_{PHL} \rvert$ vs Temperature

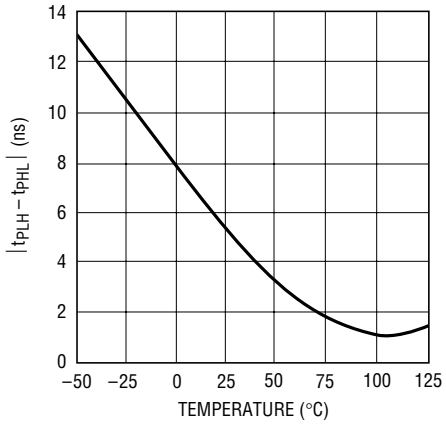

Driver Differential Output Voltage vs Output Current

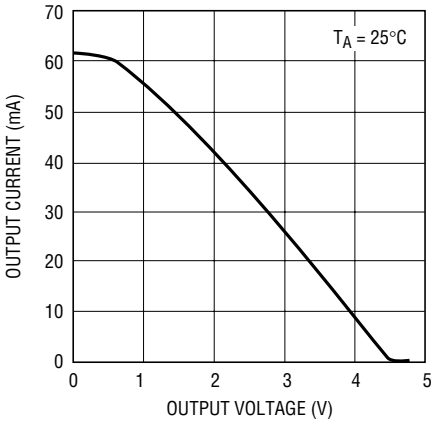

TYPICAL PERFORMANCE CHARACTERISTICS

Driver Differential Output Voltage vs Temperature

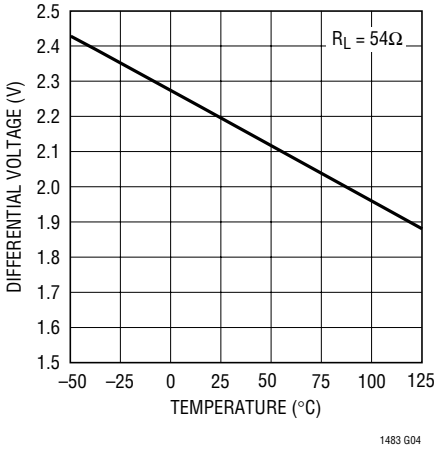

Driver Output Low Voltage vs Output Current

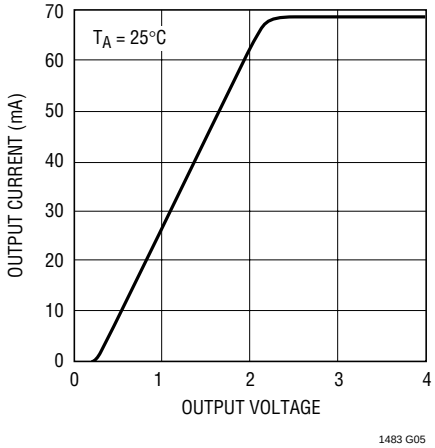

Driver Output High Voltage vs Output Current

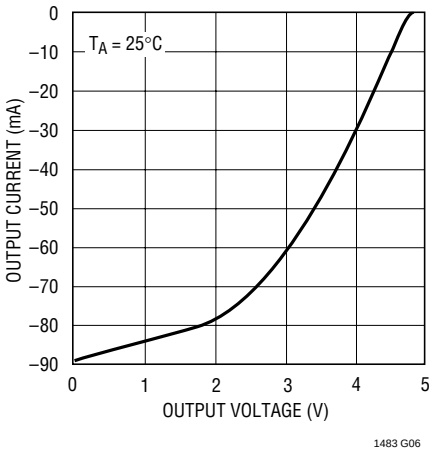

PIN FUNCTIONS

RO (Pin 1): Receiver Output. If the receiver output is enabled ($\overline{RE}$ low), then if A > B by 200mV, RO will be high. If A < B by 200mV, then RO will be low.

$\overline{RE}$ (Pin 2): Receiver Output Enable. A low enables the receiver output, RO. A high input forces the receiver output into a high impedance state.

DE (Pin 3): Driver Outputs Enable. A high on DE enables the driver output. A, B and the chip will function as a line driver. A low input will force the driver outputs into a high impedance state and the chip will function as a line receiver. If $\overline{RE}$ is high and DE is low, the part will enter a low power (1μA) shutdown state.

DI (Pin 4): Driver Input. If the driver outputs are enabled (DE high) then a low on DI forces the outputs A low and B high. A high on DI with the driver outputs enabled will force A high and B low.

GND (Pin 5): Ground.

A (Pin 6): Driver Output/Receiver Input.

B (Pin 7): Driver Output/Receiver Input.

V_{CC} (Pin 8): Positive Supply. 4.75V < V_{CC} < 5.25V.

FUNCTION TABLES

LTC1483 Transmitting

INPUTS			OUTPUTS	
$\overline{RE}$	DE	DI	B	A
X	1	1	0	1
X	1	0	1	0
0	0	X	Z	Z
1	0	X	Z*	Z*

*Shutdown mode for LTC1483

LTC1483 Receiving

INPUTS			OUTPUTS
$\overline{RE}$	DE	A – B	RO
0	0	≥0.2V	1
0	0	≤–0.2V	0
0	0	Inputs Open	1
1	0	X	Z*

*Shutdown mode for LTC1483

TEST CIRCUITS



Figure 1. Driver DC Test Load

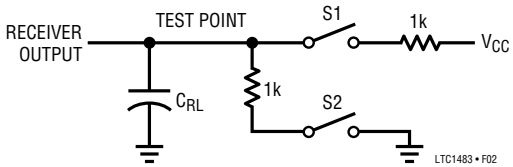

Figure 2. Receiver Timing Test Load

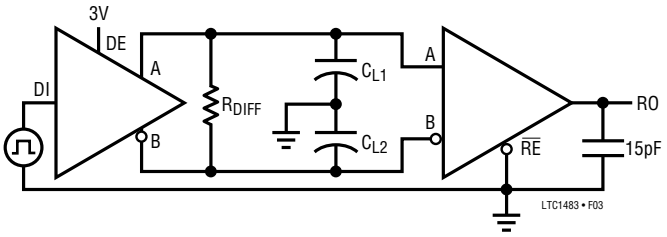

Figure 3. Driver/Receiver Timing Test Circuit

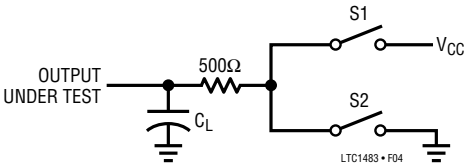

Figure 4. Driver Timing Test Load

SWITCHING TIME WAVEFORMS

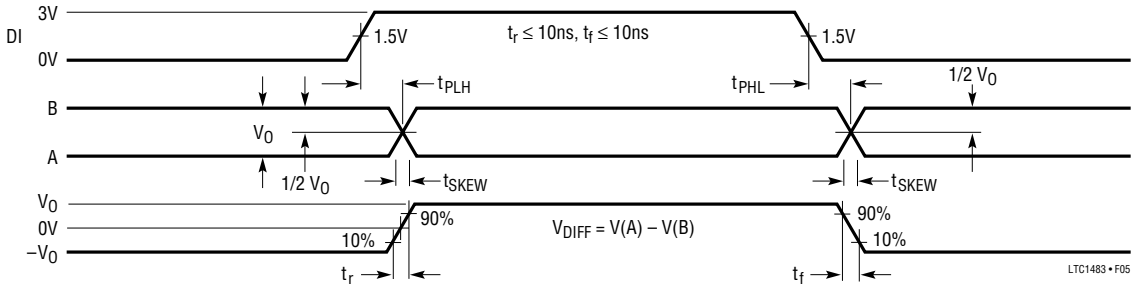

Figure 5. Driver Propagation Delays

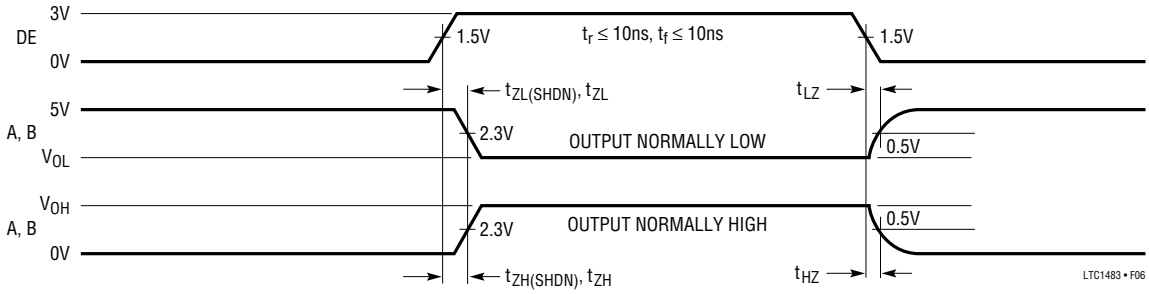

Figure 6. Driver Enable and Disable Times

SWITCHING TIME WAVEFORMS

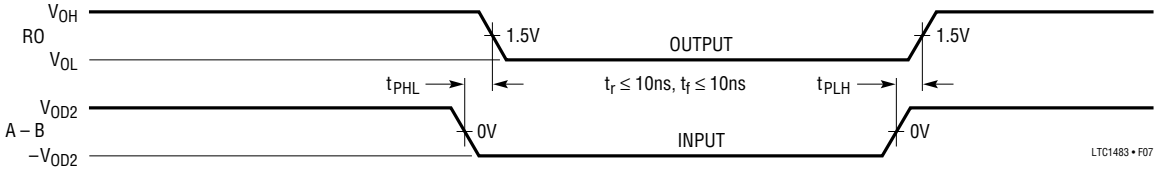

Figure 7. Receiver Propagation Delays

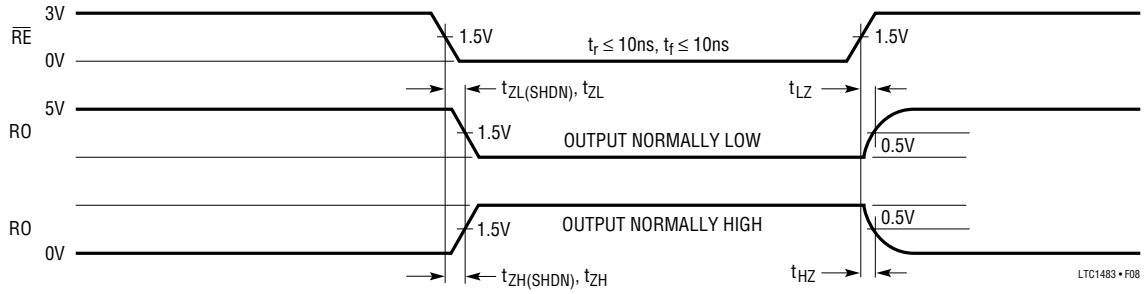

Figure 8. Receiver Enable and Disable Times

APPLICATIONS INFORMATION

Basic Theory of Operation

Traditionally RS485 transceivers have been designed using bipolar technology because the common-mode range of the device must extend beyond the supplies and the device must be immune to ESD damage and latch-up. Unfortunately, most bipolar devices draw a large amount of supply current, which is unacceptable for the numerous applications that require low power consumption. The LTC1483 is a CMOS RS485/RS422 transceiver which features ultra-low power consumption without sacrificing ESD and latch-up immunity.

The LTC1483 uses a proprietary driver output stage, which allows a common-mode range that extends beyond the power supplies while virtually eliminating latch-up and providing excellent ESD protection. Figure 9 shows the LTC1483 output stage while Figure 10 shows a conventional CMOS output stage.

When the conventional CMOS output stage of Figure 10 enters a high impedance state, both the P-channel (P1) and the N-channel (N1) are turned off. If the output is then driven above V_{CC} or below ground, the P+/N-well diode (D1) or the N+/P-substrate diode (D2) respectively will turn on and clamp the output to the supply. Thus, the output stage is no longer in a high impedance state and is not able to meet the RS485 common-mode range requirement. In addition, the large amount of current flowing through either diode will induce the well-known CMOS latch-up condition, which could destroy the device.

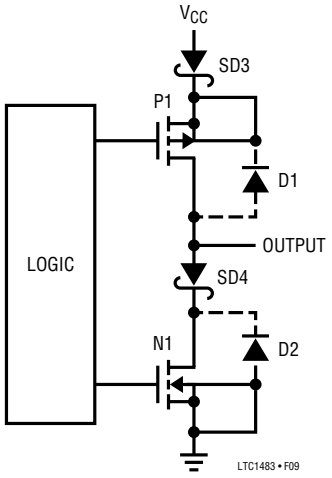

Figure 9. LTC1483 Output Stage

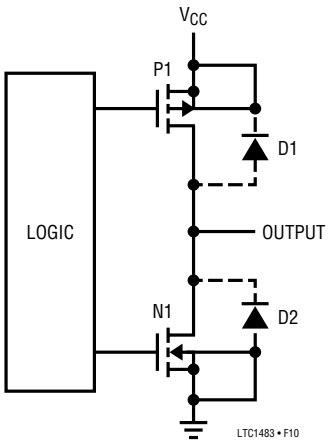

Figure 10. Conventional CMOS Output Stage

APPLICATIONS INFORMATION

The LTC1483 output stage of Figure 9 eliminates these problems by adding two Schottky diodes, SD3 and SD4. The Schottky diodes are fabricated by a proprietary modification to the standard N-well CMOS process. When the output stage is operating normally, the Schottky diodes are forward biased and have a small voltage drop across them. When the output is in the high impedance state and is driven above V_{CC} or below ground, the parasitic diode D1 or D2 still turns on, but SD3 or SD4 will reverse bias and prevent current from flowing into the N-well or the substrate. Thus the high impedance state is maintained even with the output voltage beyond the supplies. With no minority carrier current flowing into the N-well or substrate, latch-up is virtually eliminated under power-up or power-down conditions.

The LTC1483 output stage will maintain a high impedance state until the breakdown of the N-channel or P-channel is reached when going positive or negative respectively. The output will be clamped to either V_{CC} or ground by a Zener voltage plus a Schottky diode drop, but this voltage is well beyond the RS485 operating range. An ESD cell protects output against multiple ±10kV human body model ESD strikes. Because the ESD injected current in the N-well or substrate consists of majority carriers, latch-up is prevented by careful layout techniques.

Slew Rate

The LTC1483 is designed for systems that are sensitive to electromagnetic radiation. The part features a slew rate limited driver that reduces high frequency electromagnetic emissions, while improving signal fidelity by reducing reflections due to misterminated cables. Figures 11 and 12 show the spectrum of the signal at the driver output for a standard slew rate RS485 driver and the slew rate limited LTC1483. The LTC1483 shows significant reduction of the high frequency harmonics. Because the driver is slew rate limited, the maximum operating frequency is limited to 250kbits/s.

Low Power Operation

The LTC1483 is designed to operate with a quiescent current of 120µA max. With the driver in three-state I_{CC} will drop to this 120µA level. With the driver enabled there will be additional current drawn by the internal 12k resistor. Under normal operating conditions this additional current is overshadowed by the current drawn by the external bus impedance.

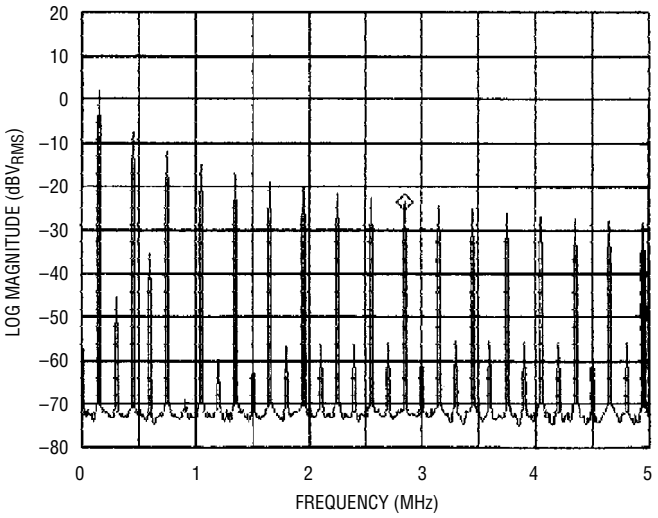

Figure 11. Typical RS485 Driver Output Spectrum Transmitting at 150kHz

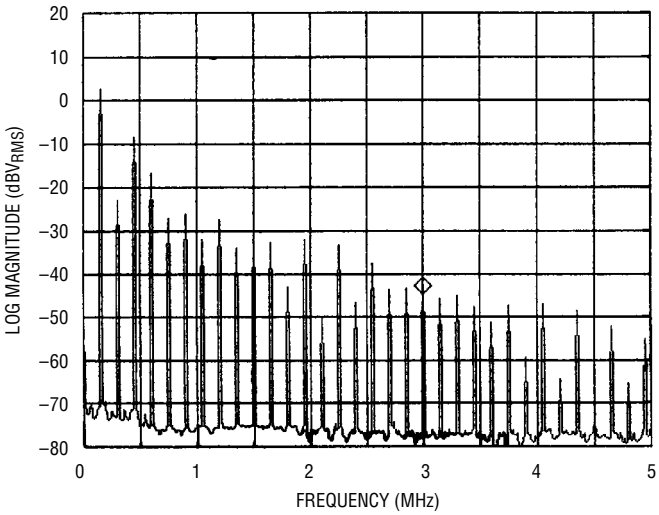

Figure 12. Slew Rate Limited LTC1483 Driver Output Spectrum Transmitting at 150kHz

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of circuits as described herein will not infringe on existing patent rights.

APPLICATIONS INFORMATION

Shutdown Mode

Both the receiver output (RO) and the driver outputs (A, B) can be placed in three-state mode by bringing $\overline{RE}$ high and DE low respectively. In addition, the LTC1483 will enter shutdown mode when $\overline{RE}$ is high and DE is low.

In shutdown the LTC1483 typically draws only 1µA of supply current. In order to guarantee that the part goes into shutdown, $\overline{RE}$ must be high and DE must be low for at least 600ns simultaneously. If this time duration is less than 50ns the part will not enter shutdown mode. Toggling either $\overline{RE}$ or DE will wake the LTC1483 back up within 3.5µs.

If the slow slew rate driver was active immediately prior to shutdown, the supply current will not drop to 1µA until the driver outputs have reached a steady state; this can take as long as 2.6µs under worst case conditions. If the driver was disabled prior to shutdown the supply current will drop to 1µA immediately.

PACKAGE DESCRIPTION

Dimension in inches (millimeters) unless otherwise noted.

N Package
8-Lead Plastic DIP

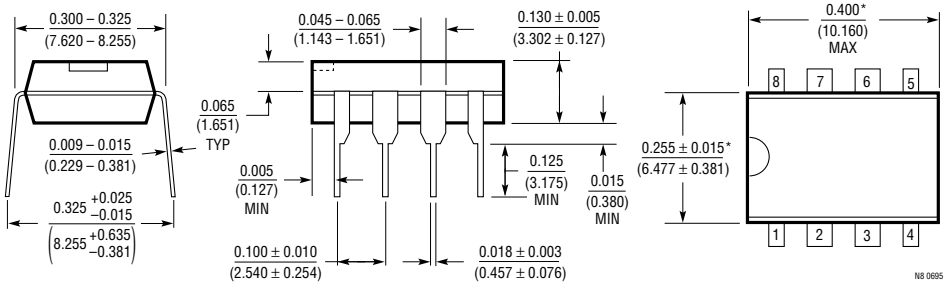

*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.010 INCH (0.254mm)

S Package
8-Lead Plastic SOIC

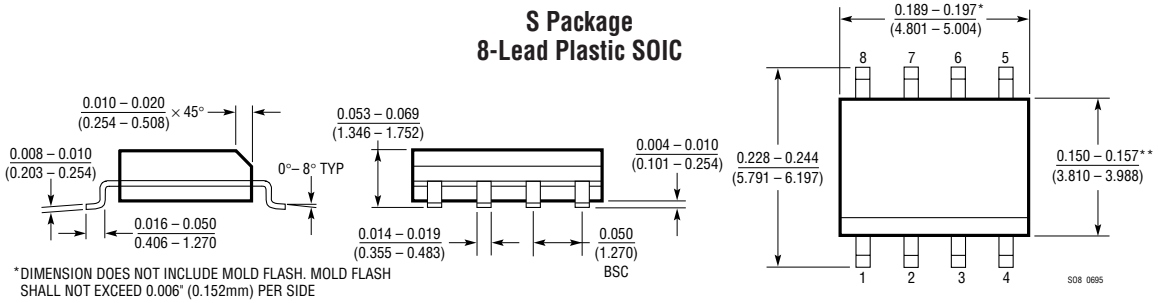

*DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.006" (0.152mm) PER SIDE

**DIMENSION DOES NOT INCLUDE INTERLEAD FLASH. INTERLEAD FLASH SHALL NOT EXCEED 0.010" (0.254mm) PER SIDE

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LTC485	5V Low Power RS485 Interface Transceiver	Low Power
LTC1480	3.3V Ultra-Low Power RS485 Transceiver	World's First 3V Powered 485 Transceiver with Low Power Consumption
LTC1481	5V Ultra-Low Power RS485 Transceiver with Shutdown	Lowest Power
LTC1485	5V Differential Bus Transceiver	Highest Speed
LTC1487	5V Ultra-Low Power RS485 with Low EMI Shutdown and High Input Impendance	High Input Impendance/Low EMI/Lowest Power

Linear Technology Corporation
1630 McCarthy Blvd., Milpitas, CA 95035-7487
(408) 432-1900 • FAX: (408) 434-0507 • TELEX: 499-3977

LT/GP 1094 10K • PRINTED IN THE USA

© LINEAR TECHNOLOGY CORPORATION 1994

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru