



■ Features :

- True sine wave output (THD<3%)
- High surge power up to 3000W
- U.P.S. mode and energy saving mode (selectable)
- High efficiency up to 91%
- Power ON-OFF switch
- Standby saving mode can be selectable
- Front panel indicator for operation status
- Thermostatically controlled cooling fan
- Protections: Bat. low alarm / Bat. low shutdown / Over voltage / Over temp. / Output short / Input polarity reverse / Overload / AC circuit breaker
- Application : Home appliance, power tools, office and portable equipment, vehicle and yacht ...etc.
- Built-in solar / AC charger
- Optional monitoring software
- 3 years warranty



SPECIFICATION

MODEL		TN-1500-112□	TN-1500-124□	TN-1500-148□	TN-1500-212□	TN-1500-224□	TN-1500-248□	
OUTPUT	RATED POWER (Typ.)	1500W						
	MAXIMUM OUTPUT POWER (Typ.)	1725W for 180 sec. / 1875W for 10 sec. / surge power 3000W for 30 cycles						
	AC VOLTAGE	Factory setting set at 110VAC			Factory setting set at 230VAC			
		100 / 110 / 115 / 120VAC selectable by setting button S.W			200 / 220 / 230 / 240VAC selectable by setting button S.W			
	FREQUENCY	60±0.1Hz 50/60Hz selectable by setting button S.W			50±0.1Hz 50/60Hz selectable by setting button S.W			
	WAVEFORM	Note.2	True sine wave (THD<3%) at rated input voltage					
	AC REGULATION (Typ.)	±3.0%						
	TRANSFER TIME (Typ.)	10ms inverter→→ by pass						
	SAVING MODE (Typ.)	Default disabled. Load ≤ 5W will be changed to standby mode						
FRONT PANEL INDICATOR		Battery voltage level, output load level, saving mode, fault and operation status						
INPUT	BAT. VOLTAGE	12V	24V	48V	12V	24V	48V	
	VOLTAGE RANGE (Typ.)	Note.3,6	10.5 ~ 15VDC	21 ~ 30VDC	42 ~ 60VDC	10.5 ~ 15VDC	21 ~ 30VDC	42 ~ 60VDC
	DC CURRENT (Typ.)	Note.5	150A	75A	37.5A	150A	75A	37.5A
	NO LOAD DISSIPATION		≤ 18W @ standby saving mode					
	OFF MODE CURRENT DRAW		≤ 1mA					
	EFFICIENCY (Typ.)	Note.2	87%	89%	89%	88%	90%	91%
	BATTERY TYPES		Open & sealed Lead Acid					
BATTERY INPUT PROTECTION	FUSE	40A*5	30A*3	30A*2	40A*5	30A*3	30A*2	
	BAT. LOW ALARM	11.3±4%	22.5±4%	45±4%	11.3±4%	22.5±4%	45±4%	
	BAT. LOW SHUTDOWN	10.5±4%	21±4%	42±4%	10.5±4%	21±4%	42±4%	
	REVERSE POLARITY		By internal fuse open					
	OVER TEMPERATURE		82℃ ± 5℃	82℃ ± 5℃	96℃ ± 5℃	68℃ ± 5℃	68℃ ± 5℃	68℃ ± 5℃
OUTPUT PROTECTION	OUTPUT SHORT		Protection type : Shut down o/p voltage, re-power on to recover ; by internal RTH3 detect on heatsink of power transistor					
	OVER LOAD (Typ.)		105 ~ 115% load for 180 sec., 115% ~ 125% load for 10 sec.					
			Protection type : Shut down o/p voltage, re-power on to recover					
	CIRCUIT BREAKER		20A			10A		
	GFCI PROTECTION		Optional (Only type F)			None		
	ENVIRONMENT	WORKING TEMP.	Note.1	0 ~ +40℃ @ 100% load ; 60℃ @ 50% load				
WORKING HUMIDITY		20% ~ 90% RH non-condensing						
STORAGE TEMP., HUMIDITY		-30 ~ +70℃ / -22 ~ +158°F, 10 ~ 95% RH						
VIBRATION		10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes						
SAFETY STANDARDS		UL458 (only for "GFCI" receptacle-Type F) None						
SAFETY & EMC	LVD	None			EN60950-1			
	WITHSTAND VOLTAGE		Bat I/P - AC I/P:3.0KVAC Bat I/P - AC O/P:3.0KVAC AC O/P - FG:1.5KVAC					
	EMC EMISSION		Compliance to FCC class A			Compliance to EN55022 class B, 72/ 245/ CEE, 95/ 54/ CE, E-Mark		
	EMC IMMUNITY		None			Compliance to EN61000-4-2,3,4,5,6,8,11		
	AC CHARGER	CHARGE CURRENT (Typ.)	5.5A	2.7A	1.35A	5.5A	2.7A	1.35A
CHARGE VOLTAGE		14.3V±4%	28.5V±4%	57V±4%	14.3V±4%	28.5V±4%	57V±4%	
SOLAR CHARGER	MAX OPEN CIRCUIT VOLTAGE	25V	45V	75V	25V	45V	75V	
	CHARGE CURRENT (max.)	30A						
OTHERS	CHARGE VOLTAGE	14.3V±4%	28.5V±4%	57V±4%	14.3V±4%	28.5V±4%	57V±4%	
	CONTROL WIRING	RJ11 -RS232 (Option)						
	DIMENSION	420*220*88mm (L*W*H)						
NOTE	PACKING	6.85Kg; 2pcs/15.7Kg/1.61CUFT						
	1. Output derating capacity referenced by curve 1. 2. THD and Efficiency is tested by 1000W, linear load at 13V, 26V, 52V input voltage. 3. Input derating capacity referenced by curve 2. 4. All parameters not specified above are measured at rated load, 25℃ of ambient temperature. 5. DC current is tested by 1500W, linear load at 13V, 26V, 52V input voltage. 6. The tolerance of each voltage value by models is:112/212→±0.5V;124/224→±1V;148/248→±2V							

■ Instructions for TN-1500 monitoring software

1. Installation of TN-1500 unit and PC

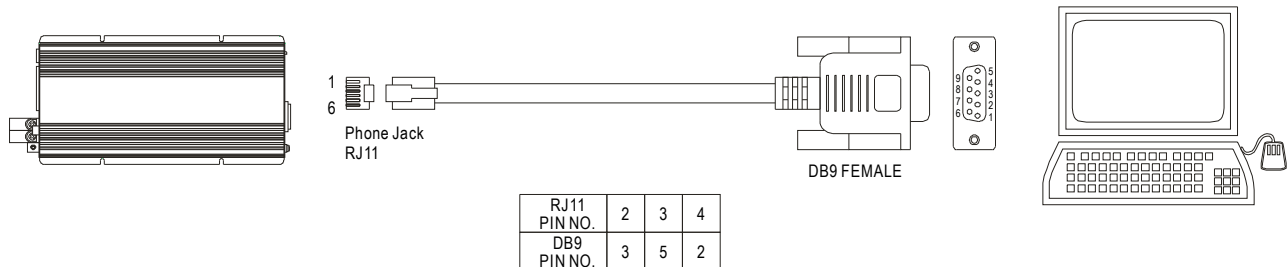


Figure 1

2. Explanation of Monitoring Manu

2.1 Main Page


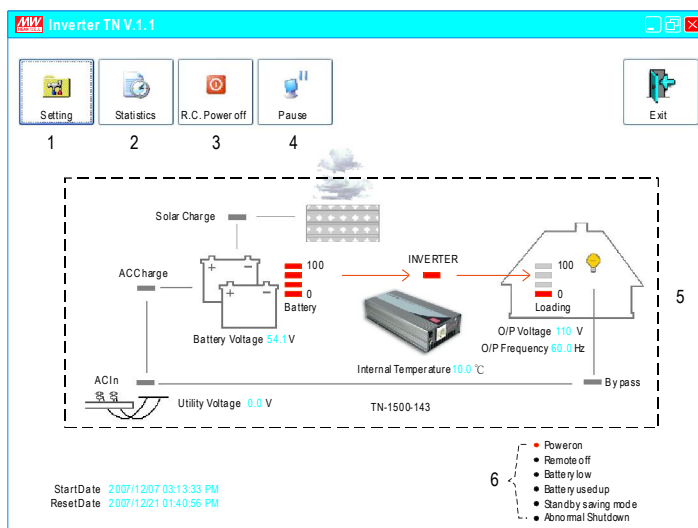


Figure 2

1. Setting: Adjustment for output voltage, charging related voltage, frequency, and operation mode. Please refer to Figure 3 for details.
2. Statistics: Calculate for the percentage of operating period for each operation mode. Please refer to Figure 4 for details.
3. R.C. Power off: Power can be turned ON or OFF at the remote location.
4. Pause: Stop refreshing the page of monitoring software.
5. Status of unit: Indicating current operating status of TN-1500.
6. Signals that display current condition of the unit.

2.2 Setting Page

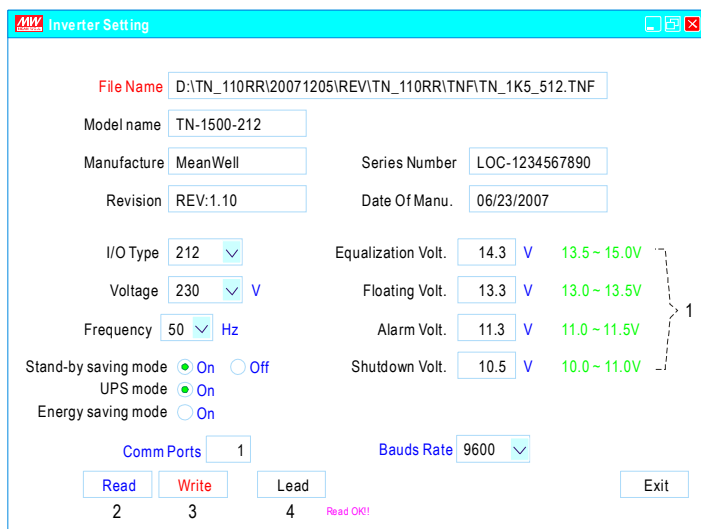

File Name: D:\TN_110RR\20071205\REV\TN_110RR\TNF\TN_1K5_512.TNF

Model name: TN-1500-212

Manufacture: MeanWell Series Number: LOC-1234567890

Revision: REV:1.10 Date Of Manu.: 06/23/2007

I/O Type: 212 Equalization Volt.: 14.3 V 13.5 ~ 15.0V

Voltage: 230 V Floating Volt.: 13.3 V 13.0 ~ 13.5V

Frequency: 50 Hz Alarm Volt.: 11.3 V 11.0 ~ 11.5V

Stand-by saving mode: ☒ On ☐ Off Shutdown Volt.: 10.5 V 10.0 ~ 11.0V

UPS mode: ☒ On

Energy saving mode: ☐ On

Comm Ports: 1 Bauds Rate: 9600


Read Write Load Exit

2 3 4 Read OK!!

Figure 3

1. User can adjust the settings based on the characteristics of batteries been used: Equalization Voltage, Floating Voltage, Alarm Voltage, and Shut-down Voltage. UPS Mode / Energy Saving Mode selection and AC output voltage and frequency can also be set in this page.
2. Read: Read current settings of the unit.
3. Write: Write the revised setting into the unit.
4. Load: Load in factory default settings.

2.3 Statistic Page

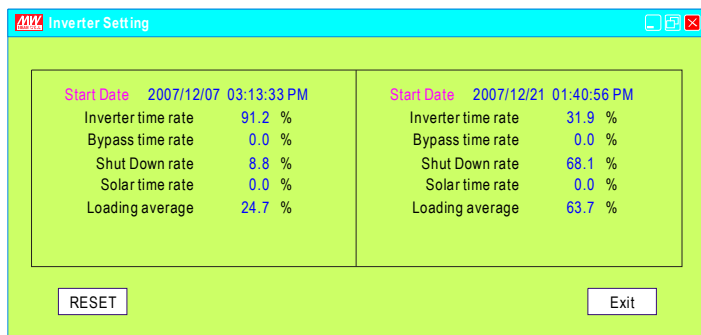

Start Date: 2007/12/07 03:13:33 PM

Inverter time rate: 91.2 %

Bypass time rate: 0.0 %

Shut Down rate: 8.8 %

Solar time rate: 0.0 %

Loading average: 24.7 %

Start Date: 2007/12/21 01:40:56 PM

Inverter time rate: 31.9 %

Bypass time rate: 0.0 %

Shut Down rate: 68.1 %

Solar time rate: 0.0 %

Loading average: 63.7 %

RESET Exit

Figure 4

1. Start Date: Date that installing the monitoring software.
2. Reset Date: Date that resetting the statistics. The Start Date will not be influenced by resetting the statistics or turning off the unit.
3. Inverter time rate: Operating period of "Inverter Mode" represents how many percent of the whole operating period.
4. Bypass time rate: Operating period of "Bypass Mode" (energy provides directly by the utility) represents how many percent of the whole operating period.
5. Shut down rate: Percentage of time period that the unit is under the condition of shut down.
*** Inverter time rate + Bypass time rate + Shut down rate = 100 %**
6. Solar time rate: Percentage of time period that the solar charger is functioning after turning on the TN-1500 unit.
7. Loading average: Average loading after turning on the TN-1500 unit.

True sine wave inverter
+AC charger and solar charger

O/P Wattage:1500W

TN - 1500 -

112 A

12:12VDC

Bat. Voltage: 24:24VDC

48:48VDC


Output: 1:110VAC
2:230VAC

A:TYPE A OUTLET
B:TYPE B OUTLET
C:TYPE C OUTLET
D:TYPE D OUTLET
E:TYPE E OUTLET
F:TYPE F OUTLET

AC Output Receptacles (optional)





Receptacle type						
	TYPE-A	TYPE-B	TYPE-C	TYPE-D	TYPE-E	TYPE-F
Country	USA	EUROPE	AUSTRALIA	U.K	JAPAN	GFCI
Certificate						

Mechanical Specification

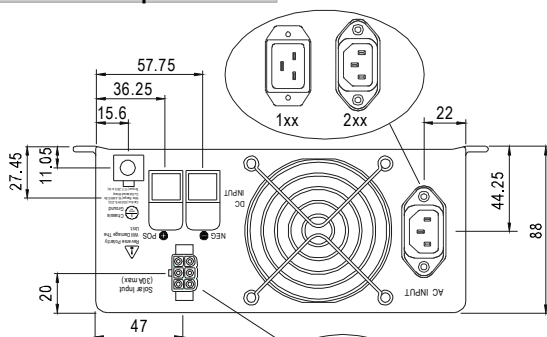


Unit:mm

Derating Curve

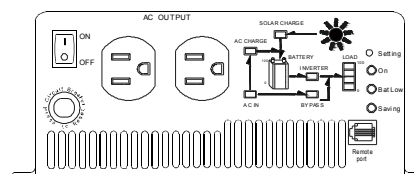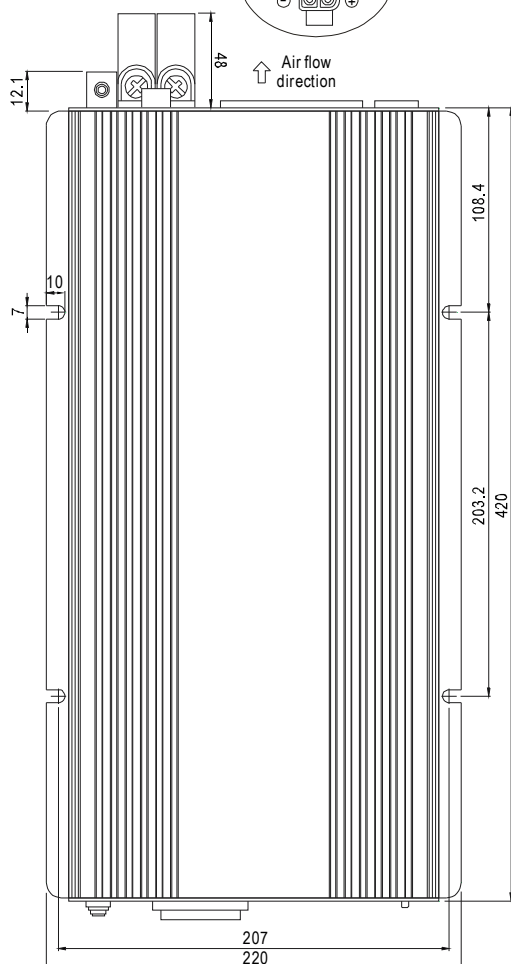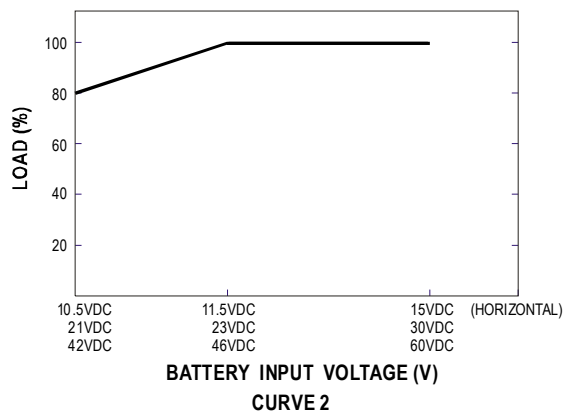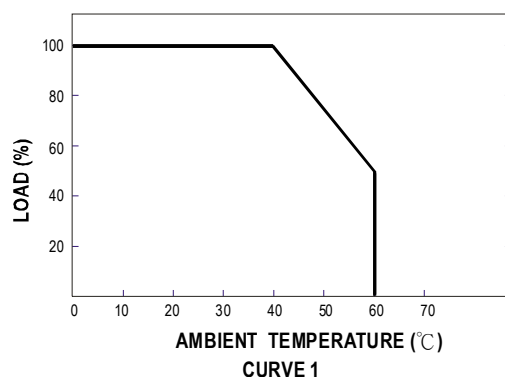

Type-A

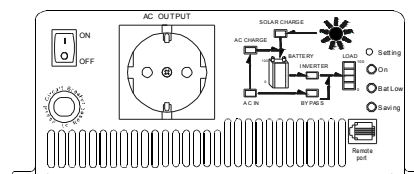

Type-B

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru