8-Bit

SAA-XC866

8-Bit Single-Chip Microcontroller

Data Sheet

V1.5 2010-09

Microcontrollers

Edition 2010-09

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2010 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (**www.infineon.com**).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

8-Bit

SAA-XC866

8-Bit Single-Chip Microcontroller

Data Sheet

V1.5 2010-09

Microcontrollers

SAA-XC866 Data Sheet
Revision History: 2010-09 V1.5

Previous Version: V1.4 2010-08

Page	Subjects (major changes since last revision)
Changes from V1.4 2010-08 to V1.5 2010-09	
All	3.3 V device variant is added to the data sheet. Parameters specific to the variant are also added.

We Listen to Your Comments
Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to:
mcdocu.comments@infineon.com

Table of Contents **Page**

1 Summary of Features 4

2 General Device Information 7
2.1 Block Diagram 7
2.2 Logic Symbol 8
2.3 Pin Configuration 9
2.4 Pin Definitions and Functions 10

3 Functional Description 15
3.1 Processor Architecture 15
3.2 Memory Organization 16
3.2.1 Memory Protection Strategy 19
3.2.2 Special Function Register 21
3.2.2.1 Address Extension by Mapping 21
3.2.2.2 Address Extension by Paging 23
3.2.3 Bit Protection Scheme 27
3.2.4 SAA-XC866 Register Overview 28
3.3 Flash Memory 40
3.3.1 Flash Bank Sectorization 42
3.3.2 Flash Programming Width 43
3.4 Interrupt System 44
3.4.1 Interrupt Source 44
3.4.2 Interrupt Source and Vector 49
3.4.3 Interrupt Priority 51
3.5 Parallel Ports 52
3.6 Power Supply System with Embedded Voltage Regulator 55
3.7 Reset Control 56
3.7.1 Module Reset Behavior 58
3.7.2 Booting Scheme 58
3.8 Clock Generation Unit 59
3.8.1 Recommended External Oscillator Circuits 61
3.8.2 Clock Management 63
3.9 Power Saving Modes 65
3.10 Watchdog Timer 66
3.11 Universal Asynchronous Receiver/Transmitter 69
3.11.1 Baud-Rate Generator 70
3.11.2 Baud Rate Generation using Timer 1 73
3.12 Normal Divider Mode (8-bit Auto-reload Timer) 73
3.13 LIN Protocol 74
3.13.1 LIN Header Transmission 74
3.14 High-Speed Synchronous Serial Interface 76
3.15 Timer 0 and Timer 1 78
3.16 Timer 2 79

3.17 Capture/Compare Unit 6 80
3.18 Analog-to-Digital Converter 82
3.18.1 ADC Clocking Scheme 83
3.18.2 ADC Conversion Sequence 84
3.19 On-Chip Debug Support 85
3.19.1 JTAG ID Register 86
3.20 Identification Register 87

4 Electrical Parameters 88
4.1 General Parameters 88
4.1.1 Parameter Interpretation 88
4.1.2 Absolute Maximum Rating 89
4.1.3 Operating Conditions 90
4.2 DC Parameters 91
4.2.1 Input/Output Characteristics 91
4.2.2 Supply Threshold Characteristics 95
4.2.3 ADC Characteristics 96
4.2.3.1 ADC Conversion Timing 98
4.2.4 Power Supply Current 99
4.3 AC Parameters 101
4.3.1 Testing Waveforms 101
4.3.2 Output Rise/Fall Times 102
4.3.3 Power-on Reset and PLL Timing 103
4.3.4 On-Chip Oscillator Characteristics 104
4.3.5 JTAG Timing 105
4.3.6 SSC Master Mode Timing 107

5 Package and Reliability 108
5.1 Package Parameters (PG-TSSOP-38) 108
5.2 Package Outline 109
5.3 Quality Declaration 110

1 Summary of Features

- High-performance XC800 Core
  - compatible with standard 8051 processor
  - two clocks per machine cycle architecture (for memory access without wait state)
  - two data pointers
- On-chip memory
  - 8 Kbytes of Boot ROM
  - 256 bytes of RAM
  - 512 bytes of XRAM
  - 4/8/16 Kbytes of Flash; or
    8/16 Kbytes of ROM, with additional 4 Kbytes of Flash
    (includes memory protection strategy)
- I/O port supply at 3.3 V/5.0 V and core logic supply at 2.5 V (generated by embedded voltage regulator)

(further features are on next page)

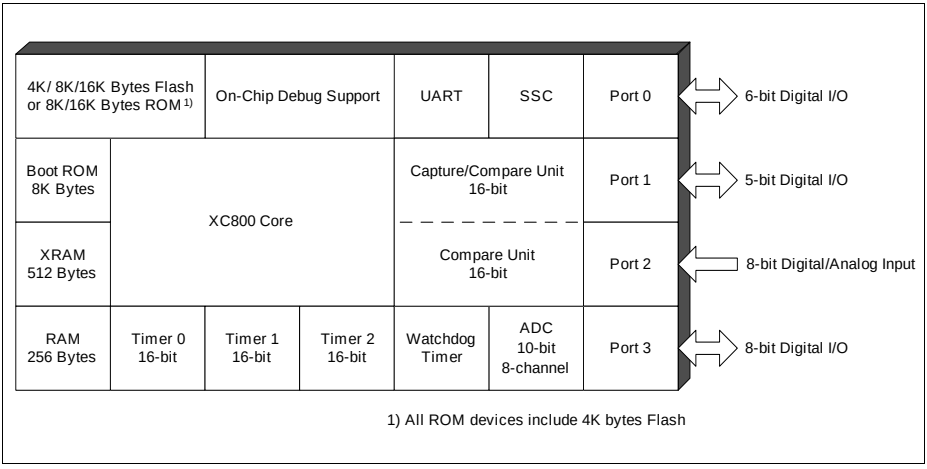

Figure 1 SAA-XC866 Functional Units

Features (continued):

- Reset generation
  - Power-On reset
  - Hardware reset
  - Brownout reset for core logic supply
  - Watchdog timer reset
  - Power-Down Wake-up reset
- On-chip OSC and PLL for clock generation
  - PLL loss-of-lock detection
- Power saving modes
  - slow-down mode
  - idle mode
  - power-down mode with wake-up capability via RXD or EXINT0
  - clock gating control to each peripheral
- Programmable 16-bit Watchdog Timer (WDT)
- Four ports
  - 19 pins as digital I/O
  - 8 pins as digital/analog input
- 8-channel, 10-bit ADC
- Three 16-bit timers
  - Timer 0 and Timer 1 (T0 and T1)
  - Timer 2
- Capture/compare unit for PWM signal generation (CCU6)
- Full-duplex serial interface (UART)
- Synchronous serial channel (SSC)
- On-chip debug support
  - 1 Kbyte of monitor ROM (part of the 8-Kbyte Boot ROM)
  - 64 bytes of monitor RAM
- PG-TSSOP-38 pin package
- Temperature range T_A:
  - SAA (-40 to 140 °C)

SAA-XC866 Variant Devices

The SAA-XC866 product family features devices with different configurations and program memory sizes, offering cost-effective solution for different application requirements.

The list of SAA-XC866 devices and their differences are summarized in **Table 1**.

Table 1 Device Summary

Device Type	Device Name	Power Supply (V)	P-Flash Size (Kbytes)	D-Flash Size (Kbytes)	ROM Size (Kbytes)	LIN BSL Support
Flash[1)]	SAA-XC866L-4FRA	5.0	12	4	–	Yes
	SAA-XC866-4FRA	5.0	12	4	–	No
	SAA-XC866L-2FRA	5.0	4	4	–	Yes
	SAA-XC866-2FRA	5.0	4	4	–	No
	SAA-XC866L-1FRA	5.0	–	4	–	Yes
	SAA-XC866-1FRA	5.0	–	4	–	No
	SAA-XC866L-4FRA	3.3	12	4	–	Yes
ROM	SAA-XC866L-4RRA	5.0	–	4	16	Yes
	SAA-XC866-4RRA	5.0	–	4	16	No
	SAA-XC866L-2RRA	5.0	–	4	8	Yes
	SAA-XC866-2RRA	5.0	–	4	8	No

1) The flash memory (P-Flash and D-Flash) can be used for code or data.

Ordering Information

The ordering code for Infineon Technologies microcontrollers provides an exact reference to the required product. This ordering code identifies:

- The derivative itself, i.e. its function set, the temperature range, and the supply voltage
- the package and the type of delivery

For the available ordering codes for the SAA-XC866, please refer to your responsible sales representative or your local distributor.

As this document refers to all the derivatives, some descriptions may not apply to a specific product. For simplicity all versions are referred to by the term SAA-XC866 throughout this document.

2 General Device Information

2.1 Block Diagram

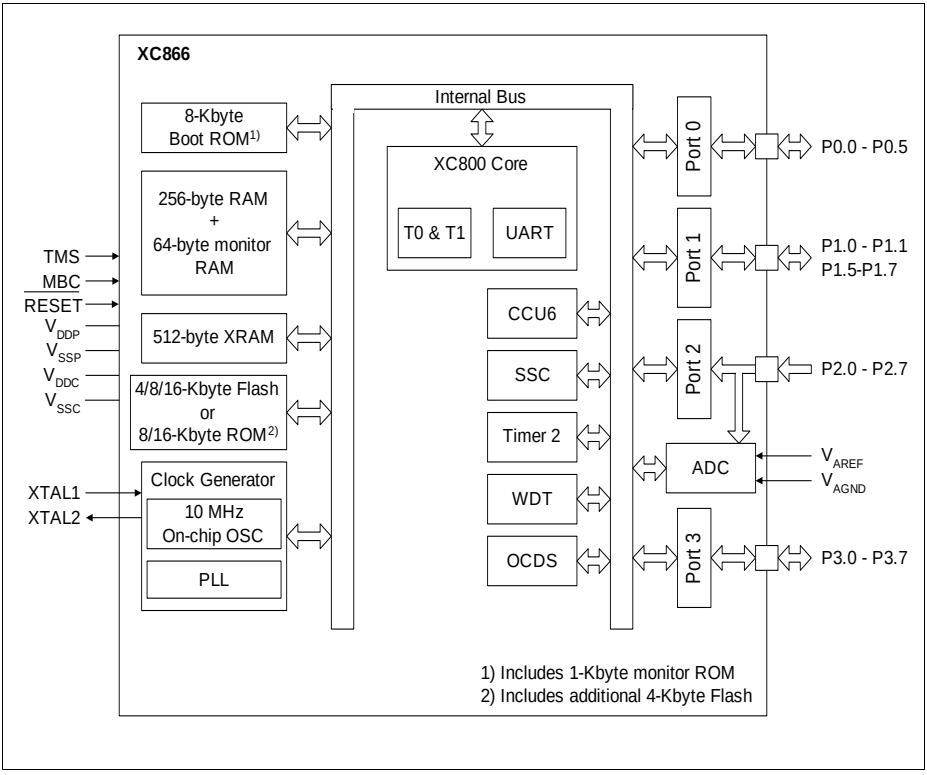

Figure 2 SAA-XC866 Block Diagram

2.2 Logic Symbol

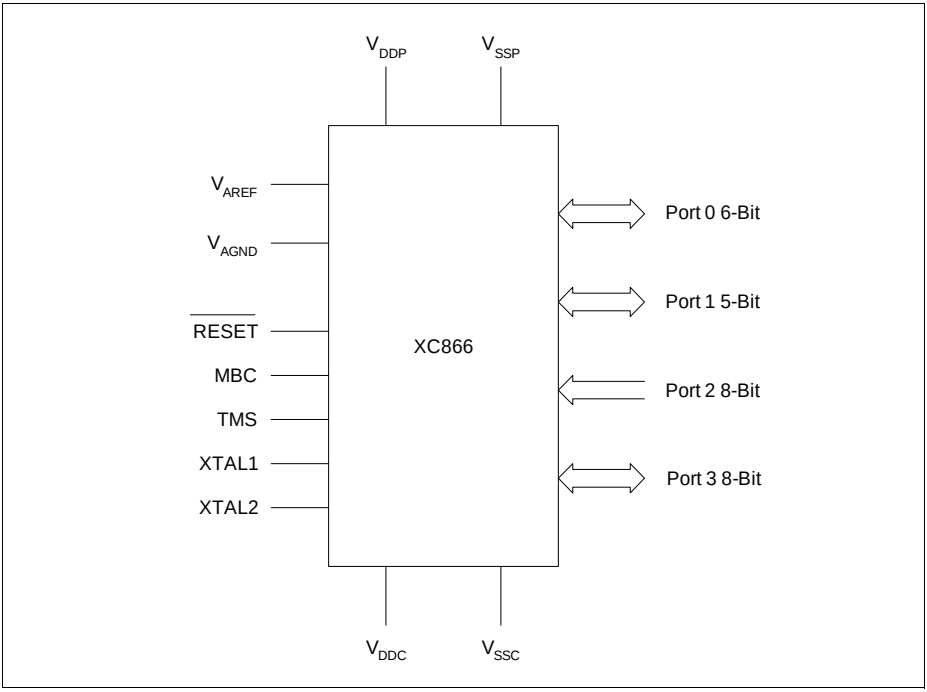

Figure 3 SAA-XC866 Logic Symbol

2.3 Pin Configuration

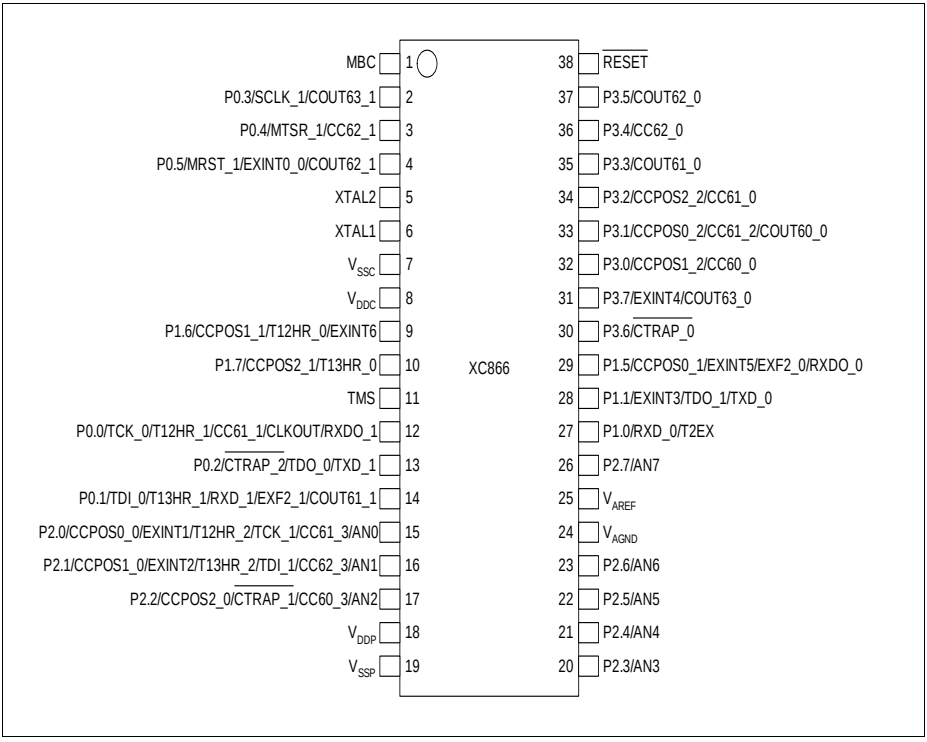

Figure 4 SAA-XC866 Pin Configuration, PG-TSSOP-38 Package (top view)

2.4 Pin Definitions and Functions

Table 2 Pin Definitions and Functions

Symbol	Pin Number	Type	Reset State	Function	
P0		I/O		**Port 0** Port 0 is a 6-bit bidirectional general purpose I/O port. It can be used as alternate functions for the JTAG, CCU6, UART, and the SSC.	
P0.0	12		Hi-Z	TCK_0 T12HR_1 CC61_1 CLKOUT RXDO_1	JTAG Clock Input CCU6 Timer 12 Hardware Run Input Input/Output of Capture/Compare channel 1 Clock Output UART Transmit Data Output
P0.1	14		Hi-Z	TDI_0 T13HR_1 RXD_1 COUT61_1 EXF2_1	JTAG Serial Data Input CCU6 Timer 13 Hardware Run Input UART Receive Data Input Output of Capture/Compare channel 1 Timer 2 External Flag Output
P0.2	13		PU	$\overline{\text{CTRAP}}$_2 TDO_0 TXD_1	CCU6 Trap Input JTAG Serial Data Output UART Transmit Data Output/ Clock Output
P0.3	2		Hi-Z	SCK_1 COUT63_1	SSC Clock Input/Output Output of Capture/Compare channel 3
P0.4	3		Hi-Z	MTSR_1 CC62_1	SSC Master Transmit Output/ Slave Receive Input Input/Output of Capture/Compare channel 2
P0.5	4		Hi-Z	MRST_1 EXINT0_0 COUT62_1	SSC Master Receive Input/ Slave Transmit Output External Interrupt Input 0 Output of Capture/Compare channel 2

Table 2 Pin Definitions and Functions (cont'd)

Symbol	Pin Number	Type	Reset State	Function
P1		I/O		**Port 1** Port 1 is a 5-bit bidirectional general purpose I/O port. It can be used as alternate functions for the JTAG, CCU6, UART, and the SSC.
P1.0	27		PU	RXD_0 UART Receive Data Input T2EX Timer 2 External Trigger Input
P1.1	28		PU	EXINT3 External Interrupt Input 3 TDO_1 JTAG Serial Data Output TXD_0 UART Transmit Data Output/ Clock Output
P1.5	29		PU	CCPOS0_1 CCU6 Hall Input 0 EXINT5 External Interrupt Input 5 EXF2_0 TImer 2 External Flag Output RXDO_0 UART Transmit Data Output
P1.6	9		PU	CCPOS1_1 CCU6 Hall Input 1 T12HR_0 CCU6 Timer 12 Hardware Run Input EXINT6 External Interrupt Input 6
P1.7	10		PU	CCPOS2_1 CCU6 Hall Input 2 T13HR_0 CCU6 Timer 13 Hardware Run Input P1.5 and P1.6 can be used as a software chip select output for the SSC.

Table 2 Pin Definitions and Functions (cont'd)

Symbol	Pin Number	Type	Reset State	Function
P2		I		**Port 2** Port 2 is an 8-bit general purpose input-only port. It can be used as alternate functions for the digital inputs of the JTAG and CCU6. It is also used as the analog inputs for the ADC.
P2.0	15		Hi-Z	CCPOS0_0 CCU6 Hall Input 0 EXINT1 External Interrupt Input 1 T12HR_2 CCU6 Timer 12 Hardware Run Input TCK_1 JTAG Clock Input CC61_3 Input of Capture/Compare channel 1 AN0 Analog Input 0
P2.1	16		Hi-Z	CCPOS1_0 CCU6 Hall Input 1 EXINT2 External Interrupt Input 2 T13HR_2 CCU6 Timer 13 Hardware Run Input TDI_1 JTAG Serial Data Input CC62_3 Input of Capture/Compare channel 2 AN1 Analog Input 1
P2.2	17		Hi-Z	CCPOS2_0 CCU6 Hall Input 2 CTRAP_1 CCU6 Trap Input CC60_3 Input of Capture/Compare channel 0 AN2 Analog Input 2
P2.3	20		Hi-Z	AN3 Analog Input 3
P2.4	21		Hi-Z	AN4 Analog Input 4
P2.5	22		Hi-Z	AN5 Analog Input 5
P2.6	23		Hi-Z	AN6 Analog Input 6
P2.7	26		Hi-Z	AN7 Analog Input 7

Table 2 Pin Definitions and Functions (cont'd)

Symbol	Pin Number	Type	Reset State	Function
P3		I		**Port 3** Port 3 is a bidirectional general purpose I/O port. It can be used as alternate functions for the CCU6.
P3.0	32		Hi-Z	CCPOS1_2 CCU6 Hall Input 1 CC60_0 Input/Output of Capture/Compare channel 0
P3.1	33		Hi-Z	CCPOS0_2 CCU6 Hall Input 0 CC61_2 Input/Output of Capture/Compare channel 1 COUT60_0 Output of Capture/Compare channel 0
P3.2	34		Hi-Z	CCPOS2_2 CCU6 Hall Input 2 CC61_0 Input/Output of Capture/Compare channel 1
P3.3	35		Hi-Z	COUT61_0 Output of Capture/Compare channel 1
P3.4	36		Hi-Z	CC62_0 Input/Output of Capture/Compare channel 2
P3.5	37		Hi-Z	COUT62_0 Output of Capture/Compare channel 2
P3.6	30		PD	$\overline{\text{CTRAP_0}}$ CCU6 Trap Input
P3.7	31		Hi-Z	EXINT4 External Interrupt Input 4 COUT63_0 Output of Capture/Compare channel 3

Table 2 Pin Definitions and Functions (cont'd)

Symbol	Pin Number	Type	Reset State	Function
V_{DDP}	18	–	–	**I/O Port Supply (3.3 V/5.0 V) Also used by EVR and analog modules.**
V_{SSP}	19	–	–	**I/O Port Ground**
V_{DDC}	8	–	–	**Core Supply Monitor (2.5 V)**
V_{SSC}	7	–	–	**Core Supply Ground**
V_{AREF}	25	–	–	**ADC Reference Voltage**
V_{AGND}	24	–	–	**ADC Reference Ground**
XTAL1	6	I	Hi-Z	**External Oscillator Input (NC if not needed)**
XTAL2	5	O	Hi-Z	**External Oscillator Output (NC if not needed)**
TMS	11	I	PD	**Test Mode Select**
$\overline{\text{RESET}}$	38	I	PU	**Reset Input**
MBC[1)]	1	I	PU	**Monitor & BootStrap Loader Control**

1) An external pull-up device in the range of 4.7 kΩ to 100 kΩ is required to enter user mode. Alternatively MBC can be tied to high if alternate functions (for debugging) of the pin are not utilized.

3 Functional Description

3.1 Processor Architecture

The SAA-XC866 is based on a high-performance 8-bit Central Processing Unit (CPU) that is compatible with the standard 8051 processor. While the standard 8051 processor is designed around a 12-clock machine cycle, the SAA-XC866 CPU uses a 2-clock machine cycle. This allows fast access to ROM or RAM memories without wait state. Access to the Flash memory, however, requires an additional wait state (one machine cycle). The instruction set consists of 45% one-byte, 41% two-byte and 14% three-byte instructions.

The SAA-XC866 CPU provides a range of debugging features, including basic stop/start, single-step execution, breakpoint support and read/write access to the data memory, program memory and SFRs. **Figure 5** shows the CPU functional blocks.

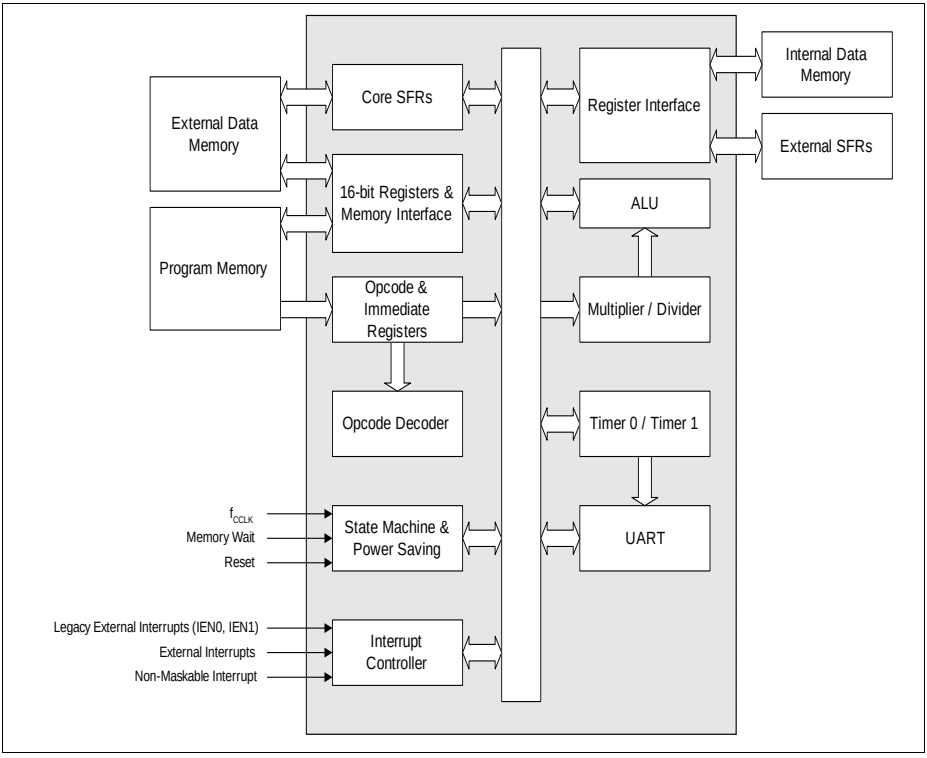

Figure 5 CPU Block Diagram

3.2 Memory Organization

The SAA-XC866 CPU operates in the following five address spaces:

- 8 Kbytes of Boot ROM program memory
- 256 bytes of internal RAM data memory
- 512 bytes of XRAM memory
- a 128-byte Special Function Register area
- 4/8/16 Kbytes of Flash program memory (Flash devices); or
  8/16 Kbytes of ROM program memory, with additional 4 Kbytes of Flash (ROM devices)

Figure 6 illustrates the memory address spaces of the SAA-XC866-4FR devices.

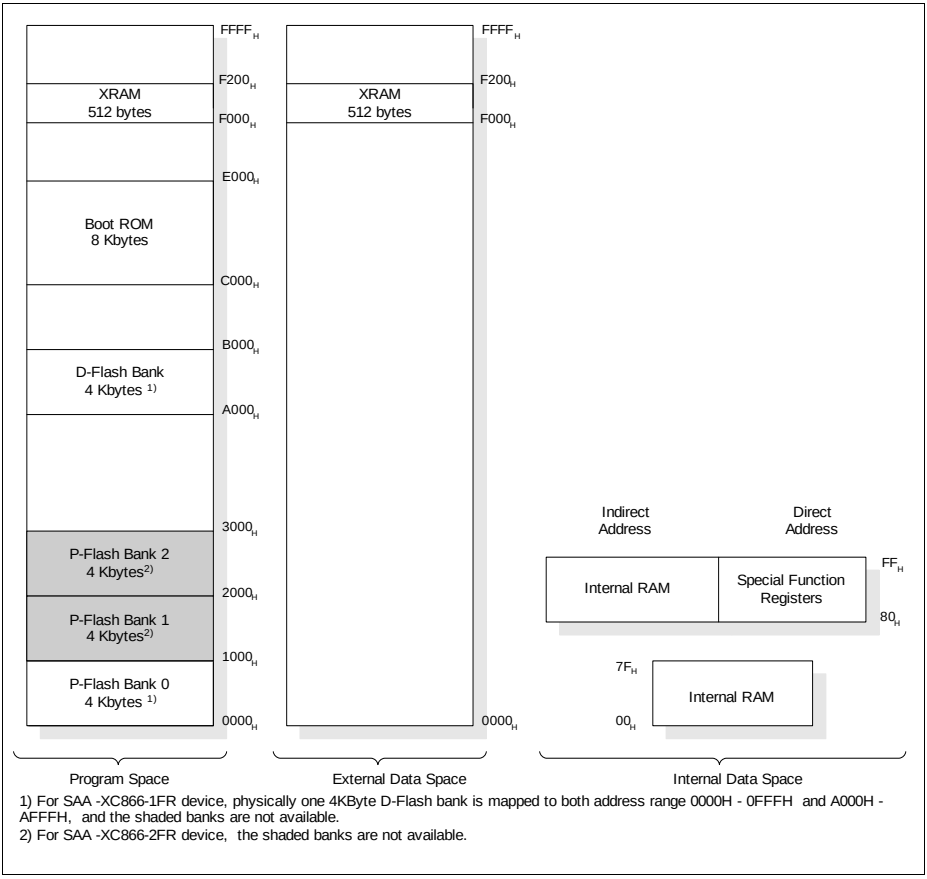

Figure 6 Memory Map of SAA-XC866 Flash Devices

Figure 7 illustrates the memory address spaces of the SAA-XC866-4RR device.

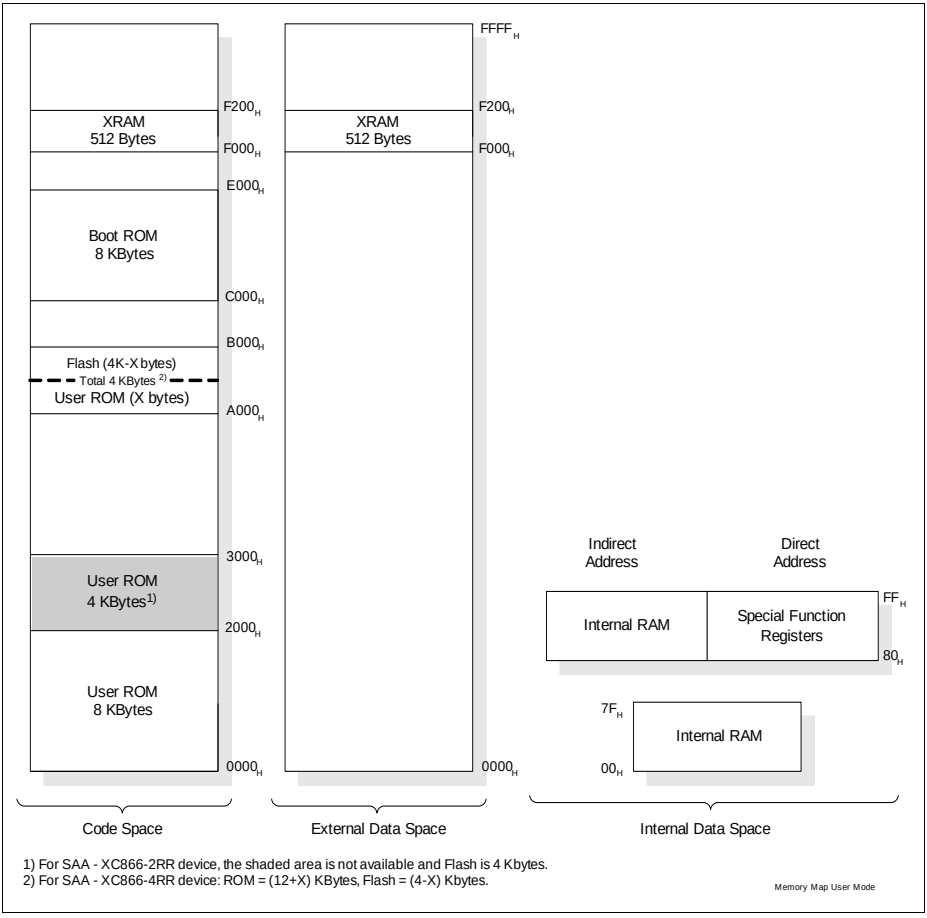

Figure 7 Memory Map of SAA-XC866 ROM Devices

3.2.1 Memory Protection Strategy

The SAA-XC866 memory protection strategy includes:

- Read-out protection: The Flash Memory can be enabled for read-out protection and ROM memory is always protected.
- Program and erase protection: The Flash memory in all devices can be enabled for program and erase protection.

Flash memory protection is available in two modes:

- Mode 0: Only the P-Flash is protected; the D-Flash is unprotected
- Mode 1: Both the P-Flash and D-Flash are protected

The selection of each protection mode and the restrictions imposed are summarized in **Table 3**.

Table 3 Flash Protection Modes

Mode	0	1
Activation	Program a valid password via BSL mode 6	
Selection	MSB of password = 0	MSB of password = 1
P-Flash contents can be read by	Read instructions in the P-Flash	Read instructions in the P-Flash or D-Flash
P-Flash program and erase	Not possible	Not possible
D-Flash contents can be read by	Read instructions in any program memory	Read instructions in the P-Flash or D-Flash
D-Flash program	Possible	Not possible
D-Flash erase	Possible, on the condition that bit DFLASHEN in register MISC_CON is set to 1 prior to each erase operation	Not possible

BSL mode 6, which is used for enabling Flash protection, can also be used for disabling Flash protection. Here, the programmed password must be provided by the user. A password match triggers an automatic erase of the read-protected Flash contents, see **Table 4** and **Table 5**, and the programmed password is erased. The Flash protection is then disabled upon the next reset.

For XC866-2FR and XC866-4FR devices:

The selection of protection type is summarized in **Table 4**.

Table 4 Flash Protection Type for XC866-2FR and XC866-4FR devices

PASSWORD	Type of Protection	Flash Banks to Erase when Unprotected
$1XXXXXXX_B$	Flash Protection Mode 1	All Banks
$0XXXXXXX_B$	Flash Protection Mode 0	P-Flash Bank

For XC866-1FR device and ROM devices:

The selection of protection type is summarized in **Table 5**.

Table 5 Flash Protection Type for XC866-1FR device and ROM devices

PASSWORD	Type of Protection (Applicable to the whole Flash)	Sectors to Erase when Unprotected	Comments
$1XXXXXXX_B$	Read/Program/Erase	All Sectors	Compatible to Protection mode 1
$00001XXX_B$	Erase	Sector 0	
$00010XXX_B$	Erase	Sector 0 and 1	
$00011XXX_B$	Erase	Sector 0 to 2	
$00100XXX_B$	Erase	Sector 0 to 3	
$00101XXX_B$	Erase	Sector 0 to 4	
$00110XXX_B$	Erase	Sector 0 to 5	
$00111XXX_B$	Erase	Sector 0 to 6	
$01000XXX_B$	Erase	Sector 0 to 7	
$01001XXX_B$	Erase	Sector 0 to 8	
$01010XXX_B$	Erase	All Sectors	
Others	Erase	None	

Although no protection scheme can be considered infallible, the SAA-XC866 memory protection strategy provides a very high level of protection for a general purpose microcontroller.

3.2.2 Special Function Register

The Special Function Registers (SFRs) occupy direct internal data memory space in the range 80_H to FF_H. All registers, except the program counter, reside in the SFR area. The SFRs include pointers and registers that provide an interface between the CPU and the on-chip peripherals. As the 128-SFR range is less than the total number of registers required, address extension mechanisms are required to increase the number of addressable SFRs. The address extension mechanisms include:

- Mapping
- Paging

3.2.2.1 Address Extension by Mapping

Address extension is performed at the system level by mapping. The SFR area is extended into two portions: the standard (non-mapped) SFR area and the mapped SFR area. Each portion supports the same address range 80_H to FF_H, bringing the number of addressable SFRs to 256. The extended address range is not directly controlled by the CPU instruction itself, but is derived from bit RMAP in the system control register SYSCON0 at address $8F_H$. To access SFRs in the mapped area, bit RMAP in SFR SYSCON0 must be set. Alternatively, the SFRs in the standard area can be accessed by clearing bit RMAP. The SFR area can be selected as shown in **Figure 8**.

SYSCON0
System Control Register 0 **Reset Value: 00_H**

7	6	5	4	3	2	1	0
0					**1**	**0**	**RMAP**
r					rw	r	rw

Field	Bits	Type	Description
RMAP	0	rw	**Special Function Register Map Control** 0 The access to the standard SFR area is enabled. 1 The access to the mapped SFR area is enabled.
1	2	rw	**Reserved** Returns the last value if read; should be written with 1.
0	1,[7:3]	r	**Reserved** Returns 0 if read; should be written with 0.

Note: The RMAP bit must be cleared/set by ANL or ORL instructions. The rest bits of SYSCON0 should not be modified.

As long as bit RMAP is set, the mapped SFR area can be accessed. This bit is not cleared automatically by hardware. Thus, before standard/mapped registers are accessed, bit RMAP must be cleared/set, respectively, by software.

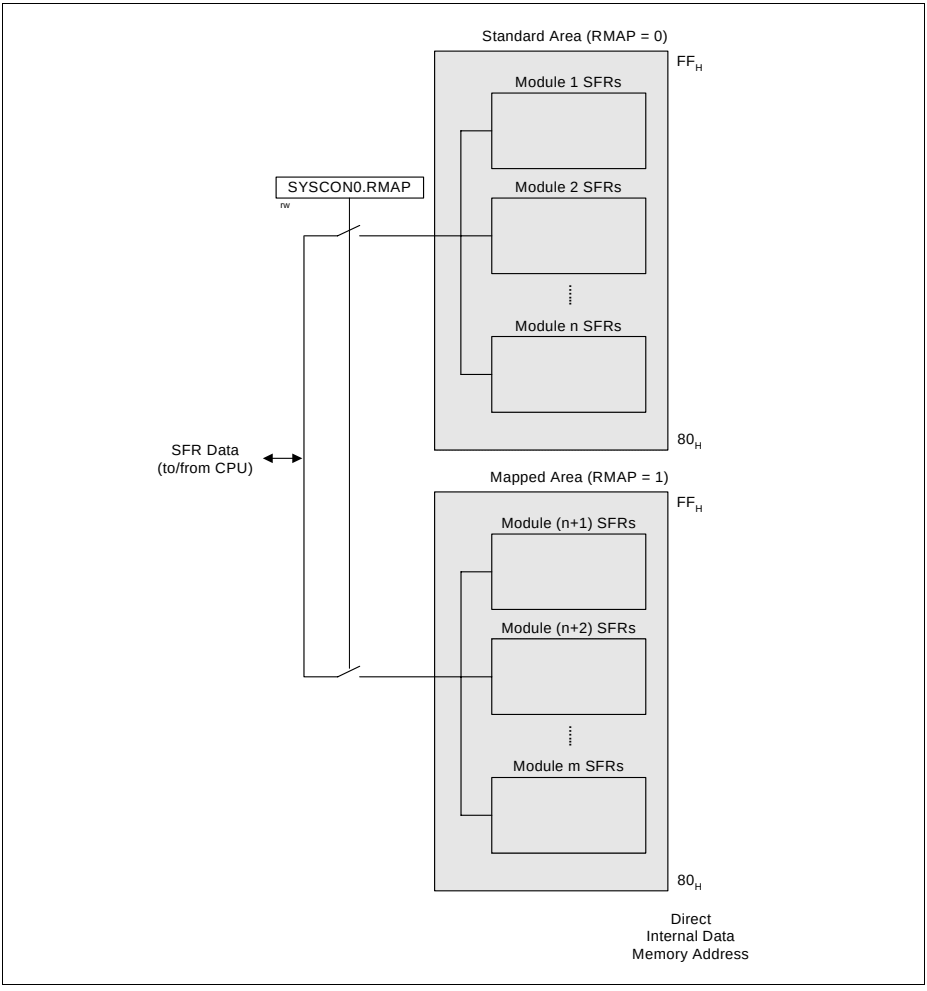

Figure 8 Address Extension by Mapping

3.2.2.2 Address Extension by Paging

Address extension is further performed at the module level by paging. With the address extension by mapping, the SAA-XC866 has a 256-SFR address range. However, this is still less than the total number of SFRs needed by the on-chip peripherals. To meet this requirement, some peripherals have a built-in local address extension mechanism for increasing the number of addressable SFRs. The extended address range is not directly controlled by the CPU instruction itself, but is derived from bit field PAGE in the module page register MOD_PAGE. Hence, the bit field PAGE must be programmed before accessing the SFR of the target module. Each module may contain a different number of pages and a different number of SFRs per page, depending on the specific requirement. Besides setting the correct RMAP bit value to select the SFR area, the user must also ensure that a valid PAGE is selected to target the desired SFR. A page inside the extended address range can be selected as shown in **Figure 9**.

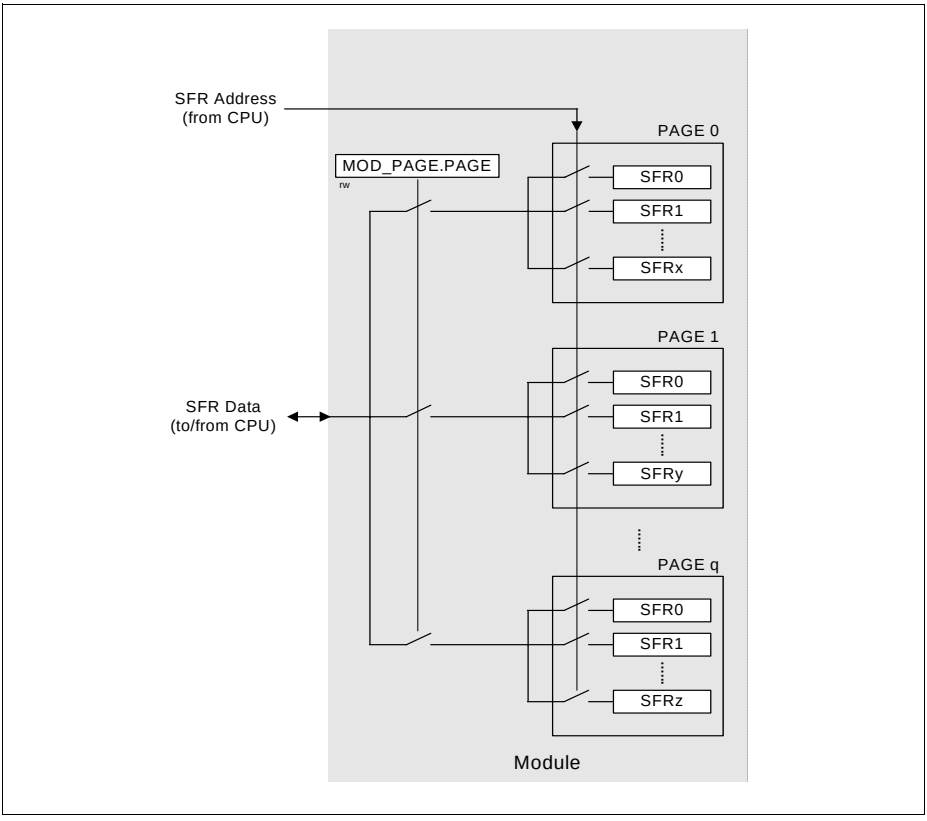

Figure 9 Address Extension by Paging

In order to access a register located in a page different from the actual one, the current page must be left. This is done by reprogramming the bit field PAGE in the page register. Only then can the desired access be performed.

If an interrupt routine is initiated between the page register access and the module register access, and the interrupt needs to access a register located in another page, the current page setting can be saved, the new one programmed and finally, the old page setting restored. This is possible with the storage fields STx (x = 0 - 3) for the save and restore action of the current page setting. By indicating which storage bit field should be used in parallel with the new page value, a single write operation can:

- Save the contents of PAGE in STx before overwriting with the new value
  (this is done in the beginning of the interrupt routine to save the current page setting and program the new page number); or
- Overwrite the contents of PAGE with the contents of STx, ignoring the value written to the bit positions of PAGE
  (this is done at the end of the interrupt routine to restore the previous page setting before the interrupt occurred)

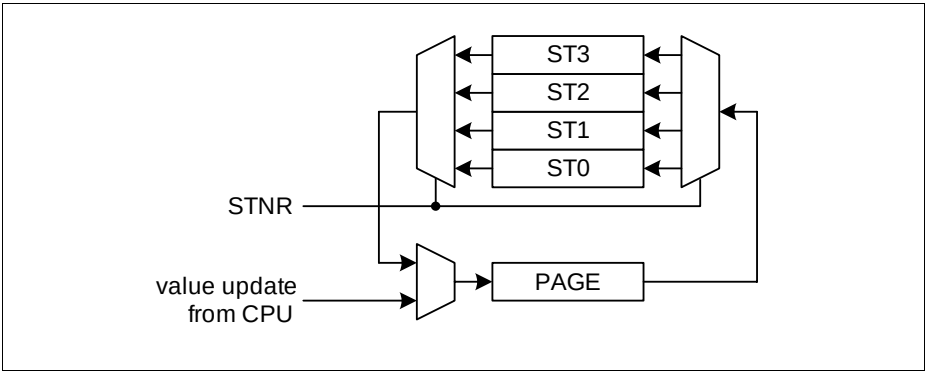

Figure 10 Storage Elements for Paging

With this mechanism, a certain number of interrupt routines (or other routines) can perform page changes without reading and storing the previously used page information. The use of only write operations makes the system simpler and faster. Consequently, this mechanism significantly improves the performance of short interrupt routines.

The SAA-XC866 supports local address extension for:

- Parallel Ports
- Analog-to-Digital Converter (ADC)
- Capture/Compare Unit 6 (CCU6)
- System Control Registers

The page register has the following definition:

MOD_PAGE
Page Register for module MOD **Reset Value: 00_H**

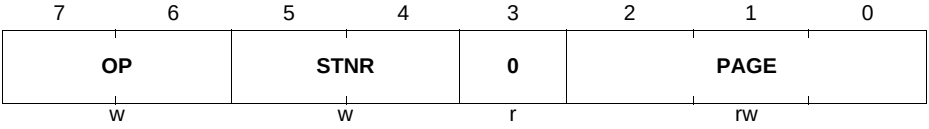

Field	Bits	Type	Description
PAGE	[2:0]	rw	**Page Bits** When written, the value indicates the new page. When read, the value indicates the currently active page.
STNR	[5:4]	w	**Storage Number** This number indicates which storage bit field is the target of the operation defined by bit field OP. If OP = 10_B, the contents of PAGE are saved in STx before being overwritten with the new value. If OP = 11_B, the contents of PAGE are overwritten by the contents of STx. The value written to the bit positions of PAGE is ignored. 00 ST0 is selected. 01 ST1 is selected. 10 ST2 is selected. 11 ST3 is selected.

Field	Bits	Type	Description
OP	[7:6]	w	**Operation** 0X Manual page mode. The value of STNR is ignored and PAGE is directly written. 10 New page programming with automatic page saving. The value written to the bit positions of PAGE is stored. In parallel, the previous contents of PAGE are saved in the storage bit field STx indicated by STNR. 11 Automatic restore page action. The value written to the bit positions PAGE is ignored and instead, PAGE is overwritten by the contents of the storage bit field STx indicated by STNR.
0	3	r	**Reserved** Returns 0 if read; should be written with 0.

3.2.3 Bit Protection Scheme

The bit protection scheme prevents direct software writing of selected bits (i.e., protected bits) using the PASSWD register. When the bit field MODE is 11_B, writing 10011_B to the bit field PASS opens access to writing of all protected bits, and writing 10101_B to the bit field PASS closes access to writing of all protected bits. Note that access is opened for maximum 32 CCLKs if the “close access” password is not written. If “open access” password is written again before the end of 32 CCLK cycles, there will be a recount of 32 CCLK cycles. The protected bits include NDIV, WDTEN, PD, and SD.

PASSWD
Password Register **Reset Value: 07_H**

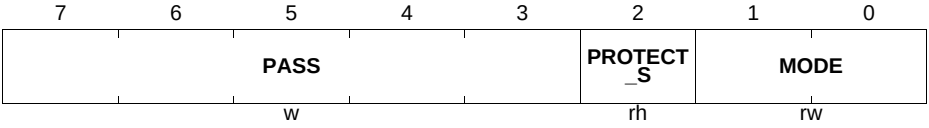

Field	Bits	Type	Description
MODE	[1:0]	rw	**Bit Protection Scheme Control bits** 00 Scheme Disabled 11 Scheme Enabled (default) Others: Scheme Enabled These two bits cannot be written directly. To change the value between 11_B and 00_B, the bit field PASS must be written with 11000_B; only then, will the MODE[1:0] be registered.
PROTECT_S	2	rh	**Bit Protection Signal Status bit** This bit shows the status of the protection. 0 Software is able to write to all protected bits. 1 Software is unable to write to any protected bits.
PASS	[7:3]	w	**Password bits** The Bit Protection Scheme only recognizes three patterns. 11000_B Enables writing of the bit field MODE. 10011_B Opens access to writing of all protected bits. 10101_B Closes access to writing of all protected bits.

3.2.4 SAA-XC866 Register Overview

The SFRs of the SAA-XC866 are organized into groups according to their functional units. The contents (bits) of the SFRs are summarized in **Table 6** to **Table 14**, with the addresses of the bitaddressable SFRs appearing in bold typeface.

The CPU SFRs can be accessed in both the standard and mapped memory areas (RMAP = 0 or 1).

Table 6 CPU Register Overview

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
RMAP = 0 or 1										
81_H	**SP** **Reset: 07_H** Stack Pointer Register	Bit Field	SP							
		Type	rw							
82_H	**DPL** **Reset: 00_H** Data Pointer Register Low	Bit Field	DPL7	DPL6	DPL5	DPL4	DPL3	DPL2	DPL1	DPL0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
83_H	**DPH** **Reset: 00_H** Data Pointer Register High	Bit Field	DPH7	DPH6	DPH5	DPH4	DPH3	DPH2	DPH1	DPH0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
87_H	**PCON** **Reset: 00_H** Power Control Register	Bit Field	SMOD	0			GF1	GF0	0	IDLE
		Type	rw	r			rw	rw	r	rw
88_H	**TCON** **Reset: 00_H** Timer Control Register	Bit Field	TF1	TR1	TF0	TR0	IE1	IT1	IE0	IT0
		Type	rwh	rw	rwh	rw	rwh	rw	rwh	rw
89_H	**TMOD** **Reset: 00_H** Timer Mode Register	Bit Field	GATE1	0	T1M		GATE0	0	T0M	
		Type	rw	r	rw		rw	r	rw	
$8A_H$	**TL0** **Reset: 00_H** Timer 0 Register Low	Bit Field	VAL							
		Type	rwh							
$8B_H$	**TL1** **Reset: 00_H** Timer 1 Register Low	Bit Field	VAL							
		Type	rwh							
$8C_H$	**TH0** **Reset: 00_H** Timer 0 Register High	Bit Field	VAL							
		Type	rwh							
$8D_H$	**TH1** **Reset: 00_H** Timer 1 Register High	Bit Field	VAL							
		Type	rwh							
98_H	**SCON** **Reset: 00_H** Serial Channel Control Register	Bit Field	SM0	SM1	SM2	REN	TB8	RB8	TI	RI
		Type	rw	rw	rw	rw	rw	rwh	rwh	rwh
99_H	**SBUF** **Reset: 00_H** Serial Data Buffer Register	Bit Field	VAL							
		Type	rwh							
$A2_H$	**EO** **Reset: 00_H** Extended Operation Register	Bit Field	0			TRAP_EN	0			DPSEL0
		Type	r			rw	r			rw
$A8_H$	**IEN0** **Reset: 00_H** Interrupt Enable Register 0	Bit Field	EA	0	ET2	ES	ET1	EX1	ET0	EX0
		Type	rw	r	rw	rw	rw	rw	rw	rw
$B8_H$	**IP** **Reset: 00_H** Interrupt Priority Register	Bit Field	0		PT2	PS	PT1	PX1	PT0	PX0
		Type	r		rw	rw	rw	rw	rw	rw
$B9_H$	**IPH** **Reset: 00_H** Interrupt Priority Register High	Bit Field	0		PT2H	PSH	PT1H	PX1H	PT0H	PX0H
		Type	r		rw	rw	rw	rw	rw	rw
$D0_H$	**PSW** **Reset: 00_H** Program Status Word Register	Bit Field	CY	AC	F0	RS1	RS0	OV	F1	P
		Type	rw	rwh	rwh	rw	rw	rwh	rwh	rh
$E0_H$	**ACC** **Reset: 00_H** Accumulator Register	Bit Field	ACC7	ACC6	ACC5	ACC4	ACC3	ACC2	ACC1	ACC0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
$E8_H$	**IEN1** **Reset: 00_H** Interrupt Enable Register 1	Bit Field	ECCIP3	ECCIP2	ECCIP1	ECCIP0	EXM	EX2	ESSC	EADC
		Type	rw	rw	rw	rw	rw	rw	rw	rw

Table 6 CPU Register Overview (cont'd)

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
$F0_H$	**B** **Reset: 00_H** B Register	Bit Field	B7	B6	B5	B4	B3	B2	B1	B0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
$F8_H$	**IP1** **Reset: 00_H** Interrupt Priority Register 1	Bit Field	PCCIP 3	PCCIP 2	PCCIP 1	PCCIP 0	PXM	PX2	PSSC	PADC
		Type	rw	rw	rw	rw	rw	rw	rw	rw
$F9_H$	**IPH1** **Reset: 00_H** Interrupt Priority Register 1 High	Bit Field	PCCIP 3H	PCCIP 2H	PCCIP 1H	PCCIP 0H	PXMH	PX2H	PSSCH	PADC H
		Type	rw	rw	rw	rw	rw	rw	rw	rw

The system control SFRs can be accessed in the standard memory area (RMAP = 0).

Table 7 System Control Register Overview

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
RMAP = 0 or 1										
$8F_H$	**SYSCON0** **Reset: 00_H** System Control Register 0	Bit Field	0							RMAP
		Type	r							rw
RMAP = 0										
BF_H	**SCU_PAGE** **Reset: 00_H** Page Register for System Control	Bit Field	OP		STNR		0	PAGE		
		Type	w		w		r	rwh		
RMAP = 0, Page 0										
$B3_H$	**MODPISEL** **Reset: 00_H** Peripheral Input Select Register	Bit Field	0		JTAG TDIS	JTAG TCKS	0		EXINT 0IS	URRIS
		Type	r		rw	rw	r		rw	rw
$B4_H$	**IRCON0** **Reset: 00_H** Interrupt Request Register 0	Bit Field	0	EXINT 6	EXINT 5	EXINT 4	EXINT 3	EXINT 2	EXINT 1	EXINT 0
		Type	r	rwh	rwh	rwh	rwh	rwh	rwh	rwh
$B5_H$	**IRCON1** **Reset: 00_H** Interrupt Request Register 1	Bit Field	0			ADCS RC1	ADCS RC0	RIR	TIR	EIR
		Type	r			rwh	rwh	rwh	rwh	rwh
$B7_H$	**EXICON0** **Reset: 00_H** External Interrupt Control Register 0	Bit Field	EXINT3		EXINT2		EXINT1		EXINT0	
		Type	rw		rw		rw		rw	
BA_H	**EXICON1** **Reset: 00_H** External Interrupt Control Register 1	Bit Field	0		EXINT6		EXINT5		EXINT4	
		Type	r		rw		rw		rw	
BB_H	**NMICON** **Reset: 00_H** NMI Control Register	Bit Field	0	NMI ECC	NMI VDDP	NMI VDD	NMI OCDS	NMI FLASH	NMI PLL	NMI WDT
		Type	r	rw	rw	rw	rw	rw	rw	rw
BC_H	**NMISR** **Reset: 00_H** NMI Status Register	Bit Field	0	FNMI ECC	FNMI VDDP	FNMI VDD	FNMI OCDS	FNMI FLASH	FNMI PLL	FNMI WDT
		Type	r	rwh	rwh	rwh	rwh	rwh	rwh	rwh
BD_H	**BCON** **Reset: 00_H** Baud Rate Control Register	Bit Field	BGSEL		0	BREN	BRPRE			R
		Type	rw		r	rw	rw			rw
BE_H	**BG** **Reset: 00_H** Baud Rate Timer/Reload Register	Bit Field	BR_VALUE							
		Type	rw							
$E9_H$	**FDCON** **Reset: 00_H** Fractional Divider Control Register	Bit Field	BGS	SYNEN	ERRSYN	EOFSYN	BRK	NDOV	FDM	FDEN
		Type	rw	rw	rwh	rwh	rwh	rwh	rw	rw
EA_H	**FDSTEP** **Reset: 00_H** Fractional Divider Reload Register	Bit Field	STEP							
		Type	rw							
EB_H	**FDRES** **Reset: 00_H** Fractional Divider Result Register	Bit Field	RESULT							
		Type	rh							
RMAP = 0, Page 1										

Table 7 System Control Register Overview (cont'd)

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
$B3_H$	**ID** **Reset: 01_H** Identity Register	Bit Field	PRODID					VERID		
		Type	r					r		
$B4_H$	**PMCON0** **Reset: 00_H** Power Mode Control Register 0	Bit Field	0	WDT RST	WKRS	WK SEL	SD	PD	WS	
		Type	r	rwh	rwh	rw	rw	rwh	rw	
$B5_H$	**PMCON1** **Reset: 00_H** Power Mode Control Register 1	Bit Field	0				T2_DIS	CCU _DIS	SSC _DIS	ADC _DIS
		Type	r				rw	rw	rw	rw
$B6_H$	**OSC_CON** **Reset: 08_H** OSC Control Register	Bit Field	0			OSC PD	XPD	OSC SS	ORD RES	OSCR
		Type	r			rw	rw	rw	rwh	rh
$B7_H$	**PLL_CON** **Reset: 20_H** PLL Control Register	Bit Field	NDIV				VCO BYP	OSC DISC	RESLD	LOCK
		Type	rw				rw	rw	rwh	rh
BA_H	**CMCON** **Reset: 00_H** Clock Control Register	Bit Field	VCO SEL	0			CLKREL			
		Type	rw	r			rw			
BB_H	**PASSWD** **Reset: 07_H** Password Register	Bit Field	PASS					PROTE CT_S	MODE	
		Type	w					rh	rw	
BC_H	**FEAL** **Reset: 00_H** Flash Error Address Register Low	Bit Field	ECCERRADDR[7:0]							
		Type	rh							
BD_H	**FEAH** **Reset: 00_H** Flash Error Address Register High	Bit Field	ECCERRADDR[15:8]							
		Type	rh							
BE_H	**COCON** **Reset: 00_H** Clock Output Control Register	Bit Field	0		TLEN	COUT S	COREL			
		Type	r		rw	rw	rw			
$E9_H$	**MISC_CON** **Reset: 00_H** Miscellaneous Control Register	Bit Field	0							DFLAS HEN
		Type	r							rwh
RMAP = 0, Page 3										
$B3_H$	**XADDRH** **Reset: $F0_H$** On-Chip XRAM Address Higher Order	Bit Field	ADDRH							
		Type	rw							

The WDT SFRs can be accessed in the mapped memory area (RMAP = 1).

Table 8 WDT Register Overview

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
RMAP = 1										
BB_H	**WDTCON** **Reset: 00_H** Watchdog Timer Control Register	Bit Field	0		WINB EN	WDT PR	0	WDT EN	WDT RS	WDT IN
		Type	r		rw	rh	r	rw	rwh	rw
BC_H	**WDTREL** **Reset: 00_H** Watchdog Timer Reload Register	Bit Field	WDTREL							
		Type	rw							
BD_H	**WDTWINB** **Reset: 00_H** Watchdog Window-Boundary Count Register	Bit Field	WDTWINB							
		Type	rw							
BE_H	**WDTL** **Reset: 00_H** Watchdog Timer Register Low	Bit Field	WDT[7:0]							
		Type	rh							
BF_H	**WDTH** **Reset: 00_H** Watchdog Timer Register High	Bit Field	WDT[15:8]							
		Type	rh							

The Port SFRs can be accessed in the standard memory area (RMAP = 0).

Table 9 Port Register Overview

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
RMAP = 0										
$B2_H$	**PORT_PAGE** **Reset: 00_H** Page Register for PORT	Bit Field	OP		STNR		0	PAGE		
		Type	w		w		r	rwh		
RMAP = 0, Page 0										
80_H	**P0_DATA** **Reset: 00_H** P0 Data Register	Bit Field	0		P5	P4	P3	P2	P1	P0
		Type	r		rwh	rwh	rwh	rwh	rwh	rwh
86_H	**P0_DIR** **Reset: 00_H** P0 Direction Register	Bit Field	0		P5	P4	P3	P2	P1	P0
		Type	r		rw	rw	rw	rw	rw	rw
90_H	**P1_DATA** **Reset: 00_H** P1 Data Register	Bit Field	P7	P6	P5	0			P1	P0
		Type	rwh	rwh	rwh	r			rwh	rwh
91_H	**P1_DIR** **Reset: 00_H** P1 Direction Register	Bit Field	P7	P6	P5	0			P1	P0
		Type	rw	rw	rw	r			rw	rw
$A0_H$	**P2_DATA** **Reset: 00_H** P2 Data Register	Bit Field	P7	P6	P5	P4	P3	P2	P1	P0
		Type	rwh	rwh	rwh	rwh	rwh	rwh	rwh	rwh
$A1_H$	**P2_DIR** **Reset: 00_H** P2 Direction Register	Bit Field	P7	P6	P5	P4	P3	P2	P1	P0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
$B0_H$	**P3_DATA** **Reset: 00_H** P3 Data Register	Bit Field	P7	P6	P5	P4	P3	P2	P1	P0
		Type	rwh	rwh	rwh	rwh	rwh	rwh	rwh	rwh
$B1_H$	**P3_DIR** **Reset: 00_H** P3 Direction Register	Bit Field	P7	P6	P5	P4	P3	P2	P1	P0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
RMAP = 0, Page 1										
80_H	**P0_PUDSEL** **Reset: FF_H** P0 Pull-Up/Pull-Down Select Register	Bit Field	0		P5	P4	P3	P2	P1	P0
		Type	r		rw	rw	rw	rw	rw	rw
86_H	**P0_PUDEN** **Reset: $C4_H$** P0 Pull-Up/Pull-Down Enable Register	Bit Field	0		P5	P4	P3	P2	P1	P0
		Type	r		rw	rw	rw	rw	rw	rw
90_H	**P1_PUDSEL** **Reset: FF_H** P1 Pull-Up/Pull-Down Select Register	Bit Field	P7	P6	P5	0			P1	P0
		Type	rw	rw	rw	r			rw	rw
91_H	**P1_PUDEN** **Reset: FF_H** P1 Pull-Up/Pull-Down Enable Register	Bit Field	P7	P6	P5	0			P1	P0
		Type	rw	rw	rw	r			rw	rw
$A0_H$	**P2_PUDSEL** **Reset: FF_H** P2 Pull-Up/Pull-Down Select Register	Bit Field	P7	P6	P5	P4	P3	P2	P1	P0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
$A1_H$	**P2_PUDEN** **Reset: 00_H** P2 Pull-Up/Pull-Down Enable Register	Bit Field	P7	P6	P5	P4	P3	P2	P1	P0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
$B0_H$	**P3_PUDSEL** **Reset: BF_H** P3 Pull-Up/Pull-Down Select Register	Bit Field	P7	P6	P5	P4	P3	P2	P1	P0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
$B1_H$	**P3_PUDEN** **Reset: 40_H** P3 Pull-Up/Pull-Down Enable Register	Bit Field	P7	P6	P5	P4	P3	P2	P1	P0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
RMAP = 0, Page 2										
80_H	**P0_ALTSEL0** **Reset: 00_H** P0 Alternate Select 0 Register	Bit Field	0		P5	P4	P3	P2	P1	P0
		Type	r		rw	rw	rw	rw	rw	rw
86_H	**P0_ALTSEL1** **Reset: 00_H** P0 Alternate Select 1 Register	Bit Field	0		P5	P4	P3	P2	P1	P0
		Type	r		rw	rw	rw	rw	rw	rw
90_H	**P1_ALTSEL0** **Reset: 00_H** P1 Alternate Select 0 Register	Bit Field	P7	P6	P5	0			P1	P0
		Type	rw	rw	rw	r			rw	rw
91_H	**P1_ALTSEL1** **Reset: 00_H** P1 Alternate Select 1 Register	Bit Field	P7	P6	P5	0			P1	P0
		Type	rw	rw	rw	r			rw	rw
$B0_H$	**P3_ALTSEL0** **Reset: 00_H** P3 Alternate Select 0 Register	Bit Field	P7	P6	P5	P4	P3	P2	P1	P0
		Type	rw	rw	rw	rw	rw	rw	rw	rw

Table 9 Port Register Overview (cont'd)

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
$B1_H$	**P3_ALTSEL1** **Reset: 00_H** P3 Alternate Select 1 Register	Bit Field	P7	P6	P5	P4	P3	P2	P1	P0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
RMAP = 0, Page 3										
80_H	**P0_OD** **Reset: 00_H** P0 Open Drain Control Register	Bit Field	0		P5	P4	P3	P2	P1	P0
		Type	r		rw	rw	rw	rw	rw	rw
90_H	**P1_OD** **Reset: 00_H** P1 Open Drain Control Register	Bit Field	P7	P6	P5	0			P1	P0
		Type	rw	rw	rw	r			rw	rw
$B0_H$	**P3_OD** **Reset: 00_H** P3 Open Drain Control Register	Bit Field	P7	P6	P5	P4	P3	P2	P1	P0
		Type	rw	rw	rw	rw	rw	rw	rw	rw

The ADC SFRs can be accessed in the standard memory area (RMAP = 0).

Table 10 ADC Register Overview

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
RMAP = 0										
$D1_H$	**ADC_PAGE** **Reset: 00_H** Page Register for ADC	Bit Field	OP		STNR		0	PAGE		
		Type	w		w		r	rwh		
RMAP = 0, Page 0										
CA_H	**ADC_GLOBCTR** **Reset: 30_H** Global Control Register	Bit Field	ANON	DW	CTC		0			
		Type	rw	rw	rw		r			
CB_H	**ADC_GLOBSTR** **Reset: 00_H** Global Status Register	Bit Field	0		CHNR			0	SAMPLE	BUSY
		Type	r		rh			r	rh	rh
CC_H	**ADC_PRAR** **Reset: 00_H** Priority and Arbitration Register	Bit Field	ASEN1	ASEN0	0	ARBM	CSM1	PRIO1	CSM0	PRIO0
		Type	rw	rw	r	rw	rw	rw	rw	rw
CD_H	**ADC_LCBR** **Reset: $B7_H$** Limit Check Boundary Register	Bit Field	BOUND1				BOUND0			
		Type	rw				rw			
CE_H	**ADC_INPCR0** **Reset: 00_H** Input Class Register 0	Bit Field	STC							
		Type	rw							
CF_H	**ADC_ETRCR** **Reset: 00_H** External Trigger Control Register	Bit Field	SYNEN1	SYNEN0	ETRSEL1			ETRSEL0		
		Type	rw	rw	rw			rw		
RMAP = 0, Page 1										
CA_H	**ADC_CHCTR0** **Reset: 00_H** Channel Control Register 0	Bit Field	0	LCC			0		RESRSEL	
		Type	r	rw			r		rw	
CB_H	**ADC_CHCTR1** **Reset: 00_H** Channel Control Register 1	Bit Field	0	LCC			0		RESRSEL	
		Type	r	rw			r		rw	
CC_H	**ADC_CHCTR2** **Reset: 00_H** Channel Control Register 2	Bit Field	0	LCC			0		RESRSEL	
		Type	r	rw			r		rw	
CD_H	**ADC_CHCTR3** **Reset: 00_H** Channel Control Register 3	Bit Field	0	LCC			0		RESRSEL	
		Type	r	rw			r		rw	
CE_H	**ADC_CHCTR4** **Reset: 00_H** Channel Control Register 4	Bit Field	0	LCC			0		RESRSEL	
		Type	r	rw			r		rw	
CF_H	**ADC_CHCTR5** **Reset: 00_H** Channel Control Register 5	Bit Field	0	LCC			0		RESRSEL	
		Type	r	rw			r		rw	
$D2_H$	**ADC_CHCTR6** **Reset: 00_H** Channel Control Register 6	Bit Field	0	LCC			0		RESRSEL	
		Type	r	rw			r		rw	
$D3_H$	**ADC_CHCTR7** **Reset: 00_H** Channel Control Register 7	Bit Field	0	LCC			0		RESRSEL	
		Type	r	rw			r		rw	
RMAP = 0, Page 2										

Table 10 ADC Register Overview (cont'd)

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
CA_H	**ADC_RESR0L** **Reset: 00_H** Result Register 0 Low	Bit Field	RESULT[1:0]		0	VF	DRC	CHNR		
		Type	rh		r	rh	rh	rh		
CB_H	**ADC_RESR0H** **Reset: 00_H** Result Register 0 High	Bit Field	RESULT[9:2]							
		Type	rh							
CC_H	**ADC_RESR1L** **Reset: 00_H** Result Register 1 Low	Bit Field	RESULT[1:0]		0	VF	DRC	CHNR		
		Type	rh		r	rh	rh	rh		
CD_H	**ADC_RESR1H** **Reset: 00_H** Result Register 1 High	Bit Field	RESULT[9:2]							
		Type	rh							
CE_H	**ADC_RESR2L** **Reset: 00_H** Result Register 2 Low	Bit Field	RESULT[1:0]		0	VF	DRC	CHNR		
		Type	rh		r	rh	rh	rh		
CF_H	**ADC_RESR2H** **Reset: 00_H** Result Register 2 High	Bit Field	RESULT[9:2]							
		Type	rh							
$D2_H$	**ADC_RESR3L** **Reset: 00_H** Result Register 3 Low	Bit Field	RESULT[1:0]		0	VF	DRC	CHNR		
		Type	rh		r	rh	rh	rh		
$D3_H$	**ADC_RESR3H** **Reset: 00_H** Result Register 3 High	Bit Field	RESULT[9:2]							
		Type	rh							
RMAP = 0, Page 3										
CA_H	**ADC_RESRA0L** **Reset: 00_H** Result Register 0, View A Low	Bit Field	RESULT[2:0]			VF	DRC	CHNR		
		Type	rh			rh	rh	rh		
CB_H	**ADC_RESRA0H** **Reset: 00_H** Result Register 0, View A High	Bit Field	RESULT[10:3]							
		Type	rh							
CC_H	**ADC_RESRA1L** **Reset: 00_H** Result Register 1, View A Low	Bit Field	RESULT[2:0]			VF	DRC	CHNR		
		Type	rh			rh	rh	rh		
CD_H	**ADC_RESRA1H** **Reset: 00_H** Result Register 1, View A High	Bit Field	RESULT[10:3]							
		Type	rh							
CE_H	**ADC_RESRA2L** **Reset: 00_H** Result Register 2, View A Low	Bit Field	RESULT[2:0]			VF	DRC	CHNR		
		Type	rh			rh	rh	rh		
CF_H	**ADC_RESRA2H** **Reset: 00_H** Result Register 2, View A High	Bit Field	RESULT[10:3]							
		Type	rh							
$D2_H$	**ADC_RESRA3L** **Reset: 00_H** Result Register 3, View A Low	Bit Field	RESULT[2:0]			VF	DRC	CHNR		
		Type	rh			rh	rh	rh		
$D3_H$	**ADC_RESRA3H** **Reset: 00_H** Result Register 3, View A High	Bit Field	RESULT[10:3]							
		Type	rh							
RMAP = 0, Page 4										
CA_H	**ADC_RCR0** **Reset: 00_H** Result Control Register 0	Bit Field	VFCTR	WFR	0	IEN	0			DRCTR
		Type	rw	rw	r	rw	r			rw
CB_H	**ADC_RCR1** **Reset: 00_H** Result Control Register 1	Bit Field	VFCTR	WFR	0	IEN	0			DRCTR
		Type	rw	rw	r	rw	r			rw
CC_H	**ADC_RCR2** **Reset: 00_H** Result Control Register 2	Bit Field	VFCTR	WFR	0	IEN	0			DRCTR
		Type	rw	rw	r	rw	r			rw
CD_H	**ADC_RCR3** **Reset: 00_H** Result Control Register 3	Bit Field	VFCTR	WFR	0	IEN	0			DRCTR
		Type	rw	rw	r	rw	r			rw
CE_H	**ADC_VFCR** **Reset: 00_H** Valid Flag Clear Register	Bit Field	0				VFC3	VFC2	VFC1	VFC0
		Type	r				w	w	w	w
RMAP = 0, Page 5										

Table 10 ADC Register Overview (cont'd)

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
CA_H	**ADC_CHINFR** **Reset: 00_H** Channel Interrupt Flag Register	Bit Field	CHINF 7	CHINF 6	CHINF 5	CHINF 4	CHINF 3	CHINF 2	CHINF 1	CHINF 0
		Type	rh	rh	rh	rh	rh	rh	rh	rh
CB_H	**ADC_CHINCR** **Reset: 00_H** Channel Interrupt Clear Register	Bit Field	CHINC 7	CHINC 6	CHINC 5	CHINC 4	CHINC 3	CHINC 2	CHINC 1	CHINC 0
		Type	w	w	w	w	w	w	w	w
CC_H	**ADC_CHINSR** **Reset: 00_H** Channel Interrupt Set Register	Bit Field	CHINS 7	CHINS 6	CHINS 5	CHINS 4	CHINS 3	CHINS 2	CHINS 1	CHINS 0
		Type	w	w	w	w	w	w	w	w
CD_H	**ADC_CHINPR** **Reset: 00_H** Channel Interrupt Node Pointer Register	Bit Field	CHINP 7	CHINP 6	CHINP 5	CHINP 4	CHINP 3	CHINP 2	CHINP 1	CHINP 0
		Type	rw	rw	rw	rw	rw	rw	rw	rw
CE_H	**ADC_EVINFR** **Reset: 00_H** Event Interrupt Flag Register	Bit Field	EVINF 7	EVINF 6	EVINF 5	EVINF 4	0		EVINF 1	EVINF 0
		Type	rh	rh	rh	rh	r		rh	rh
CF_H	**ADC_EVINCR** **Reset: 00_H** Event Interrupt Clear Flag Register	Bit Field	EVINC 7	EVINC 6	EVINC 5	EVINC 4	0		EVINC 1	EVINC 0
		Type	w	w	w	w	r		w	w
$D2_H$	**ADC_EVINSR** **Reset: 00_H** Event Interrupt Set Flag Register	Bit Field	EVINS 7	EVINS 6	EVINS 5	EVINS 4	0		EVINS 1	EVINS 0
		Type	w	w	w	w	r		w	w
$D3_H$	**ADC_EVINPR** **Reset: 00_H** Event Interrupt Node Pointer Register	Bit Field	EVINP 7	EVINP 6	EVINP 5	EVINP 4	0		EVINP 1	EVINP 0
		Type	rw	rw	rw	rw	r		rw	rw
RMAP = 0, Page 6										
CA_H	**ADC_CRCR1** **Reset: 00_H** Conversion Request Control Register 1	Bit Field	CH7	CH6	CH5	CH4	0			
		Type	rwh	rwh	rwh	rwh	r			
CB_H	**ADC_CRPR1** **Reset: 00_H** Conversion Request Pending Register 1	Bit Field	CHP7	CHP6	CHP5	CHP4	0			
		Type	rwh	rwh	rwh	rwh	r			
CC_H	**ADC_CRMR1** **Reset: 00_H** Conversion Request Mode Register 1	Bit Field	Rsv	LDEV	CLR PND	SCAN	ENSI	ENTR	ENGT	
		Type	r	w	w	rw	rw	rw	rw	
CD_H	**ADC_QMR0** **Reset: 00_H** Queue Mode Register 0	Bit Field	CEV	TREV	FLUSH	CLRV	TRMD	ENTR	ENGT	
		Type	w	w	w	w	rw	rw	rw	
CE_H	**ADC_QSR0** **Reset: 20_H** Queue Status Register 0	Bit Field	Rsv	0	EMPTY	EV	0			
		Type	r	r	rh	rh	r			
CF_H	**ADC_Q0R0** **Reset: 00_H** Queue 0 Register 0	Bit Field	EXTR	ENSI	RF	V	0	REQCHNR		
		Type	rh	rh	rh	rh	r	rh		
$D2_H$	**ADC_QBUR0** **Reset: 00_H** Queue Backup Register 0	Bit Field	EXTR	ENSI	RF	V	0	REQCHNR		
		Type	rh	rh	rh	rh	r	rh		
$D2_H$	**ADC_QINR0** **Reset: 00_H** Queue Input Register 0	Bit Field	EXTR	ENSI	RF	0		REQCHNR		
		Type	w	w	w	r		w		

The Timer 2 SFRs can be accessed in the standard memory area (RMAP = 0).

Table 11 Timer 2 Register Overview

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
$C0_H$	**T2_T2CON** **Reset: 00_H** Timer 2 Control Register	Bit Field	TF2	EXF2	0		EXEN2	TR2	0	$\overline{CP}$/ $\overline{RL2}$
		Type	rwh	rwh	r		rw	rwh	r	rw

Table 11 Timer 2 Register Overview (cont'd)

$C1_H$	**T2_T2MOD** **Reset: 00_H** Timer 2 Mode Register	Bit Field	T2 REGS	T2 RHEN	EDGE SEL	PREN	T2PRE		DCEN
		Type	rw	rw	rw	rw	rw		rw
$C2_H$	**T2_RC2L** **Reset: 00_H** Timer 2 Reload/Capture Register Low	Bit Field	RC2[7:0]						
		Type	rwh						
$C3_H$	**T2_RC2H** **Reset: 00_H** Timer 2 Reload/Capture Register High	Bit Field	RC2[15:8]						
		Type	rwh						
$C4_H$	**T2_T2L** **Reset: 00_H** Timer 2 Register Low	Bit Field	THL2[7:0]						
		Type	rwh						
$C5_H$	**T2_T2H** **Reset: 00_H** Timer 2 Register High	Bit Field	THL2[15:8]						
		Type	rwh						

The CCU6 SFRs can be accessed in the standard memory area (RMAP = 0).

Table 12 CCU6 Register Overview

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
RMAP = 0										
$A3_H$	**CCU6_PAGE** **Reset: 00_H** Page Register for CCU6	Bit Field	OP		STNR		0	PAGE		
		Type	w		w		r	rwh		
RMAP = 0, Page 0										
$9A_H$	**CCU6_CC63SRL** **Reset: 00_H** Capture/Compare Shadow Register for Channel CC63 Low	Bit Field	CC63SL							
		Type	rw							
$9B_H$	**CCU6_CC63SRH** **Reset: 00_H** Capture/Compare Shadow Register for Channel CC63 High	Bit Field	CC63SH							
		Type	rw							
$9C_H$	**CCU6_TCTR4L** **Reset: 00_H** Timer Control Register 4 Low	Bit Field	T12 STD	T12 STR	0		DTRES	T12 RES	T12RS	T12RR
		Type	w	w	r		w	w	w	w
$9D_H$	**CCU6_TCTR4H** **Reset: 00_H** Timer Control Register 4 High	Bit Field	T13 STD	T13 STR	0			T13 RES	T13RS	T13RR
		Type	w	w	r			w	w	w
$9E_H$	**CCU6_MCMOUTSL** **Reset: 00_H** Multi-Channel Mode Output Shadow Register Low	Bit Field	STRM CM	0	MCMPS					
		Type	w	r	rw					
$9F_H$	**CCU6_MCMOUTSH** **Reset: 00_H** Multi-Channel Mode Output Shadow Register High	Bit Field	STRHP	0	CURHS			EXPHS		
		Type	w	r	rw			rw		
$A4_H$	**CCU6_ISRL** **Reset: 00_H** Capture/Compare Interrupt Status Reset Register Low	Bit Field	RT12P M	RT12O M	RCC62 F	RCC62 R	RCC61 F	RCC61 R	RCC60 F	RCC60 R
		Type	w	w	w	w	w	w	w	w
$A5_H$	**CCU6_ISRH** **Reset: 00_H** Capture/Compare Interrupt Status Reset Register High	Bit Field	RSTR	RIDLE	RWHE	RCHE	0	RTRPF	RT13 PM	RT13 CM
		Type	w	w	w	w	r	w	w	w
$A6_H$	**CCU6_CMPMODIFL** **Reset: 00_H** Compare State Modification Register Low	Bit Field	0	MCC63 S	0			MCC62 S	MCC61 S	MCC60 S
		Type	r	w	r			w	w	w
$A7_H$	**CCU6_CMPMODIFH** **Reset: 00_H** Compare State Modification Register High	Bit Field	0	MCC63 R	0			MCC62 R	MCC61 R	MCC60 R
		Type	r	w	r			w	w	w
FA_H	**CCU6_CC60SRL** **Reset: 00_H** Capture/Compare Shadow Register for Channel CC60 Low	Bit Field	CC60SL							
		Type	rwh							

Table 12 CCU6 Register Overview (cont'd)

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
FB_H	**CCU6_CC60SRH Reset: 00_H** Capture/Compare Shadow Register for Channel CC60 High	Bit Field	CC60SH							
		Type	rwh							
FC_H	**CCU6_CC61SRL Reset: 00_H** Capture/Compare Shadow Register for Channel CC61 Low	Bit Field	CC61SL							
		Type	rwh							
FD_H	**CCU6_CC61SRH Reset: 00_H** Capture/Compare Shadow Register for Channel CC61 High	Bit Field	CC61SH							
		Type	rwh							
FE_H	**CCU6_CC62SRL Reset: 00_H** Capture/Compare Shadow Register for Channel CC62 Low	Bit Field	CC62SL							
		Type	rwh							
FF_H	**CCU6_CC62SRH Reset: 00_H** Capture/Compare Shadow Register for Channel CC62 High	Bit Field	CC62SH							
		Type	rwh							
RMAP = 0, Page 1										
$9A_H$	**CCU6_CC63RL Reset: 00_H** Capture/Compare Register for Channel CC63 Low	Bit Field	CC63VL							
		Type	rh							
$9B_H$	**CCU6_CC63RH Reset: 00_H** Capture/Compare Register for Channel CC63 High	Bit Field	CC63VH							
		Type	rh							
$9C_H$	**CCU6_T12PRL Reset: 00_H** Timer T12 Period Register Low	Bit Field	T12PVL							
		Type	rwh							
$9D_H$	**CCU6_T12PRH Reset: 00_H** Timer T12 Period Register High	Bit Field	T12PVH							
		Type	rwh							
$9E_H$	**CCU6_T13PRL Reset: 00_H** Timer T13 Period Register Low	Bit Field	T13PVL							
		Type	rwh							
$9F_H$	**CCU6_T13PRH Reset: 00_H** Timer T13 Period Register High	Bit Field	T13PVH							
		Type	rwh							
$A4_H$	**CCU6_T12DTCL Reset: 00_H** Dead-Time Control Register for Timer T12 Low	Bit Field	DTM							
		Type	rw							
$A5_H$	**CCU6_T12DTCH Reset: 00_H** Dead-Time Control Register for Timer T12 High	Bit Field	0	DTR2	DTR1	DTR0	0	DTE2	DTE1	DTE0
		Type	r	rh	rh	rh	r	rw	rw	rw
$A6_H$	**CCU6_TCTR0L Reset: 00_H** Timer Control Register 0 Low	Bit Field	CTM	CDIR	STE12	T12R	T12 PRE	T12CLK		
		Type	rw	rh	rh	rh	rw	rw		
$A7_H$	**CCU6_TCTR0H Reset: 00_H** Timer Control Register 0 High	Bit Field	0		STE13	T13R	T13 PRE	T13CLK		
		Type	r		rh	rh	rw	rw		
FA_H	**CCU6_CC60RL Reset: 00_H** Capture/Compare Register for Channel CC60 Low	Bit Field	CC60VL							
		Type	rh							
FB_H	**CCU6_CC60RH Reset: 00_H** Capture/Compare Register for Channel CC60 High	Bit Field	CC60VH							
		Type	rh							
FC_H	**CCU6_CC61RL Reset: 00_H** Capture/Compare Register for Channel CC61 Low	Bit Field	CC61VL							
		Type	rh							

Table 12 CCU6 Register Overview (cont'd)

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
FD_H	**CCU6_CC61RH** **Reset: 00_H** Capture/Compare Register for Channel CC61 High	Bit Field	CC61VH							
		Type	rh							
FE_H	**CCU6_CC62RL** **Reset: 00_H** Capture/Compare Register for Channel CC62 Low	Bit Field	CC62VL							
		Type	rh							
FF_H	**CCU6_CC62RH** **Reset: 00_H** Capture/Compare Register for Channel CC62 High	Bit Field	CC62VH							
		Type	rh							
RMAP = 0, Page 2										
$9A_H$	**CCU6_T12MSELL** **Reset: 00_H** T12 Capture/Compare Mode Select Register Low	Bit Field	MSEL61				MSEL60			
		Type	rw				rw			
$9B_H$	**CCU6_T12MSELH** **Reset: 00_H** T12 Capture/Compare Mode Select Register High	Bit Field	DBYP	HSYNC			MSEL62			
		Type	rw	rw			rw			
$9C_H$	**CCU6_IENL** **Reset: 00_H** Capture/Compare Interrupt Enable Register Low	Bit Field	ENT12PM	ENT12OM	ENCC62F	ENCC62R	ENCC61F	ENCC61R	ENCC60F	ENCC60R
		Type	rw	rw	rw	rw	rw	rw	rw	rw
$9D_H$	**CCU6_IENH** **Reset: 00_H** Capture/Compare Interrupt Enable Register High	Bit Field	ENSTR	EN IDLE	EN WHE	EN CHE	0	EN TRPF	ENT13PM	ENT13CM
		Type	rw	rw	rw	rw	r	rw	rw	rw
$9E_H$	**CCU6_INPL** **Reset: 40_H** Capture/Compare Interrupt Node Pointer Register Low	Bit Field	INPCHE		INPCC62		INPCC61		INPCC60	
		Type	rw		rw		rw		rw	
$9F_H$	**CCU6_INPH** **Reset: 39_H** Capture/Compare Interrupt Node Pointer Register High	Bit Field	0		INPT13		INPT12		INPERR	
		Type	r		rw		rw		rw	
$A4_H$	**CCU6_ISSL** **Reset: 00_H** Capture/Compare Interrupt Status Set Register Low	Bit Field	ST12PM	ST12OM	SCC62F	SCC62R	SCC61F	SCC61R	SCC60F	SCC60R
		Type	w	w	w	w	w	w	w	w
$A5_H$	**CCU6_ISSH** **Reset: 00_H** Capture/Compare Interrupt Status Set Register High	Bit Field	SSTR	SIDLE	SWHE	SCHE	SWHC	STRPF	ST13PM	ST13CM
		Type	w	w	w	w	w	w	w	w
$A6_H$	**CCU6_PSLR** **Reset: 00_H** Passive State Level Register	Bit Field	PSL63	0	PSL					
		Type	rwh	r	rwh					
$A7_H$	**CCU6_MCMCTR** **Reset: 00_H** Multi-Channel Mode Control Register	Bit Field	0		SWSYN		0	SWSEL		
		Type	r		rw		r	rw		
FA_H	**CCU6_TCTR2L** **Reset: 00_H** Timer Control Register 2 Low	Bit Field	0	T13TED		T13TEC			T13SSC	T12SSC
		Type	r	rw		rw			rw	rw
FB_H	**CCU6_TCTR2H** **Reset: 00_H** Timer Control Register 2 High	Bit Field	0				T13RSEL	T12RSEL		
		Type	r				rw	rw		
FC_H	**CCU6_MODCTRL** **Reset: 00_H** Modulation Control Register Low	Bit Field	MCMEN	0	T12MODEN					
		Type	rw	r	rw					
FD_H	**CCU6_MODCTRH** **Reset: 00_H** Modulation Control Register High	Bit Field	ECT13O	0	T13MODEN					
		Type	rw	r	rw					
FE_H	**CCU6_TRPCTRL** **Reset: 00_H** Trap Control Register Low	Bit Field	0					TRPM2	TRPM1	TRPM0
		Type	r					rw	rw	rw

Table 12 CCU6 Register Overview (cont'd)

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
FF_H	**CCU6_TRPCTRH** **Reset: 00_H** Trap Control Register High	Bit Field	TRPPEN	TRPEN13	TRPEN					
		Type	rw	rw	rw					
RMAP = 0, Page 3										
$9A_H$	**CCU6_MCMOUTL** **Reset: 00_H** Multi-Channel Mode Output Register Low	Bit Field	0	R	MCMP					
		Type	r	rh	rh					
$9B_H$	**CCU6_MCMOUTH** **Reset: 00_H** Multi-Channel Mode Output Register High	Bit Field	0		CURH			EXPH		
		Type	r		rh			rh		
$9C_H$	**CCU6_ISL** **Reset: 00_H** Capture/Compare Interrupt Status Register Low	Bit Field	T12PM	T12OM	ICC62F	ICC62R	ICC61F	ICC61R	ICC60F	ICC60R
		Type	rh	rh	rh	rh	rh	rh	rh	rh
$9D_H$	**CCU6_ISH** **Reset: 00_H** Capture/Compare Interrupt Status Register High	Bit Field	STR	IDLE	WHE	CHE	TRPS	TRPF	T13PM	T13CM
		Type	rh	rh	rh	rh	rh	rh	rh	rh
$9E_H$	**CCU6_PISEL0L** **Reset: 00_H** Port Input Select Register 0 Low	Bit Field	ISTRP		ISCC62		ISCC61		ISCC60	
		Type	rw		rw		rw		rw	
$9F_H$	**CCU6_PISEL0H** **Reset: 00_H** Port Input Select Register 0 High	Bit Field	IST12HR		ISPOS2		ISPOS1		ISPOS0	
		Type	rw		rw		rw		rw	
$A4_H$	**CCU6_PISEL2** **Reset: 00_H** Port Input Select Register 2	Bit Field	0						IST13HR	
		Type	r						rw	
FA_H	**CCU6_T12L** **Reset: 00_H** Timer T12 Counter Register Low	Bit Field	T12CVL							
		Type	rwh							
FB_H	**CCU6_T12H** **Reset: 00_H** Timer T12 Counter Register High	Bit Field	T12CVH							
		Type	rwh							
FC_H	**CCU6_T13L** **Reset: 00_H** Timer T13 Counter Register Low	Bit Field	T13CVL							
		Type	rwh							
FD_H	**CCU6_T13H** **Reset: 00_H** Timer T13 Counter Register High	Bit Field	T13CVH							
		Type	rwh							
FE_H	**CCU6_CMPSTATL** **Reset: 00_H** Compare State Register Low	Bit Field	0	CC63ST	CCPOS2	CCPOS1	CCPOS0	CC62ST	CC61ST	CC60ST
		Type	r	rh	rh	rh	rh	rh	rh	rh
FF_H	**CCU6_CMPSTATH** **Reset: 00_H** Compare State Register High	Bit Field	T13IM	COUT63PS	COUT62PS	CC62PS	COUT61PS	CC61PS	COUT60PS	CC60PS
		Type	rwh	rwh	rwh	rwh	rwh	rwh	rwh	rwh

The SSC SFRs can be accessed in the standard memory area (RMAP = 0).

Table 13 SSC Register Overview

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
RMAP = 0										
$A9_H$	**SSC_PISEL** **Reset: 00_H** Port Input Select Register	Bit Field	0					CIS	SIS	MIS
		Type	r					rw	rw	rw
AA_H	**SSC_CONL** **Reset: 00_H** Control Register Low *Programming Mode*	Bit Field	LB	PO	PH	HB	BM			
		Type	rw	rw	rw	rw	rw			
	Operating Mode	Bit Field	0				BC			
		Type	r				rh			

Table 13 SSC Register Overview

AB_H	**SSC_CONH** **Reset: 00_H** Control Register High *Programming Mode*	Bit Field	EN	MS	0	AREN	BEN	PEN	REN	TEN
		Type	rw	rw	r	rw	rw	rw	rw	rw
	Operating Mode	Bit Field	EN	MS	0	BSY	BE	PE	RE	TE
		Type	rw	rw	r	rh	rwh	rwh	rwh	rwh
AC_H	**SSC_TBL** **Reset: 00_H** Transmitter Buffer Register Low	Bit Field	TB_VALUE							
		Type	rw							
AD_H	**SSC_RBL** **Reset: 00_H** Receiver Buffer Register Low	Bit Field	RB_VALUE							
		Type	rh							
AE_H	**SSC_BRL** **Reset: 00_H** Baudrate Timer Reload Register Low	Bit Field	BR_VALUE[7:0]							
		Type	rw							
AF_H	**SSC_BRH** **Reset: 00_H** Baudrate Timer Reload Register High	Bit Field	BR_VALUE[15:8]							
		Type	rw							

The OCDS SFRs can be accessed in the mapped memory area (RMAP = 1).

Table 14 OCDS Register Overview

Addr	Register Name	Bit	7	6	5	4	3	2	1	0
RMAP = 1										
$E9_H$	**MMCR2** **Reset: $0U_H$** Monitor Mode Control Register 2	Bit Field	EXBC_P	EXBC	MBCON_P	MBCON	MMEP_P	MMEP	MMODE	JENA
		Type	w	rw	w	rwh	w	rwh	rh	rh
$F1_H$	**MMCR** **Reset: 00_H** Monitor Mode Control Register	Bit Field	MEXIT_P	MEXIT	MSTEP_P	MSTEP	MRAMS_P	MRAMS	TRF	RRF
		Type	w	rwh	w	rw	w	rwh	rh	rh
$F2_H$	**MMSR** **Reset: 00_H** Monitor Mode Status Register	Bit Field	MBCAM	MBCIN	EXBF	SWBF	HWB3F	HWB2F	HWB1F	HWB0F
		Type	rw	rh	rwh	rwh	rwh	rwh	rwh	rwh
$F3_H$	**MMBPCR** **Reset: 00_H** BreakPoints Control Register	Bit Field	SWBC	HWB3C		HWB2C		HWB1C	HWB0C	
		Type	rw	rw		rw		rw	rw	
$F4_H$	**MMICR** **Reset: 00_H** Monitor Mode Interrupt Control Register	Bit Field	DVECT	DRETR	0		MMUIE_P	MMUIE	RRIE_P	RRIE
		Type	rwh	rwh	r		w	rw	w	rw
$F5_H$	**MMDR** **Reset: 00_H** Monitor Mode Data Register *Receive*	Bit Field	MMRR							
		Type	rh							
	Transmit	Bit Field	MMTR							
		Type	w							
$F6_H$	**HWBPSR** **Reset: 00_H** Hardware Breakpoints Select Register	Bit Field	0			BPSEL_P	BPSEL			
		Type	r			w	rw			
$F7_H$	**HWBPDR** **Reset: 00_H** Hardware Breakpoints Data Register	Bit Field	HWBPxx							
		Type	rw							

3.3 Flash Memory

The Flash memory provides an embedded user-programmable non-volatile memory, allowing fast and reliable storage of user code and data. It is operated from a single 2.5 V supply from the Embedded Voltage Regulator (EVR) and does not require additional programming or erasing voltage. The sectorization of the Flash memory allows each sector to be erased independently.

Features

- In-System Programming (ISP) via UART
- In-Application Programming (IAP)
- Error Correction Code (ECC) for dynamic correction of single-bit errors
- Background program and erase operations for CPU load minimization
- Support for aborting erase operation
- Minimum program width[1] of 32-byte for D-Flash and 32-byte for P-Flash
- 1-sector minimum erase width
- 1-byte read access
- Flash is delivered in erased state (read all zeros)
- Operating supply voltage: 2.5 V ± 7.5 %
- Read access time: 3 × t_{CCLK} = 112.5 ns[2]
- Program time: 209440 / f_{SYS} = 2.6 ms[3]
- Erase time: 8175360 / f_{SYS} = 102 ms[3]

1) P-Flash: 32-byte wordline can only be programmed once, i.e., one gate disturb allowed.
D-Flash: 32-byte wordline can be programmed twice, i.e., two gate disturbs allowed.

2) f_{sys} = 80 MHz ± 7.5% (f_{CCLK} = 26.7 MHz ± 7.5 %) is the maximum frequency range for Flash read access.

3) f_{sys} = 80 MHz ± 7.5% is the only frequency range for Flash programming and erasing. f_{sysmin} is used for obtaining the worst case timing.

Table 15 shows the Flash data retention and endurance targets.

Table 15 Flash Data Retention and Endurance

Retention	Endurance[1]	Size		Remarks
		T_A=- 40 to 125 °C	T_A= 125 to 140 °C	
Program Flash				
20 years	1,000 cycles	up to 16 Kbytes[2]		for 16-Kbyte Variant
20 years	1,000 cycles	up to 8 Kbytes[2]		for 8-Kbyte Variant
20 years	1,000 cycles	up to 4 Kbytes[2]		for 4-Kbyte Variant
Data Flash				
20 years	1,000 cycles[3]	4 Kbytes	1 Kbytes	
5 years	10,000 cycles[3]	1 Kbyte	256 bytes	
2 years	70,000 cycles[3]	512 bytes	128 bytes	
2 years	100,000 cycles[3]	128 bytes	32 bytes	

1) One cycle refers to the programming of all wordlines in a sector and erasing of sector. The Flash endurance data specified in **Table 15** is valid only if the following conditions are fulfilled:
- the maximum number of erase cycles per Flash sector must not exceed 100,000 cycles.
- the maximum number of erase cycles per Flash bank must not exceed 300,000 cycles.
- the maximum number of program cycles per Flash bank must not exceed 2,500,000 cycles.

2) If no Flash is used for data, the Program Flash size can be up to the maximum Flash size available in the device variant. Having more Data Flash will mean less Flash is available for Program Flash.

3) For T_A=125 to 140°C, refers to programming of second 8 bytes (bytes 8 to 15) per WL

3.3.1 Flash Bank Sectorization

The SAA-XC866 product family offers four Flash devices with either 8 Kbytes or 16 Kbytes of embedded Flash memory. These Flash memory sizes are made up of two or four 4-Kbyte Flash banks, respectively. Each Flash device consists of Program Flash (P-Flash) bank(s) and a single Data Flash (D-Flash) bank with different sectorization shown in **Figure 11**. Both types can be used for code and data storage. The label “Data” neither implies that the D-Flash is mapped to the data memory region, nor that it can only be used for data storage. It is used to distinguish the different Flash bank sectorizations.

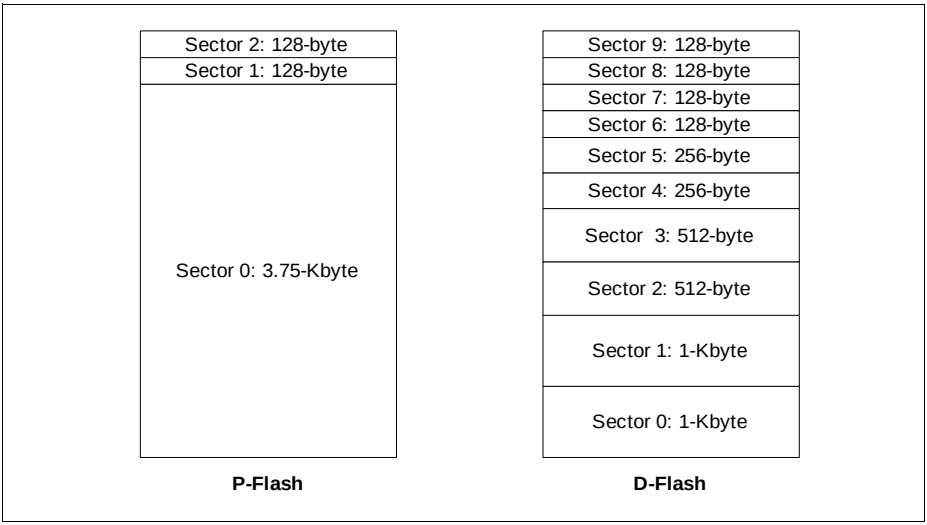

Figure 11 Flash Bank Sectorization

The internal structure of each Flash bank represents a sector architecture for flexible erase capability. The minimum erase width is always a complete sector, and sectors can be erased separately or in parallel. Contrary to standard EPROMs, erased Flash memory cells contain 0s.

The D-Flash bank is divided into more physical sectors for extended erasing and reprogramming capability; even numbers for each sector size are provided to allow greater flexibility and the ability to adapt to a wide range of application requirements.

3.3.2 Flash Programming Width

For the P-Flash banks, a programmed wordline (WL) must be erased before it can be reprogrammed as the Flash cells can only withstand one gate disturb. This means that the entire sector containing the WL must be erased since it is impossible to erase a single WL.

For the D-Flash bank, the same WL can be programmed twice before erasing is required as the Flash cells are able to withstand two gate disturbs. Hence, it is possible to program the same WL, for example, with 16 bytes of data in two times (see **Figure 12**).

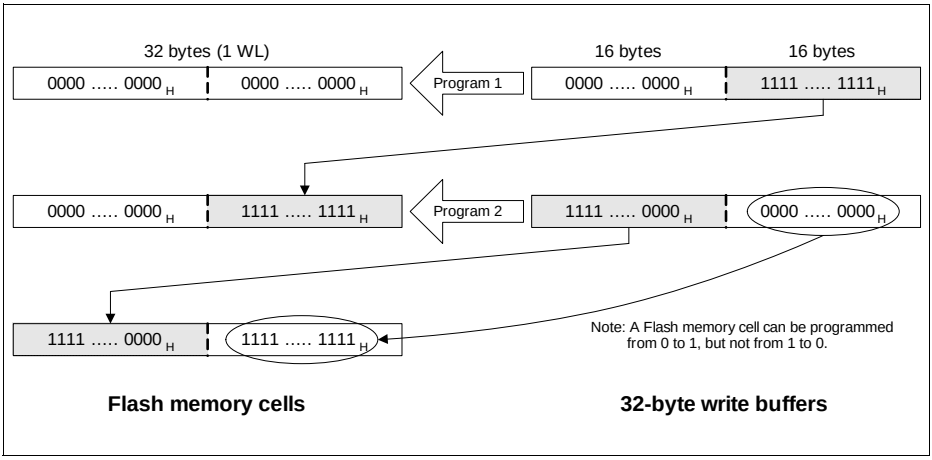

Figure 12 D-Flash Programming

Note: When programming a D-Flash WL the second time, the previously programmed Flash memory cells (whether 0s or 1s) should be reprogrammed with 0s to retain its original contents and to prevent "over-programming".

3.4 Interrupt System

The XC800 Core supports one non-maskable interrupt (NMI) and 14 maskable interrupt requests. In addition to the standard interrupt functions supported by the core, e.g., configurable interrupt priority and interrupt masking, the XC866 interrupt system provides extended interrupt support capabilities such as the mapping of each interrupt vector to several interrupt sources to increase the number of interrupt sources supported, and additional status registers for detecting and determining the interrupt source.

3.4.1 Interrupt Source

Figure 13 to **Figure 17** give a general overview of the interrupt sources and illustrates the request and control flags.

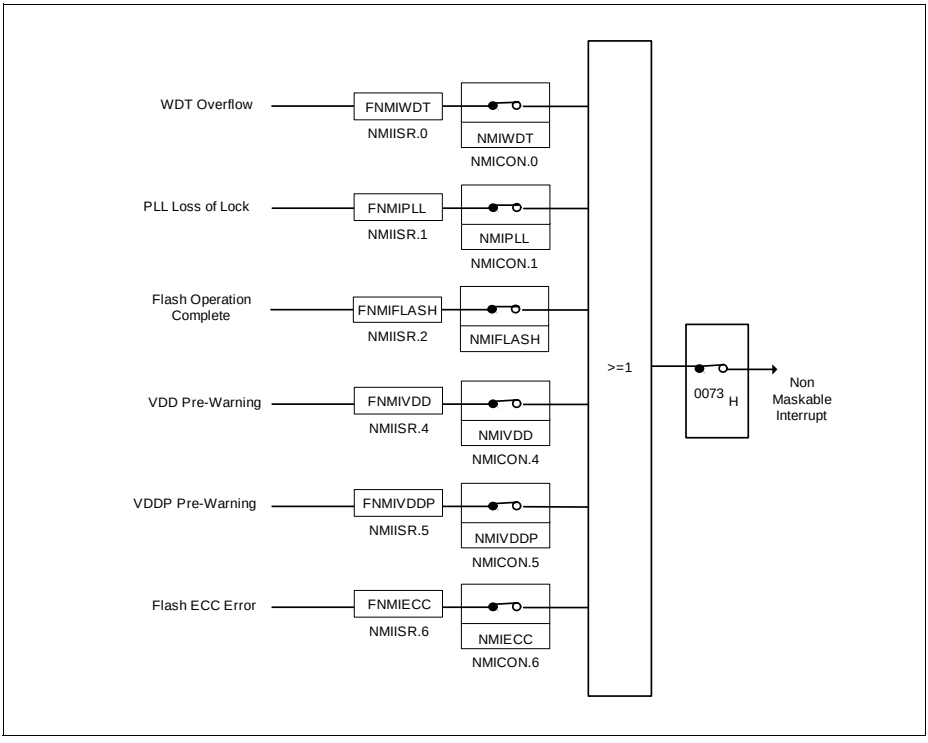

Figure 13 Non-Maskable Interrupt Request Sources

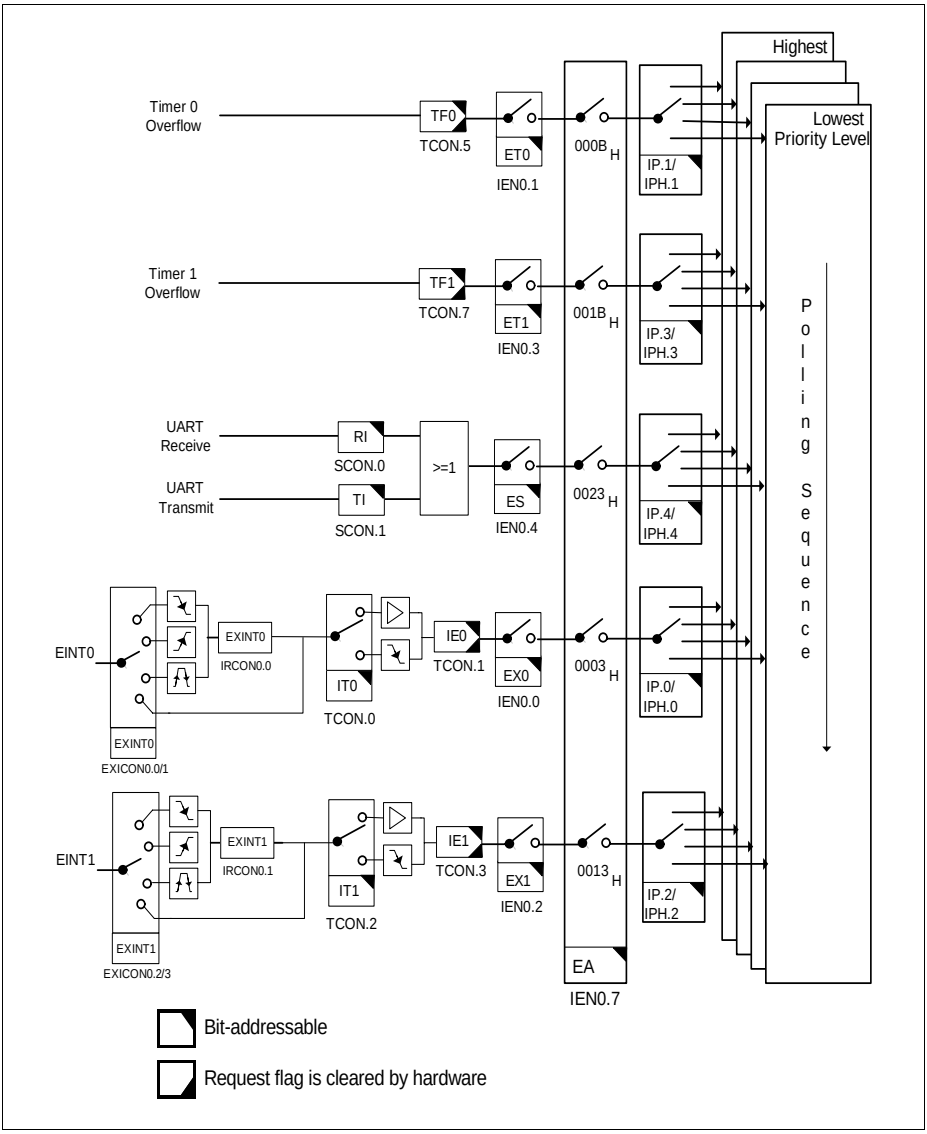

Figure 14 Interrupt Request Sources (Part 1)

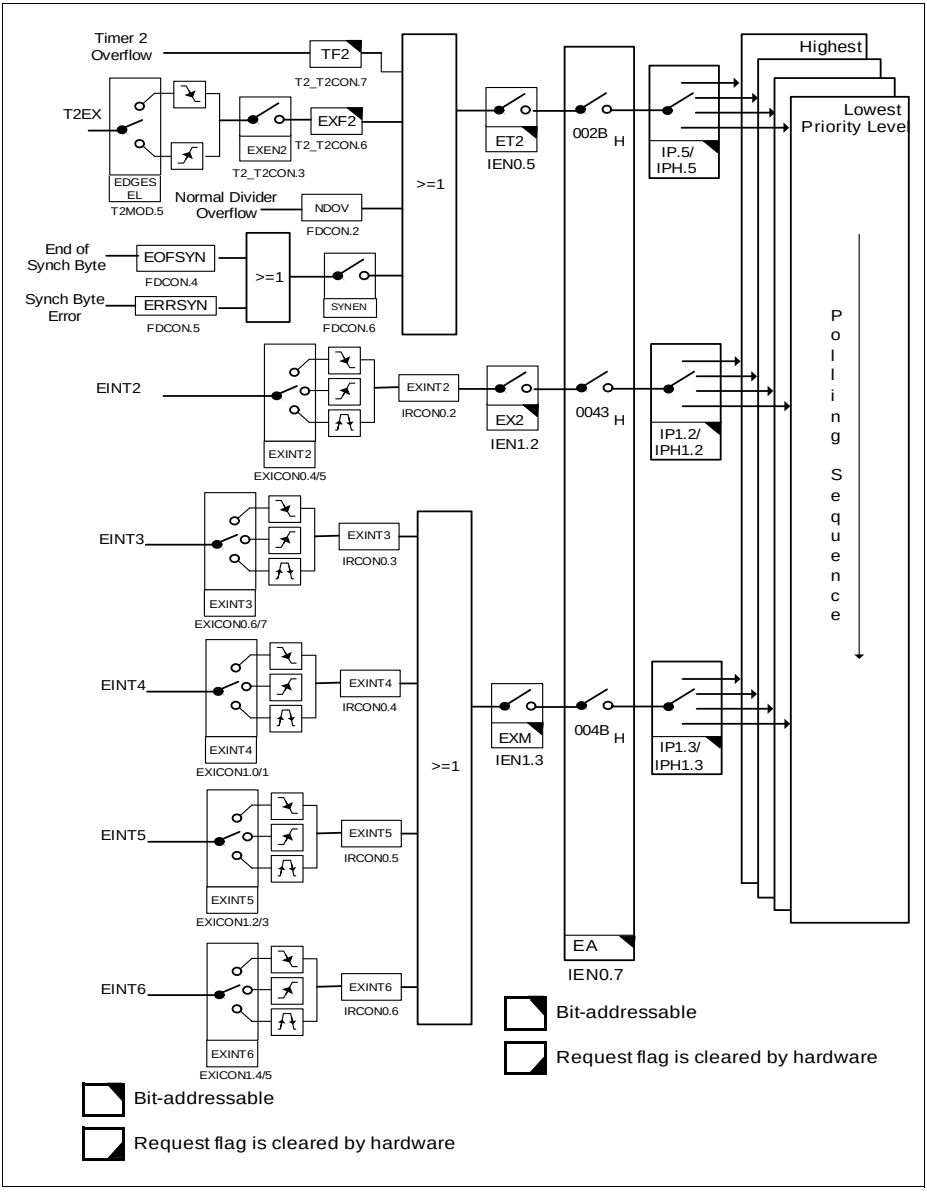

Figure 15 Interrupt Request Sources (Part 2)

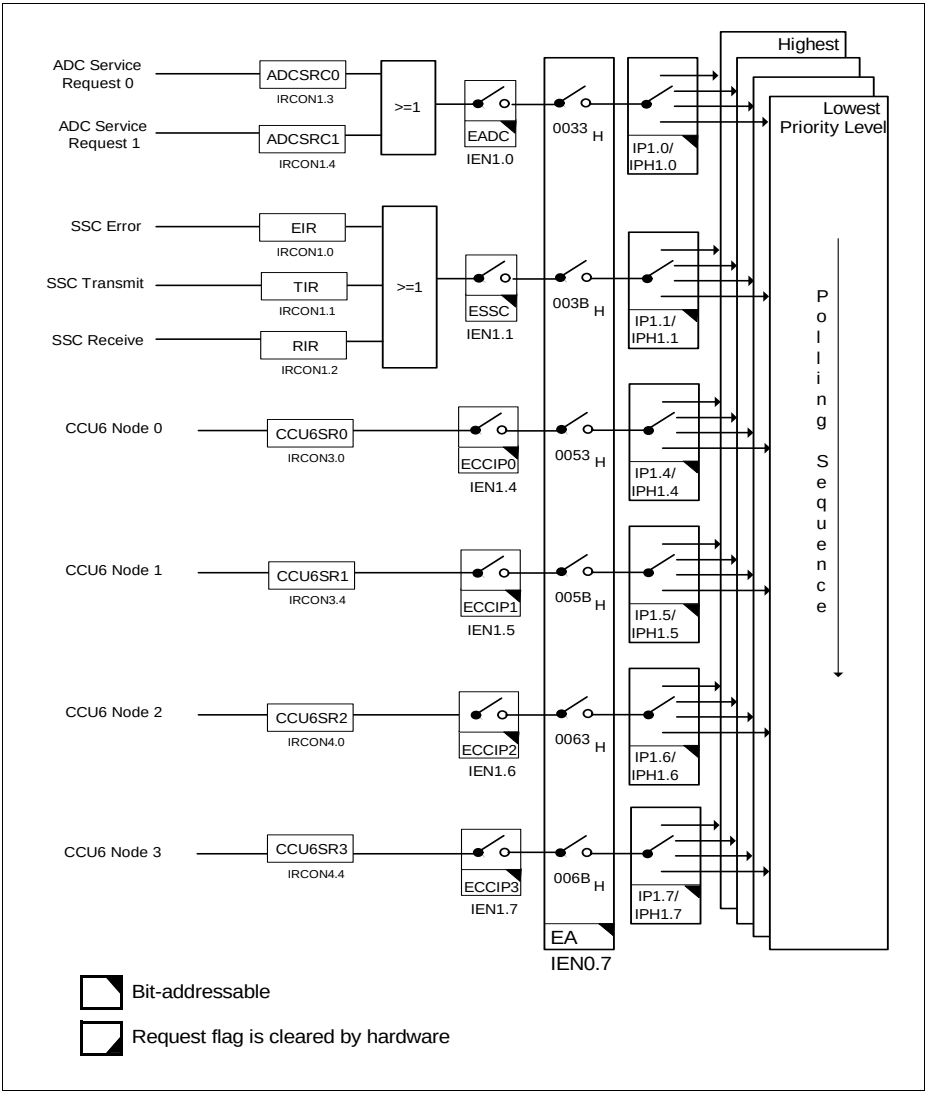

Figure 16 Interrupt Request Sources (Part 3)

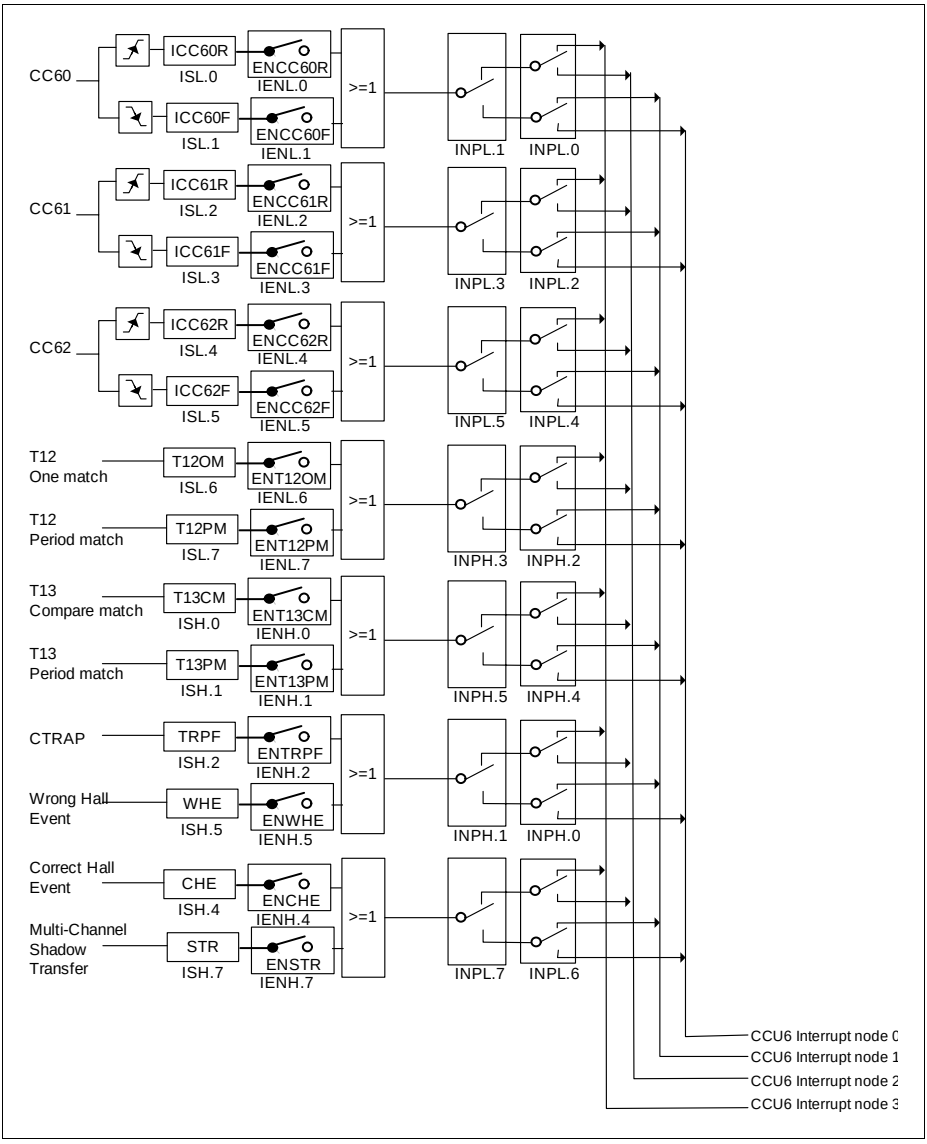

Figure 17 Interrupt Request Sources (Part 4)

3.4.2 Interrupt Source and Vector

Each interrupt source has an associated interrupt vector address. This vector is accessed to service the corresponding interrupt source request. The interrupt service of each interrupt source can be individually enabled or disabled via an enable bit. The assignment of the SAA-XC866 interrupt sources to the interrupt vector addresses and the corresponding interrupt source enable bits are summarized in **Table 16**.

Table 16 Interrupt Vector Addresses

Interrupt Source	Vector Address	Assignment for SAA-XC866	Enable Bit	SFR
NMI	0073_H	Watchdog Timer NMI	NMIWDT	NMICON
		PLL NMI	NMIPLL	
		Flash NMI	NMIFLASH	
		VDDC Prewarning NMI	NMIVDD	
		VDDP Prewarning NMI	NMIVDDP	
		Flash ECC NMI	NMIECC	
XINTR0	0003_H	External Interrupt 0	EX0	IEN0
XINTR1	$000B_H$	Timer 0	ET0	
XINTR2	0013_H	External Interrupt 1	EX1	
XINTR3	$001B_H$	Timer 1	ET1	
XINTR4	0023_H	UART	ES	
XINTR5	$002B_H$	T2	ET2	
		Fractional Divider (Normal Divider Overflow)		
		LIN		

Table 16 Interrupt Vector Addresses (cont'd)

XINTR6	0033_H	ADC	EADC	IEN1
XINTR7	$003B_H$	SSC	ESSC	
XINTR8	0043_H	External Interrupt 2	EX2	
XINTR9	$004B_H$	External Interrupt 3	EXM	
		External Interrupt 4		
		External Interrupt 5		
		External Interrupt 6		
XINTR10	0053_H	CCU6 INP0	ECCIP0	
XINTR11	$005B_H$	CCU6 INP1	ECCIP1	
XINTR12	0063_H	CCU6 INP2	ECCIP2	
XINTR13	$006B_H$	CCU6 INP3	ECCIP3	

3.4.3 Interrupt Priority

Each interrupt source, except for NMI, can be individually programmed to one of the four possible priority levels. The NMI has the highest priority and supersedes all other interrupts. Two pairs of interrupt priority registers (IP and IPH, IP1 and IPH1) are available to program the priority level of each non-NMI interrupt vector.

A low-priority interrupt can be interrupted by a high-priority interrupt, but not by another interrupt of the same or lower priority. Further, an interrupt of the highest priority cannot be interrupted by any other interrupt source.

If two or more requests of different priority levels are received simultaneously, the request of the highest priority is serviced first. If requests of the same priority are received simultaneously, then an internal polling sequence determines which request is serviced first. Thus, within each priority level, there is a second priority structure determined by the polling sequence shown in **Table 17**.

Table 17 Priority Structure within Interrupt Level

Source	Level
Non-Maskable Interrupt (NMI)	(highest)
External Interrupt 0	1
Timer 0 Interrupt	2
External Interrupt 1	3
Timer 1 Interrupt	4
UART Interrupt	5
Timer 2, Fractional Divider, LIN Interrupts	6
ADC Interrupt	7
SSC Interrupt	8
External Interrupt 2	9
External Interrupt [6:3]	10
CCU6 Interrupt Node Pointer 0	11
CCU6 Interrupt Node Pointer 1	12
CCU6 Interrupt Node Pointer 2	13
CCU6 Interrupt Node Pointer 3	14

3.5 Parallel Ports

The SAA-XC866 has 27 port pins organized into four parallel ports, Port 0 (P0) to Port 3 (P3). Each pin has a pair of internal pull-up and pull-down devices that can be individually enabled or disabled. Ports P0, P1 and P3 are bidirectional and can be used as general purpose input/output (GPIO) or to perform alternate input/output functions for the on-chip peripherals. When configured as an output, the open drain mode can be selected. Port P2 is an input-only port, providing general purpose input functions, alternate input functions for the on-chip peripherals, and also analog inputs for the Analog-to-Digital Converter (ADC).

Bidirectional Port Features:

- Configurable pin direction
- Configurable pull-up/pull-down devices
- Configurable open drain mode
- Transfer of data through digital inputs and outputs (general purpose I/O)
- Alternate input/output for on-chip peripherals

Input Port Features:

- Configurable input driver
- Configurable pull-up/pull-down devices
- Receive of data through digital input (general purpose input)
- Alternate input for on-chip peripherals
- Analog input for ADC module

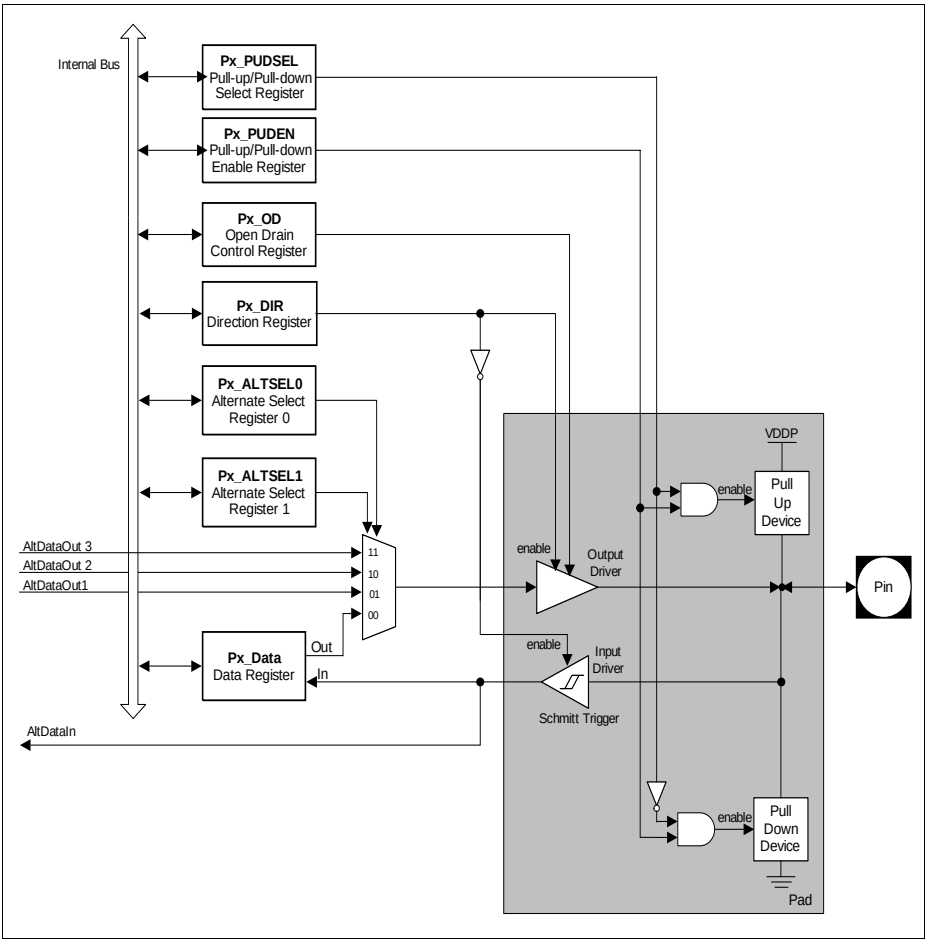

Figure 18 General Structure of Bidirectional Port

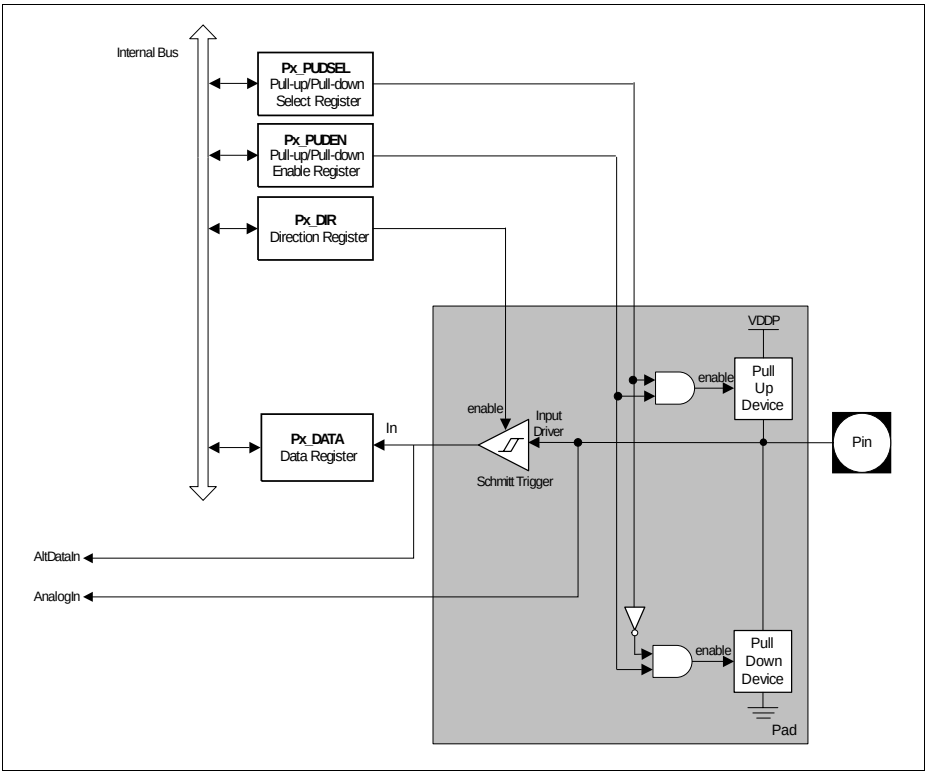

Figure 19 General Structure of Input Port

3.6 Power Supply System with Embedded Voltage Regulator

The SAA-XC866 microcontroller requires two different levels of power supply:

- 3.3 V or 5.0 V for the Embedded Voltage Regulator (EVR) and Ports
- 2.5 V for the core, memory, on-chip oscillator, and peripherals

Figure 20 shows the SAA-XC866 power supply system. A power supply of 3.3 V or 5.0 V must be provided from the external power supply pin. The 2.5 V power supply for the logic is generated by the EVR. The EVR helps to reduce the power consumption of the whole chip and the complexity of the application board design.

The EVR consists of a main voltage regulator and a low power voltage regulator. In active mode, both voltage regulators are enabled. In power-down mode, the main voltage regulator is switched off, while the low power voltage regulator continues to function and provide power supply to the system with low power consumption.

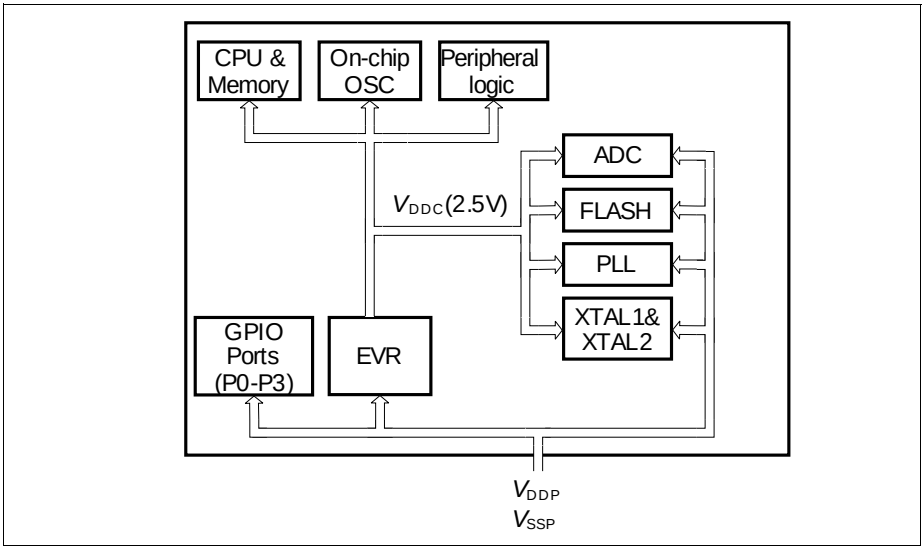

Figure 20 SAA-XC866 Power Supply System

EVR Features:

- Input voltage (V_{DDP}): 3.3 V/5.0 V
- Output voltage (V_{DDC}): 2.5 V ± 7.5%
- Low power voltage regulator provided in power-down mode
- V_{DDC} and V_{DDP} prewarning detection
- V_{DDC} brownout detection

3.7 Reset Control

The SAA-XC866 has five types of reset: power-on reset, hardware reset, watchdog timer reset, power-down wake-up reset, and brownout reset.

When the SAA-XC866 is first powered up, the status of certain pins (see **Table 19**) must be defined to ensure proper start operation of the device. At the end of a reset sequence, the sampled values are latched to select the desired boot option, which cannot be modified until the next power-on reset or hardware reset. This guarantees stable conditions during the normal operation of the device.

In order to power up the system properly, the external reset pin $\overline{\text{RESET}}$ must be asserted until V_{DDC} reaches 0.9*V_{DDC}. The delay of external reset can be realized by an external capacitor at $\overline{\text{RESET}}$ pin. This capacitor value must be selected so that V_{RESET} reaches 0.4 V, but not before V_{DDC} reaches 0.9* V_{DDC}.

A typical application example is shown in **Figure 21**. V_{DDP} capacitor value is 300 nF. V_{DDC} capacitor value is 220 nF. The capacitor connected to $\overline{\text{RESET}}$ pin is 100 nF.

Typically, the time taken for V_{DDC} to reach 0.9*V_{DDC} is less than 50 µs once V_{DDP} reaches 2.3V. Hence, based on the condition that 10% to 90% V_{DDP} (slew rate) is less than 500 µs, the $\overline{\text{RESET}}$ pin should be held low for 500 µs typically. See **Figure 22**.

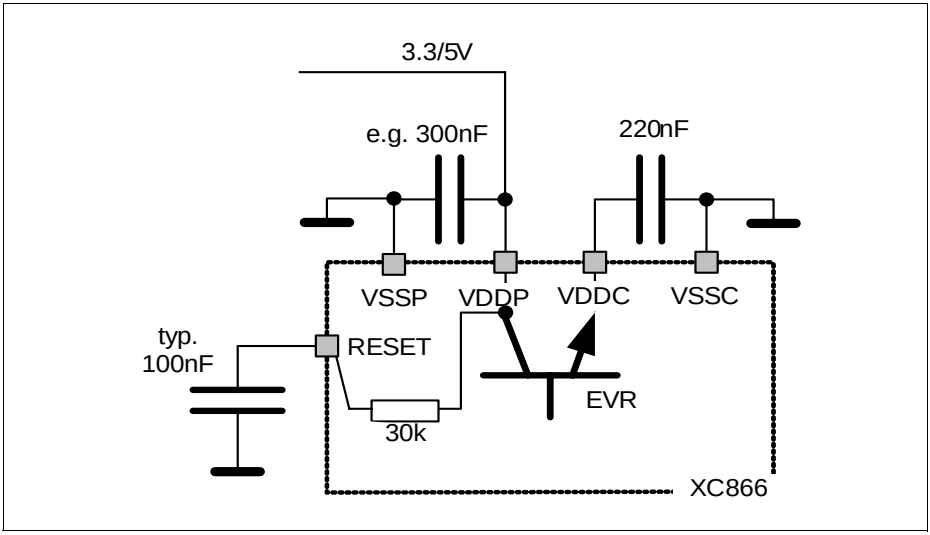

Figure 21 Reset Circuitry

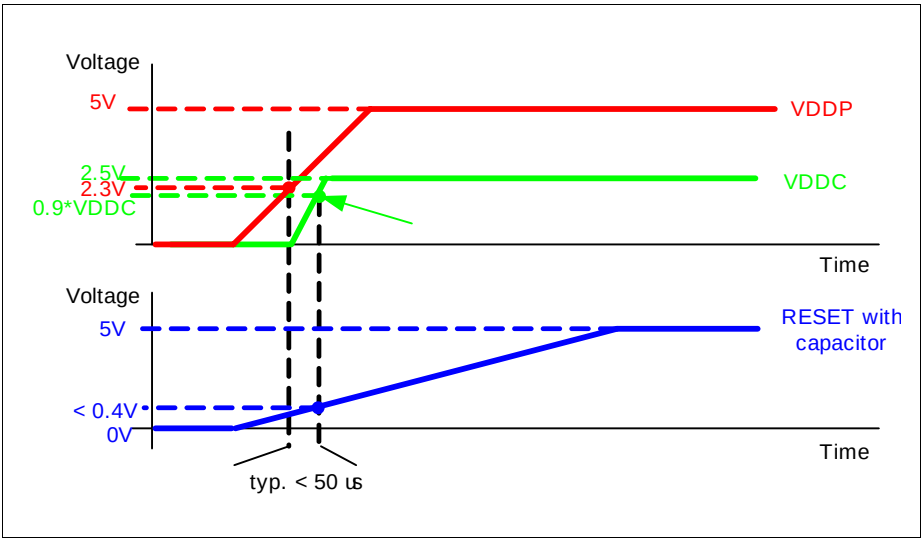

Figure 22 V_{DDP}, V_{DDC} and V_{RESET} during Power-on Reset

The second type of reset in SAA-XC866 is the hardware reset. This reset function can be used during normal operation or when the chip is in power-down mode. A reset input pin $\overline{\text{RESET}}$ is provided for the hardware reset. To ensure the recognition of the hardware reset, pin $\overline{\text{RESET}}$ must be held low for at least 100 ns.

The Watchdog Timer (WDT) module is also capable of resetting the device if it detects a malfunction in the system.

Another type of reset that needs to be detected is a reset while the device is in power-down mode (wake-up reset). While the contents of the static RAM are undefined after a power-on reset, they are well defined after a wake-up reset from power-down mode.

3.7.1 Module Reset Behavior

Table 18 shows how the functions of the SAA-XC866 are affected by the various reset types. A "■" means that this function is reset to its default state.

Table 18 Effect of Reset on Device Functions

Module/ Function	Wake-Up Reset	Watchdog Reset	Hardware Reset	Power-On Reset	Brownout Reset
CPU Core	■	■	■	■	■
Peripherals	■	■	■	■	■
On-Chip Static RAM	Not affected, reliable	Not affected, reliable	Not affected, reliable	Affected, un-reliable	Affected, un-reliable
Oscillator, PLL	■	Not affected	■	■	■
Port Pins	■	■	■	■	■
EVR	The voltage regulator is switched on	Not affected	■	■	■
FLASH	■	■	■	■	■
NMI	Disabled	Disabled	■	■	■

3.7.2 Booting Scheme

When the SAA-XC866 is reset, it must identify the type of configuration with which to start the different modes once the reset sequence is complete. Thus, boot configuration information that is required for activation of special modes and conditions needs to be applied by the external world through input pins. After power-on reset or hardware reset, the pins MBC, TMS and P0.0 collectively select the different boot options. Table 19 shows the available boot options in the SAA-XC866.

Table 19 SAA-XC866 Boot Selection

MBC	TMS	P0.0	Type of Mode	PC Start Value
1	0	x	User Mode; on-chip OSC/PLL non-bypassed	0000_H
0	0	x	BSL Mode; on-chip OSC/PLL non-bypassed	0000_H
0	1	0	OCDS Mode[1]; on-chip OSC/PLL non-bypassed	0000_H
1	1	0	Standalone User (JTAG) Mode[2]; on-chip OSC/PLL non-bypassed (normal)	0000_H

1) The OCDS mode is not accessible if Flash is protected.
2) Normal user mode with standard JTAG (TCK,TDI,TDO) pins for hot-attach purpose.

3.8 Clock Generation Unit

The Clock Generation Unit (CGU) allows great flexibility in the clock generation for the SAA-XC866. The power consumption is indirectly proportional to the frequency, whereas the performance of the microcontroller is directly proportional to the frequency. During user program execution, the frequency can be programmed for an optimal ratio between performance and power consumption. Therefore the power consumption can be adapted to the actual application state.

Features:

- Phase-Locked Loop (PLL) for multiplying clock source by different factors
- PLL Base Mode
- Prescaler Mode
- PLL Mode
- Power-down mode support

The CGU consists of an oscillator circuit and a PLL.In the SAA-XC866, the oscillator can be from either of these two sources: the on-chip oscillator (10 MHz) or the external oscillator (4 MHz to 12 MHz). The term “oscillator” is used to refer to both on-chip oscillator and external oscillator, unless otherwise stated. After the reset, the on-chip oscillator will be used by default.The external oscillator can be selected via software. In addition, the PLL provides a fail-safe logic to perform oscillator run and loss-of-lock detection. This allows emergency routines to be executed for system recovery or to perform system shut down.

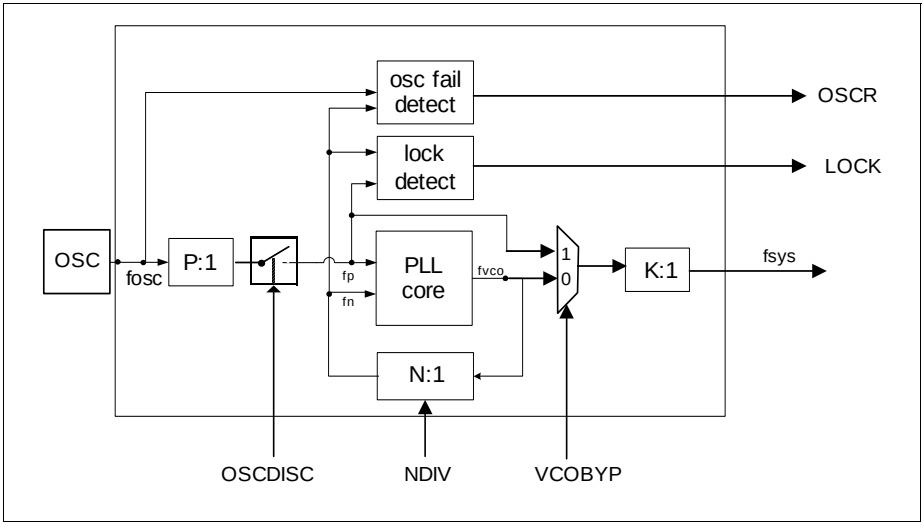

Figure 23 CGU Block Diagram

The clock system provides three ways to generate the system clock:

PLL Base Mode

The system clock is derived from the VCO base (free running) frequency clock divided by the K factor.

$$f_{SYS} = f_{VCObase} \times \frac{1}{K}$$

Prescaler Mode (VCO Bypass Operation)

In VCO bypass operation, the system clock is derived from the oscillator clock, divided by the P and K factors.

$$f_{SYS} = f_{OSC} \times \frac{1}{P \times K}$$

PLL Mode

The system clock is derived from the oscillator clock, multiplied by the N factor, and divided by the P and K factors. Both VCO bypass and PLL bypass must be inactive for this PLL mode. The PLL mode is used during normal system operation.

$$f_{SYS} = f_{OSC} \times \frac{N}{P \times K}$$

Table 20 shows the settings of bits OSCDISC and VCOBYP for different clock mode selection.

Table 20 Clock Mode Selection

OSCDISC	VCOBYP	Clock Working Modes
0	0	PLL Mode
0	1	Prescaler Mode
1	0	PLL Base Mode
1	1	PLL Base Mode

Note: When oscillator clock is disconnected from PLL, the clock mode is PLL Base mode regardless of the setting of VCOBYP bit.

System Frequency Selection

For the SAA-XC866, the values of P and K are fixed to “1” and “2”, respectively. In order to obtain the required system frequency, f_{sys}, the value of N can be selected by bit NDIV for different oscillator inputs. **Table 21** provides examples on how f_{sys} = 80 MHz can be obtained for the different oscillator sources.

Table 21 System frequency (f_{sys} = 80 MHz)

Oscillator	f_{osc}	N	P	K	f_{sys}
On-chip	10 MHz	16	1	2	80 MHz
External	10 MHz	16	1	2	80 MHz
	8 MHz	20	1	2	80 MHz
	5 MHz	32	1	2	80 MHz

Table 22 shows the VCO range for the SAA-XC866.

Table 22 VCO Range

f_{VCOmin}	f_{VCOmax}	$f_{VCOFREEmin}$	$f_{VCOFREEmax}$	Unit
150	200	20	80	MHz
100	150	10	80	MHz

3.8.1 Recommended External Oscillator Circuits

The oscillator circuit, a Pierce oscillator, is designed to work with both, an external crystal oscillator or an external stable clock source. It basically consists of an inverting amplifier and a feedback element with XTAL1 as input, and XTAL2 as output.

When using a crystal, a proper external oscillator circuitry must be connected to both pins, XTAL1 and XTAL2. The crystal frequency can be within the range of 4 MHz to 12 MHz. Additionally, it is necessary to have two load capacitances C_{X1} and C_{X2}, and depending on the crystal type, a series resistor R_{X2}, to limit the current. A test resistor R_Q may be temporarily inserted to measure the oscillation allowance (negative resistance) of the oscillator circuitry. R_Q values are typically specified by the crystal vendor. The C_{X1} and C_{X2} values shown in Figure 24 can be used as starting points for the negative resistance evaluation and for non-productive systems. The exact values and related operating range are dependent on the crystal frequency and have to be determined and optimized together with the crystal vendor using the negative resistance method. Oscillation measurement with the final target system is strongly recommended to verify the input amplitude at XTAL1 and to determine the actual oscillation allowance (margin negative resistance) for the oscillator-crystal system.

When using an external clock signal, the signal must be connected to XTAL1. XTAL2 is left open (unconnected).

The oscillator can also be used in combination with a ceramic resonator. The final circuitry must also be verified by the resonator vendor.

Figure 24 shows the recommended external oscillator circuitries for both operating modes, external crystal mode and external input clock mode.

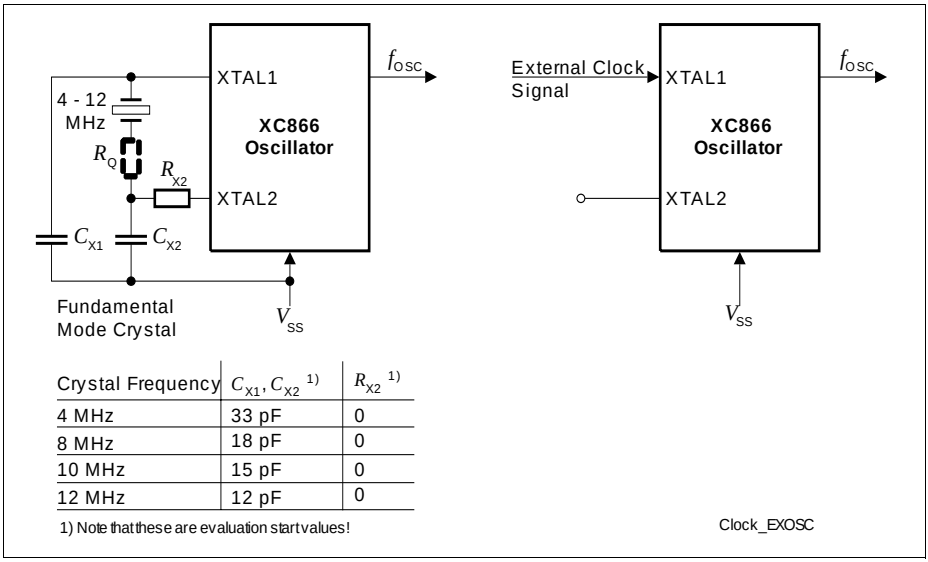

Crystal Frequency	C_{X1}, C_{X2} 1)	R_{X2} 1)
4 MHz	33 pF	0
8 MHz	18 pF	0
10 MHz	15 pF	0
12 MHz	12 pF	0

1) Note that these are evaluation start values!

Figure 24 External Oscillator Circuitries

Note: For crystal operation, it is strongly recommended to measure the negative resistance in the final target system (layout) to determine the optimum parameters for the oscillator operation. Please refer to the minimum and maximum values of the negative resistance specified by the crystal supplier.

3.8.2 Clock Management

The CGU generates all clock signals required within the microcontroller from a single clock, f_{sys}. During normal system operation, the typical frequencies of the different modules are as follow:

- CPU clock: CCLK, SCLK = 26.7 MHz
- CCU6 clock: FCLK = 26.7 MHz
- Other peripherals: PCLK = 26.7 MHz
- Flash Interface clock: CCLK3 = 80 MHz and CCLK = 26.7 MHz

In addition, different clock frequency can output to pin CLKOUT(P0.0). The clock output frequency can further be divided by 2 using toggle latch (bit TLEN is set to 1), the resulting output frequency has 50% duty cycle. **Figure 25** shows the clock distribution of the SAA-XC866.

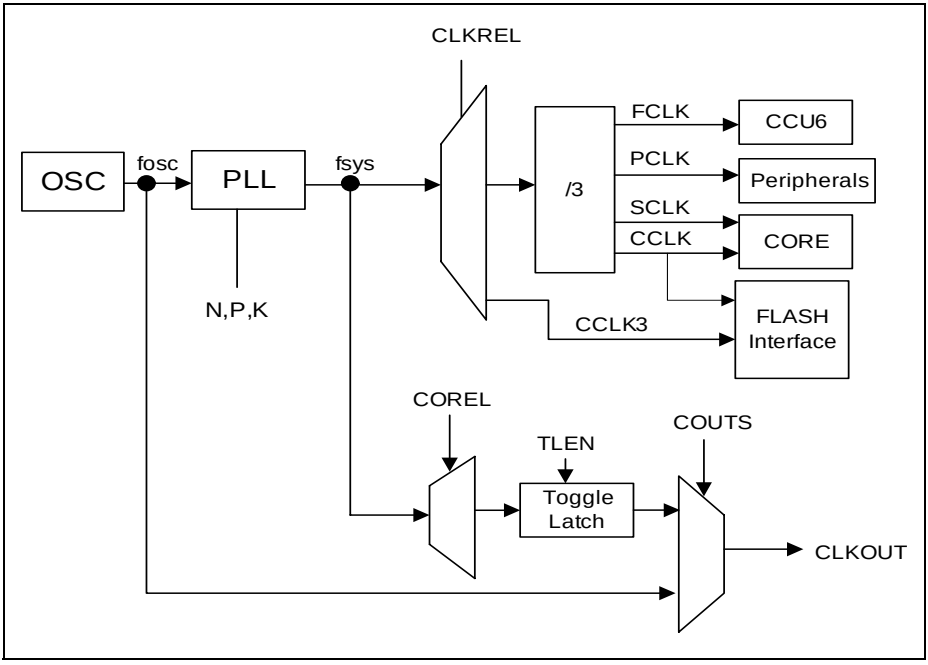

Figure 25 Clock Generation from f_{sys}

For power saving purposes, the clocks may be disabled or slowed down according to Table 23.

Table 23 System frequency (f_{sys} = 80 MHz)

Power Saving Mode	Action
Idle	Clock to the CPU is disabled.
Slow-down	Clocks to the CPU and all the peripherals, including CCU6, are divided by a common programmable factor defined by bit field CMCON.CLKREL.
Power-down	Oscillator and PLL are switched off.

3.9 Power Saving Modes

The power saving modes of the SAA-XC866 provide flexible power consumption through a combination of techniques, including:

- Stopping the CPU clock
- Stopping the clocks of individual system components
- Reducing clock speed of some peripheral components
- Power-down of the entire system with fast restart capability

After a reset, the active mode (normal operating mode) is selected by default (see **Figure 26**) and the system runs in the main system clock frequency. From active mode, different power saving modes can be selected by software. They are:

- Idle mode
- Slow-down mode
- Power-down mode

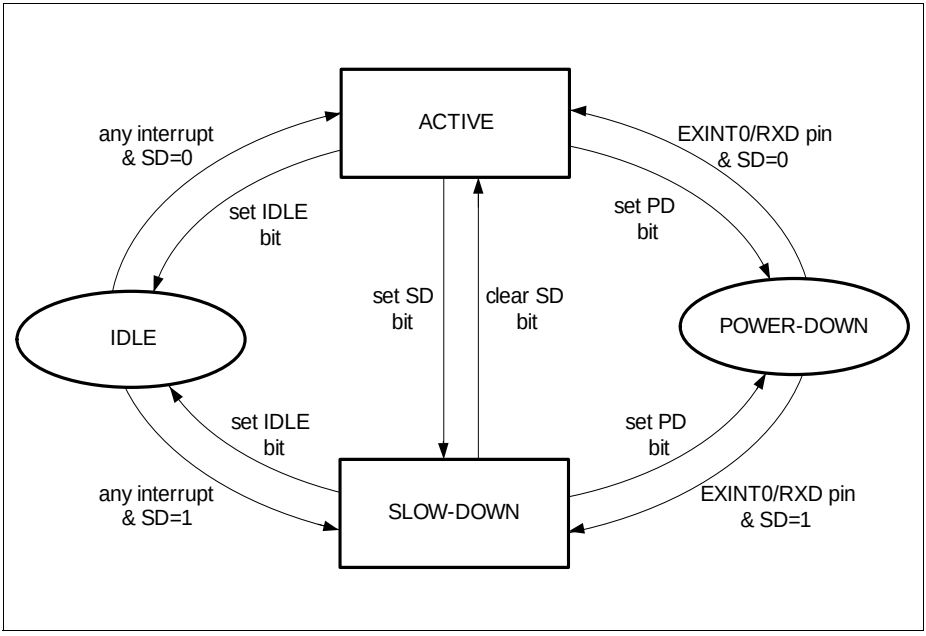

Figure 26 Transition between Power Saving Modes

3.10 Watchdog Timer

The Watchdog Timer (WDT) provides a highly reliable and secure way to detect and recover from software or hardware failures. The WDT is reset at a regular interval that is predefined by the user. The CPU must service the WDT within this interval to prevent the WDT from causing an SAA-XC866 system reset. Hence, routine service of the WDT confirms that the system is functioning properly. This ensures that an accidental malfunction of the SAA-XC866 will be aborted in a user-specified time period. In debug mode, the WDT is suspended and stops counting. Therefore, there is no need to refresh the WDT during debugging.

Features:

- 16-bit Watchdog Timer
- Programmable reload value for upper 8 bits of timer
- Programmable window boundary
- Selectable input frequency of $f_{PCLK}/2$ or $f_{PCLK}/128$
- Time-out detection with NMI generation and reset prewarning activation (after which a system reset will be performed)

The WDT is a 16-bit timer incremented by a count rate of $f_{PCLK}/2$ or $f_{PCLK}/128$. This 16-bit timer is realized as two concatenated 8-bit timers. The upper 8 bits of the WDT can be preset to a user-programmable value via a watchdog service access in order to modify the watchdog expire time period. The lower 8 bits are reset on each service access. **Figure 27** shows the block diagram of the WDT unit.

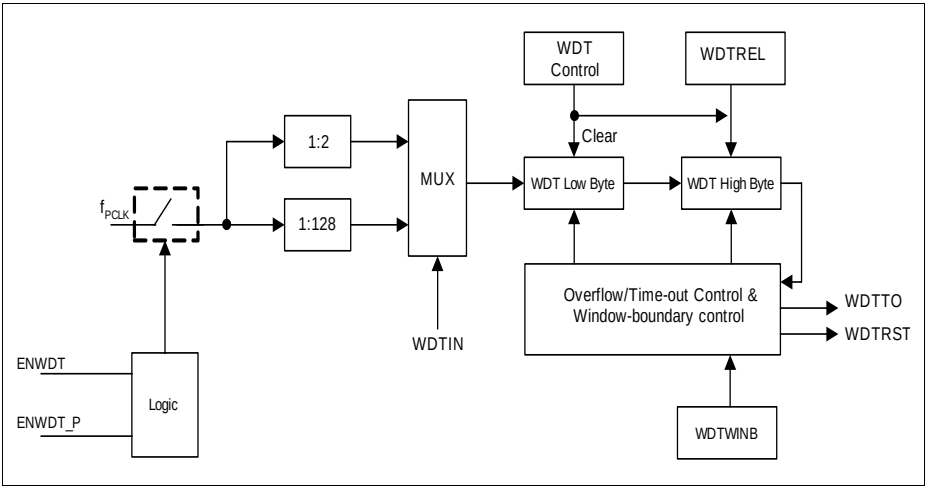

Figure 27 WDT Block Diagram

If the WDT is not serviced before the timer overflow, a system malfunction is assumed. As a result, the WDT NMI is triggered (assert WDTTO) and the reset prewarning is entered. The prewarning period lasts for 30_H count, after which the system is reset (assert WDTRST).

The WDT has a “programmable window boundary” which disallows any refresh during the WDT’s count-up. A refresh during this window boundary constitutes an invalid access to the WDT, causing the reset prewarning to be entered but without triggering the WDT NMI. The system will still be reset after the prewarning period is over. The window boundary is from 0000_H to the value obtained from the concatenation of WDTWINB and 00_H.

After being serviced, the WDT continues counting up from the value (<WDTREL> * 2^8). The time period for an overflow of the WDT is programmable in two ways:

- the input frequency to the WDT can be selected to be either $f_{PCLK}/2$ or $f_{PCLK}/128$
- the reload value WDTREL for the high byte of WDT can be programmed in register WDTREL

The period, P_{WDT}, between servicing the WDT and the next overflow can be determined by the following formula:

$$P_{WDT} = \frac{2^{(1 + WDTIN \times 6)} \times (2^{16} - WDTREL \times 2^8)}{f_{PCLK}}$$

If the Window-Boundary Refresh feature of the WDT is enabled, the period P_{WDT} between servicing the WDT and the next overflow is shortened if WDTWINB is greater than WDTREL, see **Figure 28**. This period can be calculated using the same formula by replacing WDTREL with WDTWINB. For this feature to be useful, WDTWINB should not be smaller than WDTREL.

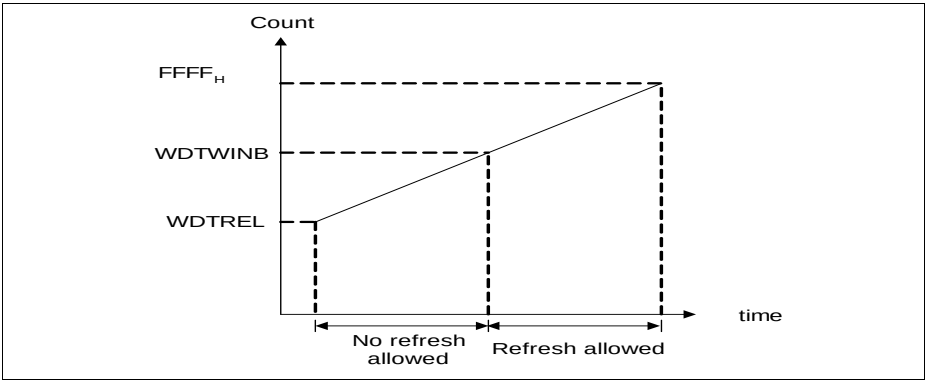

Figure 28 WDT Timing Diagram

Table 24 lists the possible watchdog time range that can be achieved for different module clock frequencies. Some numbers are rounded to 3 significant digits.

Table 24 Watchdog Time Ranges

Reload value in WDTREL	Prescaler for f_{PCLK}	
	2 (WDTIN = 0)	**128 (WDTIN = 1)**
	26.7 MHz	**26.7 MHz**
FF_H	19.2 µs	1.23 ms
$7F_H$	2.48 ms	159 ms
00_H	4.92 ms	315 ms

3.11 Universal Asynchronous Receiver/Transmitter

The Universal Asynchronous Receiver/Transmitter (UART) provides a full-duplex asynchronous receiver/transmitter, i.e., it can transmit and receive simultaneously. It is also receive-buffered, i.e., it can commence reception of a second byte before a previously received byte has been read from the receive register. However, if the first byte still has not been read by the time reception of the second byte is complete, one of the bytes will be lost.

Features:

- Full-duplex asynchronous modes
  - 8-bit or 9-bit data frames, LSB first
  - fixed or variable baud rate
- Receive buffered
- Multiprocessor communication
- Interrupt generation on the completion of a data transmission or reception

The UART can operate in four asynchronous modes as shown in **Table 25**. Data is transmitted on TXD and received on RXD.

Table 25 UART Modes

Operating Mode	Baud Rate
Mode 0: 8-bit shift register	$f_{PCLK}/2$
Mode 1: 8-bit shift UART	Variable
Mode 2: 9-bit shift UART	$f_{PCLK}/32$ or $f_{PCLK}/64$
Mode 3: 9-bit shift UART	Variable

There are several ways to generate the baud rate clock for the serial port, depending on the mode in which it is operating. In mode 0, the baud rate for the transfer is fixed at $f_{PCLK}/2$. In mode 2, the baud rate is generated internally based on the UART input clock and can be configured to either $f_{PCLK}/32$ or $f_{PCLK}/64$. The variable baud rate is set by either the underflow rate on the dedicated baud-rate generator, or by the overflow rate on Timer 1.

3.11.1 Baud-Rate Generator

The baud-rate generator is based on a programmable 8-bit reload value, and includes divider stages (i.e., prescaler and fractional divider) for generating a wide range of baud rates based on its input clock f_{PCLK}, see **Figure 29**.

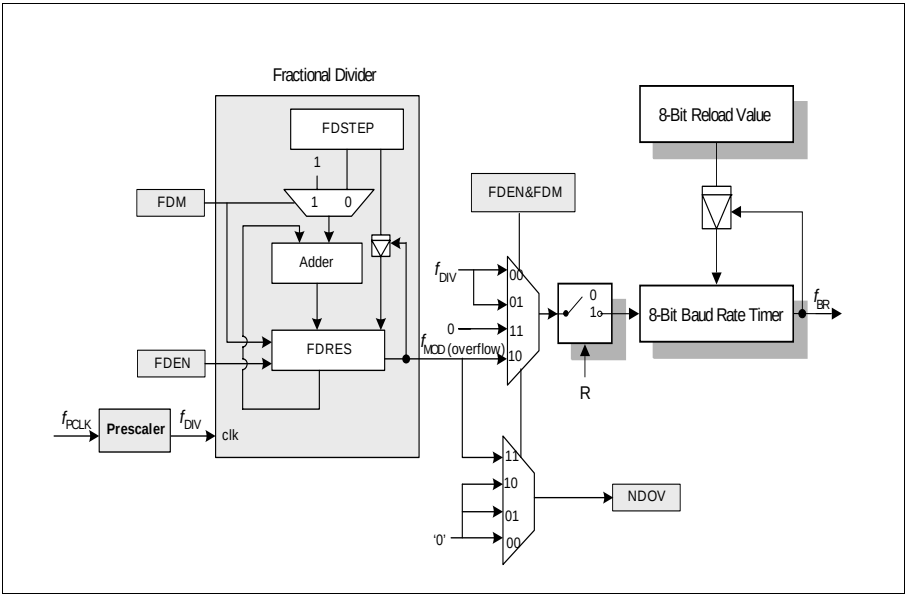

Figure 29 Baud-rate Generator Circuitry

The baud rate timer is a count-down timer and is clocked by either the output of the fractional divider (f_{MOD}) if the fractional divider is enabled (FDCON.FDEN = 1), or the output of the prescaler (f_{DIV}) if the fractional divider is disabled (FDEN = 0). For baud rate generation, the fractional divider must be configured to fractional divider mode (FDCON.FDM = 0). This allows the baud rate control run bit BCON.R to be used to start or stop the baud rate timer. At each timer underflow, the timer is reloaded with the 8-bit reload value in register BG and one clock pulse is generated for the serial channel.

Enabling the fractional divider in normal divider mode (FDEN = 1 and FDM = 1) stops the baud rate timer and nullifies the effect of bit BCON.R. See **Section 3.12**.

The baud rate (f_{BR}) value is dependent on the following parameters:

- Input clock f_{PCLK}
- Prescaling factor (2^{BRPRE}) defined by bit field BRPRE in register BCON
- Fractional divider (STEP/256) defined by register FDSTEP
  (to be considered only if fractional divider is enabled and operating in fractional divider mode)

- 8-bit reload value (BR_VALUE) for the baud rate timer defined by register BG

The following formulas calculate the final baud rate without and with the fractional divider respectively:

$$\text{baud rate} = \frac{f_{PCLK}}{16 \times 2^{BRPRE} \times (\text{BR_VALUE} + 1)} \quad \text{where} \quad 2^{BRPRE} \times (\text{BR_VALUE} + 1) > 1$$

$$\text{baud rate} = \frac{f_{PCLK}}{16 \times 2^{BRPRE} \times (\text{BR_VALUE} + 1)} \times \frac{STEP}{256}$$

The maximum baud rate that can be generated is limited to $f_{PCLK}/32$. Hence, for a module clock of 26.7 MHz, the maximum achievable baud rate is 0.83 MBaud.

Standard LIN protocol can support a maximum baud rate of 20kHz, the baud rate accuracy is not critical and the fractional divider can be disabled. Only the prescaler is used for auto baud rate calculation. For LIN fast mode, which supports the baud rate of 20kHz to 115.2kHz, the higher baud rates require the use of the fractional divider for greater accuracy.

Table 26 lists the various commonly used baud rates with their corresponding parameter settings and deviation errors. The fractional divider is disabled and a module clock of 26.7 MHz is used.

Table 26 Typical Baud rates for UART with Fractional Divider disabled

Baud rate	Prescaling Factor (2^{BRPRE})	Reload Value (BR_VALUE + 1)	Deviation Error
19.2 kBaud	1 (BRPRE=000_B)	87 (57_H)	-0.22 %
9600 Baud	1 (BRPRE=000_B)	174 (AE_H)	-0.22 %
4800 Baud	2 (BRPRE=001_B)	174 (AE_H)	-0.22 %
2400 Baud	4 (BRPRE=010_B)	174 (AE_H)	-0.22 %

The fractional divider allows baud rates of higher accuracy (lower deviation error) to be generated. **Table 27** lists the resulting deviation errors from generating a baud rate of 115.2 kHz, using different module clock frequencies. The fractional divider is enabled (fractional divider mode) and the corresponding parameter settings are shown.

Table 27 Deviation Error for UART with Fractional Divider enabled

f_{PCLK}	Prescaling Factor (2^{BRPRE})	Reload Value (BR_VALUE + 1)	STEP	Deviation Error
26.67 MHz	1	10 (A_H)	177 ($B1_H$)	+0.03 %
13.33 MHz	1	7 (7_H)	248 ($F8_H$)	+0.11 %
6.67 MHz	1	3 (3_H)	212 ($D4_H$)	-0.16 %

3.11.2 Baud Rate Generation using Timer 1

In UART modes 1 and 3, Timer 1 can be used for generating the variable baud rates. In theory, this timer could be used in any of its modes. But in practice, it should be set into auto-reload mode (Timer 1 mode 2), with its high byte set to the appropriate value for the required baud rate. The baud rate is determined by the Timer 1 overflow rate and the value of SMOD as follows:

[3.1]

$$\text{Mode 1, 3 baud rate} = \frac{2^{SMOD} \times f_{PCLK}}{32 \times 2 \times (256 - TH1)}$$

3.12 Normal Divider Mode (8-bit Auto-reload Timer)

Setting bit FDM in register FDCON to 1 configures the fractional divider to normal divider mode, while at the same time disables baud rate generation (see **Figure 29**). Once the fractional divider is enabled (FDEN = 1), it functions as an 8-bit auto-reload timer (with no relation to baud rate generation) and counts up from the reload value with each input clock pulse. Bit field RESULT in register FDRES represents the timer value, while bit field STEP in register FDSTEP defines the reload value. At each timer overflow, an overflow flag (FDCON.NDOV) will be set and an interrupt request generated. This gives an output clock f_{MOD} that is 1/n of the input clock f_{DIV}, where n is defined by 256 - STEP.

The output frequency in normal divider mode is derived as follows:

[3.2]

$$f_{MOD} = f_{DIV} \times \frac{1}{256 - STEP}$$

3.13 LIN Protocol

The UART can be used to support the Local Interconnect Network (LIN) protocol for both master and slave operations. The LIN baud rate detection feature provides the capability to detect the baud rate within LIN protocol using Timer 2. This allows the UART to be synchronized to the LIN baud rate for data transmission and reception.

LIN is a holistic communication concept for local interconnected networks in vehicles. The communication is based on the SCI (UART) data format, a single-master/multiple-slave concept, a clock synchronization for nodes without stabilized time base. An attractive feature of LIN is self-synchronization of the slave nodes without a crystal or ceramic resonator, which significantly reduces the cost of hardware platform. Hence, the baud rate must be calculated and returned with every message frame.

The structure of a LIN frame is shown in **Figure 30**. The frame consists of the:

- header, which comprises a Break (13-bit time low), Synch Byte (55_H), and ID field
- response time
- data bytes (according to UART protocol)
- checksum

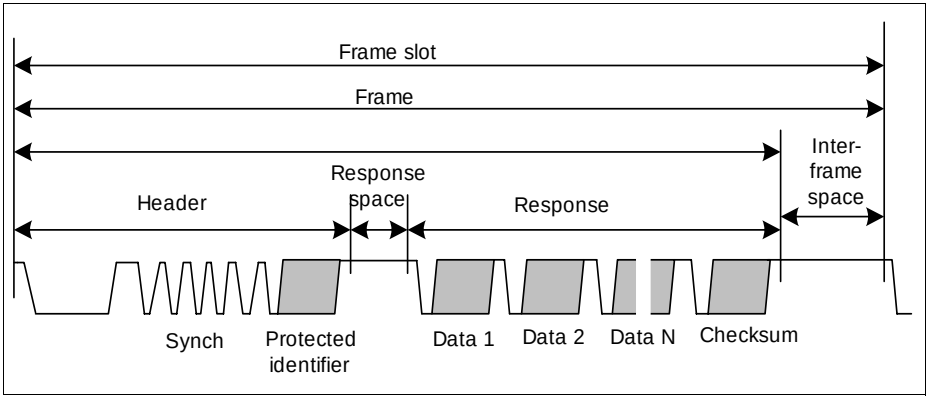

Figure 30 Structure of LIN Frame

3.13.1 LIN Header Transmission

LIN header transmission is only applicable in master mode. In the LIN communication, a master task decides when and which frame is to be transferred on the bus. It also identifies a slave task to provide the data transported by each frame. The information needed for the handshaking between the master and slave tasks is provided by the master task through the header portion of the frame.

The header consists of a break and synch pattern followed by an identifier. Among these three fields, only the break pattern cannot be transmitted as a normal 8-bit UART data.

The break must contain a dominant value of 13 bits or more to ensure proper synchronization of slave nodes.

In the LIN communication, a slave task is required to be synchronized at the beginning of the protected identifier field of frame. For this purpose, every frame starts with a sequence consisting of a break field followed by a synch byte field. This sequence is unique and provides enough information for any slave task to detect the beginning of a new frame and be synchronized at the start of the identifier field.

Upon entering LIN communication, a connection is established and the transfer speed (baud rate) of the serial communication partner (host) is automatically synchronized in the following steps:

STEP 1: Initialize interface for reception and timer for baud rate measurement

STEP 2: Wait for an incoming LIN frame from host

STEP 3: Synchronize the baud rate to the host

STEP 4: Enter for Master Request Frame or for Slave Response Frame

*Note: Re-synchronization and setup of baud rate are always done for **every** Master Request Header or Slave Response Header LIN frame.*

3.14 High-Speed Synchronous Serial Interface

The High-Speed Synchronous Serial Interface (SSC) supports full-duplex and half-duplex synchronous communication. The serial clock signal can be generated by the SSC internally (master mode), using its own 16-bit baud-rate generator, or can be received from an external master (slave mode). Data width, shift direction, clock polarity and phase are programmable. This allows communication with SPI-compatible devices or devices using other synchronous serial interfaces.

Features:

- Master and slave mode operation
  - Full-duplex or half-duplex operation
- Transmit and receive buffered
- Flexible data format
  - Programmable number of data bits: 2 to 8 bits
  - Programmable shift direction: LSB or MSB shift first
  - Programmable clock polarity: idle low or high state for the shift clock
  - Programmable clock/data phase: data shift with leading or trailing edge of the shift clock
- Variable baud rate
- Compatible with Serial Peripheral Interface (SPI)
- Interrupt generation
  - On a transmitter empty condition
  - On a receiver full condition
  - On an error condition (receive, phase, baud rate, transmit error)

Data is transmitted or received on lines TXD and RXD, which are normally connected to the pins MTSR (Master Transmit/Slave Receive) and MRST (Master Receive/Slave Transmit). The clock signal is output via line MS_CLK (Master Serial Shift Clock) or input via line SS_CLK (Slave Serial Shift Clock). Both lines are normally connected to the pin SCLK. Transmission and reception of data are double-buffered.

Figure 31 shows the block diagram of the SSC.

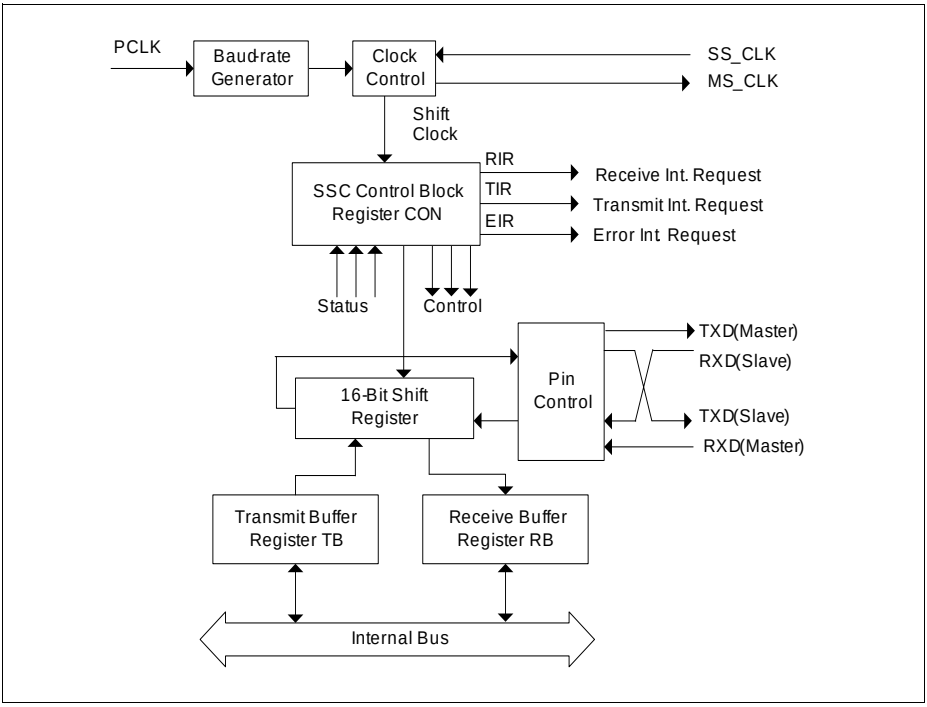

Figure 31 SSC Block Diagram

3.15 Timer 0 and Timer 1

Timers 0 and 1 are count-up timers which are incremented every machine cycle, or in terms of the input clock, every 2 PCLK cycles. They are fully compatible and can be configured in four different operating modes for use in a variety of applications, see **Table 28**. In modes 0, 1 and 2, the two timers operate independently, but in mode 3, their functions are specialized.

Table 28 Timer 0 and Timer 1 Modes

Mode	Operation
0	**13-bit timer** The timer is essentially an 8-bit counter with a divide-by-32 prescaler. This mode is included solely for compatibility with Intel 8048 devices.
1	**16-bit timer** The timer registers, TLx and THx, are concatenated to form a 16-bit counter.
2	**8-bit timer with auto-reload** The timer register TLx is reloaded with a user-defined 8-bit value in THx upon overflow.
3	**Timer 0 operates as two 8-bit timers** The timer registers, TL0 and TH0, operate as two separate 8-bit counters. Timer 1 is halted and retains its count even if enabled.

3.16 Timer 2

Timer 2 is a 16-bit general purpose timer (THL2) that has two modes of operation, a 16-bit auto-reload mode and a 16-bit one channel capture mode. If the prescalar is disabled, Timer 2 counts with an input clock of PCLK/12. Timer 2 continues counting as long as it is enabled.

Table 29 Timer 2 Modes

Mode	Description
Auto-reload	**Up/Down Count Disabled** • Count up only • Start counting from 16-bit reload value, overflow at $FFFF_H$ • Reload event configurable for trigger by overflow condition only, or by negative/positive edge at input pin T2EX as well • Programmble reload value in register RC2 • Interrupt is generated with reload event
	Up/Down Count Enabled • Count up or down, direction determined by level at input pin T2EX • No interrupt is generated • Count up – Start counting from 16-bit reload value, overflow at $FFFF_H$ – Reload event triggered by overflow condition – Programmble reload value in register RC2 • Count down – Start counting from $FFFF_H$, underflow at value defined in register RC2 – Reload event triggered by underflow condition – Reload value fixed at $FFFF_H$
Channel capture	• Count up only • Start counting from 0000_H, overflow at $FFFF_H$ • Reload event triggered by overflow condition • Reload value fixed at 0000_H • Capture event triggered by falling/rising edge at pin T2EX • Captured timer value stored in register RC2 • Interrupt is generated with reload or capture event

3.17 Capture/Compare Unit 6

The Capture/Compare Unit 6 (CCU6) provides two independent timers (T12, T13), which can be used for Pulse Width Modulation (PWM) generation, especially for AC-motor control. The CCU6 also supports special control modes for block commutation and multi-phase machines.

The timer T12 can function in capture and/or compare mode for its three channels. The timer T13 can work in compare mode only.

The multi-channel control unit generates output patterns, which can be modulated by T12 and/or T13. The modulation sources can be selected and combined for the signal modulation.

Timer T12 Features:

- Three capture/compare channels, each channel can be used either as a capture or as a compare channel
- Supports generation of a three-phase PWM (six outputs, individual signals for highside and lowside switches)
- 16-bit resolution, maximum count frequency = peripheral clock frequency
- Dead-time control for each channel to avoid short-circuits in the power stage
- Concurrent update of the required T12/13 registers
- Generation of center-aligned and edge-aligned PWM
- Supports single-shot mode
- Supports many interrupt request sources
- Hysteresis-like control mode

Timer T13 Features:

- One independent compare channel with one output
- 16-bit resolution, maximum count frequency = peripheral clock frequency
- Can be synchronized to T12
- Interrupt generation at period-match and compare-match
- Supports single-shot mode

Additional Features:

- Implements block commutation for Brushless DC-drives
- Position detection via Hall-sensor pattern
- Automatic rotational speed measurement for block commutation
- Integrated error handling
- Fast emergency stop without CPU load via external signal ($\overline{\text{CTRAP}}$)
- Control modes for multi-channel AC-drives
- Output levels can be selected and adapted to the power stage

The block diagram of the CCU6 module is shown in **Figure 32**.

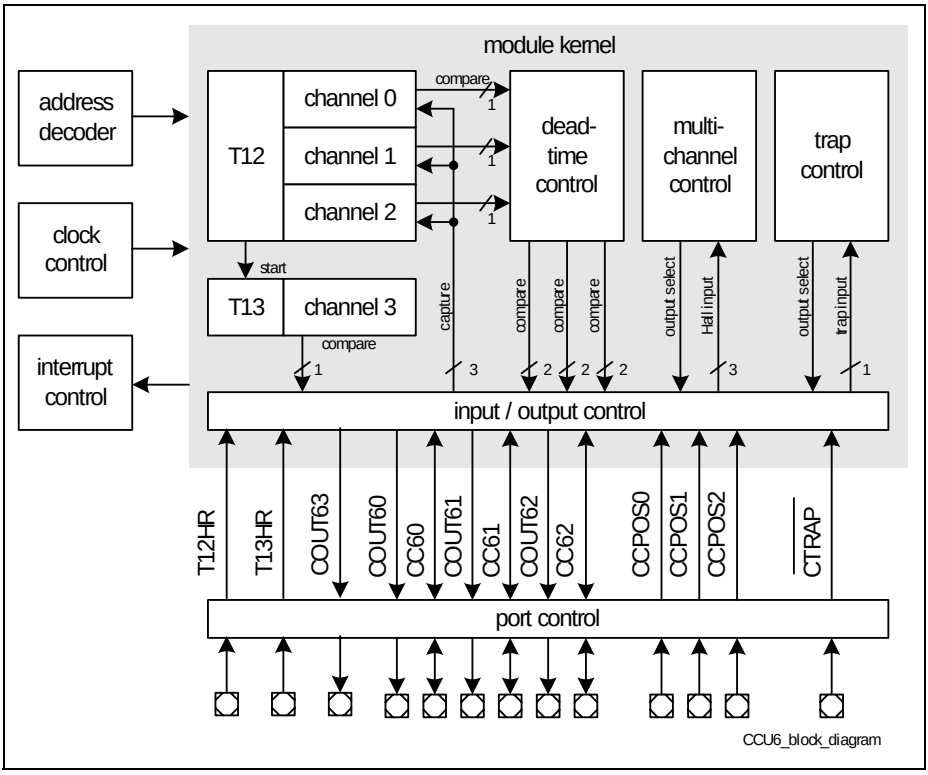

Figure 32 CCU6 Block Diagram

3.18 Analog-to-Digital Converter

The SAA-XC866 includes a high-performance 10-bit Analog-to-Digital Converter (ADC) with eight multiplexed analog input channels. The ADC uses a successive approximation technique to convert the analog voltage levels from up to eight different sources. The analog input channels of the ADC are available at Port 2.

Features:

- Successive approximation
- 8-bit or 10-bit resolution
  (TUE of ± 1 LSB and ± 2 LSB, respectively)
- Eight analog channels
- Four independent result registers
- Result data protection for slow CPU access
  (wait-for-read mode)
- Single conversion mode
- Autoscan functionality
- Limit checking for conversion results
- Data reduction filter
  (accumulation of up to 2 conversion results)
- Two independent conversion request sources with programmable priority
- Selectable conversion request trigger
- Flexible interrupt generation with configurable service nodes
- Programmable sample time
- Programmable clock divider
- Cancel/restart feature for running conversions
- Integrated sample and hold circuitry
- Compensation of offset errors
- Low power modes

3.18.1 ADC Clocking Scheme

A common module clock f_{ADC} generates the various clock signals used by the analog and digital parts of the ADC module:

- f_{ADCA} is input clock for the analog part.
- f_{ADCI} is internal clock for the analog part (defines the time base for conversion length and the sample time). This clock is generated internally in the analog part, based on the input clock f_{ADCA} to generate a correct duty cycle for the analog components.
- f_{ADCD} is input clock for the digital part.

The internal clock for the analog part f_{ADCI} is limited to a maximum frequency of 10 MHz. Therefore, the ADC clock prescaler must be programmed to a value that ensures f_{ADCI} does not exceed 10 MHz. The prescaler ratio is selected by bit field CTC in register GLOBCTR. A prescaling ratio of 32 can be selected when the maximum performance of the ADC is not required.

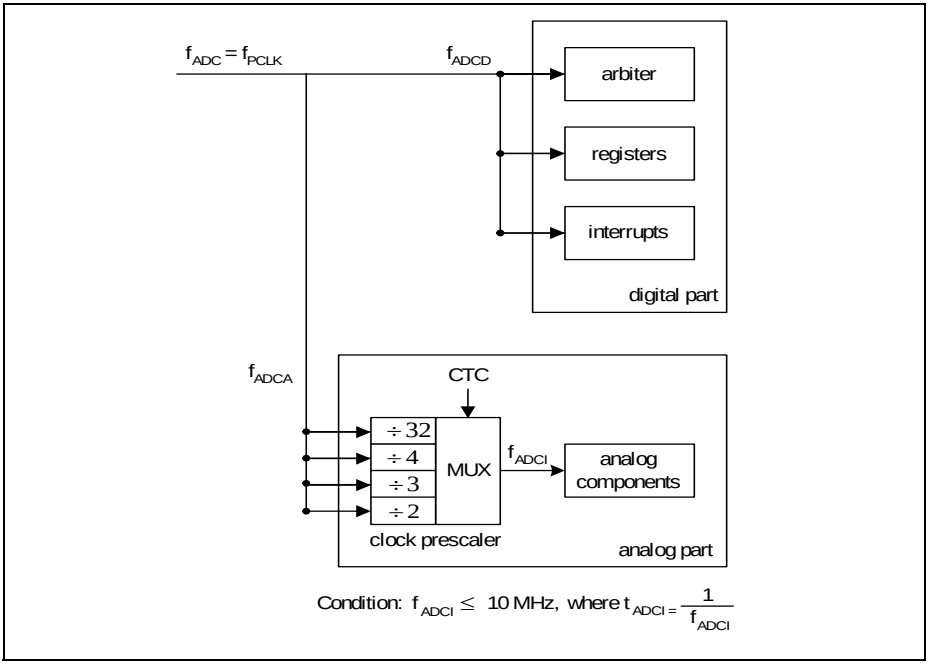

Figure 33 ADC Clocking Scheme

For module clock f_{ADC} = 26.7 MHz, the analog clock f_{ADCI} frequency can be selected as shown in **Table 30**.

Table 30 f_{ADCI} Frequency Selection

Module Clock f_{ADC}	CTC	Prescaling Ratio	Analog Clock f_{ADCI}
26.7 MHz	00_B	÷ 2	13.3 MHz (N.A)
	01_B	÷ 3	8.9 MHz
	10_B	÷ 4	6.7 MHz
	11_B (default)	÷ 32	833.3 kHz

As f_{ADCI} cannot exceed 10 MHz, bit field CTC should not be set to 00_B when f_{ADC} is 26.7 MHz. During slow-down mode where f_{ADC} may be reduced to 13.3 MHz, 6.7 MHz etc., CTC can be set to 00_B as long as the divided analog clock f_{ADCI} does not exceed 10 MHz. However, it is important to note that the conversion error could increase due to loss of charges on the capacitors, if f_{ADC} becomes too low during slow-down mode.

3.18.2 ADC Conversion Sequence

The analog-to-digital conversion procedure consists of the following phases:

- Synchronization phase (t_{SYN})
- Sample phase (t_S)
- Conversion phase
- Write result phase (t_{WR})

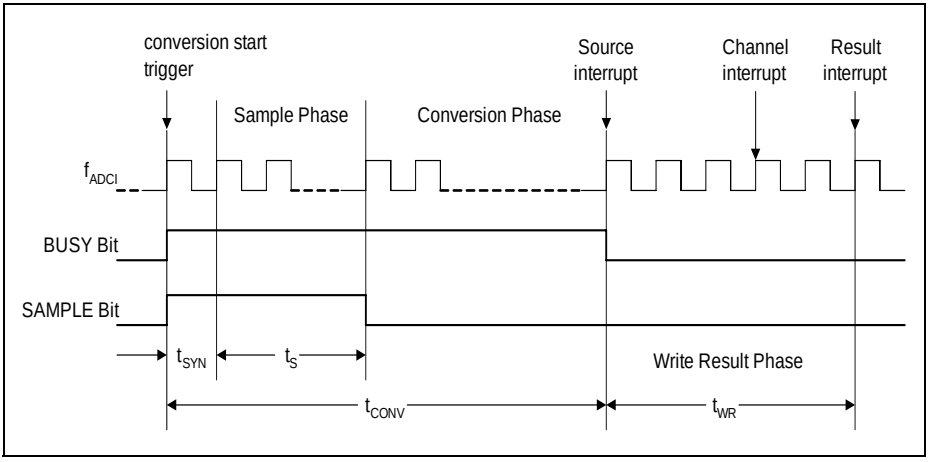

Figure 34 ADC Conversion Timing

3.19 On-Chip Debug Support

The On-Chip Debug Support (OCDS) provides the basic functionality required for the software development and debugging of XC800-based systems.

The OCDS design is based on these principles:

- use the built-in debug functionality of the XC800 Core
- add a minimum of hardware overhead
- provide support for most of the operations by a Monitor Program
- use standard interfaces to communicate with the Host (a Debugger)

Features:

- Set breakpoints on instruction address and within a specified address range
- Set breakpoints on internal RAM address
- Support unlimited software breakpoints in Flash/RAM code region
- Process external breaks
- Step through the program code

The OCDS functional blocks are shown in **Figure 35**. The Monitor Mode Control (MMC) block at the center of OCDS system brings together control signals and supports the overall functionality. The MMC communicates with the XC800 Core, primarily via the Debug Interface, and also receives reset and clock signals. After processing memory address and control signals from the core, the MMC provides proper access to the dedicated extra-memories: a Monitor ROM (holding the code) and a Monitor RAM (for work-data and Monitor-stack). The OCDS system is accessed through the JTAG[1)], which is an interface dedicated exclusively for testing and debugging activities and is not normally used in an application. The dedicated MBC pin is used for external configuration and debugging control.

Note: All the debug functionality described here can normally be used only after SAA-XC866 has been started in OCDS mode.

1) The pins of the JTAG port can be assigned to either Port 0 (primary) or Ports 1 and 2 (secondary). User must set the JTAG pins (TCK and TDI) as input during connection with the OCDS system.

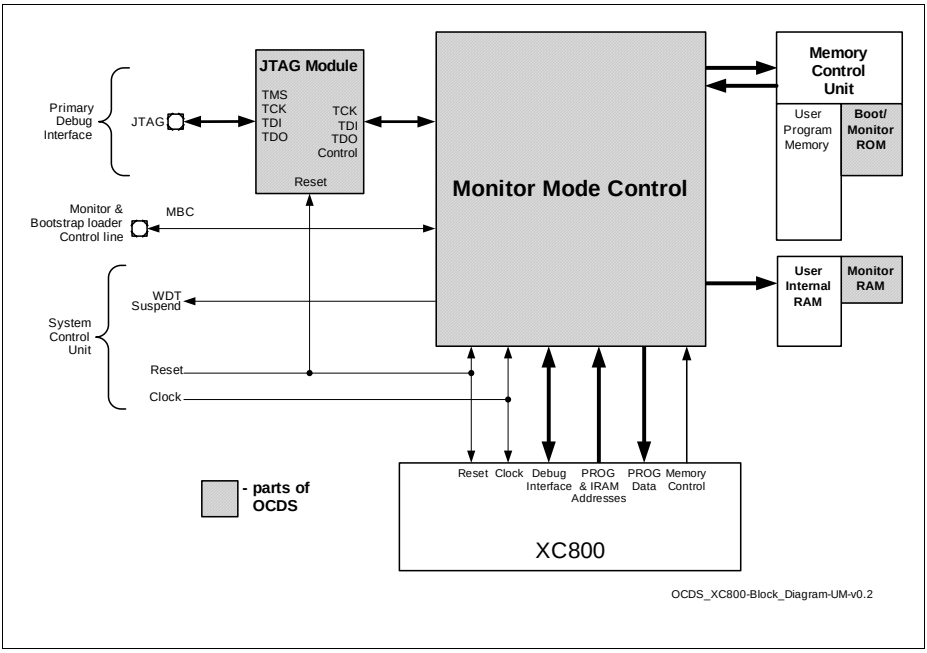

Figure 35 OCDS Block Diagram

3.19.1 JTAG ID Register

This is a read-only register located inside the JTAG module, and is used to recognize the device(s) connected to the JTAG interface. Its content is shifted out when INSTRUCTION register contains the IDCODE command (opcode 04_H), and the same is also true immediately after reset.

The JTAG ID register contents for the SAA-XC866 devices are given in **Table 31**.

Table 31 JTAG ID Summary

Device Type	Device Name	JTAG ID
Flash	SAA-XC866L-4FRA	$1010\ 0083_H$
	SAA-XC866-4FRA	$100F\ 5083_H$
	SAA-XC866L-2FRA	$1010\ 2083_H$
	SAA-XC866-2FRA	$1010\ 1083_H$
	SAA-XC866L-1FRA	$1013\ 8083_H$
	SAA-XC866-1FRA	$1013\ 8083_H$

Table 31 JTAG ID Summary

ROM	SAA-XC866L-4RRA	1013 9083$_H$
	SAA-XC866-4RRA	1013 9083$_H$
	SAA-XC866L-2RRA	1013 9083$_H$
	SAA-XC866-2RRA	1013 9083$_H$

3.20 Identification Register

The SAA-XC866 identity register is located at Page 1 of address B3$_H$.

ID
Identity Register **Reset Value: 0000 0010$_B$**

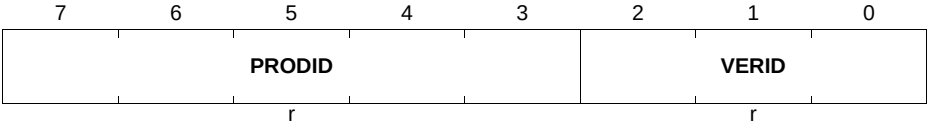

Field	Bits	Type	Description
VERID	[2:0]	r	**Version ID** 010$_B$
PRODID	[7:3]	r	**Product ID** 00000$_B$

4 Electrical Parameters

Chapter 4 provides the characteristics of the electrical parameters which are implementation-specific for the SAA-XC866.

4.1 General Parameters

The general parameters are described here to aid the users in interpreting the parameters mainly in **Section 4.2** and **Section 4.3**.

4.1.1 Parameter Interpretation

The parameters listed in this section represent partly the characteristics of the SAA-XC866 and partly its requirements on the system. To aid interpreting the parameters easily when evaluating them for a design, they are indicated by the abbreviations in the “Symbol” column:

- **CC**
  These parameters indicate **C**ontroller **C**haracteristics, which are distinctive features of the SAA-XC866 and must be regarded for a system design.
- **SR**
  These parameters indicate **S**ystem **R**equirements, which must be provided by the microcontroller system in which the SAA-XC866 is designed in.

4.1.2 Absolute Maximum Rating

Maximum ratings are the extreme limits to which the SAA-XC866 can be subjected to without permanent damage.

Table 32 Absolute Maximum Rating Parameters

Parameter	Symbol	Limit Values		Unit	Notes
		min.	max.		
Ambient temperature	T_A	-40	140	°C	under bias
Storage temperature	T_{ST}	-65	150	°C	1)
Junction temperature	T_J	-40	150	°C	under bias1)
Voltage on power supply pin with respect to V_{SS}	V_{DDP}	-0.5	6	V	1)
Voltage on core supply pin with respect to V_{SS}	V_{DDC}	-0.5	3.25	V	1)
Voltage on any pin with respect to V_{SS}	V_{IN}	-0.5	V_{DDP} + 0.5 or max. 6	V	Whichever is lower1)
Input current on any pin during overload condition	I_{IN}	-10	10	mA	1)
Absolute sum of all input currents during overload condition	$\Sigma\|I_{IN}\|$	–	50	mA	1)

1) Not subjected to production test, verified by design/characterization.

Note: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. During absolute maximum rating overload conditions ($V_{IN} > V_{DDP}$ or $V_{IN} < V_{SS}$) the voltage on V_{DDP} pin with respect to ground (V_{SS}) must not exceed the values defined by the absolute maximum ratings.

4.1.3 Operating Conditions

The following operating conditions must not be exceeded in order to ensure correct operation of the SAA-XC866. All parameters mentioned in the following table refer to these operating conditions, unless otherwise noted.

Table 33 Operating Condition Parameters

Parameter	Symbol	Limit Values		Unit	Notes/ Conditions
		min.	max.		
Digital power supply voltage	V_{DDP}	4.5	5.5	V	5V Device
Digital power supply voltage	V_{DDP}	3.0	3.6	V	3.3V Device
Digital ground voltage	V_{SS}	0		V	
Digital core supply voltage	V_{DDC}	2.3	2.7	V	
System Clock Frequency[1)]	f_{SYS}	74	86	MHz	
Ambient temperature	T_A	-40	140	°C	SAA-XC866...

1) f_{SYS} is the PLL output clock. During normal operating mode, CPU clock is f_{SYS} / 3. Please refer to **Figure 25** for detailed description.

4.2 DC Parameters

4.2.1 Input/Output Characteristics

Table 34 Input/Output Characteristics (Operating Conditions apply)

Parameter	Symbol		Limit Values		Unit	Test Conditions
			min.	max.		
V_{DDP} = 5V Range						
Output low voltage	V_{OL}	CC	–	1.0	V	I_{OL} = 15 mA
			–	0.4	V	I_{OL} = 5 mA
Output high voltage	V_{OH}	CC	V_{DDP} - 1.0	–	V	I_{OH} = -15 mA
			V_{DDP} - 0.4	–	V	I_{OH} = -5 mA
Input low voltage on port pins (all except P0.0 & P0.1)	V_{ILP}	SR	–	0.3 × V_{DDP}	V	CMOS Mode
Input low voltage on P0.0 & P0.1	V_{ILP0}	SR	-0.2	0.3 × V_{DDP}	V	CMOS Mode
Input low voltage on $\overline{\text{RESET}}$ pin	V_{ILR}	SR	–	0.3 × V_{DDP}	V	CMOS Mode
Input low voltage on TMS pin	V_{ILT}	SR	–	0.3 × V_{DDP}	V	CMOS Mode
Input high voltage on port pins (all except P0.0 & P0.1)	V_{IHP}	SR	0.7 × V_{DDP}	–	V	CMOS Mode
Input high voltage on P0.0 & P0.1	V_{IHP0}	SR	0.7 × V_{DDP}	V_{DDP}	V	CMOS Mode
Input high voltage on $\overline{\text{RESET}}$ pin	V_{IHR}	SR	0.7 × V_{DDP}	–	V	CMOS Mode
Input high voltage on TMS pin	V_{IHT}	SR	0.75 × V_{DDP}	–	V	CMOS Mode
Input Hysteresis[1] on Port Pins	HYS	CC	0.08 × V_{DDP}	–	V	CMOS Mode
Input Hysteresis[1] on XTAL1	$HYSX$	CC	0.07 × V_{DDC}	–	V	

Table 34 Input/Output Characteristics (Operating Conditions apply)

Parameter	Symbol		Limit Values		Unit	Test Conditions
			min.	max.		
Input low voltage at XTAL1	V_{ILX}	SR	V_{SS} - 0.5	0.3 × V_{DDC}	V	
Input high voltage at XTAL1	V_{IHX}	SR	0.7 × V_{DDC}	V_{DDC} + 0.5	V	
Pull-up current	I_{PU}	SR	–	-10	µA	$V_{IH,min}$
			-150	–	µA	$V_{IL,max}$
Pull-down current	I_{PD}	SR	–	10	µA	$V_{IL,max}$
			150	–	µA	$V_{IH,min}$
Input leakage current[2)]	I_{OZ1}	CC	-2	2	µA	$0 < V_{IN} < V_{DDP}$, $T_A \leq 140°C$
Input current at XTAL1	I_{ILX}	CC	-10	10	µA	
Overload current on any pin	I_{OV}	SR	-5	5	mA	[3)]
Absolute sum of overload currents	$\Sigma\|I_{OV}\|$	SR	–	25	mA	[3)]
Voltage on any pin during V_{DDP} power off	V_{PO}	SR	–	0.3	V	[4)]
Maximum current per pin (excluding V_{DDP} and V_{SS})	I_M	SR	–	15	mA	
Maximum current for all pins (excluding V_{DDP} and V_{SS})	$\Sigma\|I_M\|$	SR	–	60	mA	
Maximum current into V_{DDP}	I_{MVDDP}	SR	–	80	mA	[3)]
Maximum current out of V_{SS}	I_{MVSS}	SR	–	80	mA	[3)]

Table 34 Input/Output Characteristics (Operating Conditions apply)

Parameter	Symbol		Limit Values		Unit	Test Conditions
			min.	max.		
V_{DDP} = 3.3V Range						
Output low voltage	V_{OL}	CC	–	1.0	V	I_{OL} = 8 mA
			–	0.4	V	I_{OL} = 2.5 mA
Output high voltage	V_{OH}	CC	V_{DDP} - 1.0	–	V	I_{OH} = -8 mA
			V_{DDP} - 0.4	–	V	I_{OH} = -2.5 mA
Input low voltage on port pins (all except P0.0 & P0.1)	V_{ILP}	SR	–	0.3 × V_{DDP}	V	CMOS Mode
Input low voltage on P0.0 & P0.1	V_{ILP0}	SR	-0.2	0.3 × V_{DDP}	V	CMOS Mode
Input low voltage on $\overline{\text{RESET}}$ pin	V_{ILR}	SR	–	0.3 × V_{DDP}	V	CMOS Mode
Input low voltage on TMS pin	V_{ILT}	SR	–	0.3 × V_{DDP}	V	CMOS Mode
Input high voltage on port pins (all except P0.0 & P0.1)	V_{IHP}	SR	0.7 × V_{DDP}	–	V	CMOS Mode
Input high voltage on P0.0 & P0.1	V_{IHP0}	SR	0.7 × V_{DDP}	V_{DDP}	V	CMOS Mode
Input high voltage on $\overline{\text{RESET}}$ pin	V_{IHR}	SR	0.7 × V_{DDP}	–	V	CMOS Mode
Input high voltage on TMS pin	V_{IHT}	SR	0.75 × V_{DDP}	–	V	CMOS Mode
Input Hysteresis[1] on Port Pins	HYS	CC	0.03 × V_{DDP}	–	V	CMOS Mode
Input Hysteresis[1] on XTAL1	$HYSX$	CC	0.07 × V_{DDC}	–	V	
Input low voltage at XTAL1	V_{ILX}	SR	V_{SS} - 0.5	0.3 × V_{DDC}	V	
Input high voltage at XTAL1	V_{IHX}	SR	0.7 × V_{DDC}	V_{DDC} + 0.5	V	

Table 34 Input/Output Characteristics (Operating Conditions apply)

Parameter	Symbol		Limit Values		Unit	Test Conditions
			min.	max.		
Pull-up current	I_{PU}	SR	–	-5	µA	$V_{IH,min}$
			-50	–	µA	$V_{IL,max}$
Pull-down current	I_{PD}	SR	–	5	µA	$V_{IL,max}$
			50	–	µA	$V_{IH,min}$
Input leakage current[2]	I_{OZ1}	CC	-2	2	µA	$0 < V_{IN} < V_{DDP}$, $T_A \leq 140°C$
Input current at XTAL1	I_{ILX}	CC	- 10	10	µA	
Overload current on any pin	I_{OV}	SR	-5	5	mA	[3]
Absolute sum of overload currents	$\Sigma\|I_{OV}\|$	SR	–	25	mA	[3]
Voltage on any pin during V_{DDP} power off	V_{PO}	SR	–	0.3	V	[4]
Maximum current per pin (excluding V_{DDP} and V_{SS})	I_M	SR	–	15	mA	
Maximum current for all pins (excluding V_{DDP} and V_{SS})	$\Sigma\|I_M\|$	SR	–	60	mA	
Maximum current into V_{DDP}	I_{MVDDP}	SR	–	80	mA	
Maximum current out of V_{SS}	I_{MVSS}	SR	–	80	mA	

[1] Not subjected to production test, verified by design/characterization. Hysteresis is implemented to avoid meta stable states and switching due to internal ground bounce. It cannot be guaranteed that it suppresses switching due to external system noise.

[2] An additional error current (I_{INJ}) will flow if an overload current flows through an adjacent pin. TMS pin and $\overline{\text{RESET}}$ pin have internal pull devices and are not included in the input leakage current characteristic.

[3] Not subjected to production test, verified by design/characterization.

[4] Not subjected to production test, verified by design/characterization. However, for applications with strict low power-down current requirements, it is mandatory that no active voltage source is supplied at any GPIO pin when VDDP is powered off.

4.2.2 Supply Threshold Characteristics

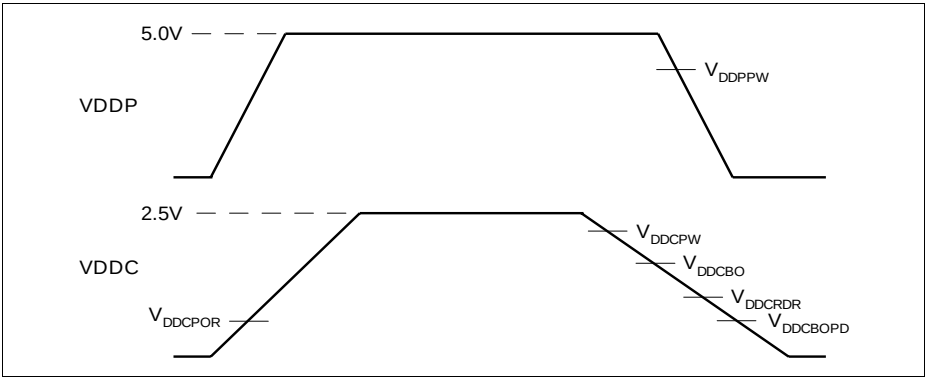

Figure 36 Supply Threshold Parameters

Table 35 Supply Threshold Parameters (Operating Conditions apply)

Parameters	Symbol		Limit Values			Unit
			min.	typ.	max.	
V_{DDC} prewarning voltage[1]	V_{DDCPW}	CC	2.2	2.3	2.4	V
V_{DDC} brownout voltage in active mode[1]	V_{DDCBO}	CC	2.0	2.1	2.2	V
RAM data retention voltage	V_{DDCRDR}	CC	0.9	1.0	1.1	V
V_{DDC} brownout voltage in power-down mode[2]	$V_{DDCBOPD}$	CC	1.3	1.5	1.7	V
V_{DDP} prewarning voltage[3]	V_{DDPPW}	CC	3.3	4.0	4.65	V
Power-on reset voltage[2][4]	V_{DDCPOR}	CC	1.3	1.5	1.7	V

1) Detection is disabled in power-down mode.

2) Detection is enabled in both active and power-down mode.

3) Detection is enabled for external power supply of 5.0V
Detection must be disabled for external power supply of 3.3V.

4) The reset of EVR is extended by 300 µs typically after the VDDC reaches the power-on reset voltage.

4.2.3 ADC Characteristics

The values in the table below are given for an analog power supply between 4.5 V to 5.5 V. The ADC can be used with an analog power supply down to 3 V. But in this case, the analog parameters may show a reduced performance. All ground pins (V_{SS}) must be externally connected to one single star point in the system. The voltage difference between the ground pins must not exceed 200mV.

Table 36 ADC Characteristics (Operating Conditions apply; V_{DDP} = 5V Range)

Parameter	Symbol	Limit Values			Unit	Test Conditions/ Remarks
		min.	typ .	max.		
Analog reference voltage	V_{AREF} SR	V_{AGND} + 1	V_{DDP}	V_{DDP} + 0.05	V	1)
Analog reference ground	V_{AGND} SR	V_{SS} - 0.05	V_{SS}	V_{AREF} - 1	V	1)
Analog input voltage range	V_{AIN} SR	V_{AGND}	–	V_{AREF}	V	
ADC clocks	f_{ADC}	–	20	40	MHz	module clock1)
	f_{ADCI}	–	–	10	MHz	internal analog clock1) See **Figure 33**
Sample time	t_S CC	(2 + INPCR0.STC) × t_{ADCI}			µs	1)
Conversion time	t_C CC	See **Section 4.2.3.1**			µs	1)
Total unadjusted error	TUE CC	–	–	1	LSB	8-bit conversion.2)
		–	–	2	LSB	10-bit conversion.2)
Differential Nonlinearity	$\|EA_{DNL}\|$ CC	–	1	–	LSB	10-bit conversion1)
Integral Nonlinearity	$\|EA_{INL}\|$ CC	–	1	–	LSB	10-bit conversion1)
Offset	$\|EA_{OFF}\|$ CC	–	1	–	LSB	10-bit conversion1)
Gain	$\|EA_{GAIN}\|$ CC	–	1	–	LSB	10-bit conversion1)
Overload current coupling factor for analog inputs	K_{OVA} CC	–	–	1.0×10^{-4}	–	$I_{OV} > 0$1)3)
		–	–	1.5×10^{-3}	–	$I_{OV} < 0$1)3)

Table 36 ADC Characteristics (Operating Conditions apply; V_{DDP} = 5V Range)

Parameter	Symbol	Limit Values			Unit	Test Conditions/ Remarks
		min.	typ .	max.		
Overload current coupling factor for digital I/O pins	K_{OVD} CC	–	–	5.0 x 10^{-3}	–	$I_{OV} > 0$ 1)3)
		–	–	1.0 x 10^{-2}	–	$I_{OV} < 0$ 1)3)
Switched capacitance at the reference voltage input	C_{AREFSW} CC	–	10	20	pF	1)4)
Switched capacitance at the analog voltage inputs	C_{AINSW} CC	–	5	7	pF	1)5)
Input resistance of the reference input	R_{AREF}CC	–	1	2	kΩ	1)
Input resistance of the selected analog channel	R_{AIN} CC	–	1	1.5	kΩ	1)

1) Not subject to production test, verified by design/characterization.

2) TUE is tested at V_{AREF} = 5.0 V, V_{AGND} = 0 V , V_{DDP} = 5.0 V.

3) An overload current (I_{OV}) through a pin injects a certain error current (I_{INJ}) into the adjacent pins. This error current adds to the respective pin's leakage current (I_{OZ}). The amount of error current depends on the overload current and is defined by the overload coupling factor K_{OV}. The polarity of the injected error current is inverse compared to the polarity of the overload current that produces it. The total current through a pin is $|I_{TOT}| = |I_{OZ1}| + (|I_{OV}| \times K_{OV})$. The additional error current may distort the input voltage on analog inputs.

4) This represents an equivalent switched capacitance. This capacitance is not switched to the reference voltage at once. Instead of this, smaller capacitances are successively switched to the reference voltage.

5) The sampling capacity of the conversion C-Network is pre-charged to $V_{AREF}/2$ before connecting the input to the C-Network. Because of the parasitic elements, the voltage measured at ANx is lower than $V_{AREF}/2$.

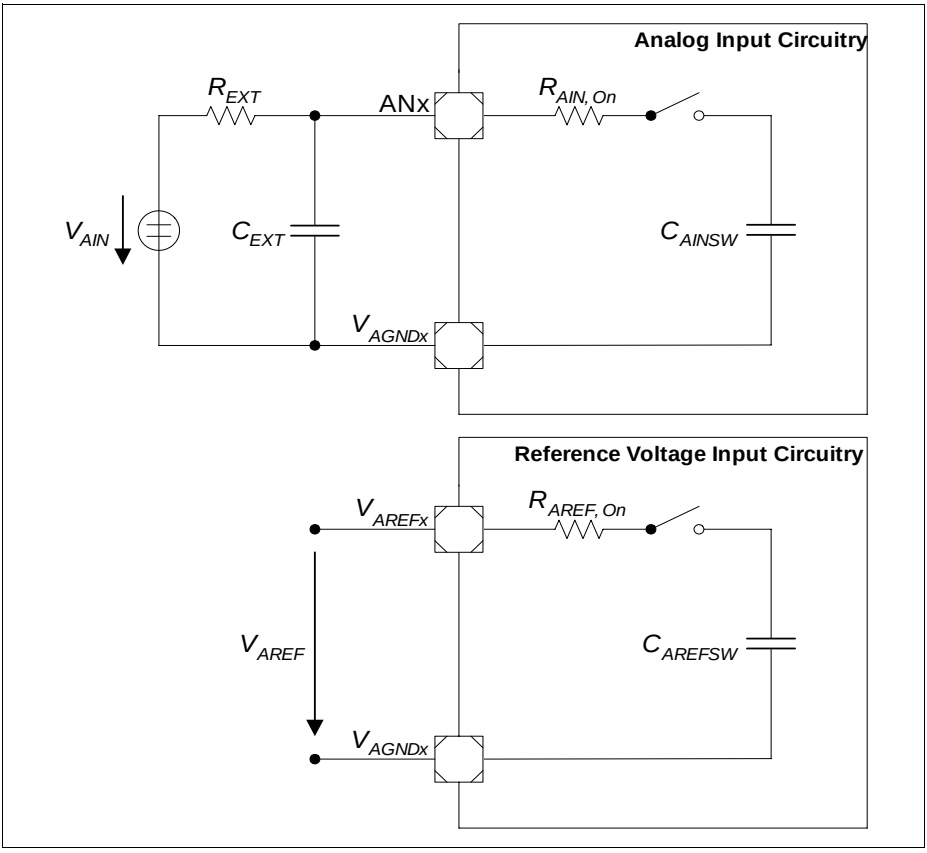

Figure 37 ADC Input Circuits

4.2.3.1 ADC Conversion Timing

Conversion time, $t_C = t_{ADC} \times (1 + r \times (3 + n + STC))$, where

r = CTC + 2 for CTC = 00_B, 01_B or 10_B,

r = 32 for CTC = 11_B,

CTC = Conversion Time Control (GLOBCTR.CTC),

STC = Sample Time Control (INPCR0.STC),

n = 8 or 10 (for 8-bit and 10-bit conversion respectively),

$t_{ADC} = 1 / f_{ADC}$

4.2.4 Power Supply Current

Table 37 Power Supply Current Parameters (Operating Conditions apply)

Parameter	Symbol	Limit Values		Unit	Test Condition
		typ.[1]	max.[2]		
Active Mode	I_{DDP}	22.6	24.5	mA	[3]
Idle Mode	I_{DDP}	17.2	19.7	mA	[4]
Active Mode with slow-down enabled	I_{DDP}	7.2	8.2	mA	[5]
Idle Mode with slow-down enabled	I_{DDP}	7.1	8	mA	[6]

1) The typical I_{DDP} values are periodically measured at T_A = + 25 °C and V_{DDP} = 5.0 V.

2) The maximum I_{DDP} values are measured under worst case conditions (T_A = + 140 °C and V_{DDP} = 5.5 V).

3) I_{DDP} (active mode) is measured with: CPU clock and input clock to all peripherals running at 26.7 MHz(set by on-chip oscillator of 10 MHz and NDIV in PLL_CON to 0010_B), $\overline{RESET}$ = V_{DDP}.

4) I_{DDP} (idle mode) is measured with: CPU clock disabled, watchdog timer disabled, input clock to all peripherals enabled and running at 26.7 MHz, $\overline{RESET}$ = V_{DDP}.

5) I_{DDP} (active mode with slow-down mode) is measured with: CPU clock and input clock to all peripherals running at 833 KHz by setting CLKREL in CMCON to 0101_B, $\overline{RESET}$ = V_{DDP}.

6) I_{DDP} (idle mode with slow-down mode) is measured with: CPU clock disabled, watchdog timer disabled, input clock to all peripherals enabled and running at 833 KHz by setting CLKREL in CMCON to 0101_B, $\overline{RESET}$ = V_{DDP}.

Table 38 Power Down Current (Operating Conditions apply)

Parameter	Symbol	Limit Values		Unit	Test Condition
		typ.[1]	max.[2]		
Power-Down Mode[3]	I_{PDP}	1	10	µA	T_A = + 25 °C.[4]
		-	30	µA	T_A = + 85 °C.[4][5]

1) The typical I_{PDP} values are measured at V_{DDP} = 5.0 V.

2) The maximum I_{PDP} values are measured at V_{DDP} = 5.5 V.

3) I_{PDP} (power-down mode) has a maximum value of 400 µA at T_A = + 140 °C.

4) I_{PDP} (power-down mode) is measured with: $\overline{\text{RESET}}$ = V_{DDP}, V_{AGND}= V_{SS}, RXD/INT0 = V_{DDP}; rest of the ports are programmed to be input with either internal pull devices enabled or driven externally to ensure no floating inputs.

5) Not subject to production test, verified by design/characterization.

4.3 AC Parameters

4.3.1 Testing Waveforms

The testing waveforms for rise/fall time, output delay and output high impedance are shown in **Figure 38**, **Figure 39** and **Figure 40**.

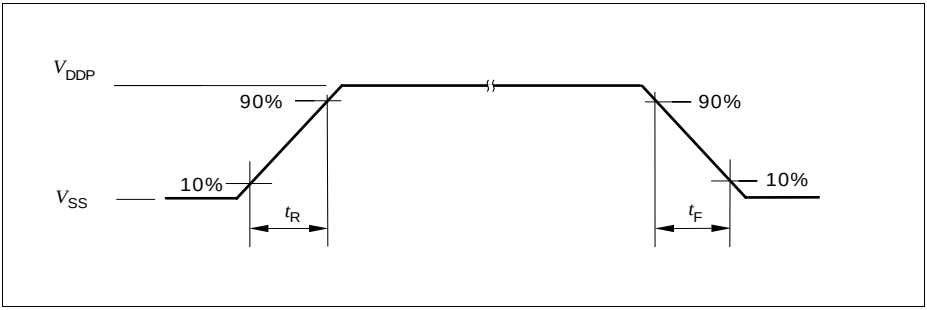

Figure 38 Rise/Fall Time Parameters

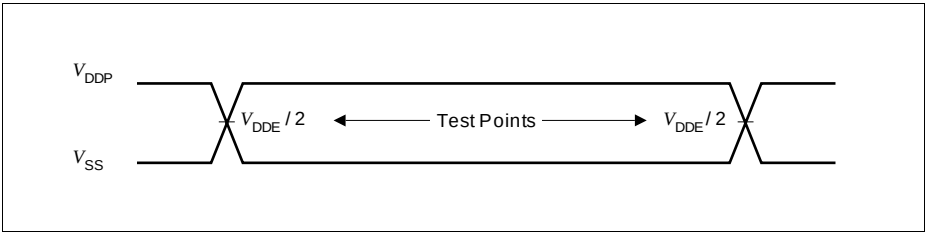

Figure 39 Testing Waveform, Output Delay

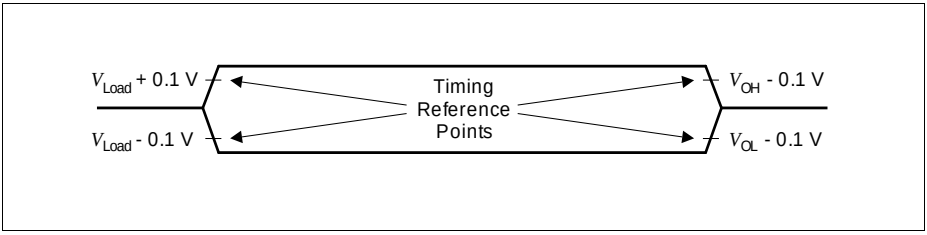

Figure 40 Testing Waveform, Output High Impedance

4.3.2 Output Rise/Fall Times

Table 39 Output Rise/Fall Times Parameters (Operating Conditions apply)

Parameter	Symbol	Limit Values		Unit	Test Conditions
		min.	max.		
V_{DDP} = 5V Range					
Rise/fall times [1] [2]	t_R, t_F	–	10	ns	20 pF. [3]
V_{DDP} = 3.3V Range					
Rise/fall times [1] [2]	t_R, t_F	–	10	ns	20 pF. [4]

[1] Rise/Fall time measurements are taken with 10% - 90% of the pad supply.

[2] Not all parameters are 100% tested, but are verified by design/characterization and test correlation.

[3] Additional rise/fall time valid for C_L = 20pF - 100pF @ 0.125 ns/pF.

[4] Additional rise/fall time valid for C_L = 20pF - 100pF @ 0.225 ns/pF.

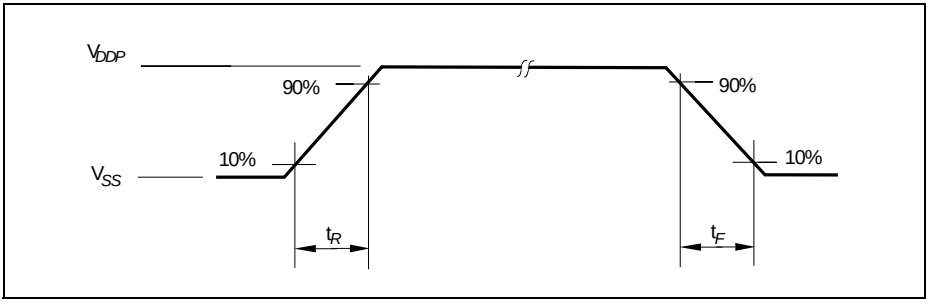

Figure 41 Rise/Fall Times Parameters

4.3.3 Power-on Reset and PLL Timing

Table 40 Power-On Reset and PLL Timing (Operating Conditions apply)

Parameter	Symbol	Limit Values			Unit	Test Conditions
		min.	typ.	max.		
Pad operating voltage	V_{PAD} CC	2.3	–	–	V	1)
On-Chip Oscillator start-up time	t_{OSCST} CC	–	–	500	ns	1)
Flash initialization time	t_{FINIT} CC	–	160	–	µs	1)
$\overline{\text{RESET}}$ hold time	t_{RST} SR	–	500	–	µs	V_{DDP} rise time (10% – 90%) ≤ 500µs 1)2)
PLL lock-in in time	t_{LOCK} CC	–	–	200	µs	1)
PLL accumulated jitter	D_P	–	–	0.7	ns	1)3)

1) Not all parameters are 100% tested, but are verified by design/characterization and test correlation.

2) $\overline{\text{RESET}}$ signal has to be active (low) until V_{DDC} has reached 90% of its maximum value (typ. 2.5V).

3) PLL lock at 80 MHz using a 4 MHz external oscillator. The PLL Divider settings are K = 2, N = 40 and P = 1.

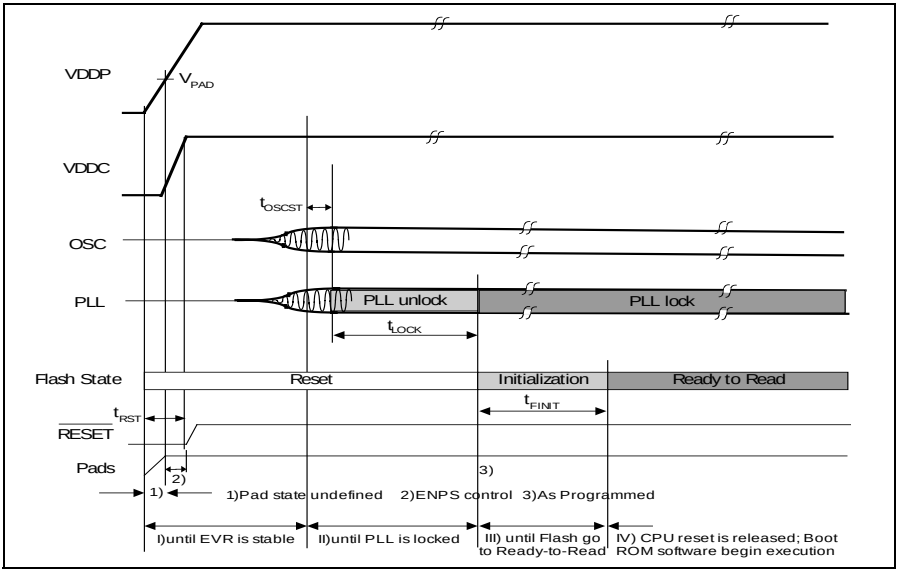

Figure 42 Power-on Reset Timing

4.3.4 On-Chip Oscillator Characteristics

Table 41 On-chip Oscillator Characteristics (Operating Conditions apply)

Parameter	Symbol	Limit Values			Unit	Test Conditions
		min.	typ.	max.		
Nominal frequency	f_{NOM} CC	9.75	10	10.25	MHz	under nominal conditions[1)]
Long term frequency deviation	Δf_{LT} CC	0	–	6.0	%	with respect to f_{NOM}, over lifetime and temperature (125°C to 140°C), for one device after trimming
		-5.0	–	5.0	%	with respect to f_{NOM}, over lifetime and temperature (–10°C to 125°C), for one device after trimming
		-6.0	–	0	%	with respect to f_{NOM}, over lifetime and temperature (–40°C to -10°C), for one device after trimming
Short term frequency deviation	Δf_{ST} CC	-1.0	–	1.0	%	within one LIN message (<10 ms .... 100 ms)

1) Nominal condition: V_{DDC} = 2.5 V, T_A = + 25°C.

4.3.5 JTAG Timing

Table 42 TCK Clock Timing (Operating Conditions apply; C_L = 50 pF)

Parameter	Symbol		Limits		Unit
			min	max	
TCK clock period[1)]	t_{TCK}	SR	50	–	ns
TCK high time[1)]	t_1	SR	20	–	ns
TCK low time[1)]	t_2	SR	20	–	ns
TCK clock rise time[1)]	t_3	SR	–	4	ns
TCK clock fall time[1)]	t_4	SR	–	4	ns

1) Not all parameters are 100% tested, but are verified by design/characterization and test correlation.

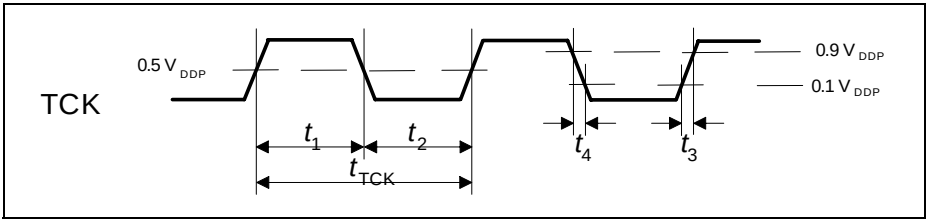

Figure 43 TCK Clock Timing

Table 43 JTAG Timing (Operating Conditions apply; C_L = 50 pF)

Parameter	Symbol		Limits		Unit
			min	max	
TMS setup to TCK[1] ↓	t_1	SR	8.0	–	ns
TMS hold to TCK[1] ↓	t_2	SR	5.0	–	ns
TDI setup to TCK[1] ↓	t_1	SR	11.0	–	ns
TDI hold to TCK[1] ↓	t_2	SR	6.0	–	ns
TDO valid output from TCK[1] ↓	t_3	CC	–	23	ns
TDO high impedance to valid output from TCK[1] ↓	t_4	CC	–	26	ns
TDO valid output to high impedance from TCK[1] ↓	t_5	CC	–	18	ns

[1] Not all parameters are 100% tested, but are verified by design/characterization and test correlation.

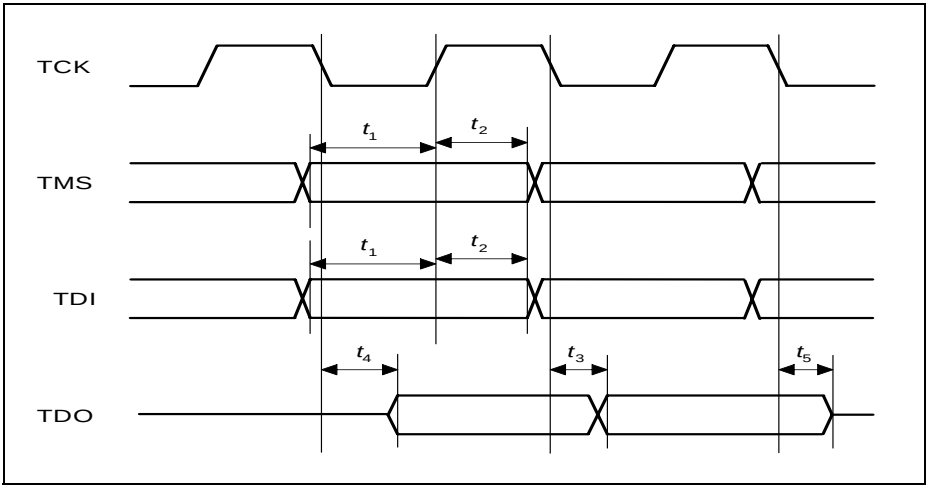

Figure 44 JTAG Timing

4.3.6 SSC Master Mode Timing

Table 44 SSC Master Mode Timing (Operating Conditions apply; C_L = 50 pF)

Parameter	Symbol		Limit Values		Unit
			min.	max.	
SCLK clock period[1]	t_0	CC	2*T_{SSC} [2]	–	ns
MTSR delay from SCLK[1] ↓	t_1	CC	0	8	ns
MRST setup to SCLK[1] ↓	t_2	SR	22	–	ns
MRST hold from SCLK[1] ↓	t_3	SR	0	–	ns

1) Not all parameters are 100% tested, but are verified by design/characterization and test correlation.

2) $T_{SSCmin} = T_{CPU} = 1/f_{CPU}$. When f_{CPU} = 26.7MHz, t_0 = 74.9ns. T_{CPU} is the CPU clock period.

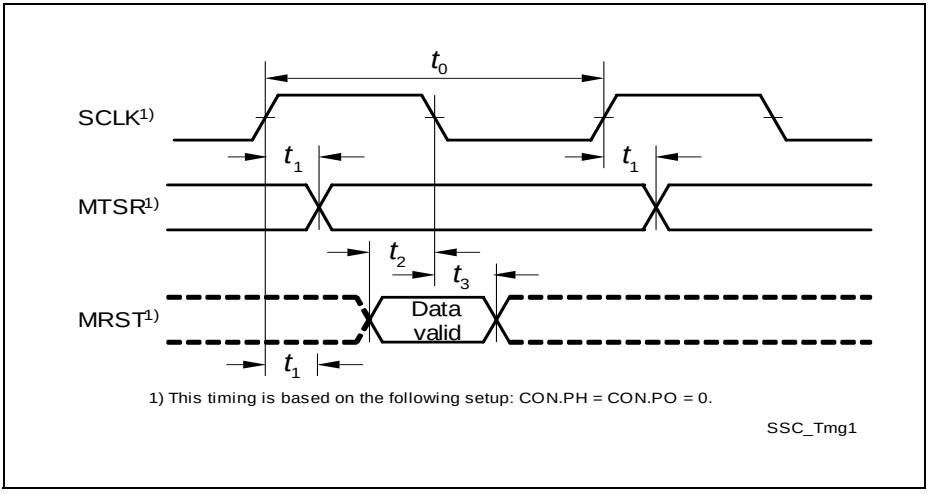

Figure 45 SSC Master Mode Timing

5 Package and Reliability

5.1 Package Parameters (PG-TSSOP-38)

Table 45 provides the thermal characteristics of the package.

Table 45 Thermal Characteristics of the Package

Parameter	Symbol		Limit Values		Unit	Notes
			Min.	Max.		
Thermal resistance junction case[1)2)]	R_{TJC}	CC	–	15.7	K/W	–
Thermal resistance junction lead[1)2)]	R_{TJL}	CC	–	39.2	K/W	–

1) The thermal resistances between the case and the ambient (R_{TCA}), the lead and the ambient (R_{TLA}) are to be combined with the thermal resistances between the junction and the case (R_{TJC}), the junction and the lead (R_{TJL}) given above, in order to calculate the total thermal resistance between the junction and the ambient (R_{TJA}). The thermal resistances between the case and the ambient (R_{TCA}), the lead and the ambient (R_{TLA}) depend on the external system (PCB, case) characteristics, and are under user responsibility.
The junction temperature can be calculated using the following equation: $T_J=T_A + R_{TJA} \times P_D$, where the R_{TJA} is the total thermal resistance between the junction and the ambient. This total junction ambient resistance R_{TJA} can be obtained from the upper four partial thermal resistances, by
a) simply adding only the two thermal resistances (junction lead and lead ambient), or
b) by taking all four resistances into account, depending on the precision needed.

2) Not all parameters are 100% tested, but are verified by design/characterization and test correlation.

5.2 Package Outline

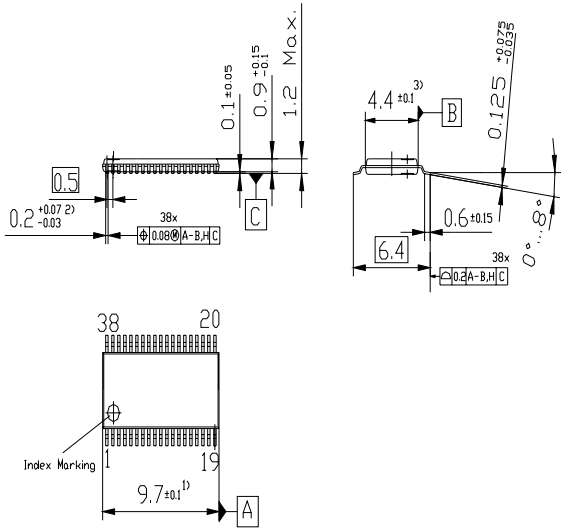

1) DOES NOT INCLUDE PLASTIC OR METAL PROTRUSION OF 0.15 MAX. PER SIDE

2) DOES NOT INCLUDE DAMBAR PROTRUSION OF 0.08 MAX. PER SIDE

3) DOES NOT INCLUDE PLASTIC OR METAL PROTRUSION OF 0.25 MAX. PER SIDE

Figure 46 PG-TSSOP-38-4 Package Outline

5.3 Quality Declaration

Table 46 shows the characteristics of the quality parameters in the SAA-XC866.

Table 46 Quality Parameters

Parameter	Symbol	Limit Values			Unit	Notes
		Min.	Typ.	Max.		
Operation Lifetime when the device is used at the four stated T_A [1)2)]	t_{OP}	–	–	1500	hours	T_A= 140°C
		–	–	2000	hours	T_A= 125°C
		–	–	10000	hours	T_A= 85°C
		–	–	1500	hours	T_A= -40°C
Operation Lifetime when the device is used at the two stated T_A [1)2)]	t_{OP2}	–	–	18000	hours	T_A= 108°C
		–	–	130000	hours	T_A= 27°C
Weighted Average Temperature [2)3)]	T_{WA}	–	106	–	°C	for 15000 hours
ESD susceptibility according to Human Body Model (HBM) for all pins (except V_{DDC}) [2)]	V_{HBM}	–	–	2000	V	Conforming to EIA/JESD22-A114-B
ESD susceptibility according to Human Body Model (HBM) for V_{DDC} [2)]	V_{HBMC}	–	–	600	V	Conforming to EIA/JESD22-A114-B
ESD susceptibility according to Charged Device Model (CDM) pins [2)]	V_{CDM}	–	–	750	V	Conforming to JESD22-C101-C

1) This lifetime refers only to the time when the device is powered-on.

2) Not all parameters are 100% tested, but are verified by design/characterization and test correlation.

3) This parameter is derived based on the Arrhenius model.

w w w . i n f i n e o n . c o m

Published by Infineon Technologies AG

LifeElectronics
Живое партнерство

ООО «ЛайфЭлектроникс» **“LifeElectronics” LLC**

ИНН 7805602321 КПП 780501001 Р/С 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 30101810900000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- *Конкурентоспособные цены и скидки постоянным клиентам.*
- *Специальные условия для постоянных клиентов.*
- *Подбор аналогов.*
- *Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.*

- *Приемлемые сроки поставки, возможна ускоренная поставка.*
- *Доставку товара в любую точку России и стран СНГ.*
- *Комплексную поставку.*
- *Работу по проектам и поставку образцов.*
- *Формирование склада под заказчика.*

- *Сертификаты соответствия на поставляемую продукцию (по желанию клиента).*
- *Тестирование поставляемой продукции.*
- *Поставку компонентов, требующих военную и космическую приемку.*
- *Входной контроль качества.*
- *Наличие сертификата ISO.*

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- *Регистрацию проекта у производителя компонентов.*
- *Техническую поддержку проекта.*
- *Защиту от снятия компонента с производства.*
- *Оценку стоимости проекта по компонентам.*
- *Изготовление тестовой платы монтаж и пусконаладочные работы.*

Тел: +7 (812) 336 43 04 (многоканальный)
Email: org@lifeelectronics.ru

www.lifeelectronics.ru