

## FEATURES

**RF output frequency range: 12.7 GHz to 15.4 GHz**

**IF input frequency range: 2.8 GHz to 4 GHz**

**LO input frequency range: 9 GHz to 12.6 GHz**

**Matched 50 Ω RF output, LO input, and IF input  
20 dB of image rejection**

**32-terminal, 4.9 mm × 4.9 mm LCC package**

## APPLICATIONS

**Point to point microwave radios**

**Radars and electronic warfare systems**

**Instrumentation, automatic test equipment**

## GENERAL DESCRIPTION

The ADMV1009 is a compact, gallium arsenide (GaAs) design, monolithic microwave integrated circuit (MMIC), upper sideband (USB), differential, upconverter in a RoHS compliant package optimized for point to point microwave radio designs that operate in the 12.7 GHz to 15.4 GHz frequency range.

The ADMV1009 provides 21 dB of conversion gain with 20 dB of sideband rejection. The ADMV1009 uses a radio frequency (RF) amplifier preceded by a passive, double balanced mixer, where a driver amplifier drives the local oscillator (LO). IF1 and IF2 mixer

## FUNCTIONAL BLOCK DIAGRAM



Figure 1.

inputs are provided, and an external 180° balun is needed to drive the IF pins differentially. The ADMV1009 is a much smaller alternative to hybrid style single sideband (SSB) upconverter assemblies and eliminates the need for wire bonding by allowing the use of surface-mount manufacturing assemblies.

The ADMV1009 upconverter comes in a compact, thermally enhanced, 4.9 mm × 4.9 mm LCC package. The ADMV1009 operates over the -40°C to +85°C temperature range.

## TABLE OF CONTENTS

|  |    |                                    |    |
|--|----|------------------------------------|----|
| Features .....                                   | 1  | Leakage Performance.....           | 13 |
| Applications.....                                | 1  | Return Loss Performance.....       | 14 |
| Functional Block Diagram .....                   | 1  | Spurious Performance .....         | 15 |
| General Description .....                        | 1  | M × N Spurious Performance.....    | 17 |
| Revision History .....                           | 2  | Theory of Operation .....          | 18 |
| Specifications.....                              | 3  | LO Driver Amplifier .....          | 18 |
| Absolute Maximum Ratings.....                    | 4  | Mixer.....                         | 18 |
| Thermal Resistance .....                         | 4  | RF Amplifier .....                 | 18 |
| ESD Caution.....                                 | 4  | Applications Information .....     | 19 |
| Pin Configuration and Function Descriptions..... | 5  | Typical Application Circuit.....   | 19 |
| Typical Performance Characteristics .....        | 6  | Evaluation Board Information ..... | 20 |
| IF Frequency = 2.8 GHz .....                     | 6  | Bill of Materials.....             | 22 |
| IF Frequency = 3.4 GHz .....                     | 8  | Outline Dimensions .....           | 23 |
| IF Frequency = 4 GHz .....                       | 10 | Ordering Guide .....               | 23 |
| IF Bandwidth .....                               | 12 |                                    |    |

## REVISION HISTORY

### 4/2018—Rev. A to Rev. B

|  |   |
|--|---|
| Changes to Thermal Resistance Section and Table 3..... | 4 |
|--|---|

### 1/2018—Rev. 0 to Rev. A

|  |   |
|--|---|
| Change to Product Title.....   | 1 |
| Changes to General Description and Figure 1 .....                              | 1 |
| Changes to Table 1 .....   | 3 |
| Changes to Table 2.....  | 4 |
| Added Thermal Resistance Section and Table 3; Renumbered Sequentially .....    | 4 |
| Changes to Figure 2 and Table 4.....   | 5 |
| Changes to Figure 4, Figure 7, Figure 4 Caption, and Figure 7 Caption.....     | 6 |
| Changes to Figure 14, Figure 17, Figure 14 Caption, and Figure 17 Caption..... | 8 |

|   |    |
|---|----|
| Changes to Figure 24, Figure 27, Figure 24 Caption, and Figure 27 Caption ..... | 10 |
| Changes to Figure 35 and Figure 36.....   | 12 |
| Changes to Figure 37 through Figure 40.....                                     | 13 |
| Changes to Figure 47 through Figure 52.....                                     | 15 |
| Changes to Figure 53 through Figure 58.....                                     | 16 |
| Changes to Table 5 and M × N Spurious Performance Section ....                  | 17 |
| Change to Theory of Operation Section .....                                     | 18 |
| Changes to Figure 59.....   | 19 |
| Changes to Power On Sequence Section and Power Off Sequence Section .....       | 20 |
| Change to Table 6 .....   | 22 |
| Changes to Ordering Guide .....   | 23 |

### 10/2017—Revision 0: Initial Version

## SPECIFICATIONS

VDRF = 5 V, VDLO = 5 V, IDLO = 60 mA, IDRF = 250 mA, LO =  $-4 \text{ dBm} \leq \text{LO} \leq +4 \text{ dBm}$ ,  $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ ; data taken with Mini-Circuits NCS1-422+, RF transformer as upper sideband, unless otherwise noted.

Table 1.

| Parameter                     | Symbol | Test Conditions/Comments                              | Min  | Typ  | Max  | Unit |
|-------------------------------|--------|---|------|------|------|------|
| RF OUTPUT FREQUENCY RANGE     |        |   | 12.7 |      | 15.4 | GHz  |
| INPUT FREQUENCY RANGE         |        |   |      |      |      |      |
| Local Oscillator              | LO     |   | 9    |      | 12.6 | GHz  |
| Intermediate Frequency        | IF     |   | 2.8  |      | 4    | GHz  |
| LO AMPLITUDE                  |        |   | -4   | 0    | +4   | dBm  |
| IF INPUT POWER                |        |   | -25  |      | 0    | dBm  |
| PERFORMANCE                   |        | With balun  |      |      |      |      |
| Conversion Gain               |        |   | 15   | 21   | 25   | dB   |
| Noise Figure                  | NF     |   |      | 14   | 16.5 | dB   |
| Output Third-Order Intercept  | IP3    | At output power ( $P_{\text{out}}$ ) = 8 dBm          | 31   | 35   |      | dBm  |
| Output 1 dB Compression Point | P1dB   |   | 23   | 25   |      | dBm  |
| Sideband Rejection            |        |   | 20   | 60   |      | dBc  |
| Leakage                       |        |   |      |      |      |      |
| LO to RF                      |        |   |      | -30  | -10  | dBm  |
| LO to IF                      |        |   |      | -25  | -20  | dBm  |
| RF Output                     |        | IF = 0 dBm  |      |      |      |      |
| 2× LO – 2× IF Spur            |        |   | 45   | 52   |      | dBc  |
| 4× IF Spur                    |        |   | 70   | 75   |      | dBc  |
| Return Loss                   |        |   |      |      |      |      |
| RF Output                     |        |   |      | 12   | 10   | dB   |
| LO Input                      |        | $-4 \text{ dBm} \leq \text{LO} \leq +4 \text{ dBm}$   |      | 12   | 10   | dB   |
| IF Input                      |        |   |      | 11   | 10   | dB   |
| POWER INTERFACE               |        |   |      |      |      |      |
| Amplifier Voltage             |        |   |      |      |      |      |
| RF                            | VDRF   |   |      | 5    |      | V    |
| LO                            | VDLO   |   |      | 5    |      | V    |
| Gate Voltage                  |        |   |      |      |      |      |
| RF                            | VGRF   |   | -1.5 |      | -0.5 | V    |
| LO                            | VGLO   |   | -1.5 |      | -0.5 | V    |
| Mixer Voltage                 | VGMIX  |   |      | -1.1 |      | V    |
| Amplifier Current             |        |   |      |      |      |      |
| RF                            | IDRF   | Adjust VGRF between -1.5 V and -0.5 V to achieve IDRF |      | 250  | 300  | mA   |
| LO                            | IDLO   | Adjust VGLO between -1.5 V and -0.5 V to achieve IDLO |      | 60   |      | mA   |
| Gate Current                  |        |   |      |      |      |      |
| RF                            | IGRF   |   |      | < 3  |      | mA   |
| LO                            | IGLO   |   |      | < 1  |      | mA   |
| Total Power                   |        |   |      | 1.55 |      | W    |

## ABSOLUTE MAXIMUM RATINGS

Table 2.

| Parameter                                  | Rating           |
|--|------------------|
| Supply Voltage                             |                  |
| VDRF                                       | 6 V              |
| VDLO                                       | 6 V              |
| VGLO                                       | -2 V to 0 V      |
| VGRF                                       | -2 V to 0 V      |
| VGMIX                                      | -2 V to 0 V      |
| Maximum Junction Temperature               | 175°C            |
| Lifetime at Maximum Junction Temperature   | >1 million hours |
| Maximum Power Dissipation                  | 2.9 W            |
| Operating Temperature Range                | -40°C to +85°C   |
| Storage Temperature Range                  | -65°C to +150°C  |
| Moisture Sensitivity Level (MSL) Rating    | MSL3             |
| Input Power                                |                  |
| LO   | 15 dBm           |
| IF   | 15 dBm           |
| Lead Temperature Range (Soldering 60 sec)  | 260°C            |
| Electrostatic Discharge (ESD) Sensitivity  |                  |
| Human Body Model (HBM)                     | 750 V            |
| Field Induced Charged Device Model (FICDM) | 750 V            |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

## THERMAL RESISTANCE

Thermal performance is directly linked to printed circuit board (PCB) design and operating environment. Careful attention to PCB thermal design is required.

$\theta_{JA}$  is thermal resistance, junction to ambient (°C/W), and  $\theta_{JC}$  is thermal resistance, junction to case (°C/W).

Table 3.

| Package Type | $\theta_{JA}^1$ | $\theta_{JC}^1$ | Unit |
|--------------|-----------------|-----------------|------|
| E-32-1       | 33.4            | 31              | °C/W |

<sup>1</sup> See JEDEC standard JESD51-2 for additional information on optimal thermal impedance (printed circuit board (PCB) within 3 × 3 vias)


## ESD CAUTION



### ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

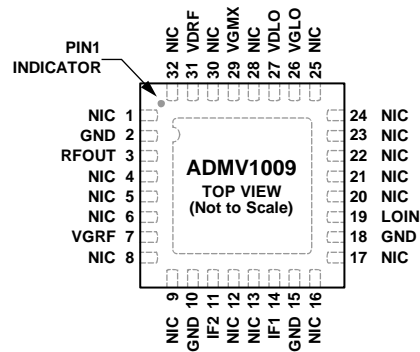

- NOTES**
1. NIC = NOT INTERNALLY CONNECTED. IT IS RECOMMENDED TO GROUND THESE PINS ON THE PCB.
  2. EXPOSED PAD. EXPOSED PAD MUST BE CONNECTED TO GND. GOOD RF AND THERMAL GROUNDING IS RECOMMENDED.

15770-002

Figure 2. Pin Configuration

Table 4. Pin Function Descriptions

| Pin No.   | Mnemonic | Description  |
|---|----------|--|
| 1, 4 to 6, 8, 9, 12, 13, 16, 17, 20 to 25, 28, 30, 32 | NIC      | Not Internally Connected. It is recommended to ground these pins on the PCB.   |
| 2, 10, 15, 18   | GND      | Ground. These pins are grounded internally and must also be grounded on the PCB.   |
| 3   | RFOUT    | RF Output. This pin is ac-coupled internally and matched to 50 Ω, single-ended.  |
| 7   | VGRF     | Power Supply Voltage for the Gate of the RF Amplifier. Refer to the Applications Information section for the required external components and biasing.                 |
| 11, 14  | IF2, IF1 | Differential IF Inputs. These pins are matched to 50 Ω and are ac-coupled. No external dc block is required.   |
| 19  | LOIN     | Local Oscillator Input. This pin is ac-coupled and matched to 50 Ω.  |
| 26  | VGLO     | Power Supply Voltage for the Gate of the LO Amplifier. Refer to the Applications Information section for the required external components and biasing.                 |
| 27  | VDLO     | Power Supply Voltage for the LO Amplifier. Refer to the Applications Information section for the required external components and biasing.                             |
| 29  | VGMIX    | Power Supply Voltage for the Mixer. This pin is a high impedance port. Refer to the Applications Information section for the required external components and biasing. |
| 31  | VDRF     | Power Supply Voltage for the RF Amplifier. Refer to the Applications Information section for the required external components and biasing.                             |
|   | EPAD     | Exposed pad. The exposed pad must be connected to GND. Good RF and thermal grounding is recommended.   |

# TYPICAL PERFORMANCE CHARACTERISTICS

## IF FREQUENCY = 2.8 GHz

VDRF = 5 V, VDLO = 5 V, IDLO = 60 mA, IDRF = 250 mA, LO = -4 dBm ≤ LO ≤ +4 dBm, -40°C ≤ T<sub>A</sub> ≤ +85°C, data taken with Mini-Circuits NCS1-422+, RF transformer as upper sideband, unless otherwise noted.



15770-003

Figure 3. Conversion Gain vs. RF Frequency at Various Temperatures



15770-006

Figure 6. Conversion Gain vs. RF Frequency at Various LO Powers



15770-004

Figure 4. Sideband Rejection vs. RF Frequency at Various Temperatures



15770-007

Figure 7. Sideband Rejection vs. RF Frequency at Various LO Powers



15770-005

Figure 5. Output IP3 vs. RF Frequency at Various Temperatures



15770-008

Figure 8. Output IP3 vs. RF Frequency at Various LO Powers

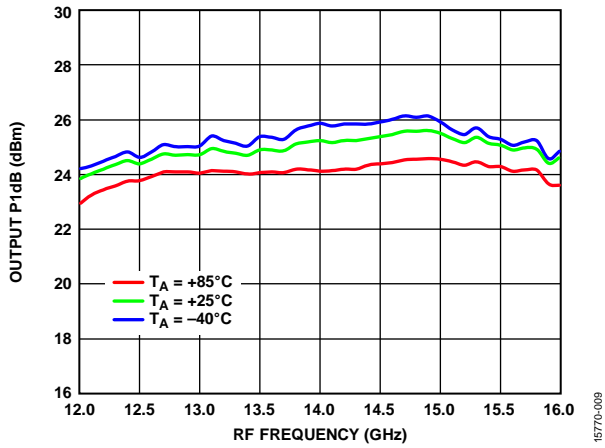


Figure 9. Output P1dB vs. RF Frequency at Various Temperatures

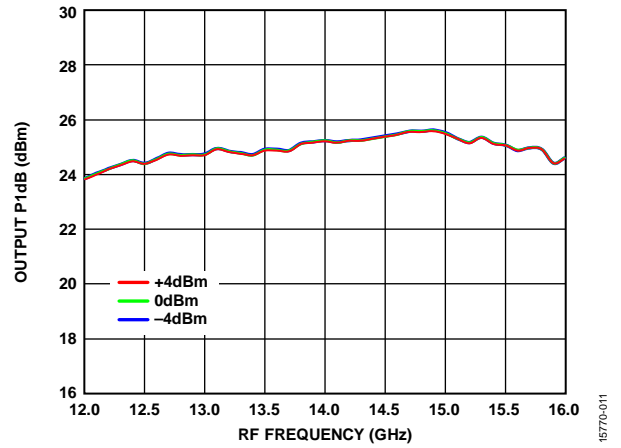


Figure 11. Output P1dB vs. RF Frequency at Various LO Powers

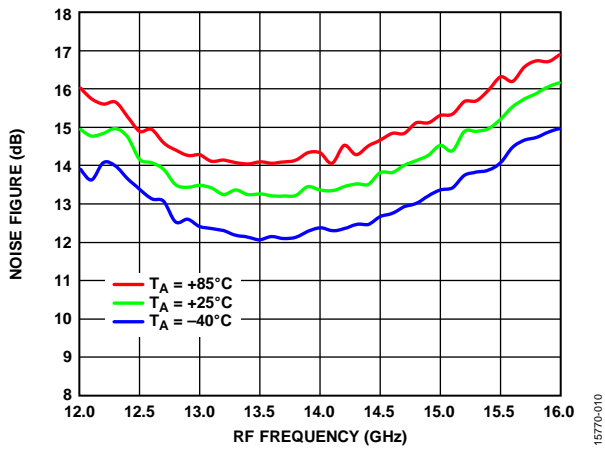


Figure 10. Noise Figure vs. RF Frequency at Various Temperatures

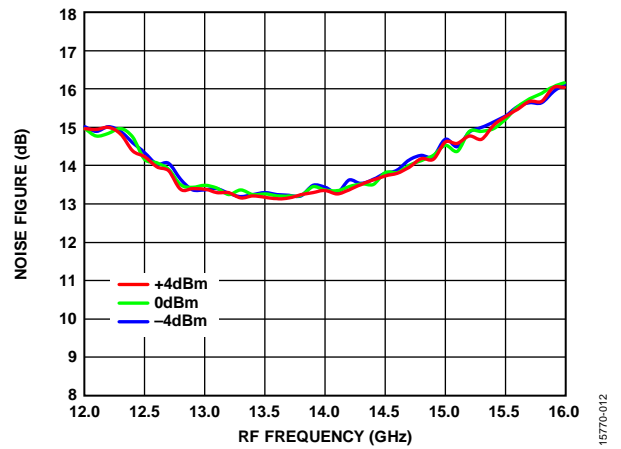


Figure 12. Noise Figure vs. RF Frequency at Various LO Powers

**IF FREQUENCY = 3.4 GHz**

VDRF = 5 V, VDLO = 5 V, IDLO = 60 mA, IDRf = 250 mA, LO = -4 dBm ≤ LO ≤ +4 dBm, -40°C ≤ T<sub>A</sub> ≤ +85°C, data taken with Mini-Circuits NCS1-422+, RF transformer as upper sideband, unless otherwise noted.



Figure 13. Conversion Gain vs. RF Frequency at Various Temperatures



Figure 16. Conversion Gain vs. RF Frequency at Various LO Powers



Figure 14. Sideband Rejection vs. RF Frequency at Various Temperatures

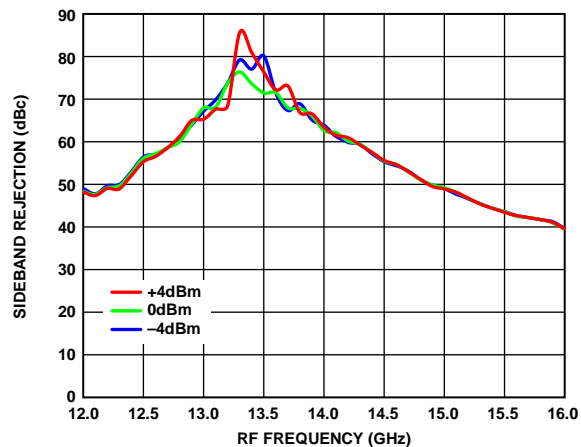


Figure 17. Sideband Rejection vs. RF Frequency at Various LO Powers

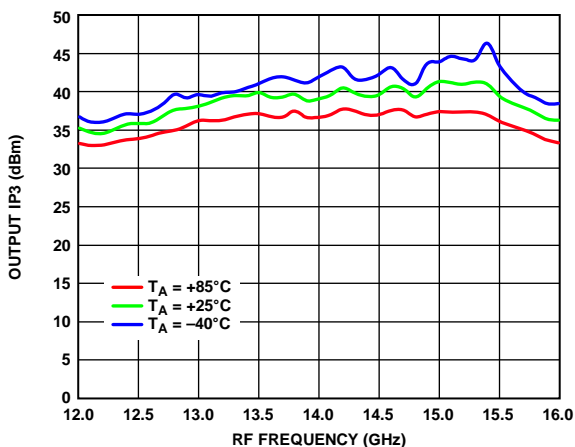


Figure 15. Output IP3 vs. RF Frequency at Various Temperatures

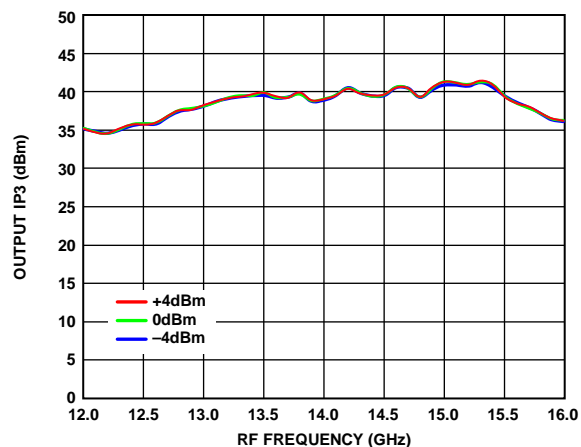


Figure 18. Output IP3 vs. RF Frequency at Various LO Powers



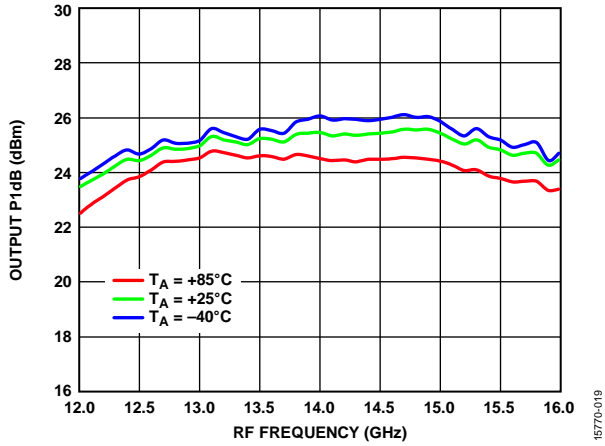


Figure 19. Output P1dB vs. RF Frequency at Various Temperatures

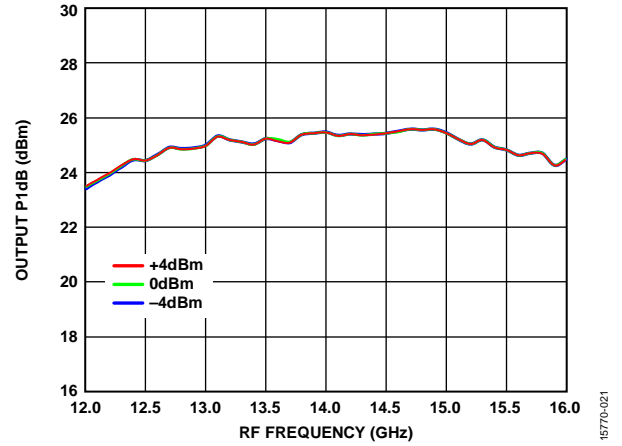


Figure 21. Output P1dB vs. RF Frequency at Various LO Powers

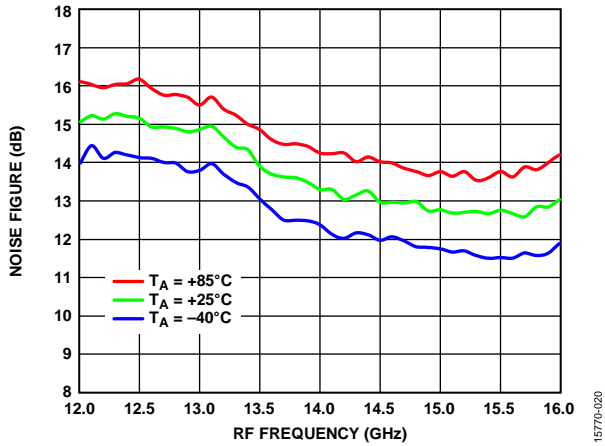


Figure 20. Noise Figure vs. RF Frequency at Various Temperatures

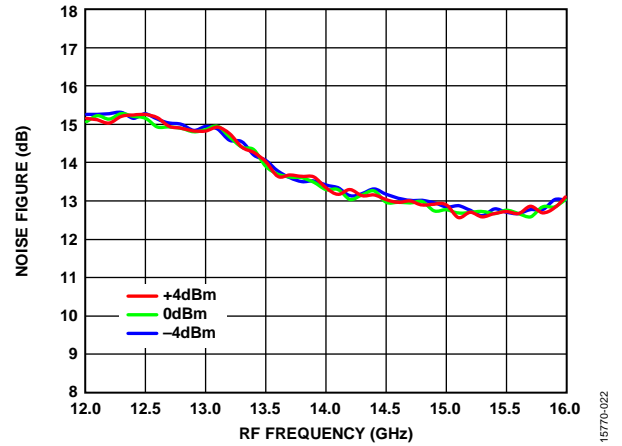


Figure 22. Noise Figure vs. RF Frequency at Various LO Powers

**IF FREQUENCY = 4 GHz**

VDRF = 5 V, VDLO = 5 V, IDLO = 60 mA, IDRf = 250 mA, LO = -4 dBm ≤ LO ≤ +4 dBm, -40°C ≤ T<sub>A</sub> ≤ +85°C, data taken with Mini-Circuits NCS1-422+, RF transformer as upper sideband, unless otherwise noted.

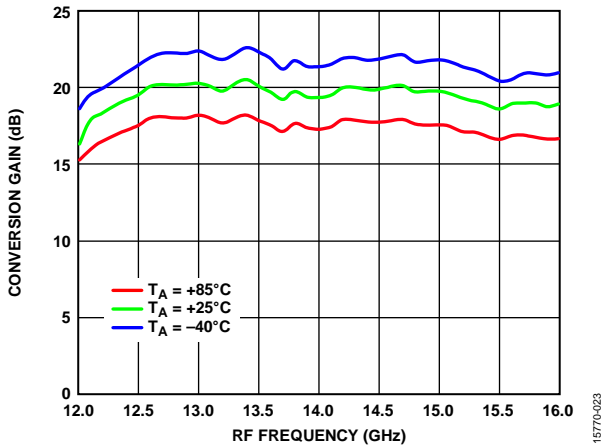


Figure 23. Conversion Gain vs. RF Frequency at Various Temperatures

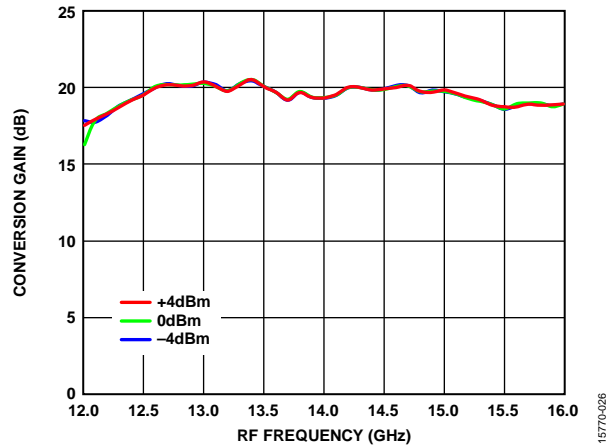


Figure 26. Conversion Gain vs. RF Frequency at Various LO Powers

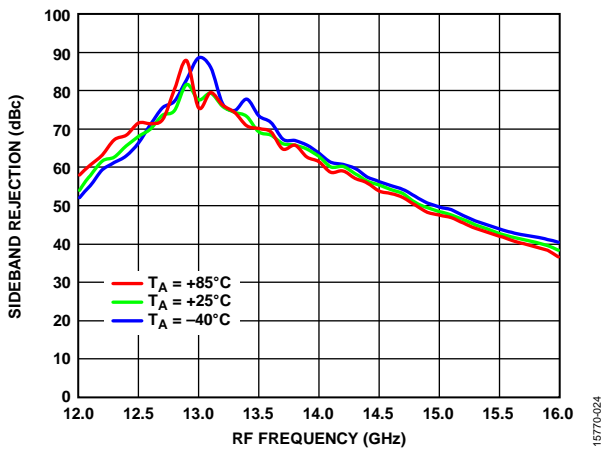


Figure 24. Sideband Rejection vs. RF Frequency at Various Temperatures

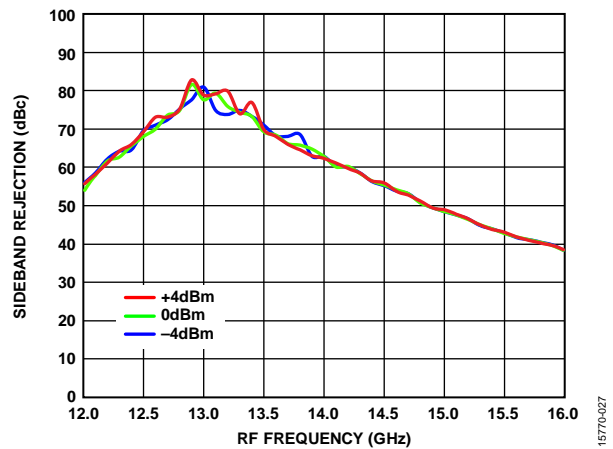


Figure 27. Sideband Rejection vs. RF Frequency at Various LO Powers

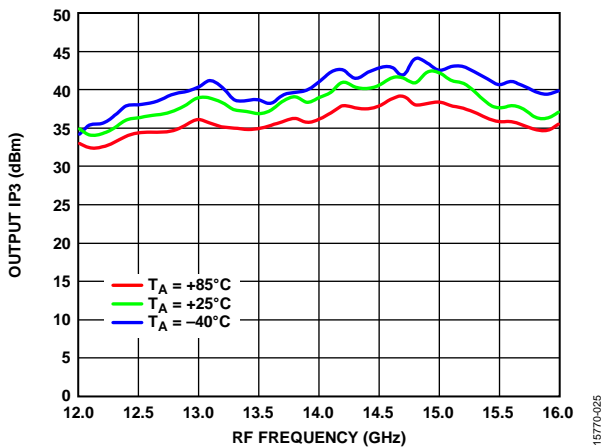


Figure 25. Output IP3 vs. RF Frequency at Various Temperatures

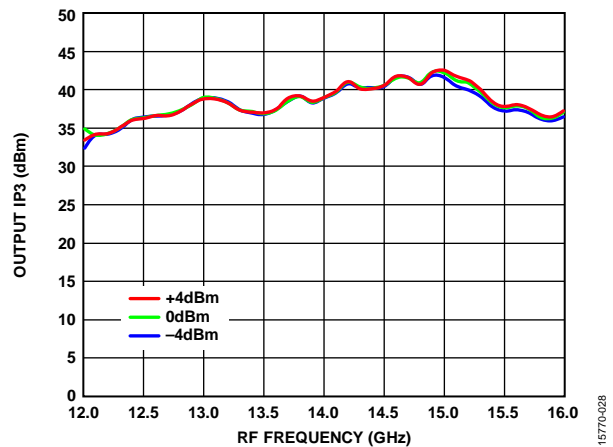


Figure 28. Output IP3 vs. RF Frequency at Various LO Powers

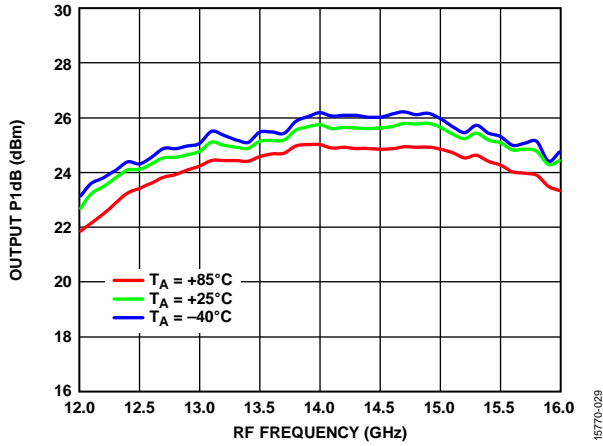


Figure 29. Output P1dB vs. RF Frequency at Various Temperatures

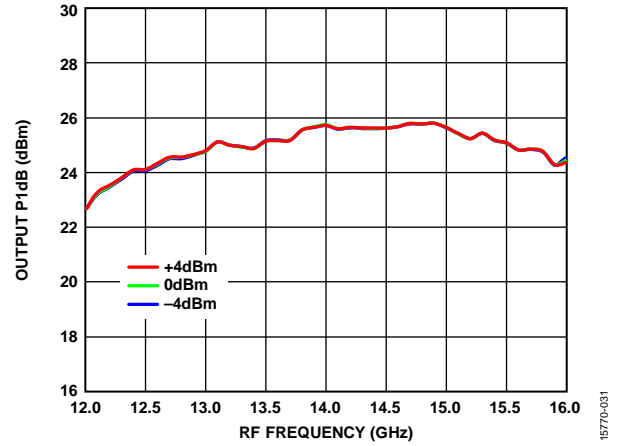


Figure 31. Output P1dB vs. RF Frequency at Various LO Powers

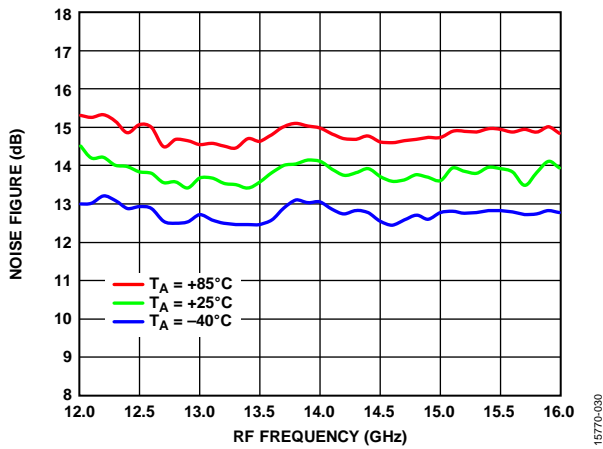


Figure 30. Noise Figure vs. RF Frequency at Various Temperatures

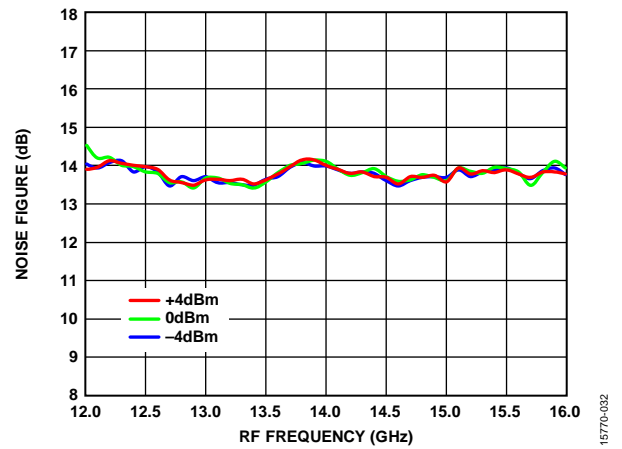


Figure 32. Noise Figure vs. RF Frequency at Various LO Powers


**IF BANDWIDTH**

VDRF = 5 V, VDLO = 5 V, IDLO = 60 mA, IDRf = 250 mA, LO = -4 dBm ≤ LO ≤ +4 dBm at 10.2 GHz, -40°C ≤ T<sub>A</sub> ≤ +85°C, data taken with Mini-Circuits NCS1-422+, RF transformer as upper sideband, unless otherwise noted.




15770-033

Figure 33. Conversion Gain vs. IF Frequency at Various Temperatures

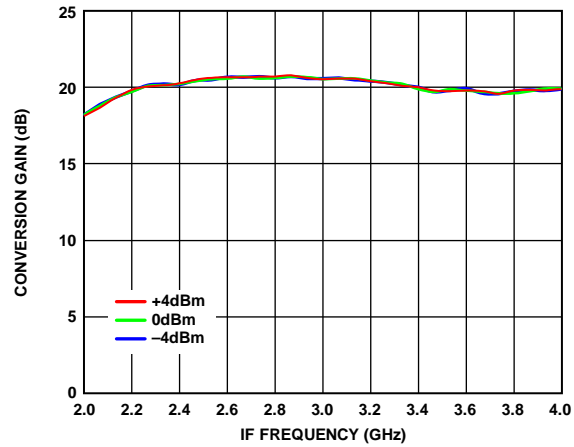


15770-035

Figure 35. Conversion Gain vs. IF Frequency at Various LO Powers

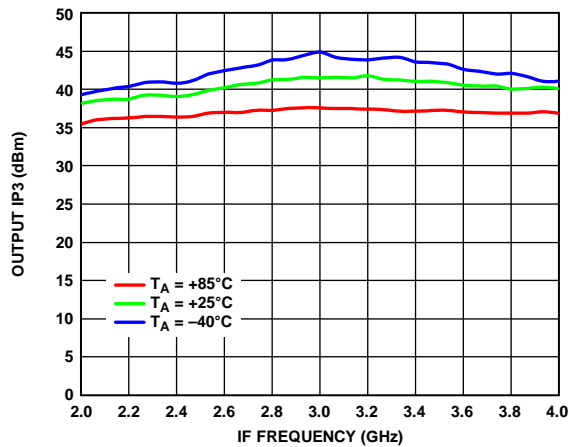

15770-034

Figure 34. Output IP3 vs. IF Frequency at Various Temperatures

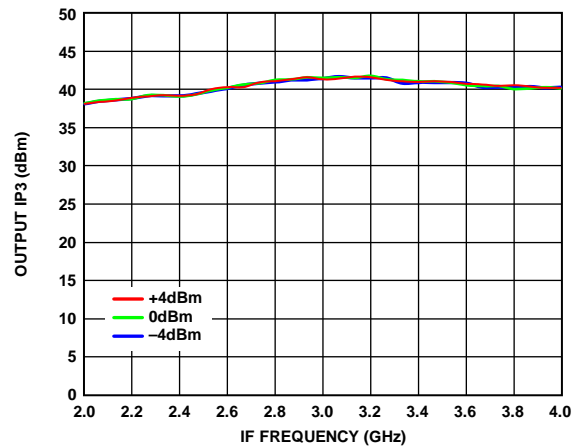

15770-036

Figure 36. Output IP3 vs. IF Frequency at Various LO Powers

**LEAKAGE PERFORMANCE**

VDRF = 5 V, VDLO = 5 V, IDLO = 60 mA, IDRf = 250 mA, LO = -4 dBm ≤ LO ≤ +4 dBm, -40°C ≤ T<sub>A</sub> ≤ +85°C, data taken with Mini-Circuits NCS1-422+, RF transformer as upper sideband, unless otherwise noted.



Figure 37. LO Leakage at RFOUT vs. LO Frequency at Various Temperatures



Figure 39. LO Leakage at RFOUT vs. LO Frequency at Various LO Powers

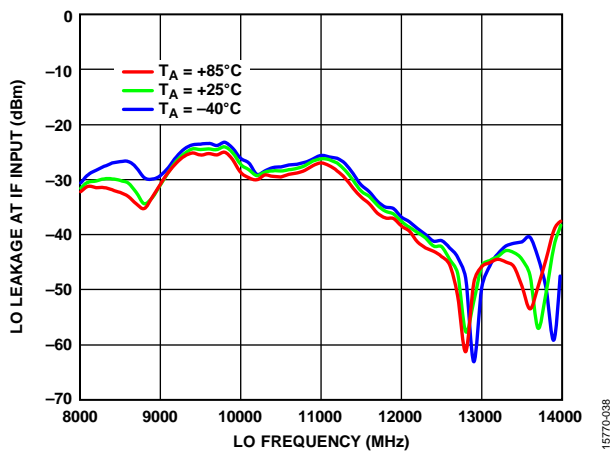


Figure 38. LO Leakage at IF Input vs. LO Frequency at Various Temperatures

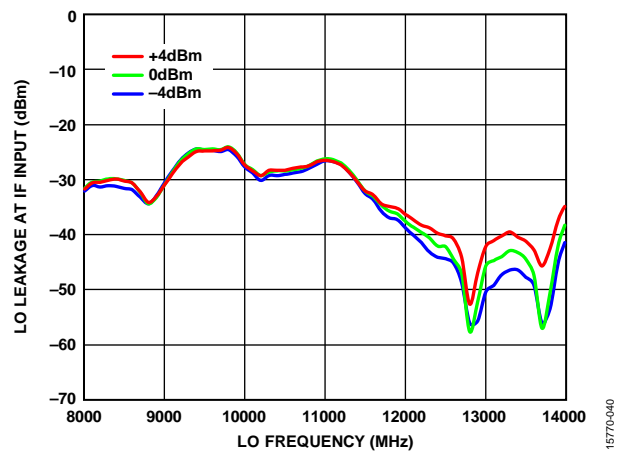


Figure 40. LO Leakage at IF Input vs. LO Frequency at Various LO Powers

**RETURN LOSS PERFORMANCE**

VDRF = 5 V, VDLO = 5 V, IDLO = 60 mA, IDRf = 250 mA, LO = -4 dBm ≤ LO ≤ +4 dBm, -40°C ≤ T<sub>A</sub> ≤ +85°C, data taken with Mini-Circuits NCS1-422+, RF transformer as upper sideband, unless otherwise noted. Measurement includes trace loss and RF connector loss.



Figure 41. RF Output Return Loss vs. RF Frequency at Various Temperatures



Figure 44. RF Output Return Loss vs. RF Frequency at Various LO Powers

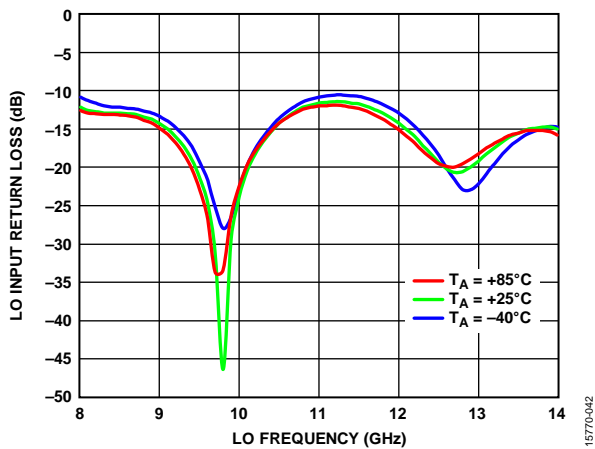


Figure 42. LO Input Return Loss vs. LO Frequency at Various Temperatures

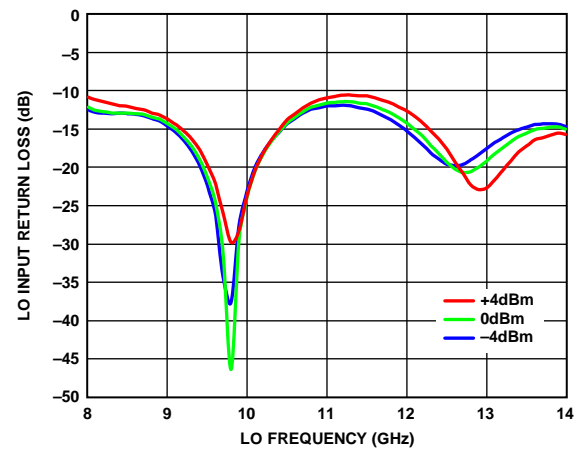


Figure 45. LO Input Return Loss vs. LO Frequency at Various LO Powers

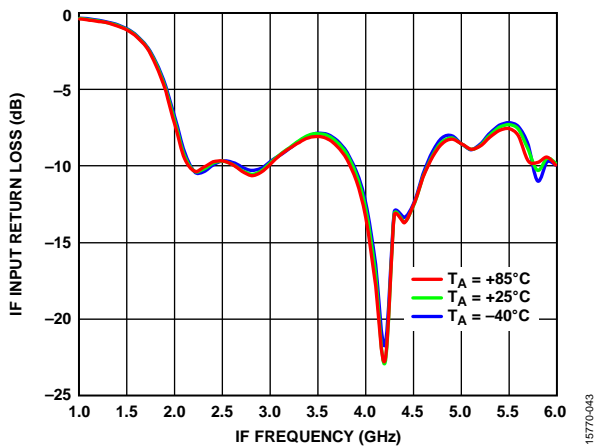


Figure 43. IF Input Return Loss vs. IF Frequency at Various Temperatures

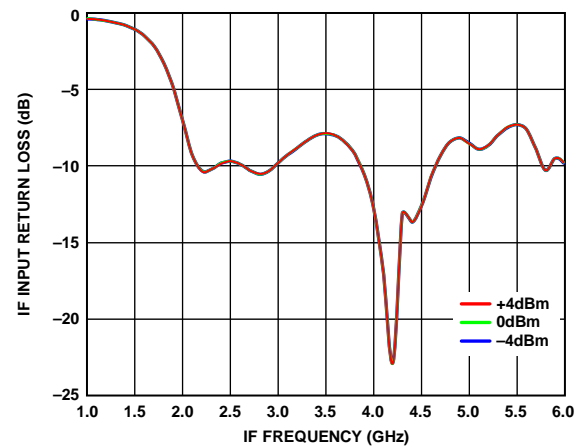


Figure 46. IF Input Return Loss vs. IF Frequency at Various LO Powers

**SPURIOUS PERFORMANCE**

VDRF = 5 V, VDLO = 5 V, IDLO = 60 mA, IDRf = 250 mA, LO = 0 dBm,  $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ , data taken with Mini-Circuits NCS1-422+, RF transformer as upper sideband, unless otherwise noted.

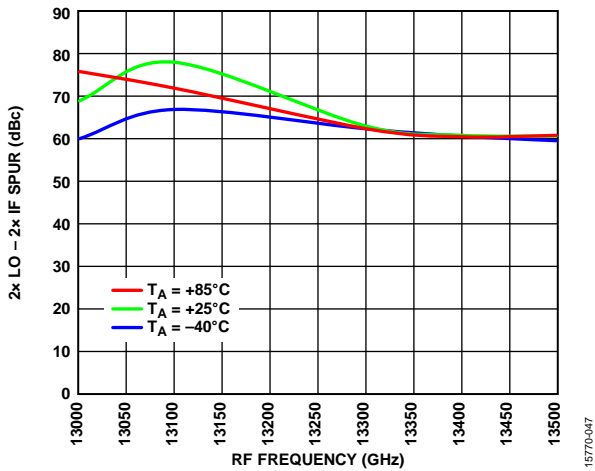


Figure 47.  $2\times\text{LO} - 2\times\text{IF}$  Leakage vs. RF Frequency at Various Temperatures, IF = 3.1 GHz, -10 dBm

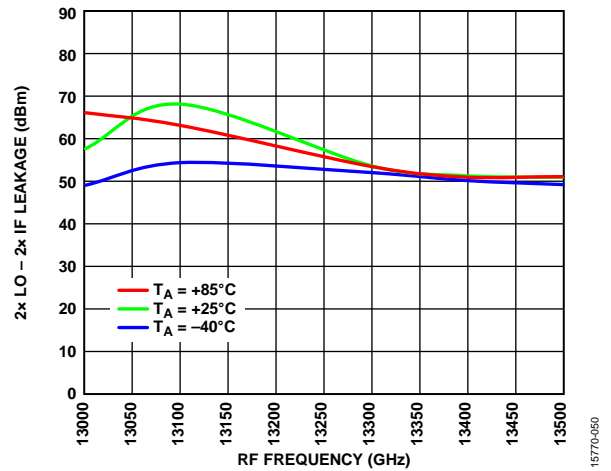


Figure 50.  $2\times\text{LO} - 2\times\text{IF}$  Leakage vs. RF Frequency at Various Temperatures, IF = 3.1 GHz, 0 dBm

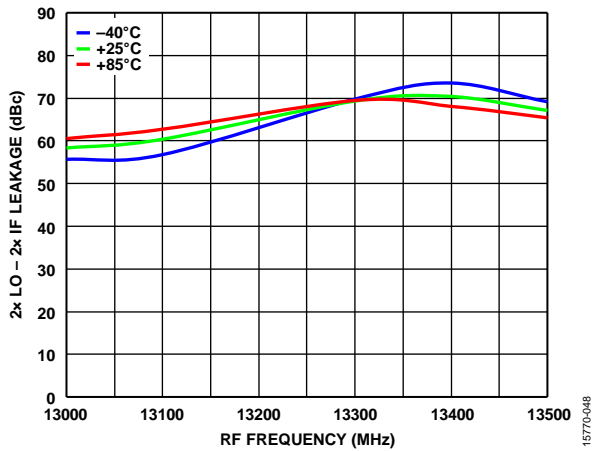


Figure 48.  $2\times\text{LO} - 2\times\text{IF}$  Leakage vs. RF Frequency at Various Temperatures, IF = 3.3 GHz, -10 dBm

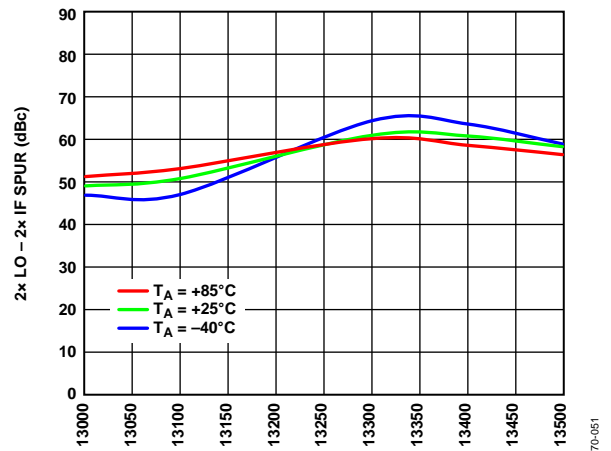


Figure 51.  $2\times\text{LO} - 2\times\text{IF}$  Leakage vs. RF Frequency at Various Temperatures, IF = 3.3 GHz, 0 dBm

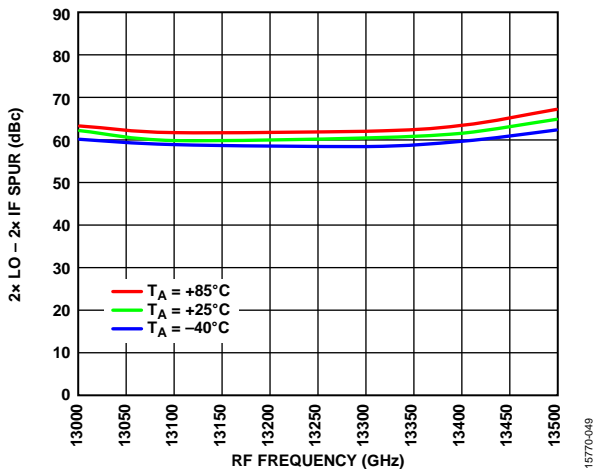


Figure 49.  $2\times\text{LO} - 2\times\text{IF}$  Leakage vs. RF Frequency at Various Temperatures, IF = 3.5 GHz, -10 dBm

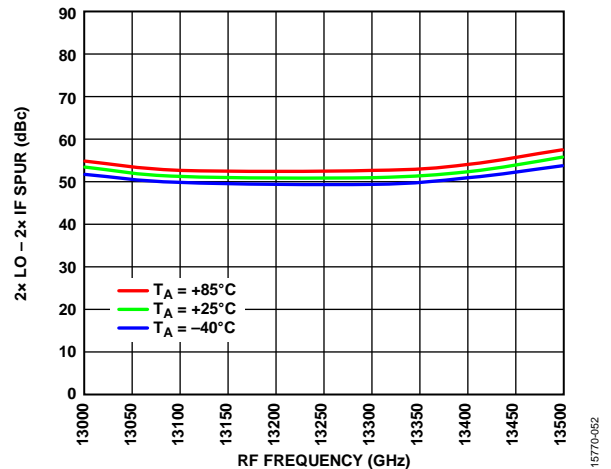


Figure 52.  $2\times\text{LO} - 2\times\text{IF}$  Leakage vs. RF Frequency at Various Temperatures, IF = 3.5 GHz, 0 dBm

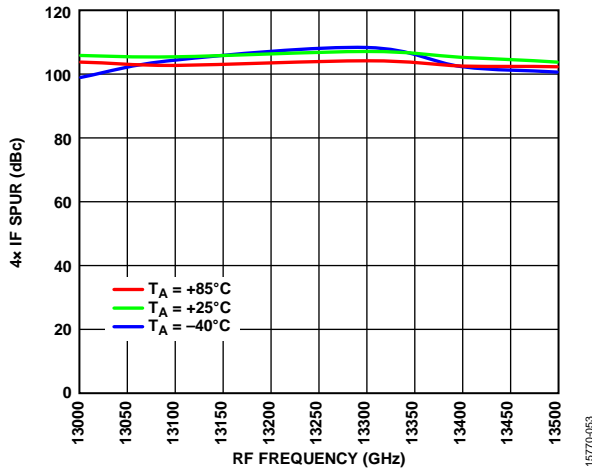


Figure 53. 4x IF Leakage vs. RF Frequency at Various Temperatures, IF = 3.1 GHz, -10 dBm

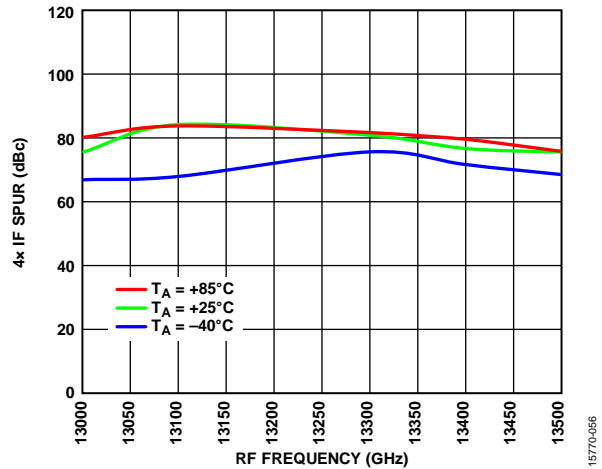


Figure 56. 4x IF Leakage vs. RF Frequency at Various Temperatures, IF = 3.1 GHz, 0 dBm

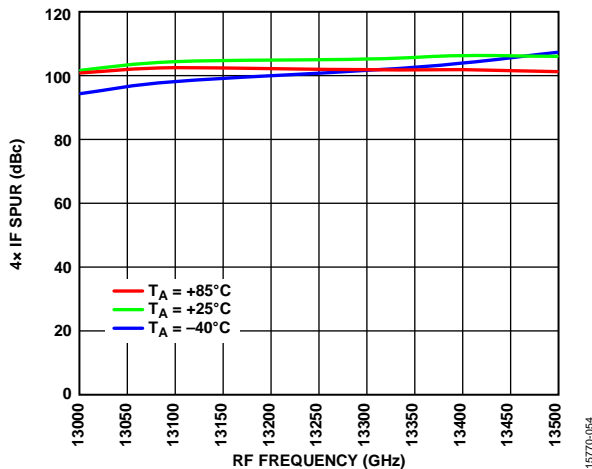


Figure 54. 4x IF Leakage vs. RF Frequency at Various Temperatures, IF = 3.3 GHz, -10 dBm

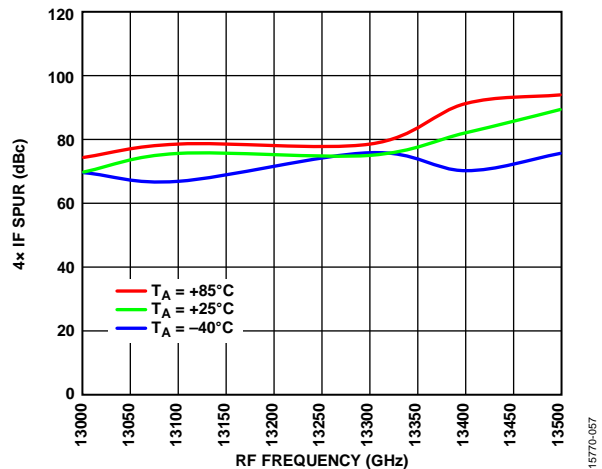


Figure 57. 4x IF Leakage vs. RF Frequency at Various Temperatures, IF = 3.3 GHz, 0 dBm

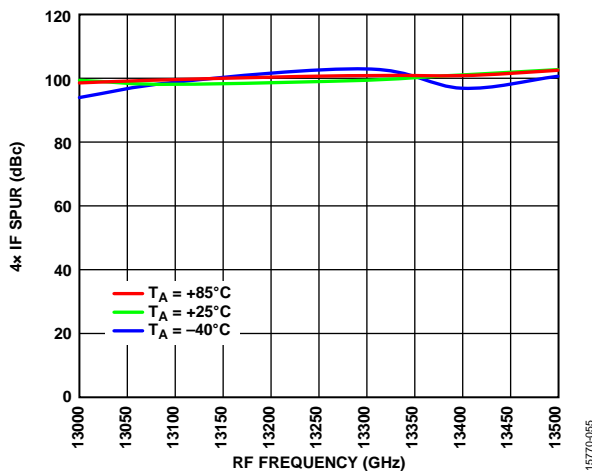


Figure 55. 4x IF Leakage vs. RF Frequency at Various Temperatures, IF = 3.5 GHz, -10 dBm

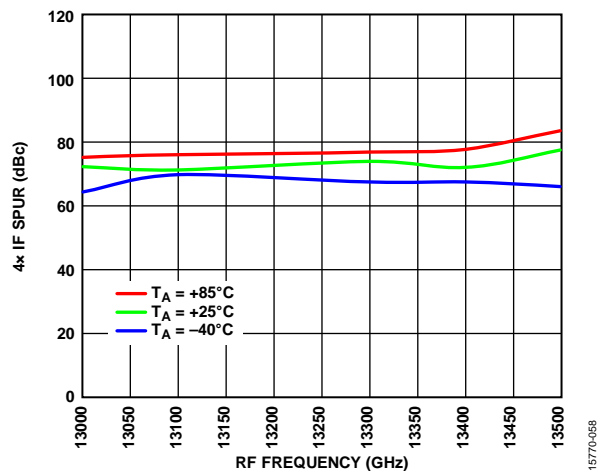


Figure 58. 4x IF Leakage vs. RF Frequency at Various Temperatures, IF = 3.5 GHz, 0 dBm



Table 5. LO Harmonic Leakage at RFOUT

| LO Frequency (MHz) <sup>1</sup> | Harmonics |     |     |     |
|---------------------------------|-----------|-----|-----|-----|
|                                 | 1.0       | 2.0 | 3.0 | 4.0 |
| 9000                            | -51       | -14 | -50 | -72 |
| 9500                            | -48       | -5  | -55 | -67 |
| 10000                           | -40       | -15 | -51 | -63 |
| 10500                           | -33       | -28 | -67 | -62 |
| 11000                           | -33       | -44 | -74 | -75 |
| 11500                           | -30       | -44 | -63 | -77 |
| 12000                           | -35       | -44 | -73 | -76 |
| 12600                           | -39       | -40 | -63 | -75 |

<sup>1</sup> All values are in dBm. LO Input Power = 0 dBm.

**M × N SPURIOUS PERFORMANCE**

**LO = 0 dBm, Upper Sideband**

IF = 3100 MHz at 0 dBm and RF = 13300 MHz. All values in dBc below RF power level. N/A means not applicable.

|        |    | N × LO |    |    |    |     |
|--------|----|--------|----|----|----|-----|
|        |    | 0      | 1  | 2  | 3  | 4   |
| M × IF | -4 | N/A    | 98 | 83 | 83 | 105 |
|        | -3 | N/A    | 99 | 66 | 75 | 104 |
|        | -2 | N/A    | 60 | 52 | 77 | 89  |
|        | -1 | N/A    | 61 | 27 | 80 | 97  |
|        | 0  | N/A    | 53 | 38 | 68 | 85  |
|        | 1  | 77     | 0  | 68 | 70 | 75  |
|        | 2  | 65     | 43 | 31 | 86 | 86  |
|        | 3  | 50     | 67 | 77 | 64 | 78  |
|        | 4  | 77     | 58 | 83 | 96 | N/A |

IF = 3300 MHz at 0 dBm and RF = 13300 MHz. All values in dBc below RF power level. N/A means not applicable.

|        |    | N × LO |     |    |    |     |
|--------|----|--------|-----|----|----|-----|
|        |    | 0      | 1   | 2  | 3  | 4   |
| M × IF | -4 | N/A    | 92  | 92 | 78 | 100 |
|        | -3 | N/A    | 100 | 85 | 67 | 101 |
|        | -2 | N/A    | 67  | 58 | 76 | 95  |
|        | -1 | N/A    | 57  | 29 | 76 | 99  |
|        | 0  | N/A    | 58  | 32 | 60 | 80  |
|        | 1  | 74     | 0   | 73 | 60 | 79  |
|        | 2  | 64     | 43  | 32 | 86 | 82  |
|        | 3  | 57     | 63  | 79 | 67 | 91  |
|        | 4  | 78     | 67  | 80 | 96 | N/A |

IF = 3500 MHz at 0 dBm and RF = 13300 MHz. All values in dBc below RF power level. N/A means not applicable.

|        |    | N × LO |     |    |    |     |
|--------|----|--------|-----|----|----|-----|
|        |    | 0      | 1   | 2  | 3  | 4   |
| M × IF | -4 | N/A    | 92  | 92 | 78 | 100 |
|        | -3 | N/A    | 100 | 85 | 67 | 101 |
|        | -2 | N/A    | 67  | 50 | 76 | 95  |
|        | -1 | N/A    | 50  | 28 | 72 | 97  |
|        | 0  | N/A    | 64  | 27 | 58 | 74  |
|        | 1  | 71     | 0   | 73 | 60 | 79  |
|        | 2  | 59     | 43  | 32 | 86 | 82  |
|        | 3  | 57     | 63  | 79 | 67 | 91  |
|        | 4  | 78     | 67  | 80 | 96 | N/A |

## THEORY OF OPERATION

The ADMV1009 is a GaAs, MMIC, SSB, upper side band upconverter in a RoHS compliant package optimized for upper sideband point to point microwave radio applications operating in the 12.7 GHz to 15.4 GHz output frequency range. The ADMV1009 supports LO input frequencies of 9 GHz to 12.6 GHz and IF frequencies of 2.8 GHz to 4 GHz.

The ADMV1009 uses a RF amplifier preceded by a passive, double balanced mixer, where a driver amplifier drives the LO (see Figure 59). The combination of design, process, and packaging technology allows the functions of these subsystems to be integrated into a single die, using mature packaging and interconnection technologies to provide a high performance, low cost design with excellent electrical, mechanical, and thermal properties. In addition, the need for external components is minimized, optimizing cost and size.

### LO DRIVER AMPLIFIER

The LO driver amplifier takes a single LO input and amplifies it to the desired LO signal level for the mixer to operate optimally. The LO driver amplifier requires a single dc bias voltage (VDLO) and a single dc gate bias (VGLO) to operate. Starting at  $-2$  V at the gate supply (VGLO), the LO amplifier is biased at  $+5$  V (VDLO). Then, the gate bias (VGLO) is varied until the desired LO amplifier bias current (IDLO) is achieved. The desired LO amplifier bias current is 60 mA under the LO input drive of  $-4$  dBm to  $+4$  dBm. The LO drive range of  $-4$  dBm to  $+4$  dBm makes it compatible with Analog Devices, Inc., wideband synthesizer portfolio without the requirement for an external LO driver amplifier.

### MIXER

The mixer has two differential inputs, IF1 and IF2, and an external  $180^\circ$  balun is required to drive the IF ports differentially. The ADMV1009 is optimized to work with the Mini-Circuit NCS1-422+ RF balun. The mixer must be biased at  $-1.1$  V (VGMIX) to operate.

### RF AMPLIFIER

The RF amplifier requires a single dc bias voltage (VDRF) and a single dc gate bias (VGRF) to operate. Starting at  $-2$  V at the gate supply (VGRF), the RF amplifier is biased at  $+5$  V (VDRF). Then, the gate bias (VGRF) is varied until the desired RF amplifier bias current (IDRF) is achieved. The desired RF amplifier bias current is 250 mA under small signal conditions.

The ADMV1009 has an internal band-pass filter between the mixer and the RF driver amplifier that reduces LO leakage and filters out the lower sideband at the RF output. The balanced input drive allows exceptional linearity performance compared to similar single-ended solutions.

The typical application circuit (see Figure 59) shows the necessary external components on the bias lines to eliminate any undesired stability problems for the RF amplifier and the LO amplifier.

The ADMV1009 upconverter comes in a compact, thermally enhanced,  $4.9$  mm  $\times$   $4.9$  mm, 32-terminal ceramic leadless chip carrier (LCC) package. The ADMV1009 operates over the  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$  temperature range.

# APPLICATIONS INFORMATION

## TYPICAL APPLICATION CIRCUIT

The typical applications circuit is shown in Figure 59. The application circuit shown has been replicated for the evaluation board circuit.



Figure 59. Typical Application Circuit

15770-059

## EVALUATION BOARD INFORMATION

The circuit board used in the application must use RF circuit design techniques. Signal lines must have  $50\ \Omega$  impedance, and the package ground leads and exposed pad must be connected directly to the ground plane, similar to what is shown in Figure 60 and Figure 61. Use a sufficient number of via holes to connect the top and bottom ground planes. The evaluation circuit board shown in Figure 59 is available from Analog Devices, Inc., upon request.

### Layout

Solder the exposed pad on the underside of the ADMV1009 to a low thermal and electrical impedance ground plane. This pad is typically soldered to an exposed opening in the solder mask on the evaluation board. Connect these ground vias to all other ground layers on the evaluation board to maximize heat dissipation from the device package. Figure 60 shows the PCB land pattern footprint for the ADMV1009-EVALZ, and Figure 61 shows the solder paste stencil for the ADMV1009-EVALZ evaluation board.

### Power-On Sequence

To set up the ADMV1009-EVALZ, take the following steps:

1. Power up the VGLO with a  $-1.5\ \text{V}$  supply.
2. Power up the VDLO with a  $5\ \text{V}$  supply.
3. Adjust VGLO from  $-1.5\ \text{V}$  to  $-0.5\ \text{V}$  such that  $\text{IDLO} = 60\ \text{mA}$ .
4. Power up VGRF with a  $-1.5\ \text{V}$  supply.
5. Power up VDRF with a  $5\ \text{V}$  supply.
6. Adjust VGRF from  $-1.5\ \text{V}$  to  $-0.5\ \text{V}$  such that  $\text{IDLO} = 250\ \text{mA}$ .
7. Power up VGMIX with a  $-1.5\ \text{V}$  supply.
8. Apply an LO signal.
9. Apply an IF signal.

### Power Off Sequence

To turn off the ADMV1009-EVALZ, take the following steps:

1. Turn off the LO and IF signals.
2. Set VGRF and VGLO to  $-1.5\ \text{V}$ .
3. Set the VDRF and VDLO supplies to  $0\ \text{V}$  and then turn off the VDRF and VDLO supplies.
4. Turn off the VGRF and VGLO supplies.

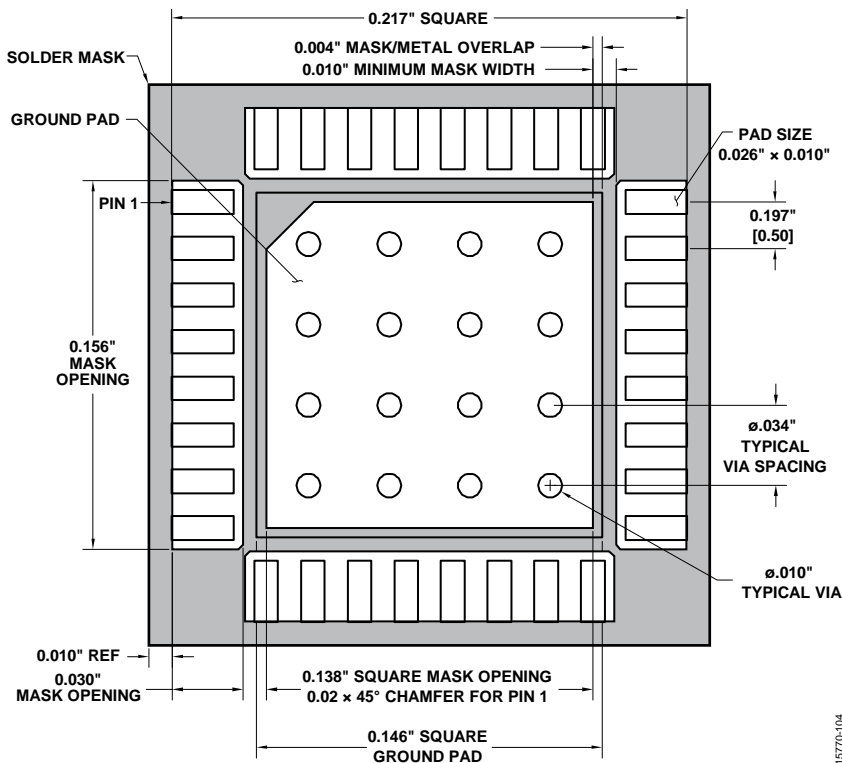


Figure 60. PCB Land Pattern Footprint of the ADMV1009-EVALZ

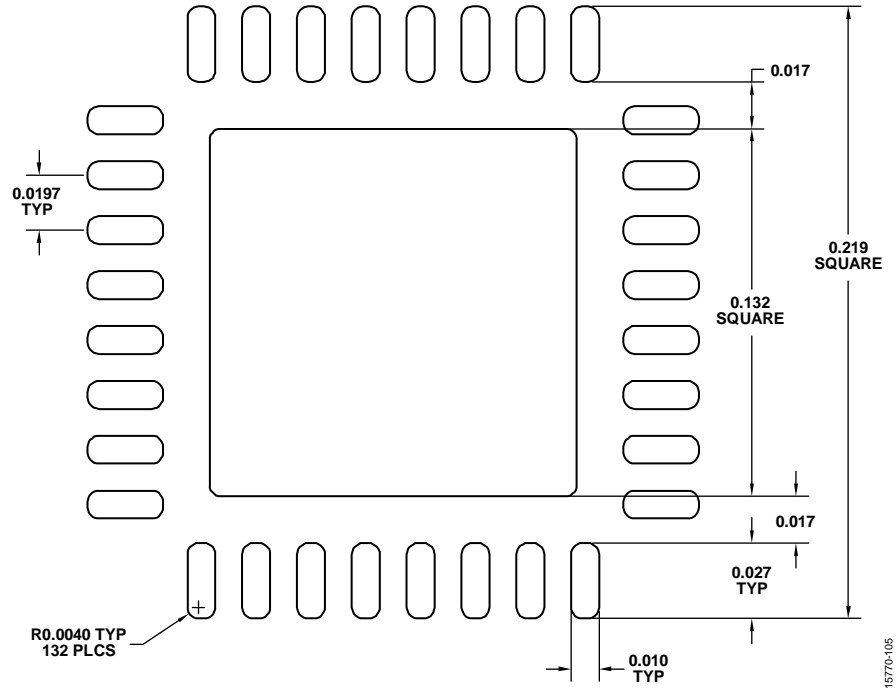


Figure 61. Solder Paste Stencil of the [ADMV1009-EVALZ](#)

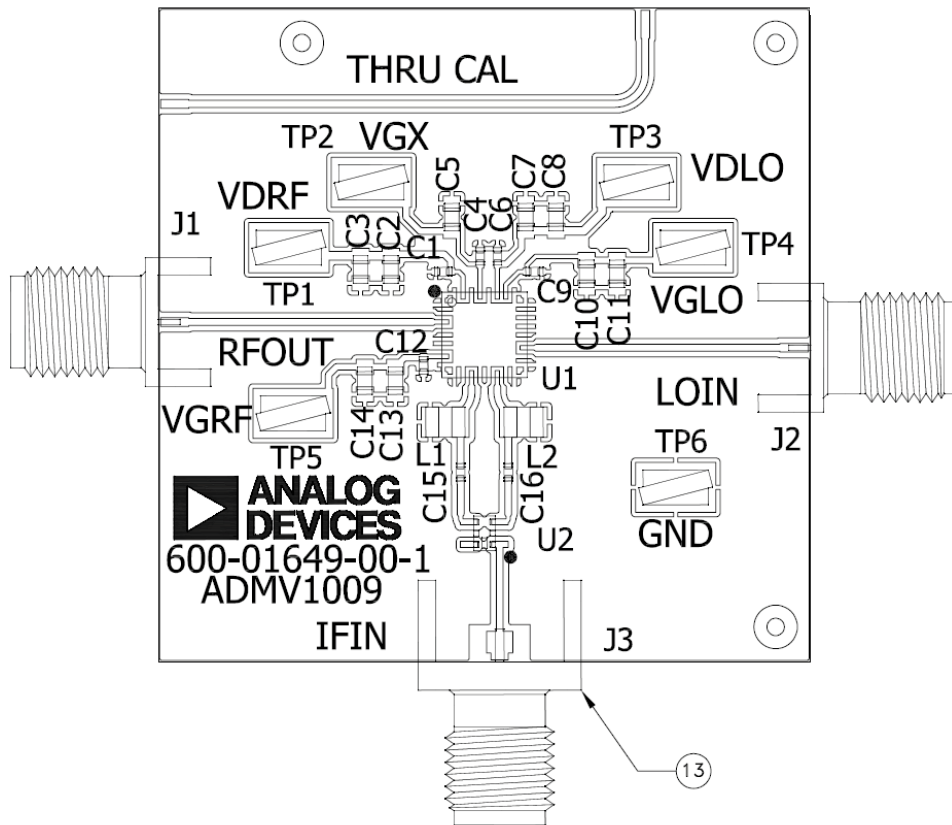


Figure 62. [ADMV1009-EVALZ](#) Evaluation Board Top Layer

## BILL OF MATERIALS

Table 6.

| Qty. | Reference Designator | Description  | Manufacturer/Part No.                       |
|------|----------------------|--|---|
| 1    | Not applicable       | PCB  | Analog Devices/600-01649-00                 |
| 1    | U1                   | <a href="#">ADMV1009AEZ</a>                        | Analog Devices/ <a href="#">ADMV1009AEZ</a> |
| 4    | C1, C4, C9, C12      | 100 pF ceramic capacitors, 5%, 50 V, C0G, 0402     | Murata/GRM1555C1H101JA01D                   |
| 4    | C2, C7, C10, C13     | 10 nF ceramic capacitors, 50 V, 10%, X7R, 0603     | Panasonic/ECJ-1VB1H103K                     |
| 5    | C3, C5, C8, C11, C14 | 1 $\mu$ F ceramic capacitors, 50 V, 10%, X7R, 0603 | Taiyo Yuden/UMK107AB7105KA-T                |
| 1    | C6                   | 470 pF ceramic capacitor, 5%, 50 V, COG, 0402, SMD | Murata/GRM1555C1H471JA01D                   |
| 2    | C15, C16             | 10 pF ceramic capacitors, 5%, 25 V, C0G, 0402      | Kemet/C0402C100J3GAL                        |
| 2    | J1, J2               | SCD, COMP, SMA connectors, SRI                     | SRI Connector Gage Co./21-141-1000-01       |
| 1    | J3                   | SCD, COMP, SMA connector                           | Johnson Components/142-0701-851             |
| 2    | L1, L2               | 56 nH inductors, 0805, 5%, 500 mA                  | Coilcraft/0805CS-560XJLB                    |
| 6    | TP1 to TP6           | Test points, PC compact SMT                        | Keystone Electronics/5016                   |
| 1    | U2                   | 50 $\Omega$ RF transformer, 3300 MHz to 4000 MHz   | Mini-Circuits/NCS1-422+                     |
| 1    | Heatsink             | Aluminum heatsink                                  | Analog Devices/111332                       |

# OUTLINE DIMENSIONS



## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Body Material | Lead Finish      | Package Description     | Package Option |
|--------------------|-------------------|-----------------------|------------------|-------------------------|----------------|
| ADMV1009AEZ        | -40°C to +85°C    | Alumina Ceramic       | Gold Over Nickel | 32-Terminal Ceramic LCC | E-32-1         |
| ADMV1009AEZ-R7     | -40°C to +85°C    | Alumina Ceramic       | Gold Over Nickel | 32-Terminal Ceramic LCC | E-32-1         |
| ADMV1009-EVALZ     |                   |                       |                  | Evaluation Board        |                |

<sup>1</sup> Z = RoHS Compliant Part.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)