



# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

## General Description

The MAX5380/MAX5381/MAX5382 are low-cost, 8-bit digital-to-analog converters (DACs) in miniature 5-pin SOT23 packages, with a simple 2-wire serial interface that allows communication with multiple devices. The MAX5380 has an internal +2V reference and operates from a +2.7V to +3.6V supply. The MAX5381 has an internal +4V reference and operates from a +4.5V to +5.5V supply. The MAX5382 operates over the full +2.7V to +5.5V supply range and has an internal reference equal to  $0.9 \times V_{DD}$ .


The fast-mode I<sup>2</sup>C\*-compatible serial interface allows communication at data rates up to 400kbps, minimizing board space and reducing interconnect complexity in many applications. Each device is available with one of four factory-preset addresses (see *Selector Guide*).

These DACs also include an output buffer, a low-power shutdown mode, and a power-on reset that ensures the DAC outputs are at zero when power is initially applied. In shutdown mode, supply current is reduced to less than 1 $\mu$ A and the output is pulled down to GND with a 10k $\Omega$  resistor.

## Applications

- Automatic Tuning (VCO)
- Power-Amplifier Bias Control
- Programmable Threshold Levels
- Automatic Gain Control
- Automatic Offset Adjustment

## Typical Operating Circuit

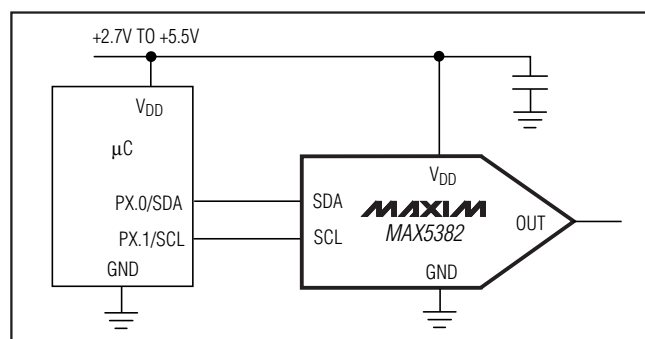

## Features

- ◆ 8-Bit Accuracy in a Miniature 5-Pin SOT23
- ◆ Wide +2.7V to +5.5V Supply Range (MAX5382)
- ◆ Low 230 $\mu$ A max Supply Current
- ◆ 1 $\mu$ A Shutdown Mode
- ◆ Buffered Output Drives Resistive Loads
- ◆ Low-Glitch Power-On Reset to Zero DAC Output
- ◆ Fast I<sup>2</sup>C-Compatible Serial Interface
- ◆  $\leq \pm 5\%$  Full-Scale Error (MAX5382)
- ◆  $\leq \pm 1$ LSB max INL/DNL


## Ordering Information

| PART          | TEMP RANGE     | PIN-PACKAGE |
|---------------|----------------|-------------|
| MAX5380_EUK-T | -40°C to +85°C | 5 SOT23     |
| MAX5381_EUK-T | -40°C to +85°C | 5 SOT23     |
| MAX5382_EUK-T | -40°C to +85°C | 5 SOT23     |

## Selector Guide

| PART        | ADDRESS | REFERENCE (V)       | TOP MARK |
|-------------|---------|---------------------|----------|
| MAX5380LEUK | 0x60    | +2.0                | ADMN     |
| MAX5380MEUK | 0x62    | +2.0                | ADMZ     |
| MAX5380NEUK | 0x64    | +2.0                | ADNF     |
| MAX5380PEUK | 0x66    | +2.0                | ADMP     |
| MAX5381LEUK | 0x60    | +4.0                | ADMV     |
| MAX5381MEUK | 0x62    | +4.0                | ADNB     |
| MAX5381NEUK | 0x64    | +4.0                | ADNH     |
| MAX5381PEUK | 0x66    | +4.0                | ADMR     |
| MAX5382LEUK | 0x60    | $0.9 \times V_{DD}$ | ADMX     |
| MAX5382MEUK | 0x62    | $0.9 \times V_{DD}$ | ADND     |
| MAX5382NEUK | 0x64    | $0.9 \times V_{DD}$ | ADNJ     |
| MAX5382PEUK | 0x66    | $0.9 \times V_{DD}$ | ADMT     |

## Pin Configuration

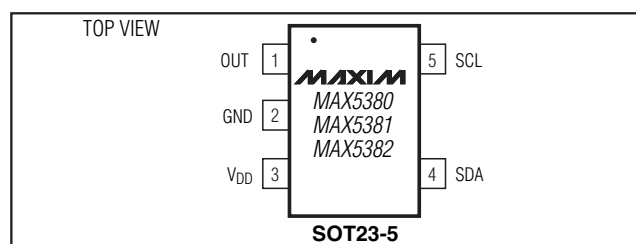

# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

## ABSOLUTE MAXIMUM RATINGS

V<sub>DD</sub> to GND .....-0.3V to +6V  
 OUT, SCL, SDA to GND .....-0.3V to +6V  
 Maximum Current into Any Pin.....50mA  
 Continuous Power Dissipation (T<sub>A</sub> = +70°C)  
   5-Pin SOT23 (derate 7.1mW/°C above +70°C).....571mW

### Operating Temperature Ranges

MAX538\_ \_EUK-T .....-40°C to +85°C  
 Storage Temperature Range .....-65°C to +150°C  
 Maximum Junction Temperature .....+150°C  
 Lead Temperature (soldering, 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(V<sub>DD</sub> = +2.7V to +3.6V (MAX5380), V<sub>DD</sub> = +4.5V to +5.5V (MAX5381), V<sub>DD</sub> = +2.7V to +5.5V (MAX5382); R<sub>L</sub> = 10kΩ; C<sub>L</sub> = 50pF, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are T<sub>A</sub> = +25°C.)

| PARAMETER                                | SYMBOL | CONDITIONS                                                |                 | MIN                    | TYP                   | MAX                    | UNITS         |      |
|------------------------------------------|--------|-----------------------------------------------------------|-----------------|------------------------|-----------------------|------------------------|---------------|------|
| STATIC ACCURACY                          |        |                                                           |                 |                        |                       |                        |               |      |
| Resolution                               |        |                                                           |                 | 8                      |                       |                        | Bits          |      |
| Integral Linearity Error                 | INL    | (Note 1)                                                  |                 | ±1                     |                       |                        | LSB           |      |
| Differential Linearity Error             | DNL    | Guaranteed monotonic                                      |                 | ±1                     |                       |                        | LSB           |      |
| Offset Error                             |        | (Note 2)                                                  |                 | ±1                     |                       |                        | ±25           | mV   |
| Offset Error Supply Rejection            |        | MAX5382 (Notes 2, 3)                                      |                 | 60                     |                       |                        | dB            |      |
| Offset Error Temperature Coefficient     |        | (Note 2)                                                  | MAX5380/MAX5381 | 3                      |                       |                        | ppm/°C        |      |
|                                          |        |                                                           | MAX5382         | 1                      |                       |                        |               |      |
| Full-Scale Error                         |        | Code = 255                                                | MAX5380/MAX5381 | 10                     |                       |                        | % of ideal FS |      |
|                                          |        |                                                           | MAX5382         | 5                      |                       |                        |               |      |
| Full-Scale Error Supply Rejection        |        | Code = 255, MAX5380/MAX5281 (Note 4)                      |                 |                        | 50                    |                        |               | dB   |
| Full-Scale Error Temperature Coefficient |        | Code = 255                                                | MAX5380/MAX5381 | ±40                    |                       |                        | ppm/°C        |      |
|                                          |        |                                                           | MAX5382         | ±10                    |                       |                        |               |      |
| DAC OUTPUT                               |        |                                                           |                 |                        |                       |                        |               |      |
| Internal Reference (Note 5)              | REF    | MAX5380                                                   |                 | 1.8                    | 2                     | 2.2                    | V             |      |
|                                          |        | MAX5381                                                   |                 | 3.6                    | 4                     | 4.4                    |               |      |
|                                          |        | MAX5382                                                   |                 | 0.85 x V <sub>DD</sub> | 0.9 x V <sub>DD</sub> | 0.95 x V <sub>DD</sub> |               |      |
| Output Load Regulation                   |        | Code = 255, 0 to 100μA                                    |                 | 0.5                    |                       |                        | LSB           |      |
|                                          |        | Code = 0, 0 to 100μA                                      |                 | 0.5                    |                       |                        |               |      |
| Output Resistance                        |        | V <sub>OUT</sub> = 0 to V <sub>DD</sub> , power-down mode |                 |                        | 10                    |                        |               | kΩ   |
| DYNAMIC PERFORMANCE                      |        |                                                           |                 |                        |                       |                        |               |      |
| Voltage Output Slew Rate                 |        | Positive and negative                                     |                 |                        | 0.4                   |                        |               | V/μs |
| Output Settling Time                     |        | To 1/2 LSB, 50kΩ and 50pF load (Note 6)                   |                 |                        | 20                    |                        |               | μs   |
| Digital Feedthrough                      |        | Code = 0, all digital inputs from 0 to V <sub>DD</sub>    |                 |                        | 2                     |                        |               | nVs  |
| Digital-Analog Glitch Impulse            |        | Code 127 to 128                                           |                 |                        | 40                    |                        |               | nVs  |
| Wake-Up Time                             |        | From software shutdown                                    |                 |                        | 50                    |                        |               | μs   |

# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

MAX5380/MAX5381/MAX5382

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{DD} = +2.7V$  to  $+3.6V$  (MAX5380),  $V_{DD} = +4.5V$  to  $+5.5V$  (MAX5381),  $V_{DD} = +2.7V$  to  $+5.5V$  (MAX5382);  $R_L = 10k\Omega$ ;  $C_L = 50pF$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are  $T_A = +25^\circ C$ .)

| PARAMETER                        | SYMBOL           | CONDITIONS                                                                      |                         | MIN                    | TYP | MAX | UNITS |
|----------------------------------|------------------|---------------------------------------------------------------------------------|-------------------------|------------------------|-----|-----|-------|
| POWER REQUIREMENTS               |                  |                                                                                 |                         |                        |     |     |       |
| Supply Voltage                   | V <sub>DD</sub>  | MAX5380                                                                         |                         | 2.7                    |     | 3.6 | V     |
|                                  |                  | MAX5381                                                                         |                         | 4.5                    |     | 5.5 |       |
|                                  |                  | MAX5382                                                                         |                         | 2.7                    |     | 5.5 |       |
| Supply Current                   | I <sub>DD</sub>  | No load, all digital inputs at 0 or V <sub>DD</sub> , code = 255                |                         |                        | 150 | 230 | μA    |
|                                  |                  | Shutdown mode                                                                   |                         |                        |     | 1   |       |
| DIGITAL INPUTS (SCL, SDA)        |                  |                                                                                 |                         |                        |     |     |       |
| Input Low Voltage                | V <sub>IL</sub>  |                                                                                 |                         | 0.3 x V <sub>DD</sub>  |     |     | V     |
| Input High Voltage               | V <sub>IH</sub>  |                                                                                 |                         | 0.7 x V <sub>DD</sub>  |     |     | V     |
| Input Hysteresis                 | V <sub>HYS</sub> |                                                                                 |                         | 0.05 x V <sub>DD</sub> |     |     | V     |
| Input Capacitance                | C <sub>IN</sub>  | (Note 7)                                                                        |                         | 10                     |     |     | pF    |
| Input Leakage Current            | I <sub>IN</sub>  |                                                                                 |                         |                        |     | ±10 | μA    |
| Pulse Width of Spike Suppressed  | t <sub>SP</sub>  |                                                                                 |                         | 0                      |     | 50  | ns    |
| DIGITAL OUTPUT (SDA, open drain) |                  |                                                                                 |                         |                        |     |     |       |
| Output Low Voltage               | V <sub>OL</sub>  | I <sub>SINK</sub> = 3mA                                                         |                         |                        |     | 0.4 | V     |
|                                  |                  | I <sub>SINK</sub> = 6mA                                                         |                         |                        |     | 0.6 |       |
| Output Fall Time                 | t <sub>OF</sub>  | V <sub>IH</sub> (MIN) to V <sub>IL</sub> (MAX), bus capacitance = 10pF to 400pF | I <sub>SINK</sub> = 3mA |                        |     | 250 | ns    |
|                                  |                  |                                                                                 | I <sub>SINK</sub> = 6mA |                        |     | 250 |       |

## TIMING CHARACTERISTICS

(Figure 3;  $V_{DD} = +2.7V$  to  $+3.6V$  (MAX5380),  $V_{DD} = +4.5V$  to  $+5.5V$  (MAX5381),  $V_{DD} = +2.7V$  to  $+5.5V$  (MAX5382);  $R_L = 10k\Omega$ ;  $C_L = 50pF$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are  $T_A = +25^\circ C$ .) (Note 7)

| PARAMETER                                          | SYMBOL       | CONDITIONS | MIN | TYP | MAX | UNITS   |
|----------------------------------------------------|--------------|------------|-----|-----|-----|---------|
| SCL Clock Frequency                                | $f_{SCL}$    |            | 0   |     | 400 | kHz     |
| Bus Free Time Between a STOP and a START Condition | $t_{BUF}$    |            | 1.3 |     |     | $\mu s$ |
| Hold Time Repeated for a START Condition           | $t_{HD:STA}$ |            | 0.6 |     |     | $\mu s$ |
| Low Period of the SCL Clock                        | $t_{LOW}$    |            | 1.3 |     |     | $\mu s$ |
| High Period of the SCL Clock                       | $t_{HIGH}$   |            | 0.6 |     |     | $\mu s$ |
| Setup Time for a Repeated START Condition          | $t_{SU:STA}$ |            | 0.6 |     |     | $\mu s$ |
| Data Hold Time                                     | $t_{HD:DAT}$ |            | 0   |     | 0.9 | $\mu s$ |
| Data Setup Time                                    | $t_{SU:DAT}$ |            | 100 |     |     | ns      |

# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

## TIMING CHARACTERISTICS (continued)

(Figure 3;  $V_{DD} = +2.7V$  to  $+3.6V$  (MAX5380),  $V_{DD} = +4.5V$  to  $+5.5V$  (MAX5381),  $V_{DD} = +2.7V$  to  $+5.5V$  (MAX5382);  $R_L = 10k\Omega$ ;  $C_L = 50pF$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are  $T_A = +25^\circ C$ .) (Note 7)

| PARAMETER                             | SYMBOL       | CONDITIONS | MIN | TYP | MAX | UNITS   |
|---------------------------------------|--------------|------------|-----|-----|-----|---------|
| Rise Time of Both SDA and SCL Signals | $t_r$        |            |     |     | 300 | ns      |
| Fall Time of Both SDA and SCL Signals | $t_f$        |            |     |     | 300 | ns      |
| Setup Time for STOP Condition         | $t_{SU:STO}$ |            | 0.6 |     |     | $\mu s$ |
| Capacitive Load for Each Bus Line     | $C_b$        |            |     |     | 400 | pF      |

**Note 1:** Guaranteed from code 5 to code 255.

**Note 2:** The offset value extrapolated from the range over which the INL is guaranteed.

**Note 3:** MAX5382 tested at  $V_{DD} = +5V \pm 10\%$ .

**Note 4:** MAX5380 tested at  $V_{DD} = +3V \pm 10\%$ , MAX5381 tested at  $V_{DD} = 5V \pm 10\%$ .


**Note 5:** Actual output voltages at full scale are  $255/256 \times V_{REF}$ .

**Note 6:** Output settling time is measured by taking the code from code 5 to 255, and from code 255 to 5.

**Note 7:** Guaranteed by design.

## Typical Operating Characteristics

( $V_{DD} = +3.0V$  (MAX5380),  $V_{DD} = +5.0V$  (MAX5381/MAX5382);  $R_L = 10k\Omega$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)









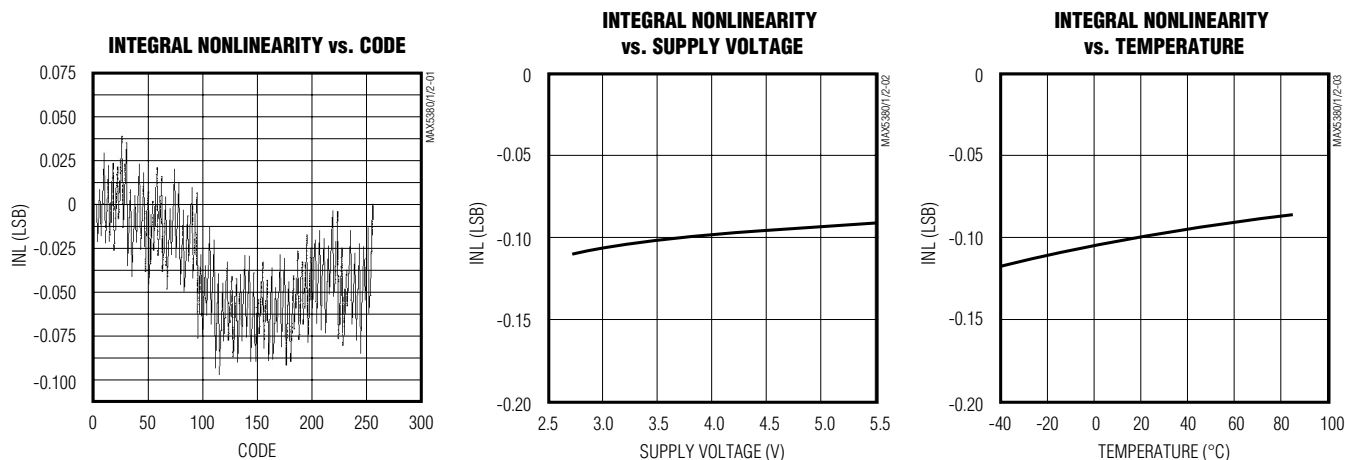


# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

## Typical Operating Characteristics (continued)

( $V_{DD} = +3.0V$  (MAX5380),  $V_{DD} = +5.0V$  (MAX5381/MAX5382);  $R_L = 10k\Omega$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)







MAX5380/MAX5381/MAX5382

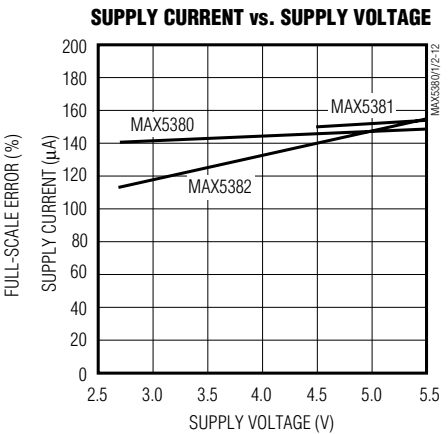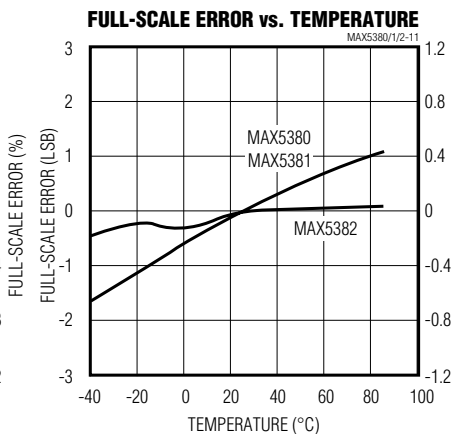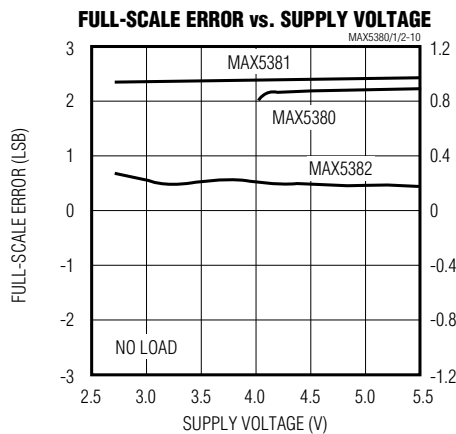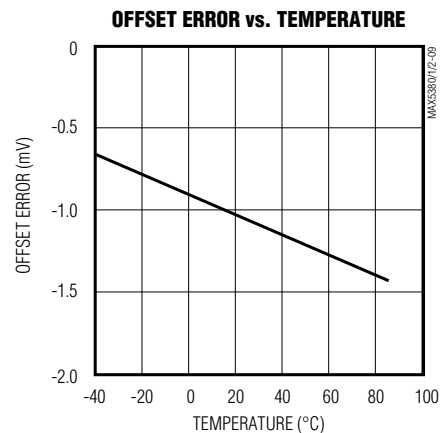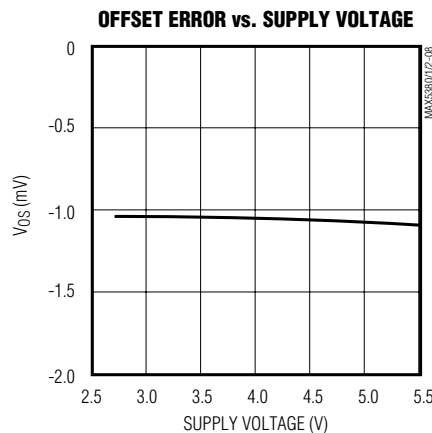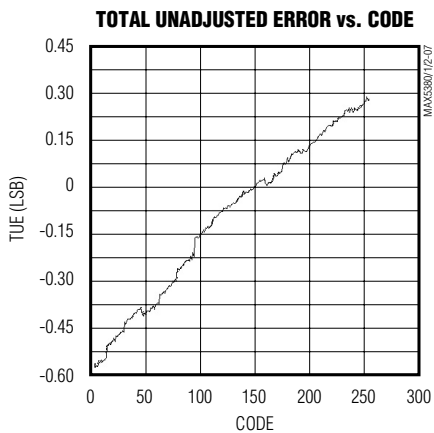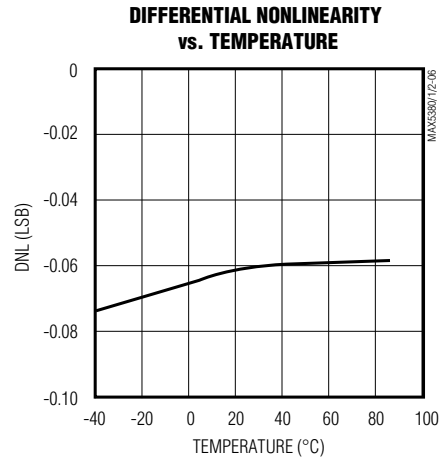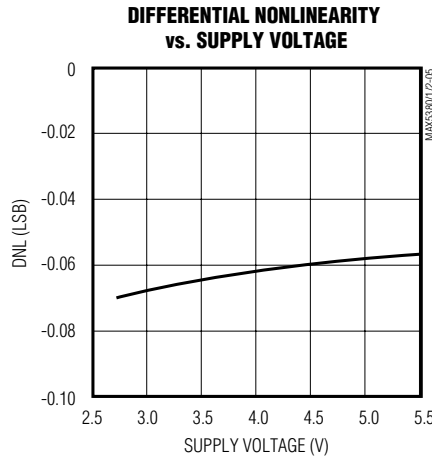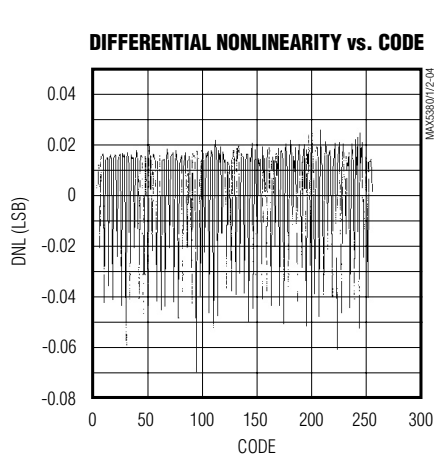

# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

## Typical Operating Characteristics (continued)

( $V_{DD} = +3.0V$  (MAX5380),  $V_{DD} = +5.0V$  (MAX5381/MAX5382);  $R_L = 10k\Omega$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

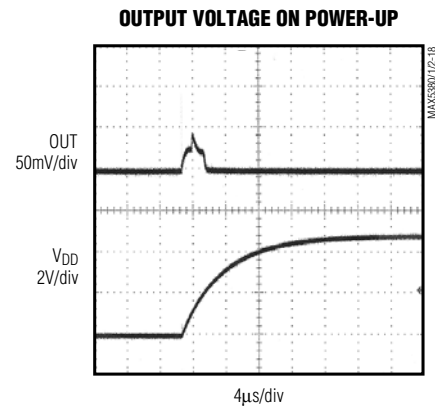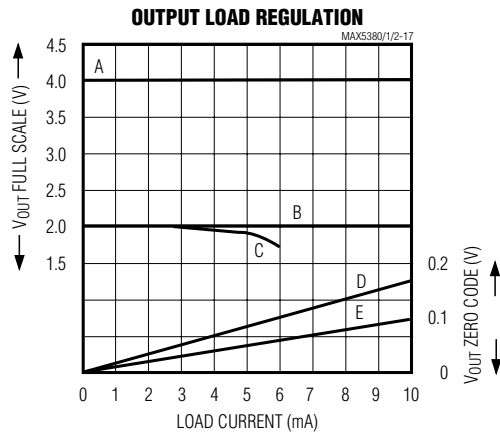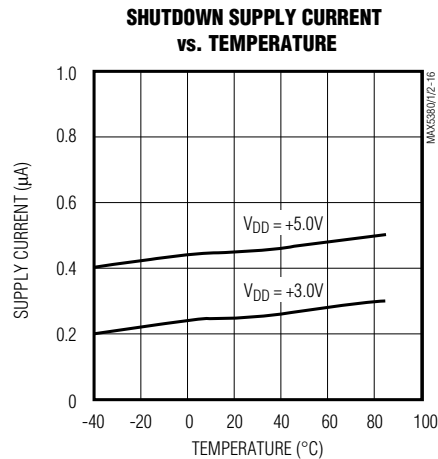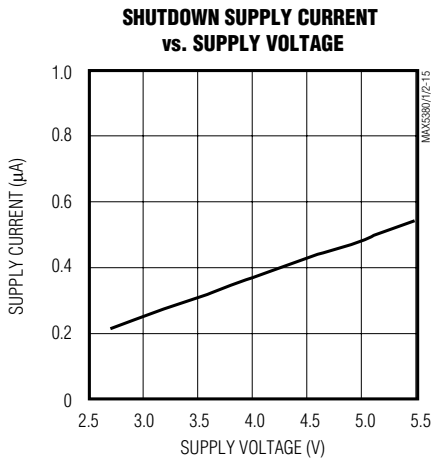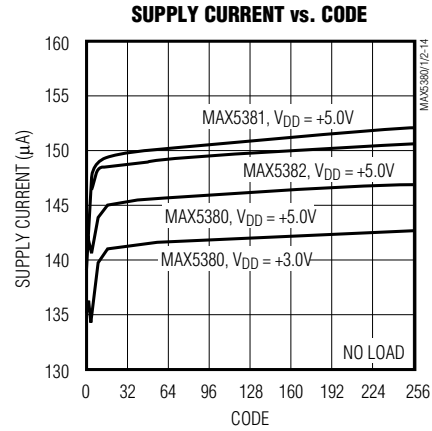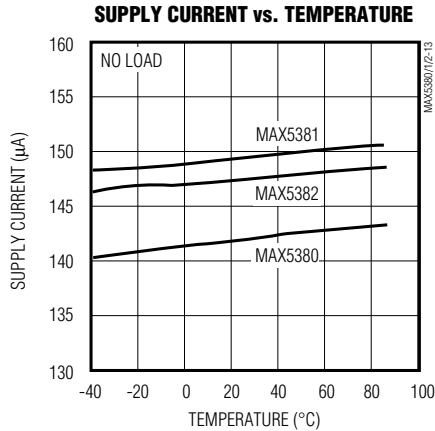


- A: MAX5361/MAX5362,  $V_{DD} = 4.5V$  FULL-SCALE OR SOURCING  
 B: MAX5360, FULL-SCALE,  $V_{DD} = 2.7V$  SINKING,  $V_{DD} = 5.0V$  SOURCING  
 C: MAX5360, FULL-SCALE,  $V_{DD} = 2.7V$  SOURCING  
 D: ZERO CODE,  $V_{DD} = 2.7V$  SINKING  
 E: ZERO CODE,  $V_{DD} = 5.5V$  SINKING

# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

## Typical Operating Characteristics (continued)


( $V_{DD} = +3.0V$  (MAX5380),  $V_{DD} = +5.0V$  (MAX5381/MAX5382);  $R_L = 10k\Omega$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

OUTPUT VOLTAGE EXITING SHUTDOWN

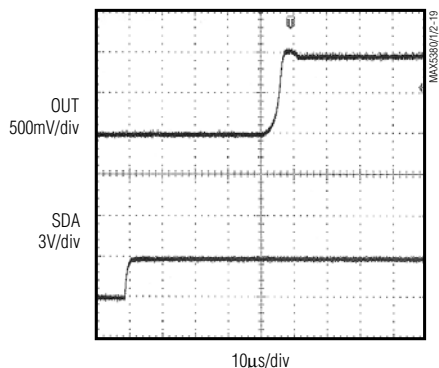


MAX5380, SHDN TO 0x80

OUTPUT VOLTAGE ENTERING SHUTDOWN

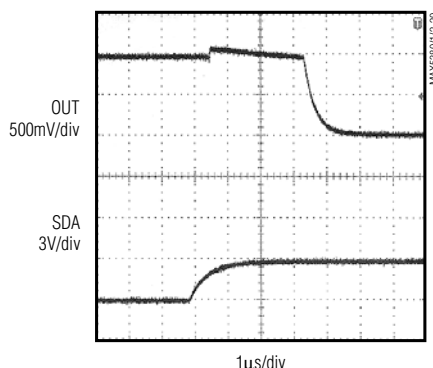


MAX5380, 0x80 TO SHDN

OUTPUT SETTLING FROM 1/4 FS TO 3/4 FS

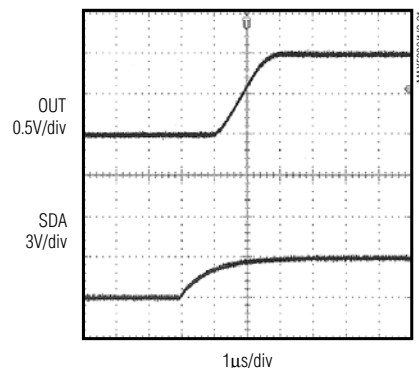


MAX5380

OUTPUT SETTLING FROM 3/4 FS TO 1/4 FS

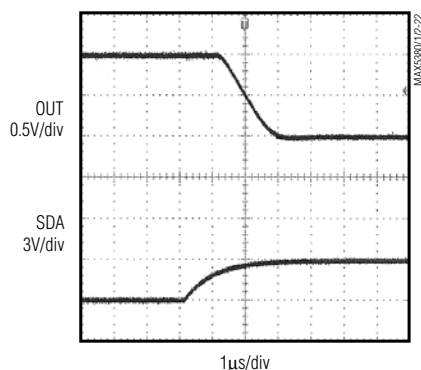


MAX5380

OUTPUT SETTLING 1LSB STEP UP

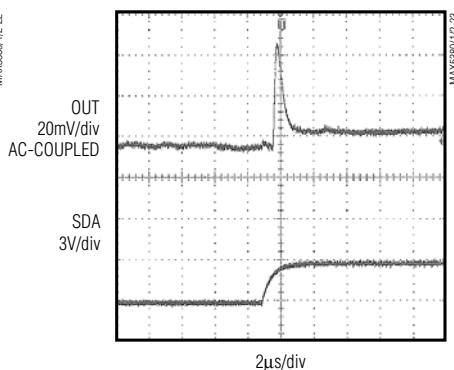

MAX5380, 0x7F TO 0x80

OUTPUT SETTLING 1LSB STEP DOWN

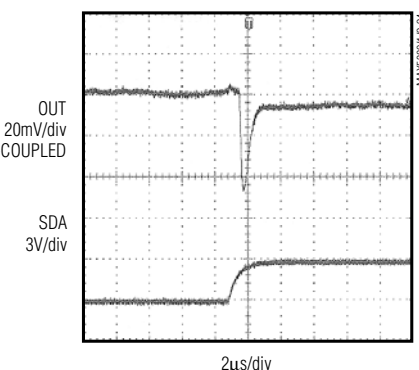

MAX5380, 0x80 TO 0x7F

## Pin Description

| PIN | NAME     | FUNCTION           |
|-----|----------|--------------------|
| 1   | OUT      | DAC Voltage Output |
| 2   | GND      | Ground             |
| 3   | $V_{DD}$ | Power-Supply Input |
| 4   | SDA      | Serial Data Input  |
| 5   | SCL      | Serial Clock Input |

# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

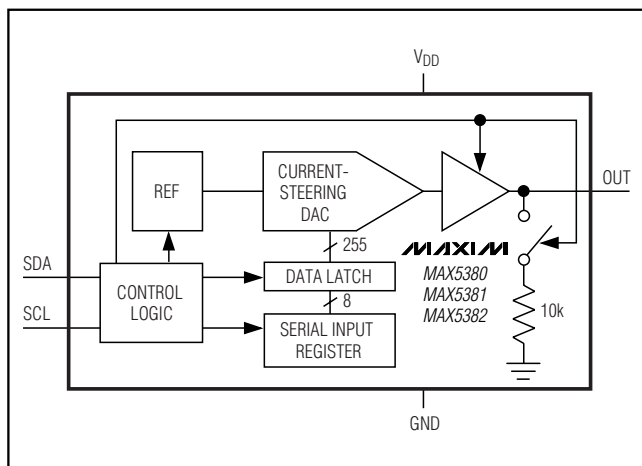


Figure 1. Functional Diagram

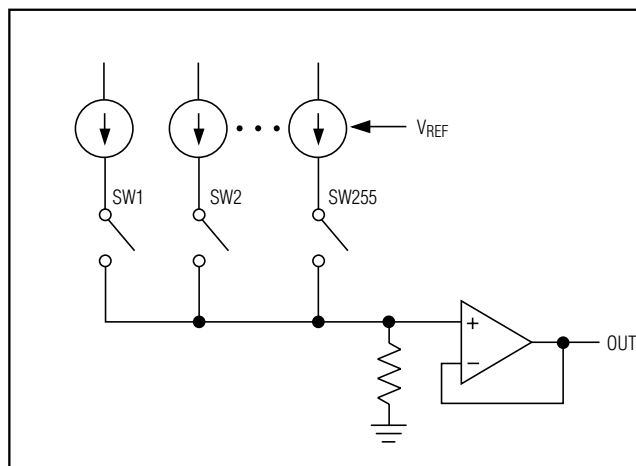


Figure 2. Current-Steering Topology

Table 1. Unipolar Code Output Voltage

| DAC CODE  | OUTPUT VOLTAGE          |                         |                                        |
|-----------|-------------------------|-------------------------|----------------------------------------|
|           | MAX5380                 | MAX5381                 | MAX5382                                |
| 1111 1111 | $2V \times (255 / 256)$ | $4V \times (255 / 256)$ | $0.9 \times V_{DD} \times (255 / 256)$ |
| 1000 0000 | +1V                     | +2V                     | $0.9 \times V_{DD} / 2$                |
| 0000 0001 | 7.8mV                   | 15.6mV                  | $0.9 \times V_{DD} / 256$              |
| 0000 0000 | 0                       | 0                       | 0                                      |

## Detailed Description

The MAX5380/MAX5381/MAX5382 voltage-output, 8-bit digital-to-analog converters (DACs) offer full 8-bit performance with less than 1LSB integral nonlinearity error and less than 1LSB differential nonlinearity error, ensuring monotonic performance. The devices use a simple 2-wire, fast-mode I<sup>2</sup>C-compatible serial interface that operates at up to 400kHz. The MAX5380/MAX5381/MAX5382 include an internal reference, an output buffer, and a low-current shutdown mode, which make these devices ideal for low-power, highly integrated applications (See Figure 1. *Functional Diagram*).

## Analog Section

The MAX5380/MAX5381/MAX5382 employ a current-steering DAC topology as shown in Figure 2. At the core of the DAC is a reference voltage-to-current converter (V/I) that generates a reference current. This current is mirrored to 255 equally weighted current sources. DAC switches control the outputs of these current mirrors so that only the desired fraction of the total current-mirror

currents is steered to the DAC output. The current is then converted to a voltage across a resistor, and this voltage is buffered by the output buffer amplifier.

## Output Voltage

Table 1 shows the relationship between the DAC code and the analog output voltage. The 8-bit DAC code is binary unipolar with  $1\text{LSB} = V_{\text{REF}} / 256$ . The MAX5380/MAX5381 have a full-scale output voltage of  $(+2V - 1\text{LSB})$  and  $(+4V - 1\text{LSB})$ , respectively, set by the internal references. The MAX5382 has a full-scale output voltage of  $(0.9 \times V_{DD} - 1\text{LSB})$ .

## Output Buffer

The DAC voltage output is an internally buffered unity-gain follower that typically slews at  $\pm 0.4V/\mu s$ . The output can swing from 0 to full scale. With a 1/4 FS to 3/4 FS output transition, the amplifier outputs typically settle to 1/2LSB in less than  $5\mu s$  when loaded with  $10k\Omega$  in parallel with  $50pF$ . The buffer amplifiers are stable with any combination of resistive loads  $>10k\Omega$  and capacitive loads  $<50pF$ .



# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

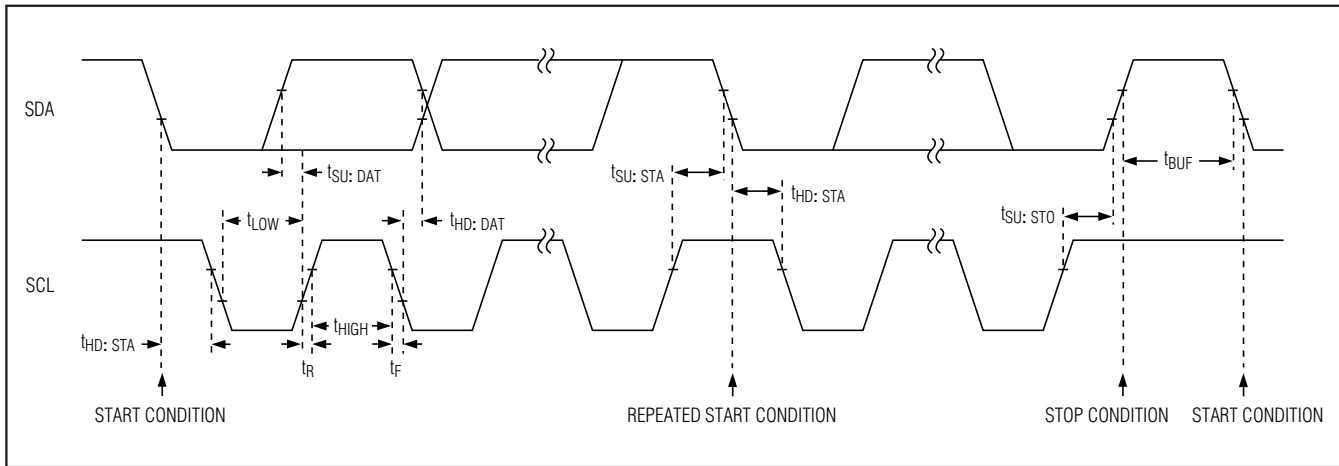


Figure 3. 2-Wire Serial Interface Timing Diagram

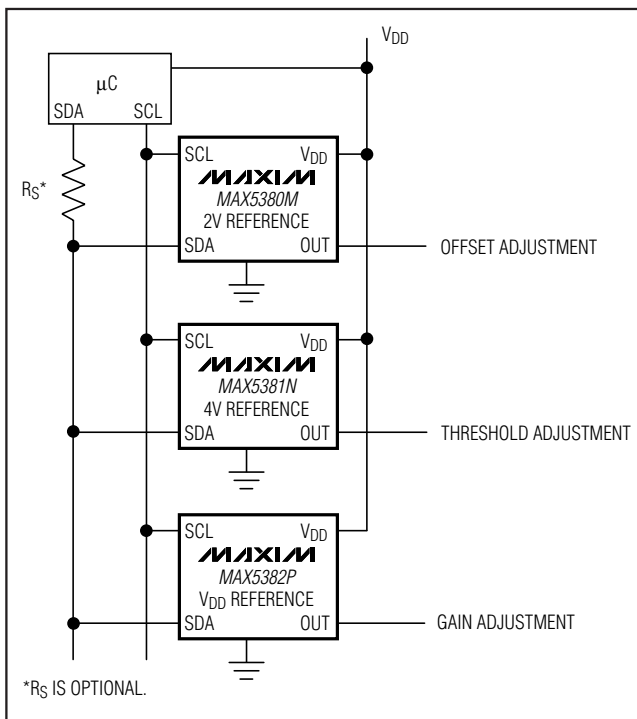


Figure 4. Typical Application Circuit

## Power-On Reset

The MAX5380/MAX5381/MAX5382 have a power-on reset circuit to set the DAC's output to 0 when  $V_{DD}$  is first applied or when  $V_{DD}$  dips below 1.7V (typ). This ensures that unwanted DAC output voltages will not occur immediately following a system startup, such as

after a loss of power. The output glitch at startup is typically less than 50mV.

## Shutdown Mode

The MAX5380/MAX5381/MAX5382 include a software-controlled shutdown mode that reduces the supply current to  $<1\mu A$ . All internal circuitry is disabled, and an internal  $10k\Omega$  resistor is placed from OUT to GND to ensure 0V at OUT while in shutdown. The device enters shutdown in less than  $5\mu s$  and exits shutdown in less than  $50\mu s$ .

## Digital Section

### Serial Interface

The MAX5380/MAX5381/MAX5382 use a simple 2-wire serial interface requiring only two I/O lines (2-wire bus) of a standard microprocessor ( $\mu P$ ) port. Figure 3 shows the timing diagram for signals on the 2-wire bus.

The two bus lines (SDA and SCL) must be high when the bus is not in use. The MAX5380/MAX5381/MAX5382 are receive-only devices (slaves) and must be controlled by a bus master device. Figure 4 shows a typical application where up to four devices can be connected to the bus, provided they have different address settings. External pull-up resistors are not necessary on these lines (when driven by push-pull drivers), though these DACs can be used in applications where pull-up resistors are required (such as in  $I^2C$  systems) to maintain compatibility with existing circuitry. The serial interface operates at SCL rates up to 400kHz. The SDA state is allowed to change only while SCL is low, with the exception of START and STOP conditions as shown in Figure 5. Each transmission consists of a START condition sent by the bus master

# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

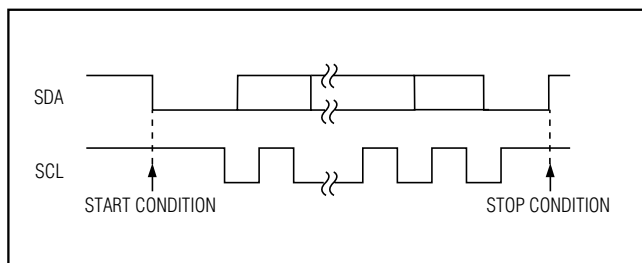


Figure 5. START and STOP Conditions

device, followed by the MAX5380/MAX5381/MAX5382s' preset slave address, a power-mode bit, the DAC data, and finally, a STOP condition (Figure 6). The bus is then free for another transmission.

SDA's state is sampled and therefore must remain stable while SCL is high. Data is transmitted in 8-bit bytes. Nine clock cycles are required to transfer each byte to the MAX5380/MAX5381/MAX5382. Release SDA during the 9th clock cycle since the selected device acknowledges receipt of the byte by pulling SDA low during this time. A series resistor on the SDA line may be needed if the master's output is forced high while the selected device acknowledges (Figure 4).

## Slave Address

The MAX5380/MAX5381/MAX5382 are available with one of four preset slave addresses. Each address option is identified by the suffix L, M, N, or P added to the part number. The address is defined as the 7MSBs sent by the master after a START condition. The address options are 0x60, 0x62, 0x64, 0x66 (left justified with LSB set to 0). The 8th bit, typically used to

define a write or read protocol, sets the device's power mode (SHDN). The device is powered-down when SHDN is set to one. During a device search routine, the MAX5380/MAX5381/MAX5382 acknowledge both options (SHDN = 0 or SHDN = 1), but do not change their power state if a stop condition (or restart) is issued immediately. The second byte (DAC data) must be sent/received for the device to update both power mode and DAC output.

## DAC Data

The 8-bit DAC data is decoded as straight binary MSB first with 1LSB =  $V_{REF} / 256$  and converted into the corresponding analog voltage as shown in Table 1. After receiving the data byte, the devices acknowledge its receipt and expect a STOP condition, at which point the DAC output is updated.

The MAX5380/MAX5381/MAX5382 update the output and the power mode only if the second byte is clocked in (SHDN = 0) or out (SHDN = 1) of the device. When SHDN = 1, the master will read all ones when clocking out a data byte. The MAX5380/MAX5381/MAX5382 do not drive SDA except for the acknowledge bit.

## I<sup>2</sup>C Compatibility

The MAX5380/MAX5381/MAX5382 are compatible with existing I<sup>2</sup>C systems. SCL and SDA are high-impedance inputs; SDA has an open drain that pulls the data line low during the 9th clock pulse. Figure 7 shows a typical I<sup>2</sup>C application. The communication protocol supports standard I<sup>2</sup>C 8-bit communications. The general call address is ignored, and CBUS formats are not supported. The devices' address is compatible with the 7-bit I<sup>2</sup>C addressing protocol only. No 10-bit formats

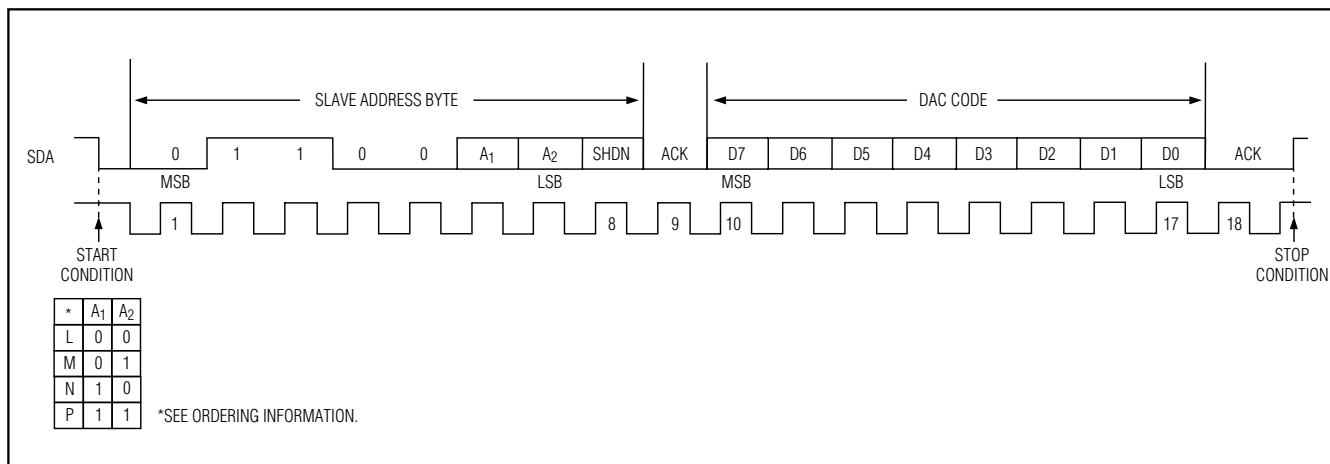


Figure 6. A Complete Serial Transmission

# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

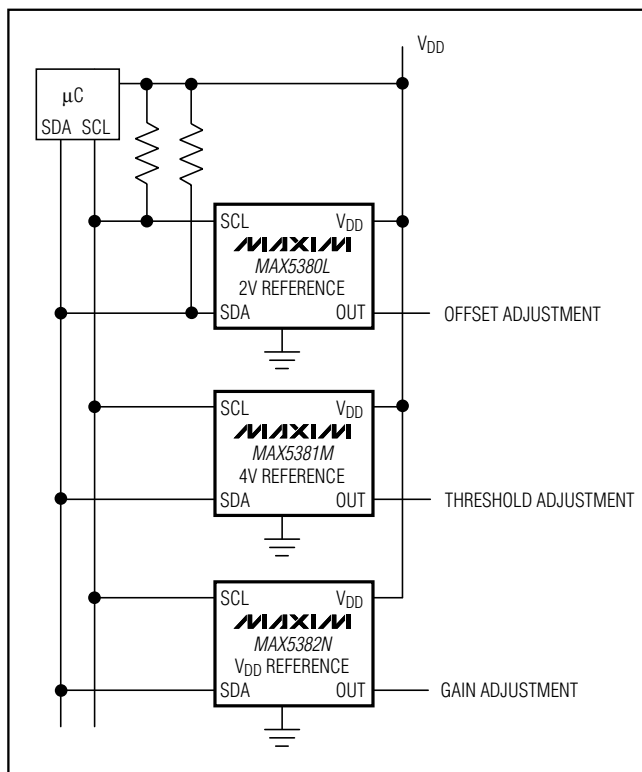


Figure 7. Typical I<sup>2</sup>C Application

are supported. RESTART protocol is supported, but an immediate STOP condition is necessary to update the DAC. The 8th bit of the address byte, typically used to indicate a read or write protocol, is used in the MAX5380/MAX5381/MAX5382 to enter or exit shutdown mode. When MAX5380/MAX5381/MAX5382 are addressed in I<sup>2</sup>C read mode, they enter shutdown mode.

## Applications Information

### Digital Inputs and Interface Logic

The serial 2-wire interface has logic levels defined as  $V_{IL} = 0.3 \times V_{DD}$  and  $V_{IH} = 0.7 \times V_{DD}$ . All inputs include Schmitt trigger buffers to accept slow-transition interfaces. This means that optocouplers can interface directly to the MAX5380/MAX5381/MAX5382 without additional external logic. The digital inputs are compatible with CMOS logic levels and must not be driven with voltages higher than  $V_{DD}$ .

### Power-Supply Bypassing and Layout

Careful printed circuit board layout is important for best system performance. To reduce crosstalk and noise injection, keep analog and digital signals separate. Ensure that the ground return from GND to the supply ground is short and low impedance; a ground plane is recommended. Bypass  $V_{DD}$  with a 0.1µF capacitor to ground as close as possible to the device. If the supply is excessively noisy, connect a 10Ω resistor in series with the supply and  $V_{DD}$  and add additional capacitance.

## Chip Information


TRANSISTOR COUNT: 2910

MAX5380/MAX5381/MAX5382

# Low-Cost, Low-Power, 8-Bit DACs with 2-Wire Serial Interface in SOT23

## Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

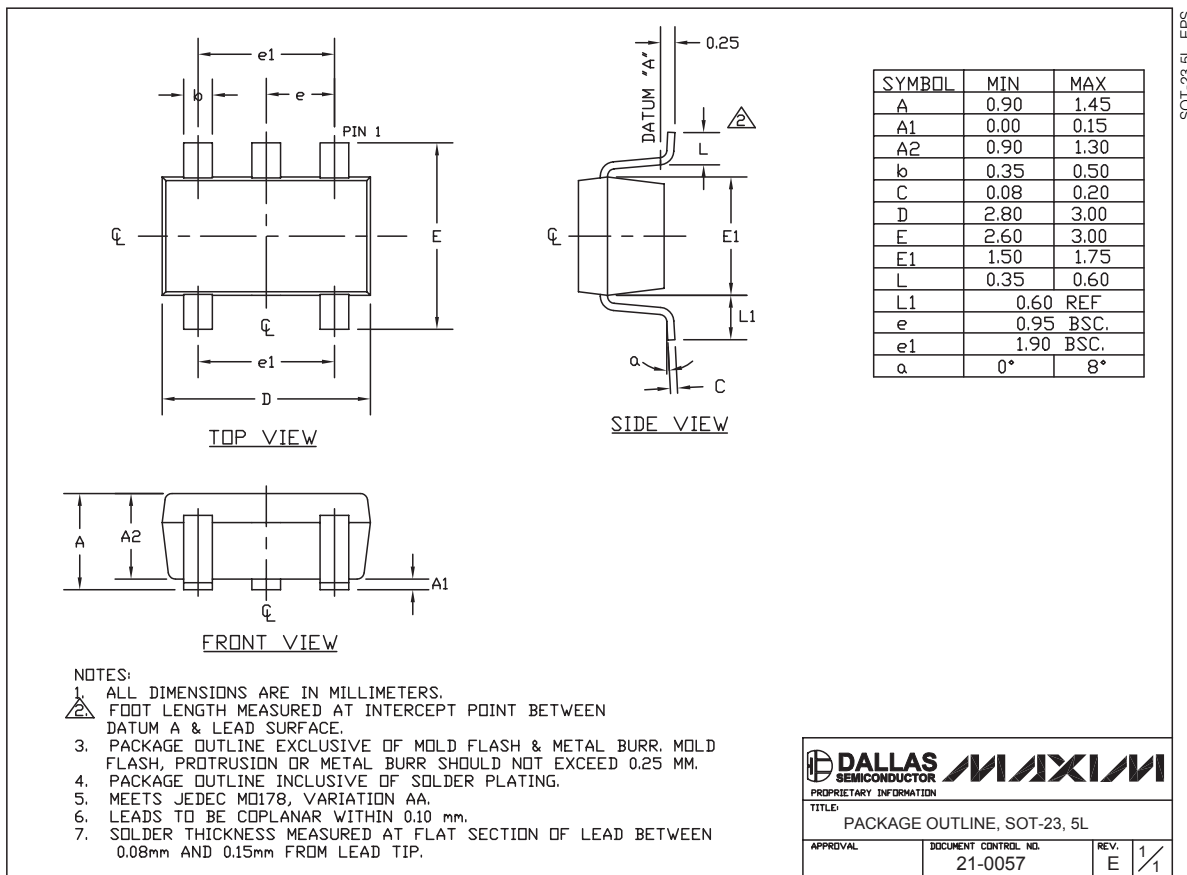

SOT-23 5L EPS

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)