

Click [here](#) for production status of specific part numbers.

## MAX20310

# Ultra-Low Quiescent Current PMIC with SIMO Buck-Boost for Wearable Applications

## General Description

The MAX20310 is a compact power management integrated circuit (PMIC) for space-constrained, battery-powered applications where size and efficiency are critical. The device combines two single inductor, multiple output (SIMO) buck-boosted outputs with two LDOs and other system power management features like a push-button monitor and sequencing controller.


The device includes a SIMO buck-boost switching regulator that provides two programmable voltage rails using a single inductor, minimizing solution footprint. The MAX20310 operates with battery voltages down to 0.7V for use with Zinc Air, Silver Oxide, or Alkaline batteries. The architecture allows for output voltages above or below the battery voltage.

Additionally, the MAX20310 has two programmable low-dropout (LDO) linear regulators. The linear regulators can also operate as power switches that can disconnect the quiescent load of system peripherals.

The MAX20310 includes a programmable power controller that allows the device to be configured for use in applications that require a true off state or for always-on applications. This controller provides a delayed reset signal, voltage sequencing, and customized button timing for on/off control and recovery hard reset.

The device also features a multiplexer for monitoring the power inputs and outputs of each function. The MAX20310 is available in a 16-bump 0.4mm pitch 1.63mm x 1.63mm wafer-level package (WLP) and operates over the -40°C to +85°C extended temperature range.

## Typical Operating Circuit

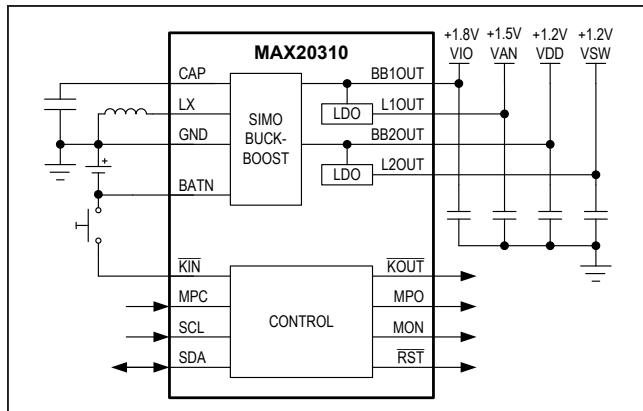

## Benefits and Features

- Extend System Battery Use Time
  - Single Inductor, Multiple Output (SIMO) Ultra-Low  $I_Q$  Buck-Boost Regulator
    - Battery Input Voltage from 0.7V to 2.0V
    - Output Voltage Programmable From 0.9V to 4.05V
    - 250mW Maximum Total Input Power
    - Incremental CAP Quiescent Current 1 $\mu$ A per channel
    - 84% Efficiency for 1.8V, 10mA Output
    - Input Current Limited
  - Dual Ultra-Low  $I_Q$  50mA LDO
    - Inputs Supplied by Dual Buck-Boost Outputs
    - Output Programmable from 0.5V to 3.65V
    - Quiescent Current 1.1 $\mu$ A per LDO / 600nA per Load Switch
    - Configurable as Load Switch
- Extend Product Shelf-Life
  - Battery Seal Mode
    - 10nA Battery Current (typ)
- Minimize Board Area
  - 1.63mm x 1.63mm WLP
- Easy-to-Implement System Control
  - Voltage Monitor Multiplexer
    - 1% Accurate Battery Inverter ( $\pm 10mV$  at 1.0V)
  - Power Button Monitor
    - Buffered Output
    - Power Sequencing
    - Reset Output
    - I<sup>2</sup>C Control Interface

## Applications

- Wearable Medical Devices
- Wearable Fitness Devices
- Portable Medical Devices

*Ordering Information* appears at end of data sheet.

## Absolute Maximum Ratings

(Voltages reference to GND unless otherwise noted)

CAP, BB1OUT, BB2OUT, L1OUT, L2OUT

MPC, SDA, SCL, $\overline{RST}$ , $\overline{KOUT}$ to GND, BATN	-0.3V to +6V
$KIN$	(BATN - 0.3V) to (GND + 0.3V)
LX to BATN	-0.3V to +6V
MPO, MON to BATIN	-0.3V to +6V
GND to BATN	-0.3V to +2.2V
Continuous Current into LX, BATN	+0.5A

Continuous Current into any other terminal	.....±100mA
Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ ):	
16-bump WLP 1.65mm x 1.65mm 0.4mm Pitch	
(derate 17.4mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$ )	.....957mW
Operating Temperature Range	.....-40°C to +85°C
Junction Temperature	.....+150°C
Storage Temperature Range	.....-65°C to +150°C
Soldering Temperature (reflow)	.....+260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only; functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## Package Information

PACKAGE TYPE: 16 WLP	
Package Code	W161F1+1
Outline Number	<a href="#">21-0491</a>
Land Pattern Number	Refer to <a href="#">Application Note 1891</a>
THERMAL RESISTANCE, FOUR-LAYER BOARD	
Junction to Ambient ( $\theta_{JA}$ )	58°C/W

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](#). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maximintegrated.com/thermal-tutorial](#).

## Electrical Characteristics

( $V_{BAT} = +1.2V$ ,  $V_{BB1OUT} = +1.8V$ ,  $V_{BB2OUT} = +1.2V$ ,  $V_{L1OUT} = +1.5V$ ,  $V_{L2OUT} = +1.0V$ ,  $I_{BB1OUT} = I_{BB2OUT} = I_{L1OUT} = I_{L2OUT} = 0A$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , all registers in their default state, unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ ) (Note 1) (Note 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
<b>SUPPLY CURRENT</b>						
Seal Input Current	$I_{SEAL}$	Seal mode, all functions disabled, $T_A = +25^\circ C$	0.01	0.2		$\mu A$
KIN Pullup Resistor to GND	$\overline{KIN}_{PULLUP}$		465			$k\Omega$
CAP Quiescent Current	$I_{Q\_CAP}$	Buck-boost 1 enabled	4			$\mu A$
		Buck-boost 1 and 2 enabled	5			$\mu A$
		Buck-boost 1 and 2 and LDO 1 enabled	5.25			$\mu A$
		Buck-boost 1 and 2 and LDO 1 and 2 enabled	5.5			$\mu A$
<b>POWER SEQUENCE</b>						
Reset Time Accuracy	$t_{RST}$		-10		+10	%
<b>BUCK-BOOST REGULATOR</b>						
Input Voltage	$V_{BAT}$	Operating	0.7	2		V
		Startup	0.8	2		
Output Voltage Range	$V_{OUT}$	50mV steps, (Note 3)	0.9	4.05		V
Quiescent Supply Current From CAP	$I_{Q\_BB}$	Burst mode, no switching, $V_{BB\_OUT} = +1.8V$	1			$\mu A$
Output Accuracy	$V_{OUT\_ACC\_BB\_OUT}$	$T_A = +25^\circ C$	-1	1		%
		$T_A = 0^\circ C$ to $+85^\circ C$	-1.8	+1.8		
		$T_A = -40^\circ C$ to $+85^\circ C$	-3	+3		
Power Supply Rejection Ratio	PSRR	$C_{BB\_OUT} = 10\mu F$	40			dB
Maximum Input Power	$P_{IN}$	(Note 5)	250			mW
Maximum Input Current	$I_{IN}$	$V_{BB\_OUT} = +1.8V$	200			mA
		$V_{BB\_OUT} = +3.3V$	244			
Short-Circuit Current Limit	$I_{LIM}$	Maximum programmable current setting	0.6			A
Passive Discharge Resistance	$R_{PAS\_BB\_OUT}$		10			$k\Omega$
<b>LDO</b>						
Quiescent Supply Current	$I_{Q\_LDO}$	LDO UVLO enabled	1.1	2		$\mu A$
		Switch mode, $V_{BB\_OUT} = +1.8V$	0.4			
Quiescent supply Current in Dropout	$I_{Q\_LDO\_D}$	$V_{BB\_OUT} = V_{LDO\_SET} - 0.1V$	1.7	3.5		$\mu A$
Maximum Output Current	$I_{MAX\_LDO}$	(Note 4)	50			mA
Output Voltage	$V_{OUT\_LDO}$	50mV steps	0.5	3.65		V

## Electrical Characteristics (continued)

( $V_{BAT} = +1.2V$ ,  $V_{BB1OUT} = +1.8V$ ,  $V_{BB2OUT} = +1.2V$ ,  $V_{L1OUT} = +1.5V$ ,  $V_{L2OUT} = +1.0V$ ,  $I_{BB1OUT} = I_{BB2OUT} = I_{L1OUT} = I_{L2OUT} = 0A$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , all registers in their default state, unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ ) (Note 1) (Note 2)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Output Accuracy	$V_{OUT\_ACC\_LDO}$	$V_{BB\_OUT} = (V_{LDO\_SET} + 0.5V)$ or higher, $I_{LOAD} = 1mA$		$T_A = 0^\circ C$ to $+85^\circ C$	-3	3	%
		$T_A = -40^\circ C$ to $+85^\circ C$		$T_A = -40^\circ C$ to $+85^\circ C$	-3.5	+3.5	
Dropout Voltage	$V_{DROP\_LDO}$	$V_{BB\_OUT} = V_{LDO\_SET} = +1.8V$ , $I_{LOAD} = 50mA$			100		mV
Line Regulation	$LINEREG_{LDO}$	$V_{BB\_OUT} = (V_{LDO\_SET} + 0.5V)$ to $+4.05V$		-1	1		%/V
Load Regulation	$LOADREG_{LDO}$	$I_{LOAD} = 50\mu A$ to $50mA$			0.003		%/mA
Passive Discharge Resistance	$R_{PAS\_LDO}$				10		k $\Omega$
Power Switch Mode Resistance	$R_{ON\_LS}$	$V_{BB\_OUT} = +1.2V$			1		$\Omega$
Turn-On Time	$t_{ON\_SLOPE}$	$I_{LDO\_OUT} = 0mA$			0.7		V/ $\mu$ s
		$I_{LDO\_OUT} = 0mA$ . Switch mode.			2.8		
Thermal Shutdown Threshold	$T_{SD}$	$T_J$ rising			150		°C
Thermal Shutdown Hysteresis	$T_{HYS}$				21		°C
<b>MONITOR MULTIPLEXER</b>							
MON Impedance	$R_{MON}$	Sense pin voltage $> +0.5V$			500		$\Omega$
Battery Voltage Buffer Precision	$V_{BAT\_OFF}$			-10	10		mV
<b>DIGITAL SIGNALS</b>							
SDA, SCL, MPC Input Logic-High	$V_{IH}$				1.4		V
SDA, SCL, MPC Input Logic-Low	$V_{IL}$				0.5		V
SDA, $\overline{RST}$ , $\overline{KOUT}$ Output Logic-Low	$V_{OL}$	$I_{OL} = 4mA$			0.4		V
MPO Output Logic-Low	$V_{OL\_MPO}$	$I_{OL} = 4mA$ to GND			0.4		V
		$I_{OL} = 4mA$ to BATN			0.4		
SCL Clock Frequency	$f_{SCL}$	(Note 5)		0	400		kHz
Bus Free Time Between a STOP and START Condition	$t_{BUF}$				1.3		$\mu$ s

**Electrical Characteristics (continued)**

( $V_{BAT} = +1.2V$ ,  $V_{BB1OUT} = +1.8V$ ,  $V_{BB2OUT} = +1.2V$ ,  $V_{L1OUT} = +1.5V$ ,  $V_{L2OUT} = +1.0V$ ,  $I_{BB1OUT} = I_{BB2OUT} = I_{L1OUT} = I_{L2OUT} = 0A$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , all registers in their default state, unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ ) (Note 1) (Note 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
START Condition (Repeated) Hold Time	$t_{HD:STA}$	(Note 6)	0.6			$\mu s$
Low Period of SCL Clock	$t_{LOW}$		1.3			$\mu s$
High Period of SCL Clock	$t_{HIGH}$		0.6			$\mu s$
Setup Time for a Repeated START Condition	$t_{SU:STA}$		0.6			$\mu s$
						$\mu s$
Data Hold Time	$t_{HD:DAT}$	(Notes 7, 8)	0			$\mu s$
Data Setup Time	$t_{SU:DAT}$	(Note 7)	100			ns
Setup Time for STOP Condition	$t_{SU:STO}$		0.6			$\mu s$

**Note 1:** All devices are 100% production tested at  $T_A = +25^\circ C$ . Limits over the operating temperature range are guaranteed by design.

**Note 2:**  $V_{BAT}$  refers to the voltage across the battery terminals;  $V_{BAT} = V_{GND} - V_{BATN}$ .

**Note 3:** Output voltage must not exceed  $V_{BB\_OUT} - V_{BATN} = 5.0V$ .

**Note 4:** Actual value may be limited by the lower of the capability of the source (battery) or the maximum input power of the MAX20310.

**Note 5:** Timing must be fast enough to prevent the device from entering sleep mode due to bus low for period  $> t_{SLEEP}$ .








**Note 6:**  $f_{SCL}$  must meet the minimum clock low time plus the rise/fall times.

**Note 7:** The maximum  $t_{HD:DAT}$  has to be met only if the device does not stretch the low period ( $t_{LOW}$ ) of the SCL signal.

**Note 8:** The device internally provides a hold time of at least 100ns for the SDA signal (referred to the  $V_{IH\_MIN}$  of the SCL signal) to bridge the undefined region of the falling edge of SCL.








## Typical Operating Characteristics

( $V_{BAT} = 1.2V$ ,  $V_{BB1OUT} = 1.8V$ ,  $V_{BB2OUT} = 1.2V$ ,  $V_{L1OUT} = 1.5V$ ,  $V_{L2OUT} = 1.0V$ ,  $L = 1.5\mu H$ ,  $C_{BB\_OUT} = 10\mu F$  (effective),  $C_{CAP} = 1\mu F$  (effective),  $C_{LDO} = 2.2\mu F$  (effective) no load on any rail,  $T_A = +25^\circ C$ , unless otherwise noted.)

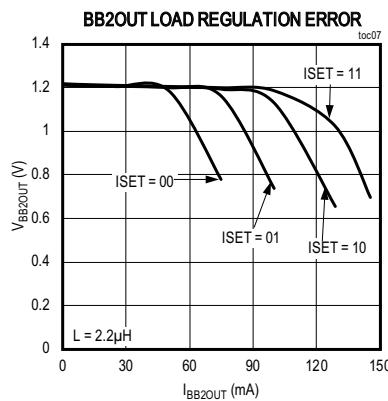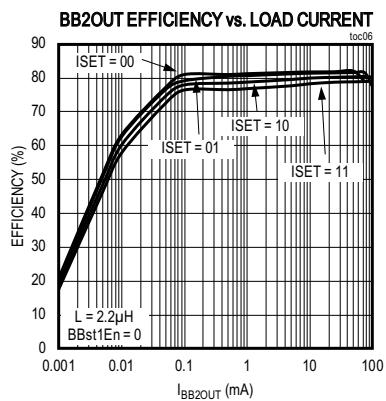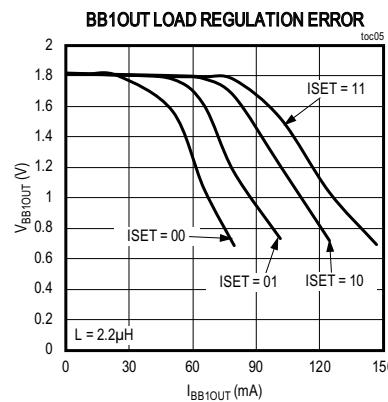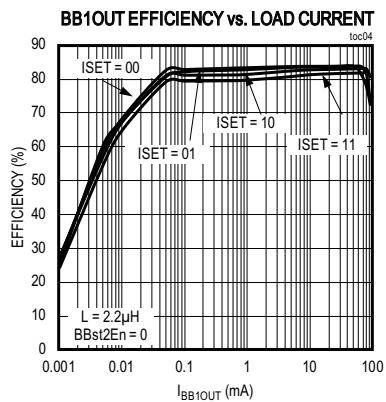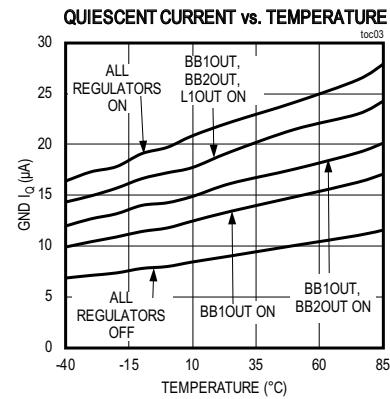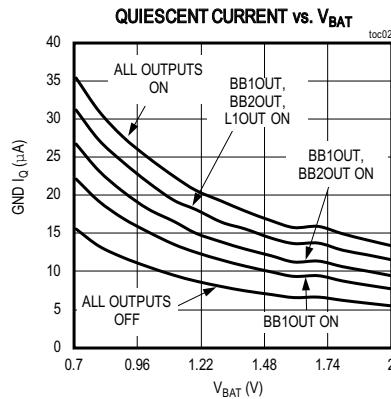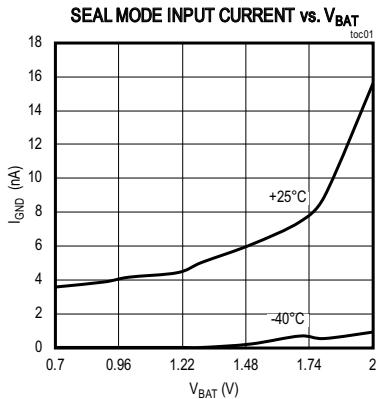


## Typical Operating Characteristics (continued)

( $V_{BAT} = 1.2V$ ,  $V_{BB1OUT} = 1.8V$ ,  $V_{BB2OUT} = 1.2V$ ,  $V_{L1OUT} = 1.5V$ ,  $V_{L2OUT} = 1.0V$ ,  $L = 1.5\mu H$ ,  $C_{BB\_OUT} = 10\mu F$  (effective),  $C_{CAP} = 1\mu F$  (effective),  $C_{LDO} = 2.2\mu F$  (effective) no load on any rail,  $T_A = +25^\circ C$ , unless otherwise noted.)

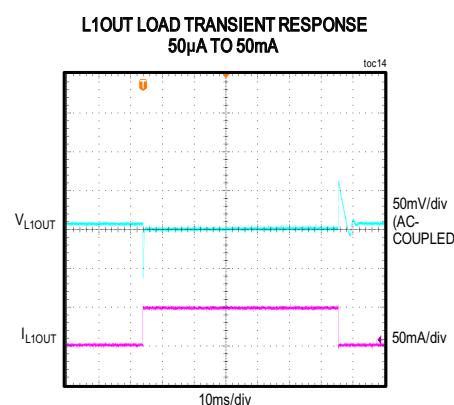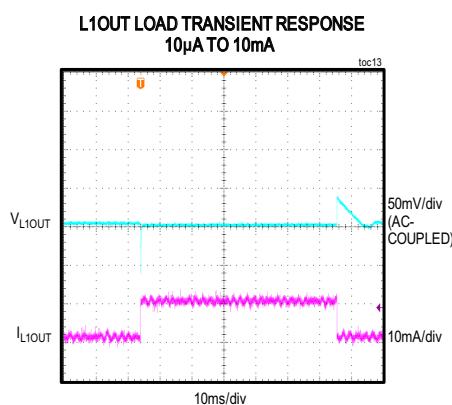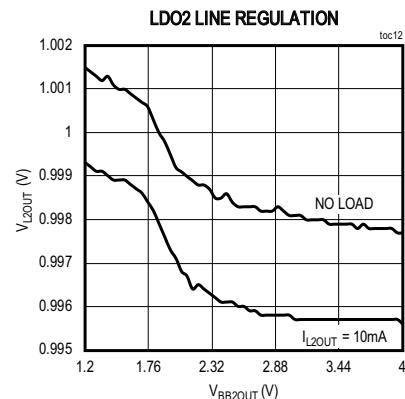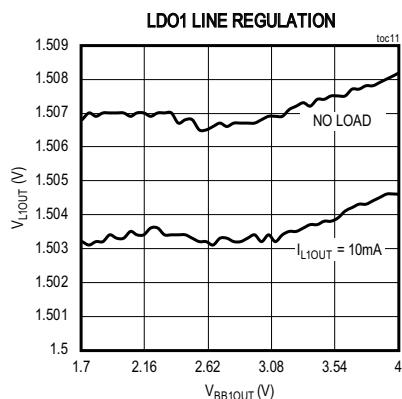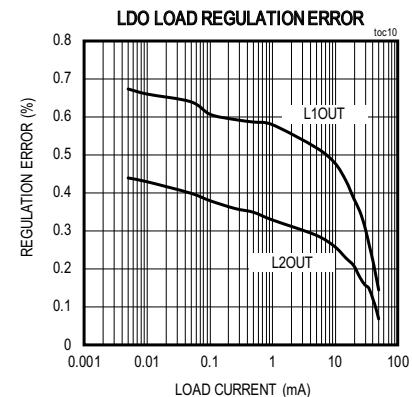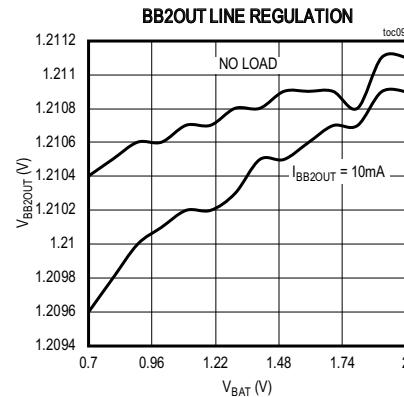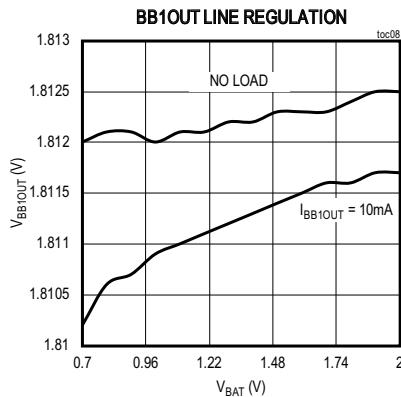


## Typical Operating Characteristics (continued)

( $V_{BAT} = 1.2V$ ,  $V_{BB1OUT} = 1.8V$ ,  $V_{BB2OUT} = 1.2V$ ,  $V_{L1OUT} = 1.5V$ ,  $V_{L2OUT} = 1.0V$ ,  $L = 1.5\mu H$ ,  $C_{BB\_OUT} = 10\mu F$  (effective),  $C_{CAP} = 1\mu F$  (effective),  $C_{LDO} = 2.2\mu F$  (effective) no load on any rail,  $T_A = +25^\circ C$ , unless otherwise noted.)

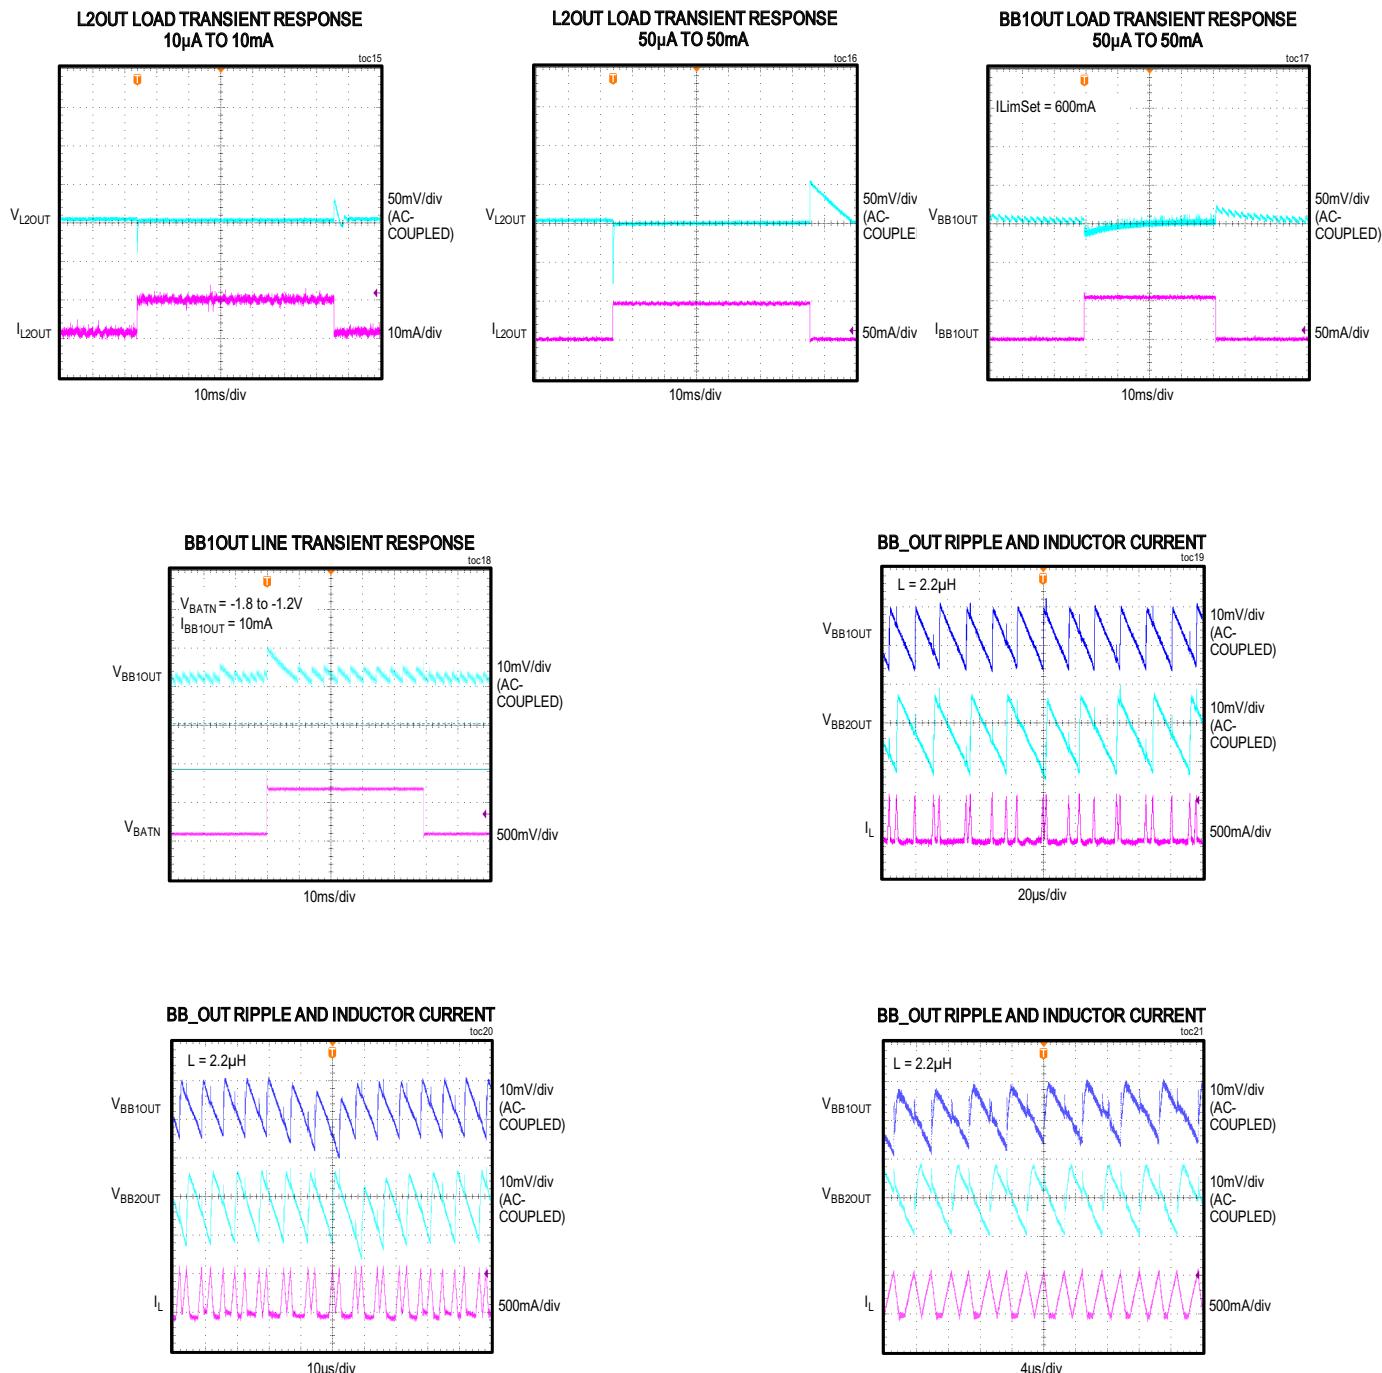


## Bump Configuration

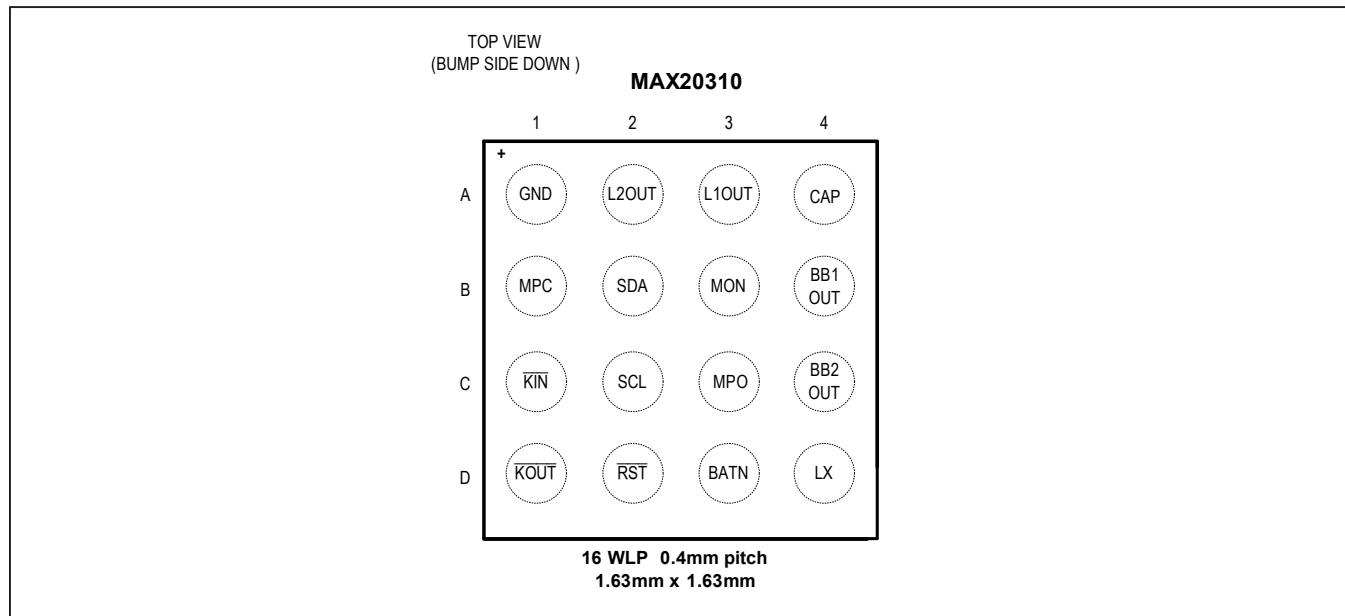

## Bump Description

BUMP	NAME	FUNCTION
A1	GND	Ground/Battery Positive Terminal
A2	L2OUT	LDO/Switch 2 Output
A3	L1OUT	LDO/Switch 1 Output
A4	CAP	Internal Supply Decoupling. Connect a minimum 1 $\mu$ F of capacitance to GND.
B1	MPC	Multipurpose Control Input
B2	SDA	I <sup>2</sup> C Serial Data
B3	MON	Monitor Multiplexer Output
B4	BB1OUT	Buck-Boost 1 Output
C1	KIN	Key Input, Internally Pulled to GND. To signal active, short KIN to BATN.
C2	SCL	I <sup>2</sup> C Serial Clock
C3	MPO	Multipurpose Output. Level shifted digital output for controlling devices referenced to the negative battery terminal.
C4	BB2OUT	Buck-Boost 2 Output
D1	KOUT	Key Output. Active-low, level-shifted button status output.
D2	RST	Reset Output. Active-low, open-drain output indicates completion of sequencer.
D3	BATN	Battery Negative Terminal
D4	LX	Inductor Switch Connection

## Functional Block Diagram

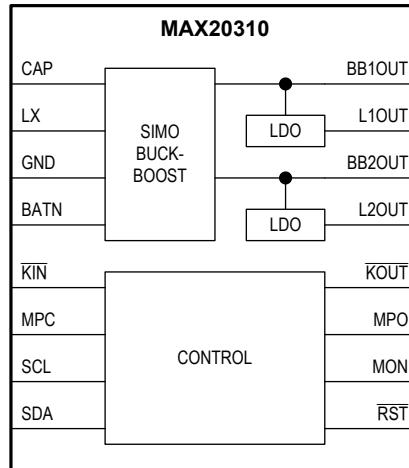

## Detailed Description

### Power Regulation

The MAX20310 features an ultra-low  $I_Q$  SIMO buck-boost switching regulator that provides two programmable voltage rails and two low- $I_Q$  LDOs. The regulators minimize quiescent current and operate on low input voltages. This makes the MAX20310 ideal for applications powered by single-cell Alkaline, Zinc Air, or Silver Oxide batteries. All regulator outputs are capable of being discharged through a resistive load (passive discharge) when turned off. The discharge mode is set by the PDsc bits in each regulator's configuration register.

### Switching Regulator

In order to maximize efficiency, the switching regulator is implemented with an inverting buck-boost topology. Referencing the battery's positive terminal to ground configures the battery as a negative supply and the switching regulator output is positive. The switching regulator operates at supplies from -2.0V down to -0.7V, but requires -0.8V to start up. The outputs are independently configurable in 50mV increments.

### LDO

For applications that require lower noise supplies, or simply need additional regulated voltages, the MAX20310 includes two LDO regulators. In normal operation, each LDO can source up to 50mA. The LDO inputs are

supplied by the buck-boost outputs. As such, an LDO cannot be enabled unless its corresponding switching regulator output is active. The LDOs can be used as switches to disconnect the quiescent loads of peripheral systems, increasing battery life. The LDO outputs are configurable from 0.5 to 3.65V in 50mV increments.

### Voltage Monitor Multiplexer

In addition to the four regulator outputs, the MAX20310 includes a voltage monitor multiplexer. The I<sup>2</sup>C controlled multiplexer connects the MON pin to any one of the regulator outputs or to BATN. This provides access to the different voltage rails in the device for ADC measurements. An inverting amplifier buffers the BATN channel in order to allow a positive, single-ended ADC to measure the voltage.

### Multipurpose Control Input

The MAX20310 includes a multipurpose control (MPC) pin that can control various functions inside the part based on the buck-boost and LDO configuration and sequence register settings. For devices with at least one BBst\_Seq[2:0] or LDO\_Seq[2:0] field set by the factory to 101 (enabled by MPC, active-low) or 110 (enabled by MPC, active-high) according to [Table 19](#), the MPC pin can be configured to control the multipurpose output (MPO) pin for level-shifting to the battery voltage. See the [Multipurpose Output](#) section below for details. If the MPC pin is unused, it must be tied to GND.

**Multipurpose Output**

In addition to the MPC pin, the MAX20310 also features a multipurpose output (MPO). The MPO pin can be configured to pull down to BATN, to pull up to GND, to pullup/down (push/pull), or be disabled (no pull). On devices with at least one BBst\_Seq[2:0] or LDO\_Seq[2:0] field set by the factory to 101 (enabled by MPC, active-low) or 110 (enabled by MPC, active-high), as detailed in table 19, the MPOCfg register allows the state of the MPO pin to be controlled either by I<sup>2</sup>C command or by

the MPC pin, regardless of polarity. [Table 1](#) below shows the truth table associated with such devices. Devices with none of the one BBst\_Seq[2:0] or LDO\_Seq[2:0] fields set by the factory to 101 (enabled by MPC, active-low) or 110 (enabled by MPC, active-high) allow the MPO output to be controlled by I<sup>2</sup>C command only. [Table 2](#) below shows the truth table associated with such devices. An example implementation is included in [Figure 1](#) to show how to use this pin to control an external regulator powered directly from the battery.

**Table 1. MPO Truth Table for Devices with One or More BBst\_Seq[2:0]/LDO\_Seq[2:0] Field Set to 101 or 110 by the Factory**

MPOPull[1:0]		MPOEn[1:0]		MPC	OUTPUT STATE
0	0	X	X	X	High-Impedance
0	1	0	0	X	High-Impedance
0	1	0	1	X	Pulled to BATN
0	1	1	0	0	Pulled to BATN
0	1	1	0	1	High-Impedance
0	1	1	1	0	High-Impedance
0	1	1	1	1	Pulled to BATN
1	0	0	0	X	Pulled to GND
1	0	0	1	X	High-Impedance
1	0	1	0	0	High-Impedance
1	0	1	0	1	Pulled to GND
1	0	1	1	0	Pulled to GND
1	1	0	0	X	Pulled to GND
1	1	0	1	X	Pulled to BATN
1	1	1	0	0	Pulled to BATN
1	1	1	0	1	Pulled to GND
1	1	1	1	0	Pulled to GND
1	1	1	1	1	Pulled to BATN

**Table 2. MPO Truth Table for Devices with None of the BBst\_Seq[2:0]/LDO\_Seq[2:0] Fields Set to 101 or 110 by the Factory**

MPOPull[1:0]		MPOEn[1:0]		MPC	OUTPUT STATE
0	0	X	X	X	High-Impedance
0	1	0	0	X	High-Impedance
0	1	0	1	X	Pulled to BATN
1	0	0	0	X	Pulled to GND
1	0	0	1	X	High-Impedance
1	1	0	0	X	Pulled to GND
1	1	0	1	X	Pulled to BATN

MAX20310

# Ultra-Low Quiescent Current PMIC with SIMO Buck-Boost for Wearable Applications

## Power On/Off and Reset Control

The MAX20310 is intended for use in small battery-powered applications. It includes an off mode to minimize drain on the battery. In the off mode, all outputs are disabled and the part waits until the KIN input goes active to wake the device. The KIN input is internally pulled to GND and needs to be shorted to BATN to wake the device. An open-drain buffered copy of the state of KIN is available at KOUT allowing the system to monitor the status of the button. When the device is powered on, each function can be automatically enabled by a sequencing controller or remain off until an I<sup>2</sup>C command enables it. This behavior is determined by the factory settings. A button monitor is present on the MAX20310 and can produce different actions for long or short button presses.

The list of settings and corresponding actions is shown in [Table 18](#). A button press always wakes up the device, and the factory configuration determines other behavior.

## Reverse Battery Protection

Some applications use batteries like AAA's that do not have mechanical reverse installation protection. In such applications, an optional external nMOSFET and resistor connected as shown in [Figure 2](#) provide reverse battery protection for the system. In normal operation, the  $100\Omega$  resistor slows the charging of  $C_{IN}$  at startup until  $V_{CAP} - V_{BATN}$  exceeds the threshold of the external MOSFET. Thereafter, the circuit functions nominally. In the case of battery reversal, the  $100\Omega$  resistor limits the current from the battery and protects the downstream system.

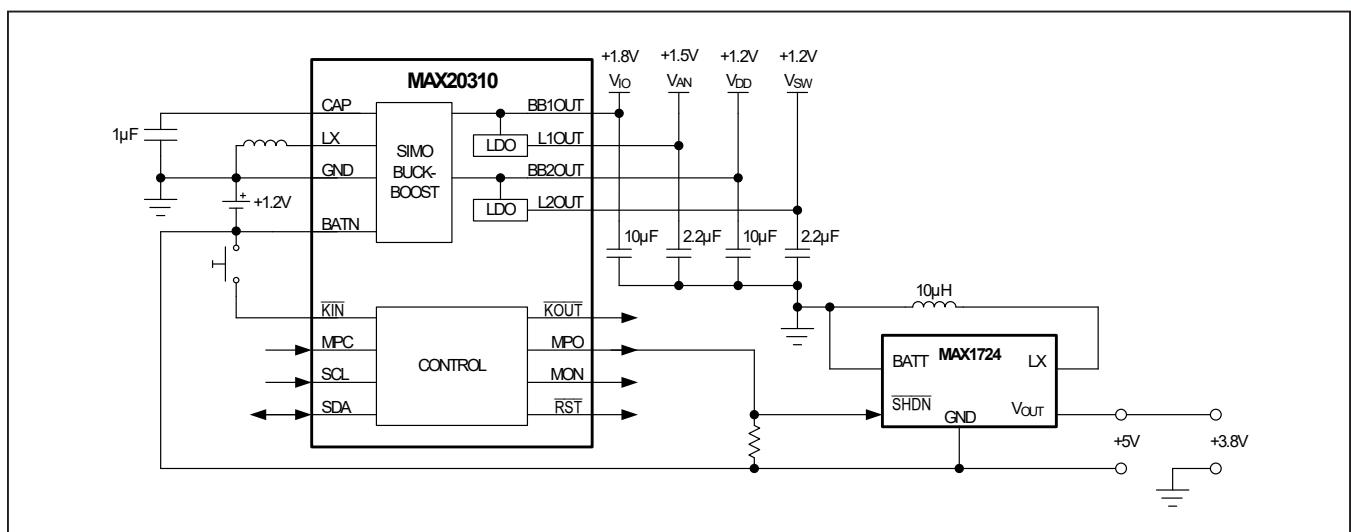


Figure 1. Controlling an External Regulator with MPO

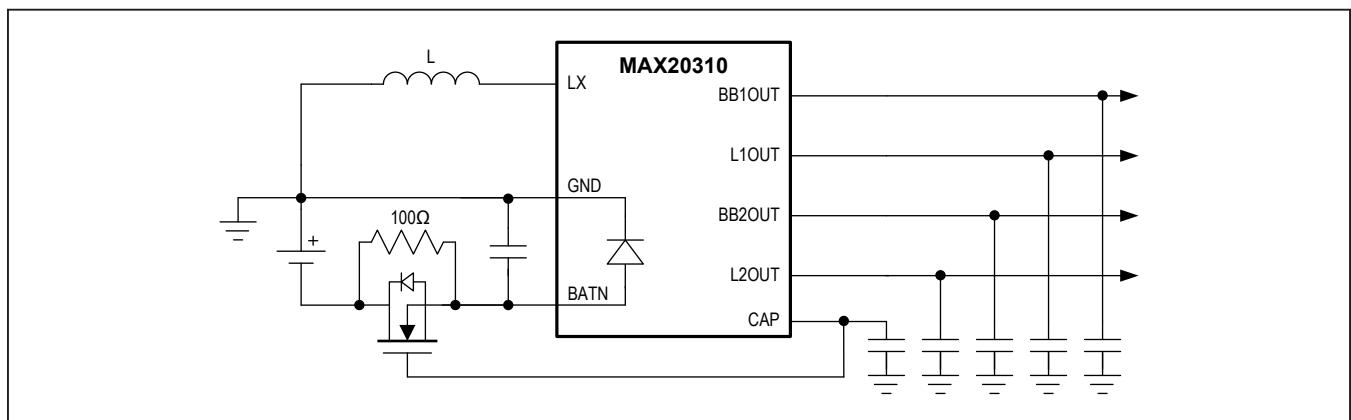


Figure 2. Reverse Battery Protection Using an External MOSFET

## Power Sequencing

The sequencing of the voltage regulators during power-on is configurable. Regulators can be configured to turn on at one of four points during the power on process. The four points are: 100ms after the power-on event, after the RST signal is released, or at two points in between. The two points are fixed proportionally to the duration of the Power-On Reset (POR) process, but the overall time of the reset delay is configurable (refer to PwrCfg register). The timing relationship is presented graphically in [Figure 3](#). Additionally, the regulators are controllable by the sequencer, an input pin, or I<sup>2</sup>C command after reset is released. Note that the LDOs will not turn on until the associated switching output is also enabled.

## I<sup>2</sup>C Interface

The MAX20310 uses the two-wire I<sup>2</sup>C interface to communicate with a host microcontroller. The configuration settings and status information provided through this interface are detailed in the register descriptions. The slave address is 0x50 for writes and 0x51 for reads.

## Applications Information

### Always-On Devices

Due to its low power consumption, the MAX20310 is ideal for always-on applications. Products targeting these always-on, buttonless applications should select a version of the MAX20310 with PwrCfgMd[1:0] = 00 and connect the KIN input to BATN as shown in [Figure 4](#). This PwrCfgMd setting configures a KIN press to only turn on the device. When a fresh battery is inserted, or when a battery tab used during product shelf life is removed, KIN is pulled to BATN and the device turns on.

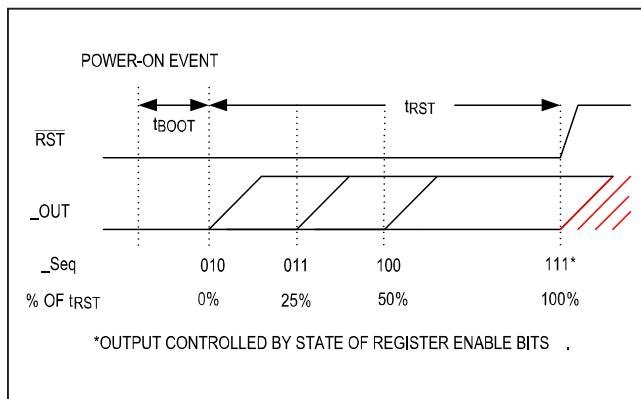


Figure 3. Reset Sequence Programming

## Additional Voltage Regulators

In applications with additional voltage regulators operating directly from the battery, careful consideration must be given to battery and system power domains. Due to the negative battery implementation of the MAX20310, the common node for the system power domain (GND) is connected to the positive terminal of the battery.

Regulators using the battery as a positive supply should connect BATN as the local ground and GND as the input supply. However, the output must always be referenced to the positive terminal of the battery (GND). This causes the output voltage of the regulator, referenced to GND, to equal  $V_{OUT} - V_{BAT}$ . As the battery discharges, this voltage might change over time.

For example, in [Figure 1](#), the external MAX1724 step-up converter produces 5V with respect to the regulator ground (BATN). Because the battery voltage is 1.2V, the output voltage in the system power domain is 3.8V. Due to the relative flatness of the discharge curves for Silver-Oxide, Zinc-Air, and other common coin cell batteries, the challenges associated with a changing reference node are reduced. However, designs should account for some variation of the BATN node.

## I<sup>2</sup>C Interface

The MAX20310 contains an I<sup>2</sup>C-compatible interface for data communication with a host controller (SCL and SDA). The interface supports a clock frequency of up to 400kHz. SCL and SDA require pullup resistors that are connected to a positive supply.

### Start, Stop, and Repeated Start Conditions

When writing to the MAX20310 using I<sup>2</sup>C, the master sends a START condition (S) followed by the MAX20310

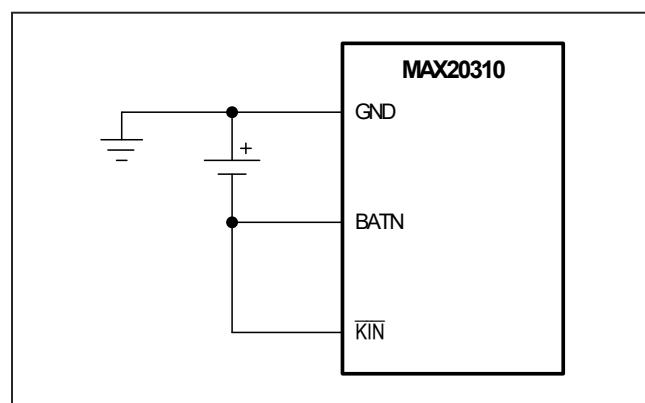


Figure 4. KIN Connected to BATN for Always-On Applications

I<sup>2</sup>C address. After the address, the master sends the register address of the register that is to be programmed. The master then ends communication by issuing a

STOP condition (P) to relinquish control of the bus, or a REPEATED START condition (Sr) to communicate to another I<sup>2</sup>C slave. See [Figure 5](#).

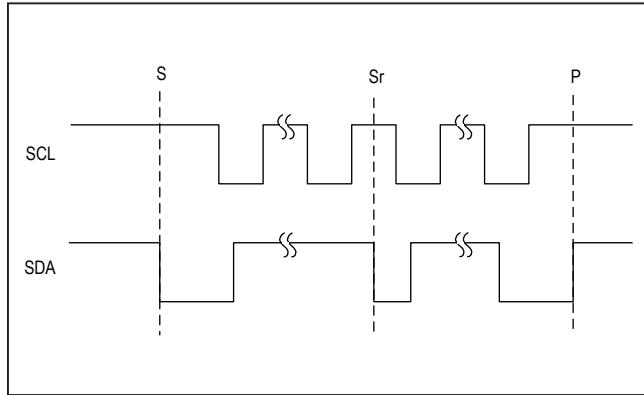


Figure 5. I<sup>2</sup>C START, STOP and REPEATED START Conditions

### Slave Address

Set the Read/Write bit high to configure the MAX20310 to read mode. Set the Read/Write bit low to configure the MAX20310 to write mode. The address is the first byte of information sent to the MAX20310 after the START condition.

### Bit Transfer

One data bit is transferred on the rising edge of each SCL clock cycle. The data on SDA must remain stable during the high period of the SCL clock pulse. Changes in SDA while SCL is high and stable are considered control signals (see the START, STOP and REPEATED START Conditions section). Both SDA and SCL remain high when the bus is not active.

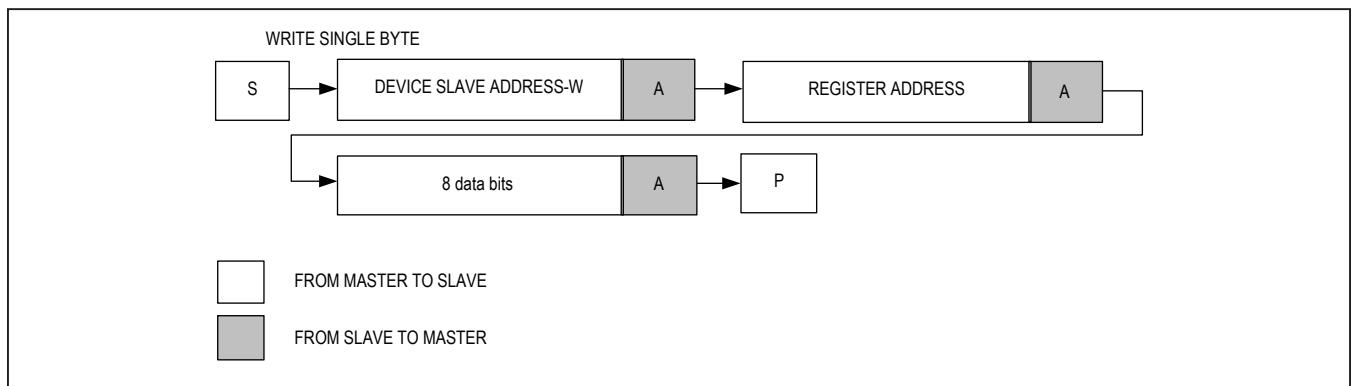


Figure 6. Write Byte Sequence

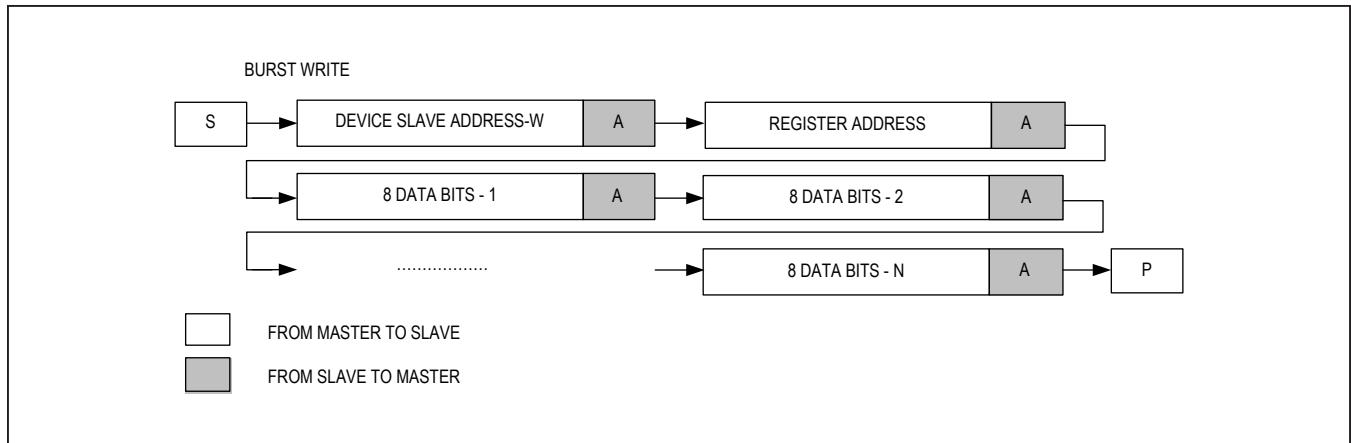


Figure 7. Burst Write Sequence

**Single-Byte Write**

In this operation, the master sends an address and two data bytes to the slave device (Figure 6). The following procedure describes the single byte write operation:

The master sends a START condition

The master sends the 7-bit slave address plus a write bit (low)

The addressed slave asserts an ACK on the data line

The master sends the 8-bit register address

The slave asserts an ACK on the data line only if the address is valid (NAK if not)

The master sends 8 data bits

The slave asserts an ACK on the data line

The master generates a STOP condition

**Burst Write**

In this operation, the master sends an address and multiple data bytes to the slave device (Figure 7). The slave device automatically increments the register address after each data byte is sent, unless the register being accessed is 0x00, in which case the register address remains the same. The following procedure describes the burst write operation:

The master sends a START condition

The master sends the 7-bit slave address plus a write bit (low)

The addressed slave asserts an ACK on the data line

The master sends the 8-bit register address

The slave asserts an ACK on the data line only if the address is valid (NAK if not)

The master sends 8 data bits

The slave asserts an ACK on the data line

Repeat 6 and 7 N-1 times

The master generates a STOP condition

**Single-Byte Read**

In this operation, the master sends an address plus two data bytes and receives one data byte from the slave device (Figure 8). The following procedure describes the single byte read operation:

The master sends a START condition

The master sends the 7-bit slave address plus a write bit (low)

The addressed slave asserts an ACK on the data line

The master sends the 8-bit register address

The slave asserts an ACK on the data line only if the address is valid (NAK if not)

The master sends a REPEATED START condition

The master sends the 7-bit slave address plus a read bit (high)

The addressed slave asserts an ACK on the data line

The slave sends 8 data bits

The master asserts a NACK on the data line

The master generates a STOP condition

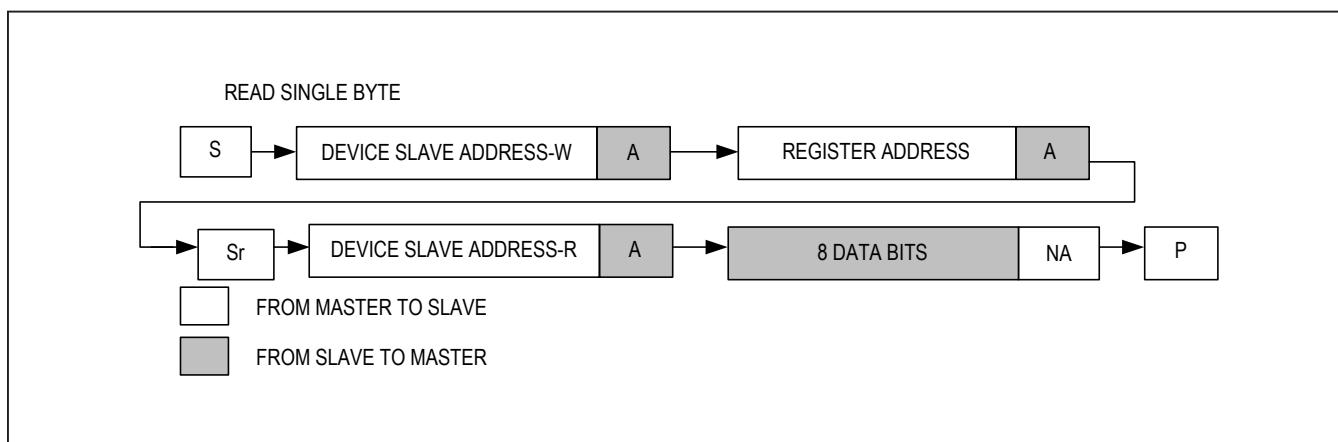


Figure 8. Read Byte Sequence

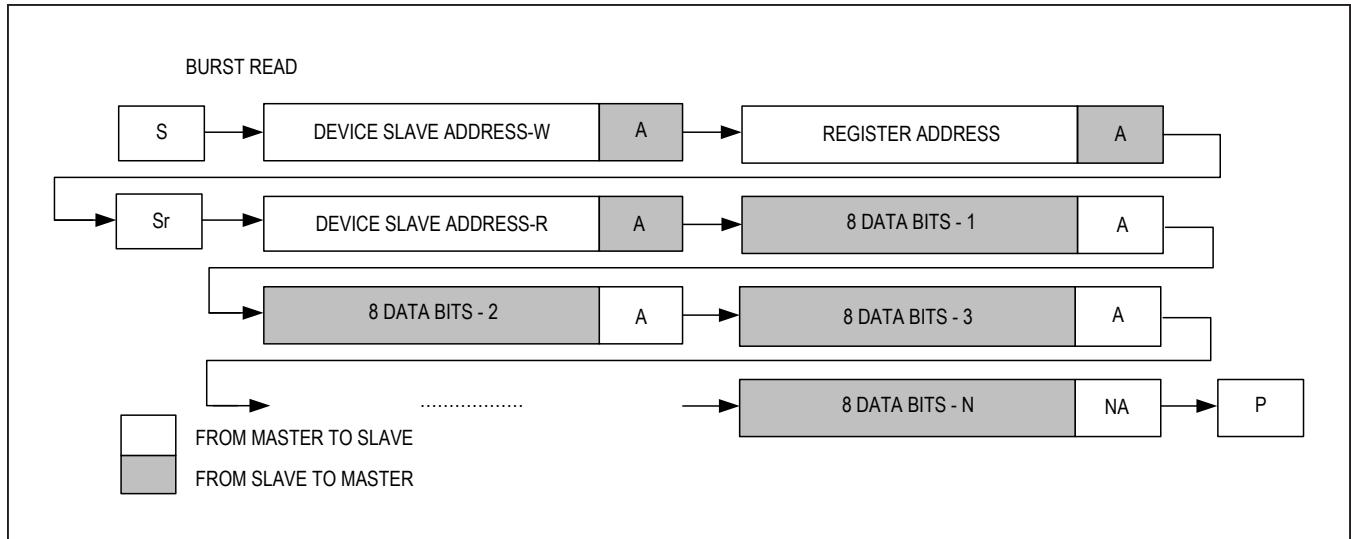


Figure 9. Burst Read Sequence

### Burst Read

In this operation, the master sends an address plus two data bytes and receives multiple data bytes from the slave device (Figure 9). The following procedure describes the burst byte read operation:

The master sends a START condition

The master sends the 7-bit slave address plus a write bit (low)

The addressed slave asserts an ACK on the data line

The master sends the 8-bit register address

The slave asserts an ACK on the data line only if the address is valid (NAK if not)

The master sends a REPEATED START condition

The master sends the 7-bit slave address plus a read bit (high)

The slave asserts an ACK on the data line

The slave sends 8 data bits

The master asserts an ACK on the data line

Repeat 9 and 10 N-2 times

The slave sends the last 8 data bits

The master asserts a NACK on the data line

The master generates a STOP condition

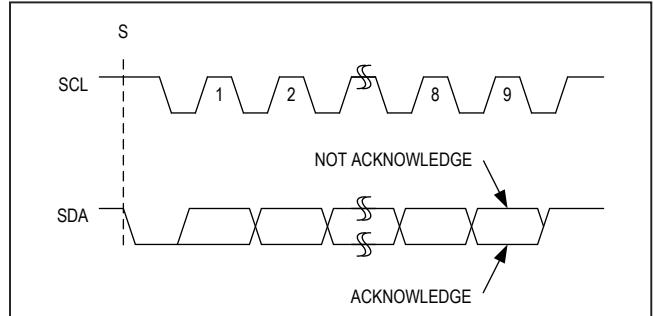


Figure 10. Acknowledge

### Acknowledge Bits

Data transfers are acknowledged with an acknowledge bit (ACK) or a not-acknowledge bit (NACK). Both the master and the MAX20310 generate ACK bits. To generate an ACK, pull SDA low before the rising edge of the ninth clock pulse and hold it low during the high period of the ninth clock pulse (see Figure 10). To generate a NACK, leave SDA high before the rising edge of the ninth clock pulse and leave it high for the duration of the ninth clock pulse. Monitoring for NACK bits allows for detection of unsuccessful data transfers.

**I<sup>2</sup>C Register Map**

REGISTER ADDRESS	REGISTER NAME	R/W	B7	B6	B5	B4	B3	B2	B1	B0
0x00	ChipId	R	ChipId[7]	ChipId[6]	ChipId[5]	ChipId[4]	ChipId[3]	ChipId[2]	ChipId[1]	ChipId[0]
0x01	ChipRev	R	ChipRev[7]	ChipRev[6]	ChipRev[5]	ChipRev[4]	ChipRev[3]	ChipRev[2]	ChipRev[1]	ChipRev[0]
0x02	BBstDmpEn	R/W	—	—	—	—	ILimSet[1]	ILimSet[0]	FeScale[1]	FeScale[0]
0x03	Reserved	—	—	—	—	—	—	—	—	—
0x04	BBst1VSet	R/W	—	—	BBst1VSet[5]	BBst1VSet[4]	BBst1VSet[3]	BBst1VSet[2]	BBst1VSet[1]	BBst1VSet[0]
0x05	BBst1VCfg	R/W	BBst1En[1]	BBst1En[0]	BBst1PDsc	BBst1ADsc	BBst1RmpDis	—	—	—
0x06	BBst2VSet	R/W	—	—	BBst2VSet[5]	BBst2VSet[4]	BBst2VSet[3]	BBst2VSet[2]	BBst2VSet[1]	BBst2VSet[0]
0x07	BBst2VCfg	R/W	BBst2En[1]	BBst2En[0]	BBst2PDsc	BBst2ADsc	BBst2RmpDis	—	—	—
0x08	LDO1Vset	R/W	—	—	LDO1VSet[5]	LDO1VSet[4]	LDO1VSet[3]	LDO1VSet[2]	LDO1VSet[1]	LDO1VSet[0]
0x09	LDO1Cfg	R/W	LDO1En[1]	LDO1En[0]	LDO1PDsc	LDO1ADsc	—	—	—	LDO1Mode
0x0A	LDO2Vset	R/W	—	—	LDO2VSet[5]	LDO2VSet[4]	LDO2VSet[3]	LDO2VSet[2]	LDO2VSet[1]	LDO2VSet[0]
0x0B	LDO2Cfg	R/W	LDO2En[1]	LDO2En[0]	LDO2PDsc	LDO2ADsc	—	—	—	LDO2Mode
0x0C	MonCfg	R/W	—	—	—	—	MonHIZ	MonSel[2]	MonSel[1]	MonSel[0]
0x0D	MPOCfg	R/W	MPOEn[1]	MPOEn[0]	—	—	—	—	MPOPull[1]	MPOPull[0]
0x0E	PwrCmd	R/W	PwrCmd[7]	PwrCmd[6]	PwrCmd[5]	PwrCmd[4]	PwrCmd[3]	PwrCmd[2]	PwrCmd[1]	PwrCmd[0]
0x0F	Status	R	LDO2UVLO	LDO1UVLO	LDO2Thm	LDO1Thm	LDO2CnMd	LDO1CnMd	KINSS	MPCSts
0x10	PwrCfg	R	PwrCfMdl[1]	PwrCfMdl[0]	GPasDsc	—	—	—	BootDly[1]	BootDly[0]
0x11	BBstSeq	R	—	BBst2Seq[2]	BBst2Seq[1]	BBst2Seq[0]	—	BBst1Seq[2]	BBst1Seq[1]	BBst1Seq[0]
0x12	LDOSeq	R	—	LDO2Seq[2]	LDO2Seq[1]	LDO2Seq[0]	—	LDO1Seq[2]	LDO1Seq[1]	LDO1Seq[0]

**I<sup>2</sup>C Register Descriptions****Table 3. ChipId Register (0x00)**

ADDRESS	0x00 (Read-Only)							
BIT	7	6	5	4	3	2	1	0
NAME	ChipId[7:0]							
ChipId[7:0]	ChipId[7:0] bits show information about the version of the MAX20310							

**Table 4. ChipRev Register (0x01)**

ADDRESS	0x01 (Read-Only)							
BIT	7	6	5	4	3	2	1	0
NAME	ChipRev[7:0]							
ChipRev[7:0]	ChipRev shows information about the revision of the MAX20310 silicon							

**Table 5. BBstCfg Register (0x02)**

ADDRESS	0x02 (Read, Write)											
BIT	7	6	5	4	3	2	1	0				
NAME	BBstDmpEn	-	-	-	ILimSet[1:0]		FetScale[1:0]					
BBstDmpEn	Buck-Boost Dump Enable This enables a dump switch to reduce LX oscillations 0: Switch disabled 1: Switch enabled											
ILimSet[1:0]	Buck-Boost Peak Current Limit Setting Sets the peak current supplied by the buck-boost regulator 00: 300mA 01: 400mA 10: 500mA 11: 600mA											
FetScale[1:0]	FetScale Scales the switching FETs to optimize efficiency at a given load 00: 28% 01: 60% 10: 80% 11: 100%											

**Table 6. BBst1VSet Register (0x04)**

ADDRESS	0x04 (Read, Write)							
BIT	7	6	5	4	3	2	1	0
NAME	-	-	BBst1VSet[5:0]					
BBst1VSet[5:0]	Buck-Boost 1 Output Voltage Setting 0.90V to 4.05V, linear scale, 50mV increments 000000 = 0.90V 000001 = 0.95V ... 111110 = 4.00V 111111 = 4.05V							

**Table 7. BBst1Cfg Register (0x05)**

ADDRESS	0x05 (Read, Write)							
BIT	7	6	5	4	3	2	1	0
NAME	BBst1En[1:0]	BBst1PDsc	—	BBst1RmpDis	—	—	—	—
BBst1En[1:0]	Buck-Boost 1 Enable 00: Disabled 01: Enabled 10: Controlled by MPC (active low) 11: Controlled by MPC (active high)							
BBst1PDsc	Buck-Boost 1 Passive Discharge 0: Disabled 1: Enabled when output is off							
BBst1RmpDis	Disable the ramped output of Buck-Boost output 1. If disabled, the BBst1VSet value is immediately applied to the output. 1: Immediate transition to set value 0: Ramp to set value mode							

**Table 8. BBst2VSet Register (0x06)**

ADDRESS	0x06 (Read, Write)							
BIT	7	6	5	4	3	2	1	0
NAME	-	-	BBst2VSet[5:0]					
BBst2VSet[5:0]	Buck-Boost 2 Output Voltage Setting 0.90V to 4.05V, linear scale, 50mV increments 000000 = 0.90V 000001 = 0.95V ... 111110 = 4.00V 111111 = 4.05V							

**Table 9. BBst2Cfg Register (0x07)**

ADDRESS	0x07 (Read, Write)							
BIT	7	6	5	4	3	2	1	0
NAME	BBst2En[1:0]		BBst2PDsc	-	BBst2RmpDis	-	-	-
BBst2En[1:0]	Buck-Boost 2 Output Enable 00: Disabled 01: Enabled 10: Controlled by MPC (active-low) 11: Controlled by MPC (active-high)							
BBst2PDsc	Buck-Boost 2 Passive Discharge 0: Disabled 1: Enabled when output is off							
BBst2RmpDis	Disable the ramped output of Buck-Boost output 2. If disabled, the BBst2VSet value is immediately applied to the output. 1: Immediate transition to set value 0: Ramp to set value mode							

**Table 10. LDO1VSet Register (0x08)**

ADDRESS	0x08 (Read, Write)							
BIT	7	6	5	4	3	2	1	0
NAME	—	—	LDO1VSet[5:0]					
LDO1VSet[5:0]	LDO 1 Output Voltage Setting 0.50V to 3.65V, 50mV increments 000000 = 0.50V 000001 = 0.55V ... 111110 = 3.60V 111111 = 3.65V							

**Table 11. LDO1Cfg Register (0x09)**

ADDRESS	0x09 (Read, Write)									
BIT	7	6	5	4	3	2	1	0		
NAME	LDO1En[1:0]		LDO1PDsc	LDO1ADsc		—	—	—	LDO1Mode	
LDO1En[1:0]	LDO 1 Output Enable 00: Disabled 01: Enabled 10: Controlled by MPC (active-low) 11: Controlled by MPC (active-high)									
LDO1PDsc	LDO 1 Passive Discharge 0: Disabled 1: Enabled when output is off									
LDO1Mode	LDO 1 Mode Configure LDO1 as an LDO or a load switch 0: LDO 1: Load Switch									

**Table 12. LDO2VSet Register (0x0A)**

ADDRESS	0x0A (Read, Write)							
BIT	7	6	5	4	3	2	1	0
NAME	—	—	LDO2VSet[5:0]					
LDO2VSet[5:0]	LDO 2 Output Voltage Setting 0.50V to 3.65V, 50mV increments 000000 = 0.50V 000001 = 0.55V ... 111110 = 3.60V 111111 = 3.65V							

**Table 13. LDO2Cfg Register (0x0B)**

ADDRESS	0x0B (Read, Write)							
BIT	7	6	5	4	3	2	1	0
NAME	LDO2En[1:0]		LDO2PDsc	—	—	—	—	LDO2Mode
LDO2En[1:0]	LDO 2 Output Enable 00: Disabled 01: Enabled 10: Controlled by MPC (active-low) 11: Controlled by MPC (active-high)							
LDO2PDsc	LDO 2 Passive Discharge 0: Disabled 1: Enabled when output is off							
LDO2Mode	LDO 2 Mode Configure LDO2 as an LDO or a load switch 0: LDO 1: Load Switch							

**Table 14. MonCfg Register (0x0C)**

ADDRESS	0x0C (Read, Write)										
BIT	7	6	5	4	3	2	1	0			
NAME	—	—	—	—	MonHiZ	MonSel[2:0]					
MonHiZ	Monitor Off Mode Condition 0: 100kΩ pulldown when disabled 1: High impedance when disabled										
MonSel[2:0]	Monitor Pin Source Selection 000: Disabled 001: BB1OUT selected 010: BB2OUT selected 011: L1OUT selected 100: L2OUT selected 101: BATIN selected 110: CAP selected 111: Reserved										

**Table 15. MPOCfg Register (0x0D)**

ADDRESS	0x0D (Read, Write)							
BIT	7	6	5	4	3	2	1	0
NAME	MPOEn[1:0]							
MPOEn[1:0]	Multipurpose Output Enable 00: Pull up (to GND) 01: Pull down (to BATN) 10: Pull up when MPC high, pull down when MPC low 11: Pull up when MPC low, pull down when MPC high							
MPOPull[1:0]	Multipurpose Output Pull Mode 00: Disabled 01: Pull down (to BATN) 10: Pull up (to GND) 11: Pull up/down (Push/Pull)							

**Table 16. PwrCmd Register (0x0E)**

ADDRESS	0x0E (Read, Write)							
BIT	7	6	5	4	3	2	1	0
NAME	PwrCmd[7:0]							
PwrCmd[7:0]	Power Command Register 10110010: Power Off - Turn off and stay off 11000011: Hard Reset - Turn off and return back on 11010100: Soft Reset - Pulse $\overline{RST}$ low							

**Table 17. Status Register (0x0F)**

ADDRESS	0x0F (Read-Only)								
BIT	7	6	5	4	3	2	1	0	
NAME	LDO2UVLO	LDO1UVLO	LDO2Thm	LDO1Thm	LDO2CrMd	LDO1CrMd	KINSts	MPCSts	
LDO2UVLO	LDO 2 Undervoltage Lockout Status 0: Normal 1: Undervoltage								
LDO1UVLO	LDO 1 Undervoltage Lockout Status 0: Normal 1: Undervoltage								
LDO2Thm	LDO 2 Thermal Limit Status 0: Normal 1: Thermal shutdown								
LDO1Thm	LDO 1 Thermal Limit Status 0: Normal 1: Thermal shutdown								
LDO2CrMd	LDO 2 Current Mode 0: LDO 1: Switch								
LDO1CrMd	LDO 1 Current Mode 0: LDO 1: Switch								
KINSts	KIN Status 0: Low 1: High								
MPCSts	Multi-Purpose Control Status 0: Low 1: High								

**Table 18. PwrCfg Register (0x10)**

ADDRESS	0x10 (Read-Only)								
BIT	7	6	5	4	3	2	1	0	
NAME	PwrCfgMd[1:0] GPasDsc — — — BootDly[1:0]								
PwrCfgMd[1:0]	Power Configuration Mode A short button press will always wake the device from the off state. 00: Button only wakes device (can be turned off by I <sup>2</sup> C command) 01: Long button press generates reset pulse 10: Long button press power cycles and reboots device 11: Long button press turns device off								
GPasDsc	Global Passive Discharge 0: Passive discharge disabled in off state 1: Passive discharged enabled in off state								
BootDly[1:0]	Boot Sequence Delay (t <sub>RST</sub> ) 00: 80ms 01: 120ms 10: 160ms 11: 200ms								

**Table 19. BBstSeq Register (0x11)**

ADDRESS	0x11 (Read-Only)															
BIT	7	6	5	4	3	2	1	0								
NAME	—	BBst2Seq[2:0]				—	BBst1Seq[2:0]									
BBst2Seq[2:0]	Buck-Boost 2 Sequencing Configuration 000: Disabled 001: Reserved 010: Enabled at 0% of power on delay 011: Enabled at 25% of power on delay 100: Enabled at 50% of power on delay 101: Enabled by MPC (active low) 110: Enabled by MPC (active high) 111: Controlled by BBst2En[1:0] after 100% of power on delay															
BBst1Seq[2:0]	Buck-Boost 2 Sequencing Configuration 000: Disabled 001: Reserved 010: Enabled at 0% of power on delay 011: Enabled at 25% of power on delay 100: Enabled at 50% of power on delay 101: Enabled by MPC (active low) 110: Enabled by MPC (active high) 111: Controlled by BBst1En[1:0] after 100% of power on delay															

**Table 20. LDOSeq Register (0x12)**

ADDRESS	0x12 (Read-Only)												
BIT	7	6	5	4	3	2	1	0					
NAME	—	LDO2Seq[2:0]			—	LDO1Seq[2:0]							
LDO2Seq[2:0]		LDO 2 Sequencing Configuration 000: Disabled 001: Reserved 010: Enabled at 0% of power on delay 011: Enabled at 25% of power on delay 100: Enabled at 50% of power on delay 101: Enabled by MPC (active low) 110: Enabled by MPC (active high) 111: Controlled by LDO2En[1:0] after 100% of power on delay											
LDO1Seq[2:0]		LDO 1 Sequencing Configuration 000: Disabled 001: Reserved 010: Enabled at 0% of power on delay 011: Enabled at 25% of power on delay 100: Enabled at 50% of power on delay 101: Enabled by MPC (active low) 110: Enabled by MPC (active high) 111: Controlled by LDO1En[1:0] after 100% of power on delay											


**Table 21. Register Bit Default Values**

REGISTER BITS	MAX20310A	MAX20310B	MAX20310C	MAX20310D	MAX20310E
ILimSet[1:0]	400mA	600mA	300mA	300mA	300mA
FetScale[1:0]	100%	100%	80%	80%	80%
LDO1En[1:0]	Disabled	Disabled	Disabled	Disabled	Disabled
LDO1VSet[5:0]	1.5V	0.5V	1.5V	3.0V	1.2V
LDO2En[1:0]	Disabled	Disabled	Disabled	Disabled	Disabled
LDO2VSet[5:0]	1.0V	1.8V	1.0V	1.2V	1.0V
BBst1En[1:0]	Disabled	Disabled	Enabled	Enabled	Enabled
BBst1VSet[5:0]	1.8V	3.0V	2.5V	3.3V	1.8V
BBst2En[1:0]	Disabled	Disabled	Disabled	Disabled	Disabled
BBst2VSet[5:0]	1.2V	2.1V	1.2V	1.5V	1.2V
BBstDmpEn	Disabled	Disabled	Disabled	Disabled	Disabled
LDO2Mode	Switch	LDO	LDO	LDO	LDO
LDO1Mode	LDO	Switch	LDO	LDO	LDO
MPOEn[1:0]	GND	GND	GND	GND	GND
PullMode[1:0]	Disabled	Disabled	Disabled	Disabled	Disabled
PwrCfgMd[1:0]	ON/off	ON	Hard Reset	Soft Reset	On/Off
GPasDsc	Disabled	Disabled	Enabled	Enabled	Enabled
BootDly[1:0]	120ms	80ms	200ms	160ms	80ms
BBst2Seq[2:0]	0% boot	25% boot	I <sup>2</sup> C after 100% boot	I <sup>2</sup> C after 100% boot	I <sup>2</sup> C after 100% boot
BBst1Seq[2:0]	0% boot	0% boot	I <sup>2</sup> C after 100% boot	I <sup>2</sup> C after 100% boot	I <sup>2</sup> C after 100% boot
LDO2Seq[2:0]	I <sup>2</sup> C after 100% boot	50% boot	I <sup>2</sup> C after 100% boot	I <sup>2</sup> C after 100% boot	I <sup>2</sup> C after 100% boot
LDO1Seq[2:0]	I <sup>2</sup> C after 100% boot				

**Table 22. Register Default Values**

REGISTER ADDRESS	REGISTER NAME	DEFAULT VALUES				
		MAX20310A	MAX20310B	MAX20310C	MAX20310D	MAX20310E
0x00	ChipId	0x00	0x00	0x00	0x00	0x00
0x01	ChipRev	0x00	0x00	0x00	0x00	0x00
0x02	BBstCfg	0x07	0x0F	0x02	0x02	0x02
0x04	BBst1VSet	0x12	0x2A	0x20	0x30	0x12
0x05	BBst1VCfg	0x10	0x10	0x60	0x60	0x60
0x06	BBst2VSet	0x06	0x18	0x06	0x0C	0x06
0x07	BBst2VCfg	0x10	0x10	0x20	0x20	0x20
0x08	LDO1Vset	0x14	0x00	0x14	0x32	0x0E
0x09	LDO1Cfg	0x10	0x11	0x20	0x20	0x20
0x0A	LDO2Vset	0x0A	0x1A	0x0A	0x0E	0x0A
0x0B	LDO2Cfg	0x11	0x10	0x20	0x20	0x20
0x0D	MPOCfg	0x00	0x00	0x00	0x00	0x00
0x10	PwrCfg	0xD1	0x10	0xA3	0x62	0xE0
0x11	BBstSeq	0x22	0x32	0x77	0x77	0x77
0x12	LDOSeq	0x77	0x47	0x77	0x77	0x77

## Typical Application Circuit

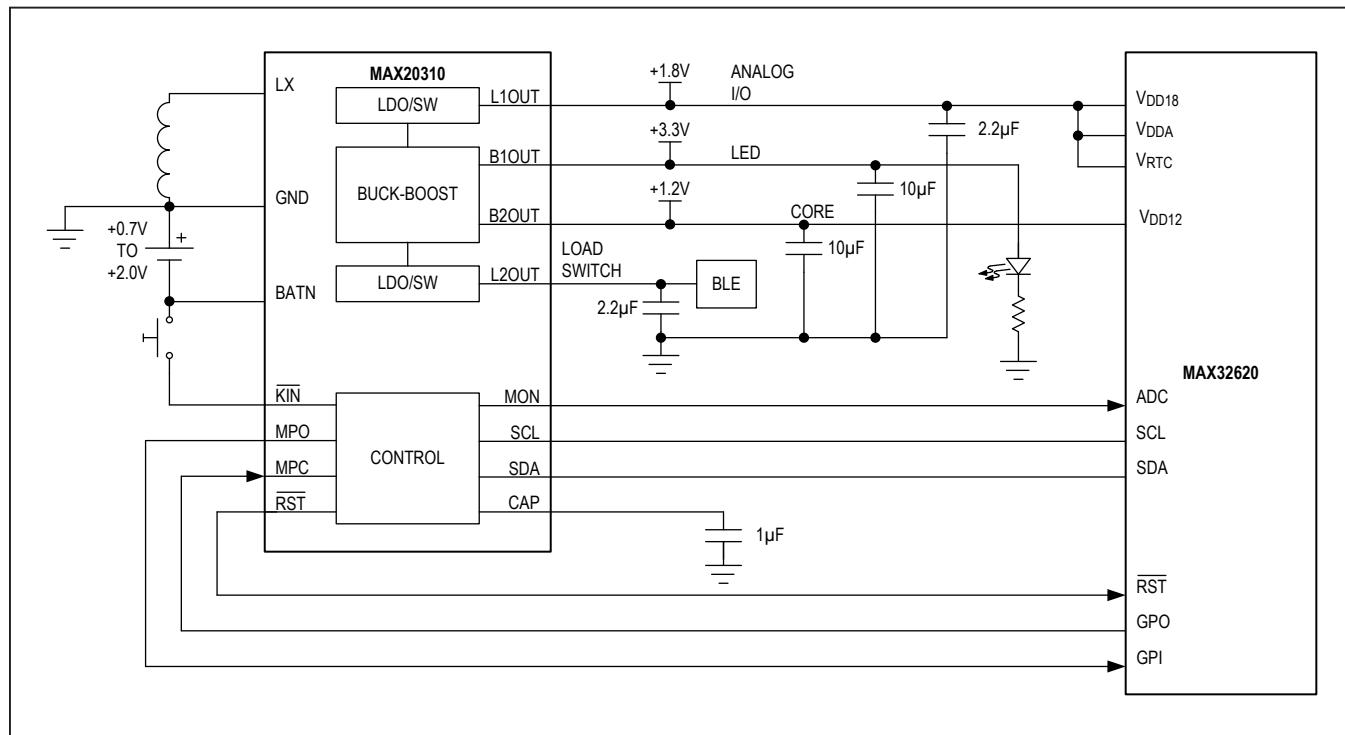

**Note:** The capacitor values shown reflect an effective capacitance. Derate capacitors appropriately according to specific application requirements.

## Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX20310AEWE+	-40°C to +85°C	16 WLP	AAK
MAX20310AEWE+T	-40°C to +85°C	16 WLP	AAK
MAX20310BEWE+	-40°C to +85°C	16 WLP	AAK
MAX20310BEWE+T	-40°C to +85°C	16 WLP	AAK
MAX20310CEWE+	-40°C to +85°C	16 WLP	AAK
MAX20310CEWE+T	-40°C to +85°C	16 WLP	AAK
MAX20310DEWE+	-40°C to +85°C	16 WLP	AAK
MAX20310DEWE+T	-40°C to +85°C	16 WLP	AAK
MAX20310EEWE+	-40°C to +85°C	16 WLP	AAK
MAX20310EEWE+T	-40°C to +85°C	16 WLP	AAK

## Chip Information

PROCESS: BiCMOS

+ Denotes a lead(Pb)-free/RoHS-compliant package.  
T = Tape and reel.

## Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	9/16	Initial release	—
1	5/17	Added future products. Updated <i>Typical Operating Characteristics</i> , <i>General Description</i> , <i>Benefits and Features</i> , <i>Power Regulation</i> , <i>Power Sequencing</i> sections, and <i>Typical Application Circuit</i> . Added <i>Always-On Devices</i> and <i>Additional Voltage Regulators</i> sections. Replaced Figure 1, added new Figure 4 and renumbered Figures 5-10. Updated Table 5 and replaced Tables 21-22.	1, 6-8 10, 12-16 18, 26-28
2	3/18	Updated the <i>Detailed Description</i> section, <i>I<sup>2</sup>C Register Map</i> , and <i>Register Bit Default Values</i> table. Replaced <i>Typical Application Circuit</i> figure. Updated <i>Ordering Information</i> to show that the MAX20310A-E are released products.	10, 17, 27, 29

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.*

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибуторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибуторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помочь разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)