

# Freescale Semiconductor

Document Number: MPX2102  
Rev 9, 01/2012

## 100 kPa On-Chip Temperature Compensated Silicon Pressure Sensors

The MPX2102 series devices are silicon piezoresistive pressure sensors providing a highly accurate and linear voltage output directly proportional to the applied pressure. The sensor is a single, monolithic silicon diaphragm with the strain gauge and a thin-film resistor network integrated on chip. The chip is laser trimmed for precise span and offset calibration and temperature compensation.

### Features

- Temperature Compensated Over 0°C to +85°C
- Easy-to-Use Chip Carrier Package Options
- Available in Absolute, Differential and Gauge Configurations
- Absolute, Differential and Gauge Options

## MPX2102 Series

0 to 100 kPa (0 to 14.5 psi)  
40 mV Full Scale  
(Typical)

### Application Examples

- Pump/Motor Control
- Robotics
- Level Detectors
- Medical Diagnostics
- Pressure Switching
- Barometers
- Altimeters

| ORDERING INFORMATION                     |                 |          |            |        |      |               |              |          |                |
|------------------------------------------|-----------------|----------|------------|--------|------|---------------|--------------|----------|----------------|
| Device Name                              | Package Options | Case No. | # of Ports |        |      | Pressure Type |              |          | Device Marking |
|                                          |                 |          | None       | Single | Dual | Gauge         | Differential | Absolute |                |
| Unibody Package (MPX2102 Series)         |                 |          |            |        |      |               |              |          |                |
| MPX2102A                                 | Tray            | 344      | •          |        |      |               |              | •        | MPX2102A       |
| MPX2102AP                                | Tray            | 344B     |            | •      |      |               |              | •        | MPX2102AP      |
| MPX2102ASX                               | Tray            | 344F     |            | •      |      |               |              | •        | MPX2102A       |
| MPX2102DP                                | Tray            | 344C     |            |        | •    |               | •            |          | MPX2102DP      |
| MPX2102GP                                | Tray            | 344B     |            | •      |      | •             |              |          | MPX2102GP      |
| MPX2102GVP                               | Tray            | 344D     |            | •      |      | •             |              |          | MPX2102GVP     |
| Small Outline Package (MPXV2102G Series) |                 |          |            |        |      |               |              |          |                |
| MPXV2102GP                               | Tray            | 1369     |            | •      |      | •             |              |          | MPXV2102GP     |
| MPAK Package (MPXM2102 Series)           |                 |          |            |        |      |               |              |          |                |
| MPXM2102A                                | Rail            | 1320     | •          |        |      |               |              | •        | MPXM2102A      |
| MPXM2102AT1                              | Tape and Reel   | 1320     | •          |        |      |               |              | •        | MPXM2102A      |
| MPXM2102AS                               | Rail            | 1320A    |            | •      |      |               |              | •        | MPXM2102AS     |
| MPXM2102AST1                             | Tape and Reel   | 1320A    |            | •      |      |               |              | •        | MPXM2102AS     |
| MPXM2102D                                | Rail            | 1320     | •          |        |      |               | •            |          | MPXM2102D      |
| MPXM2102DT1                              | Tape and Reel   | 1320     | •          |        |      |               | •            |          | MPXM2102D      |
| MPXM2102GS                               | Rail            | 1320A    |            | •      |      | •             |              |          | MPXM2102GS     |
| MPXM2102GST1                             | Tape and Reel   | 1320A    |            | •      |      | •             |              |          | MPXM2102GS     |

## UNIBODY PACKAGES



**MPX2102A**  
**CASE 344**




**MPX2102AP/GP**  
**CASE 344B**



**MPX2102DP**  
**CASE 344C**




**MPX2102GVP**  
**CASE 344D**



**MPX2102ASX**  
**CASE 344F**

## SMALL OUTLINE PACKAGE




**MPXV2102GP**  
**CASE 1369**

## MPAK



**MPXM2102A/ATI**  
**MPXM2102D/DT1**  
**CASE 1320**



**MPXM2102AS/AST1**  
**MPXM2102GS/AS**  
**CASE 1320A**

# Operating Characteristics

**Table 1. Operating Characteristics** ( $V_S = 10 V_{DC}$ ,  $T_A = 25^\circ C$  unless otherwise noted,  $P_1 > P_2$ )

| Characteristic                                                            | Symbol              | Min  | Typ       | Max  | Units       |
|---------------------------------------------------------------------------|---------------------|------|-----------|------|-------------|
| Pressure Range <sup>(1)</sup>                                             |                     |      |           |      |             |
| Absolute Pressure Range MPX2102A                                          | $P_{OP}$            | 20   | —         | 100  | kPa         |
| Differential Pressure Range MPX2102D                                      | $P_{OP}$            | 0    | —         | 100  | kPa         |
| Supply Voltage <sup>(2)</sup>                                             | $V_S$               | —    | 10        | 16   | $V_{DC}$    |
| Supply Current                                                            | $I_O$               | —    | 6.0       | —    | mAdc        |
| Full Scale Span <sup>(3)</sup>                                            | $V_{FSS}$           | 38.5 | 40        | 41.5 | mV          |
| Offset <sup>(4)</sup>                                                     |                     |      |           |      |             |
| MPX2102D Series                                                           | $V_{OFF}$           | -1.0 | —         | 1.0  | mV          |
| MPX2102A Series                                                           | $V_{OFF}$           | -2.0 | —         | 2.0  | mV          |
| MPXM2102D/G Series                                                        | $V_{OFF}$           | -1.0 | —         | 1.0  | mV          |
| MPXM2102A Series                                                          | $V_{OFF}$           | -2.0 | —         | 2.0  | mV          |
| Sensitivity                                                               | $\Delta V/\Delta P$ | —    | 0.4       | —    | mV/kPa      |
| Linearity <sup>(5)</sup>                                                  |                     |      |           |      |             |
| MPX2102D Series                                                           | —                   | -0.6 | —         | 0.4  | % $V_{FSS}$ |
| MPX2102A Series                                                           | —                   | -1.0 | —         | 1.0  | % $V_{FSS}$ |
| MPXM2102D/G Series                                                        | —                   | -0.6 | —         | 0.4  | % $V_{FSS}$ |
| MPXM2102A Series                                                          | —                   | -1.0 | —         | 1.0  | % $V_{FSS}$ |
| Pressure Hysteresis <sup>(5)</sup> (0 to 100 kPa)                         | —                   | —    | $\pm 0.1$ | —    | % $V_{FSS}$ |
| Temperature Hysteresis <sup>(5)</sup> ( $-40^\circ C$ to $+125^\circ C$ ) | —                   | —    | $\pm 0.5$ | —    | % $V_{FSS}$ |
| Temperature Coefficient of Full Scale Span <sup>(5)</sup>                 | $TCV_{FSS}$         | -2.0 | —         | 2.0  | % $V_{FSS}$ |
| Temperature Coefficient of Offset <sup>(5)</sup>                          | $TCV_{OFF}$         | -1.0 | —         | 1.0  | mV          |
| Input Impedance                                                           | $Z_{IN}$            | 1000 | —         | 2500 | $\Omega$    |
| Output Impedance                                                          | $Z_{OUT}$           | 1400 | —         | 3000 | $\Omega$    |
| Response Time <sup>(6)</sup> (10% to 90%)                                 | $t_R$               | —    | 1.0       | —    | ms          |
| Warm-Up Time                                                              | —                   | —    | 20        | —    | ms          |
| Offset Stability <sup>(7)</sup>                                           | —                   | —    | $\pm 0.5$ | —    | % $V_{FSS}$ |

1. 1.0 kPa (kiloPascal) equals 0.145 psi.

2. Device is ratiometric within this specified excitation range. Operating the device above the specified excitation range may induce additional error due to device self-heating.

3. Full Scale Span ( $V_{FSS}$ ) is defined as the algebraic difference between the output voltage at full rated pressure and the output voltage at the minimum related pressure.

4. Offset ( $V_{OFF}$ ) is defined as the output voltage at the minimum rated pressure.

5. Accuracy (error budget) consists of the following:

Linearity: Output deviation from a straight line relationship with pressure, using end point method, over the specified pressure range.

Temperature Hysteresis: Output deviation at any temperature within the operating temperature range, after the temperature is cycled to and from the minimum or maximum operating temperature points, with zero differential pressure applied.

Pressure Hysteresis: Output deviation at any pressure with the specified range, when this pressure is cycled to and from the minimum or maximum rated pressure at  $25^\circ C$ .

TcSpan: Output deviation at full rated pressure over the temperature range of 0 to  $85^\circ C$ , relative to  $25^\circ C$ .

TcOffset: Output deviation with minimum rated pressure applied, over the temperature range of 0 to  $85^\circ C$ , relative to  $25^\circ C$ .

6. Response Time is defined as the time from the incremental change in the output to go from 10% to 90% of its final value when subjected to a specified step change in pressure.

7. Offset stability is the product's output deviation when subjected to 1000 hours of Pulsed Pressure, Temperature Cycling with Bias Test.

# Maximum Ratings

Table 2. Maximum Ratings<sup>(1)</sup>

| Rating                     | Symbol           | Value       | Unit |
|----------------------------|------------------|-------------|------|
| Maximum Pressure (P1 > P2) | P <sub>MAX</sub> | 400         | kPa  |
| Storage Temperature        | T <sub>STG</sub> | -40 to +125 | °C   |
| Operating Temperature      | T <sub>A</sub>   | -40 to +125 | °C   |

1. Exposure beyond the specified limits may cause permanent damage or degradation to the device.

## Voltage Output vs. Applied Differential

The differential voltage output of the sensor is directly proportional to the differential pressure applied.

The absolute sensor has a built-in reference vacuum. The output voltage will decrease as vacuum, relative to ambient, is drawn on the pressure (P1) side.

The output voltage of the differential or gauge sensor increases with increasing pressure applied to the pressure

(P1) side relative to the vacuum (P2) side. Similarly, output voltage increases as increasing vacuum is applied to the vacuum (P2) side relative to the pressure (P1) side.

Figure 1 illustrates a block diagram of the internal circuitry on the stand-alone pressure sensor chip.

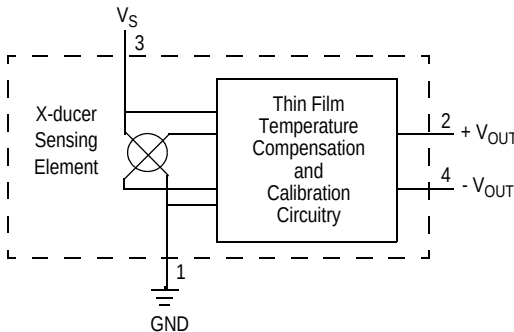


Figure 1. Temperature Compensated Pressure Sensor Schematic

## On-Chip Temperature Compensation and Calibration

Figure 2 shows the output characteristics of the MPX2102 series at 25°C. The output is directly proportional to the differential pressure and is essentially a straight line.

The effects of temperature on Full Scale Span and Offset are very small and are shown under Operating Characteristics.

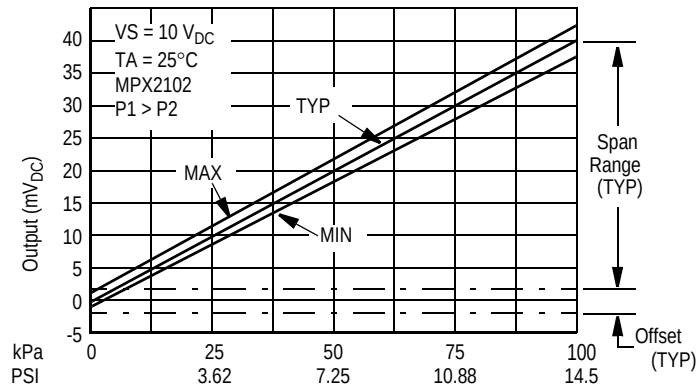


Figure 2. Output vs. Pressure Differential

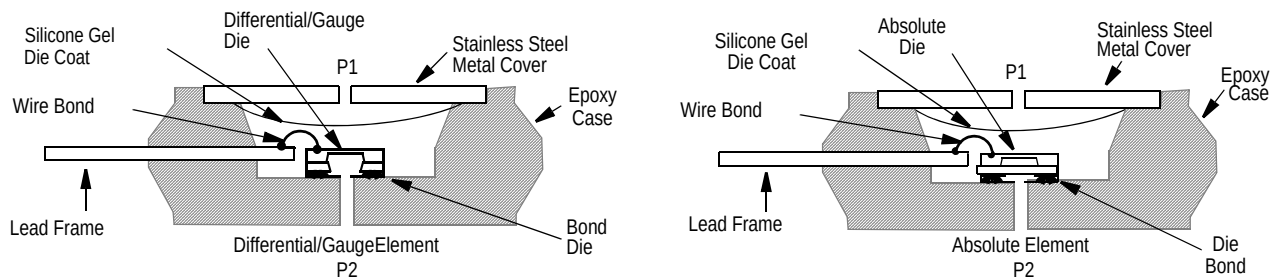


Figure 3. Cross Sectional Diagrams (Not to Scale)

Figure 3 illustrates the absolute sensing configuration (right) and the differential or gauge configuration in the basic chip carrier (Case 344). A silicone gel isolates the die surface and wire bonds from the environment, while allowing the pressure signal to be transmitted to the silicon diaphragm.

The MPX2102 series pressure sensor operating characteristics and internal reliability and qualification tests are based on use of dry air as the pressure media. Media other than dry air may have adverse effects on sensor performance and long term reliability. Contact the factory for information regarding media compatibility in your application.

### LINEARITY

Linearity refers to how well a transducer's output follows the equation:  $V_{OUT} = V_{OFF} + \text{sensitivity} \times P$  over the operating pressure range. There are two basic methods for calculating nonlinearity: (1) end point straight line fit (see Figure 4) or (2) a least squares best line fit. While a least squares fit gives the "best case" linearity error (lower numerical value), the calculations required are burdensome.

Conversely, an end point fit will give the "worst case" error (often more desirable in error budget calculations) and the calculations are more straightforward for the user.

Freescale's specified pressure sensor linearities are based on the end point straight line method measured at the midrange pressure.

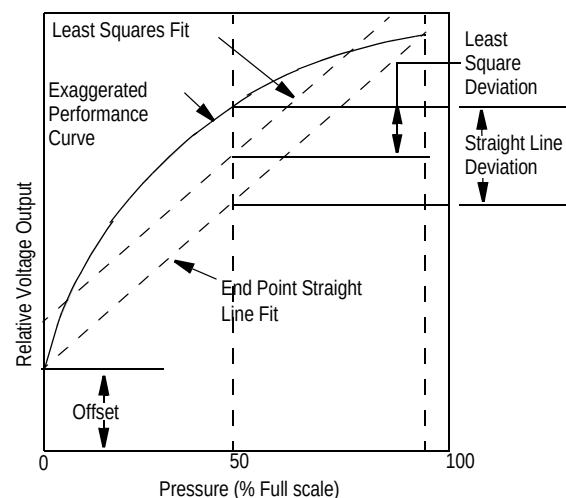


Figure 4. Linearity Specification Comparison

## PRESSURE (P1)/VACUUM (P2) SIDE IDENTIFICATION TABLE


Freescall designates the two sides of the pressure sensor as the Pressure (P1) side and the Vacuum (P2) side. The Pressure (P1) side is the side containing the silicone gel which isolates the die. The differential or gauge sensor is designed to operate with positive differential pressure applied,  $P1 > P2$ . The absolute sensor is designed for vacuum applied to P1 side.

The Pressure (P1) side may be identified by using [Table 3](#).

**Table 3. Pressure (P1) Side Delineation**

| Part Number                                                 | Case Type | Pressure (P1) Side Identifier |
|-------------------------------------------------------------|-----------|-------------------------------|
| MPX2102A                                                    | 344       | Stainless Steel Cap           |
| MPX2102DP                                                   | 344C      | Side with Part Marking        |
| MPX2102AP,<br>MPX2102GP                                     | 344B      | Side with Port Attached       |
| MPX2102GVP                                                  | 344D      | Stainless Steel Cap           |
| MPX2102ASX                                                  | 344F      | Side with Port Marking        |
| MPXV2102GP                                                  | 1369      | Side with Port Attached       |
| MPXM2102A,<br>MPX2102ATI,<br>MPXM2102D,<br>MPXM2102DT1      | 1320      | Stainless Steel Cap           |
| MPXM2102AS,<br>MPXM2102GS,<br>MPXM2102ASTI,<br>MPXM2102GSTI | 1320A     | Side with Port Attached       |

# PACKAGE DIMENSIONS

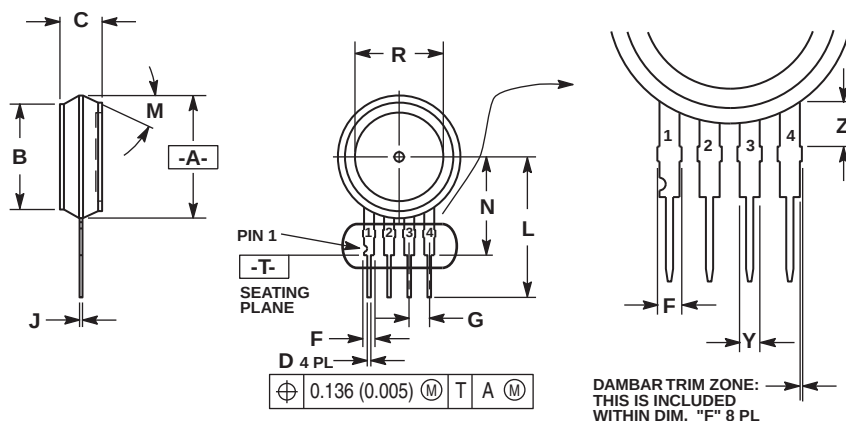


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION -A- IS INCLUSIVE OF THE MOLD STOP RING. MOLD STOP RING NOT TO EXCEED 16.00 (0.630).

| DIM | INCHES    |          | MILLIMETERS |       |
|-----|-----------|----------|-------------|-------|
|     | MIN       | MAX      | MIN         | MAX   |
| A   | 0.595     | 0.630    | 15.11       | 16.00 |
| B   | 0.514     | 0.534    | 13.06       | 13.56 |
| C   | 0.200     | 0.220    | 5.08        | 5.59  |
| D   | 0.016     | 0.020    | 0.41        | 0.51  |
| F   | 0.048     | 0.064    | 1.22        | 1.63  |
| G   | 0.100 BSC | 2.54 BSC |             |       |
| J   | 0.014     | 0.016    | 0.36        | 0.40  |
| L   | 0.695     | 0.725    | 17.65       | 18.42 |
| M   | 30' NOM   | 30' NOM  |             |       |
| N   | 0.475     | 0.495    | 12.07       | 12.57 |
| R   | 0.430     | 0.450    | 10.92       | 11.43 |
| Y   | 0.048     | 0.052    | 1.22        | 1.32  |
| Z   | 0.106     | 0.118    | 2.68        | 3.00  |

## CASE 344-15 ISSUE AA UNIBODY PACKAGE

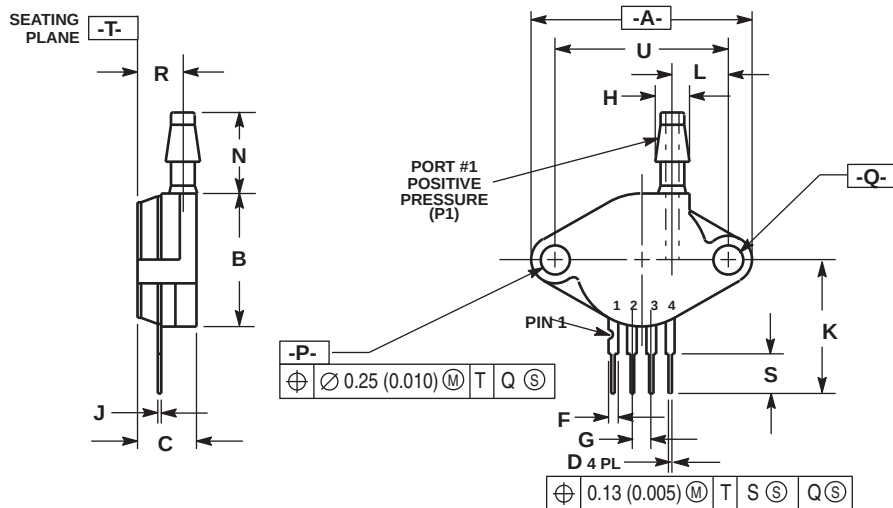


## NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |           | MILLIMETERS |       |
|-----|-----------|-----------|-------------|-------|
|     | MIN       | MAX       | MIN         | MAX   |
| A   | 1.145     | 1.175     | 29.08       | 29.85 |
| B   | 0.685     | 0.715     | 17.40       | 18.16 |
| C   | 0.305     | 0.325     | 7.75        | 8.26  |
| D   | 0.016     | 0.020     | 0.41        | 0.51  |
| F   | 0.048     | 0.064     | 1.22        | 1.63  |
| G   | 0.100 BSC | 2.54 BSC  |             |       |
| H   | 0.182     | 0.194     | 4.62        | 4.93  |
| J   | 0.014     | 0.016     | 0.36        | 0.41  |
| K   | 0.695     | 0.725     | 17.65       | 18.42 |
| L   | 0.290     | 0.300     | 7.37        | 7.62  |
| N   | 0.420     | 0.440     | 10.67       | 11.18 |
| P   | 0.153     | 0.159     | 3.89        | 4.04  |
| Q   | 0.153     | 0.159     | 3.89        | 4.04  |
| R   | 0.230     | 0.250     | 5.84        | 6.35  |
| S   | 0.220     | 0.240     | 5.59        | 6.10  |
| U   | 0.910 BSC | 23.11 BSC |             |       |

## CASE 344B-01 ISSUE B UNIBODY PACKAGE


## PACKAGE DIMENSIONS

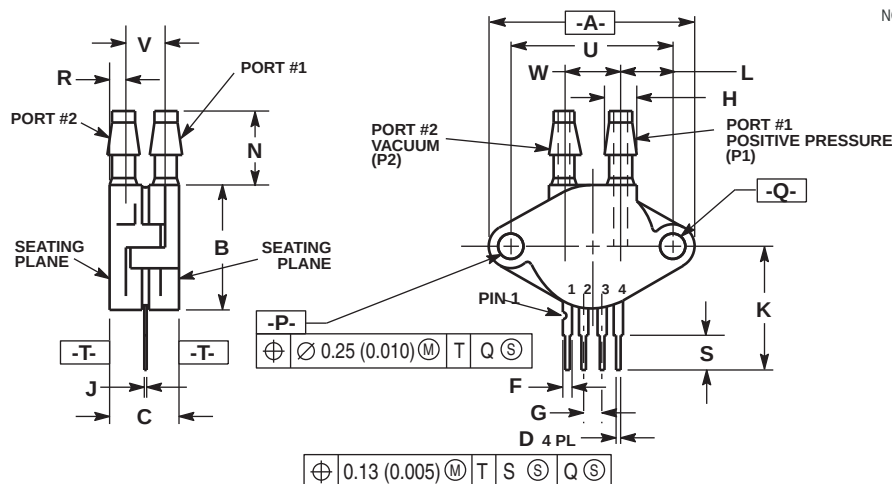

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 1.145     | 1.175 | 29.08       | 29.85 |
| B   | 0.685     | 0.715 | 17.40       | 18.16 |
| C   | 0.405     | 0.435 | 10.29       | 11.05 |
| D   | 0.016     | 0.020 | 0.41        | 0.51  |
| F   | 0.048     | 0.064 | 1.22        | 1.63  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.182     | 0.194 | 4.62        | 4.93  |
| J   | 0.014     | 0.016 | 0.36        | 0.41  |
| K   | 0.695     | 0.725 | 17.65       | 18.42 |
| L   | 0.290     | 0.300 | 7.37        | 7.62  |
| N   | 0.420     | 0.440 | 10.67       | 11.18 |
| P   | 0.153     | 0.159 | 3.89        | 4.04  |
| Q   | 0.153     | 0.159 | 3.89        | 4.04  |
| R   | 0.063     | 0.083 | 1.60        | 2.11  |
| S   | 0.220     | 0.240 | 5.59        | 6.10  |
| U   | 0.910 BSC |       | 23.11 BSC   |       |
| V   | 0.248     | 0.278 | 6.30        | 7.06  |
| W   | 0.310     | 0.330 | 7.87        | 8.38  |

### CASE 344C-01 ISSUE B UNIBODY PACKAGE

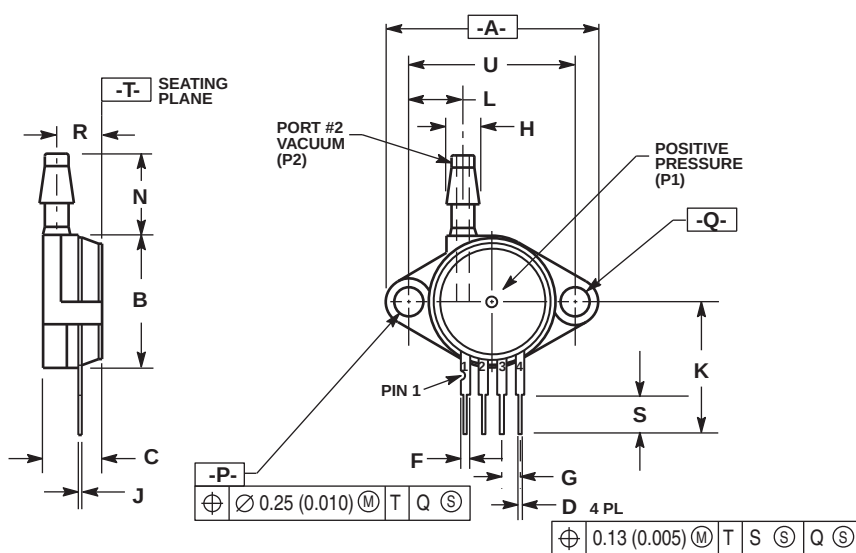


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 1.145     | 1.175 | 29.08       | 29.85 |
| B   | 0.685     | 0.715 | 17.40       | 18.16 |
| C   | 0.305     | 0.325 | 7.75        | 8.26  |
| D   | 0.016     | 0.020 | 0.41        | 0.51  |
| F   | 0.048     | 0.064 | 1.22        | 1.63  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.182     | 0.194 | 4.62        | 4.93  |
| J   | 0.014     | 0.016 | 0.36        | 0.41  |
| K   | 0.695     | 0.725 | 17.65       | 18.42 |
| L   | 0.290     | 0.300 | 7.37        | 7.62  |
| N   | 0.420     | 0.440 | 10.67       | 11.18 |
| P   | 0.153     | 0.159 | 3.89        | 4.04  |
| Q   | 0.153     | 0.158 | 3.89        | 4.04  |
| R   | 0.230     | 0.250 | 5.84        | 6.35  |
| S   | 0.220     | 0.240 | 5.59        | 6.10  |
| U   | 0.910 BSC |       | 23.11 BSC   |       |

### CASE 344D-01 ISSUE B UNIBODY PACKAGE



## PACKAGE DIMENSIONS

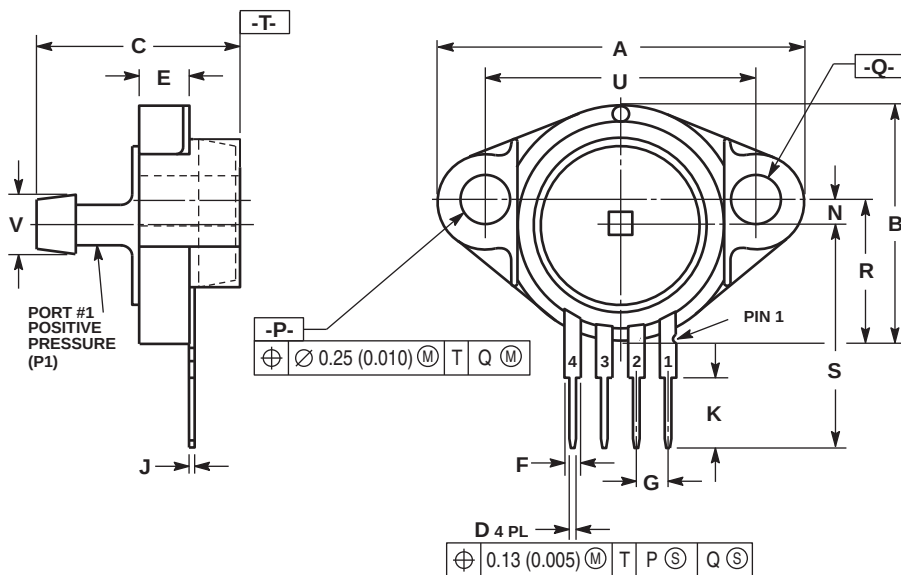


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 1.080     | 1.120 | 27.43       | 28.45 |
| B   | 0.740     | 0.760 | 18.80       | 19.30 |
| C   | 0.630     | 0.650 | 16.00       | 16.51 |
| D   | 0.016     | 0.020 | 0.41        | 0.51  |
| E   | 0.160     | 0.180 | 4.06        | 4.57  |
| F   | 0.048     | 0.064 | 1.22        | 1.63  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| J   | 0.014     | 0.016 | 0.36        | 0.41  |
| K   | 0.220     | 0.240 | 5.59        | 6.10  |
| N   | 0.070     | 0.080 | 1.78        | 2.03  |
| P   | 0.150     | 0.160 | 3.81        | 4.06  |
| Q   | 0.150     | 0.160 | 3.81        | 4.06  |
| R   | 0.440     | 0.460 | 11.18       | 11.68 |
| S   | 0.695     | 0.725 | 17.65       | 18.42 |
| U   | 0.840     | 0.860 | 21.34       | 21.84 |
| V   | 0.182     | 0.194 | 4.62        | 4.92  |

**CASE 344F-01  
ISSUE B  
UNIBODY PACKAGE**

# PACKAGE DIMENSIONS

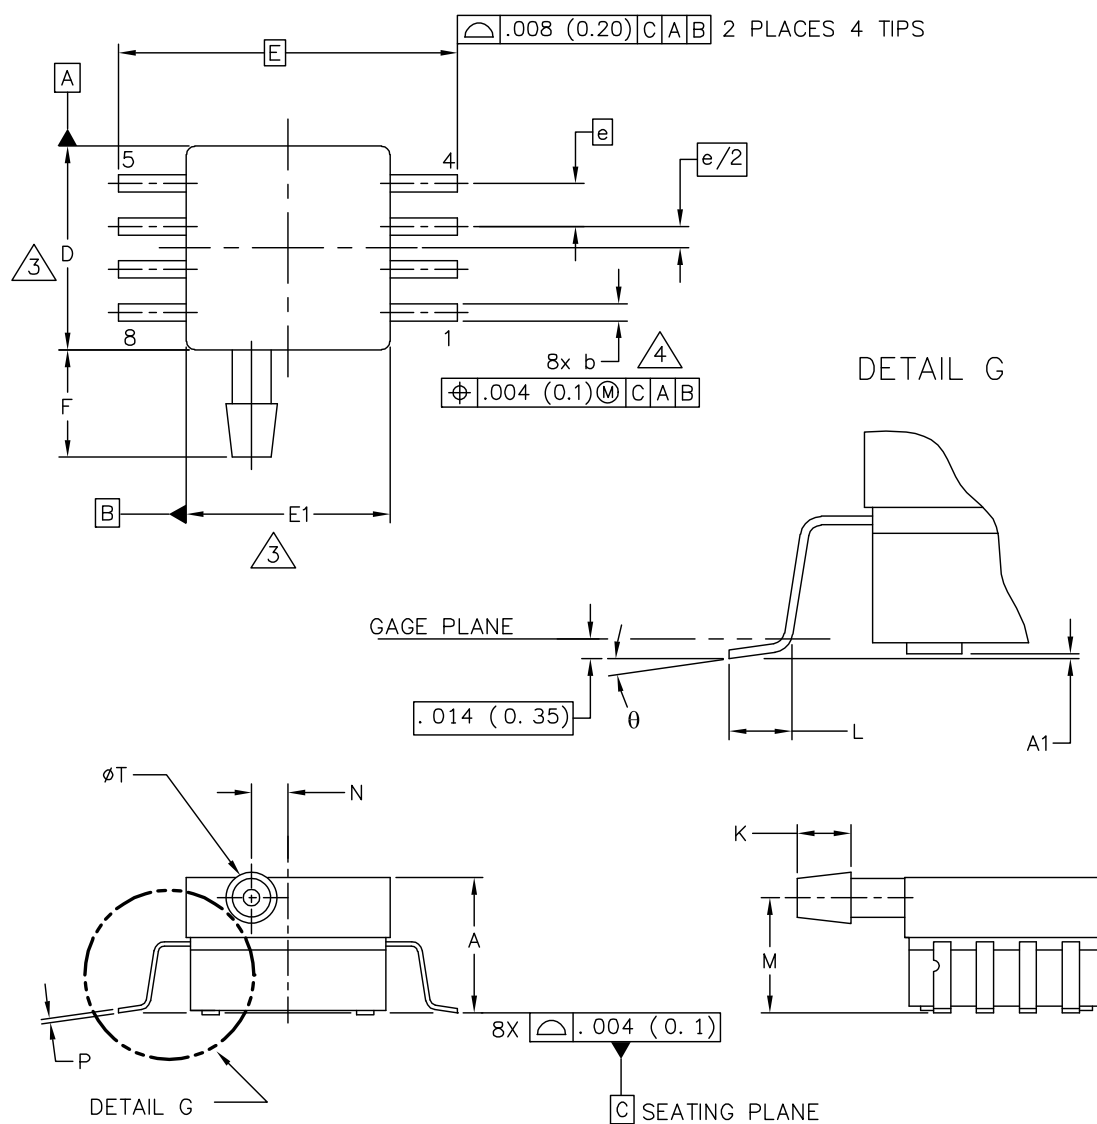

|                                                         |                           |                            |
|---------------------------------------------------------|---------------------------|----------------------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |
| TITLE:<br><br>8 LD SOP, SIDE PORT                       | DOCUMENT NO: 98ASA99303D  | REV: B                     |
|                                                         | CASE NUMBER: 1369-01      | 24 MAY 2005                |
|                                                         | STANDARD: NON-JEDEC       |                            |

**CASE 1369-01  
ISSUE B  
SMALL OUTLINE PACKAGE**

# PACKAGE DIMENSIONS

## NOTES:

1. CONTROLLING DIMENSION: INCH

2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.


③ DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH AND PROTRUSIONS SHALL NOT EXCEED .006 (0.152) PER SIDE.

④ DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .008 (0.203) MAXIMUM.

| INCHES                                                  |          |      | MILLIMETERS        |       | DIM                      | INCHES                     |     | MILLIMETERS |             |
|---------------------------------------------------------|----------|------|--------------------|-------|--------------------------|----------------------------|-----|-------------|-------------|
| DIM                                                     | MIN      | MAX  | MIN                | MAX   |                          | MIN                        | MAX | MIN         | MAX         |
| A                                                       | .300     | .330 | 7.11               | 7.62  | θ                        | 0°                         | 7°  | 0°          | 7°          |
| A1                                                      | .002     | .010 | 0.05               | 0.25  | —                        | ---                        | --- | ---         | ---         |
| b                                                       | .038     | .042 | 0.96               | 1.07  | —                        | ---                        | --- | ---         | ---         |
| D                                                       | .465     | .485 | 11.81              | 12.32 | —                        | ---                        | --- | ---         | ---         |
| E                                                       | .717 BSC |      | 18.21 BSC          |       | —                        | ---                        | --- | ---         | ---         |
| E1                                                      | .465     | .485 | 11.81              | 12.32 | —                        | ---                        | --- | ---         | ---         |
| e                                                       | .100 BSC |      | 2.54 BSC           |       | —                        | ---                        | --- | ---         | ---         |
| F                                                       | .245     | .255 | 6.22               | 6.47  | —                        | ---                        | --- | ---         | ---         |
| K                                                       | .120     | .130 | 3.05               | 3.30  | —                        | ---                        | --- | ---         | ---         |
| L                                                       | .061     | .071 | 1.55               | 1.80  | —                        | ---                        | --- | ---         | ---         |
| M                                                       | .270     | .290 | 6.86               | 7.36  | —                        | ---                        | --- | ---         | ---         |
| N                                                       | .080     | .090 | 2.03               | 2.28  | —                        | ---                        | --- | ---         | ---         |
| P                                                       | .009     | .011 | 0.23               | 0.28  | —                        | ---                        | --- | ---         | ---         |
| T                                                       | .115     | .125 | 2.92               | 3.17  | —                        | ---                        | --- | ---         | ---         |
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. |          |      | MECHANICAL OUTLINE |       |                          | PRINT VERSION NOT TO SCALE |     |             |             |
| TITLE:<br><br>8 LD SOP, SIDE PORT                       |          |      |                    |       | DOCUMENT NO: 98ASA99303D |                            |     |             | REV: B      |
|                                                         |          |      |                    |       | CASE NUMBER: 1369-01     |                            |     |             | 24 MAY 2005 |
|                                                         |          |      |                    |       | STANDARD: NON-JEDEC      |                            |     |             |             |

PAGE 2 OF 2

**CASE 1369-01  
ISSUE B  
SMALL OUTLINE PACKAGE**

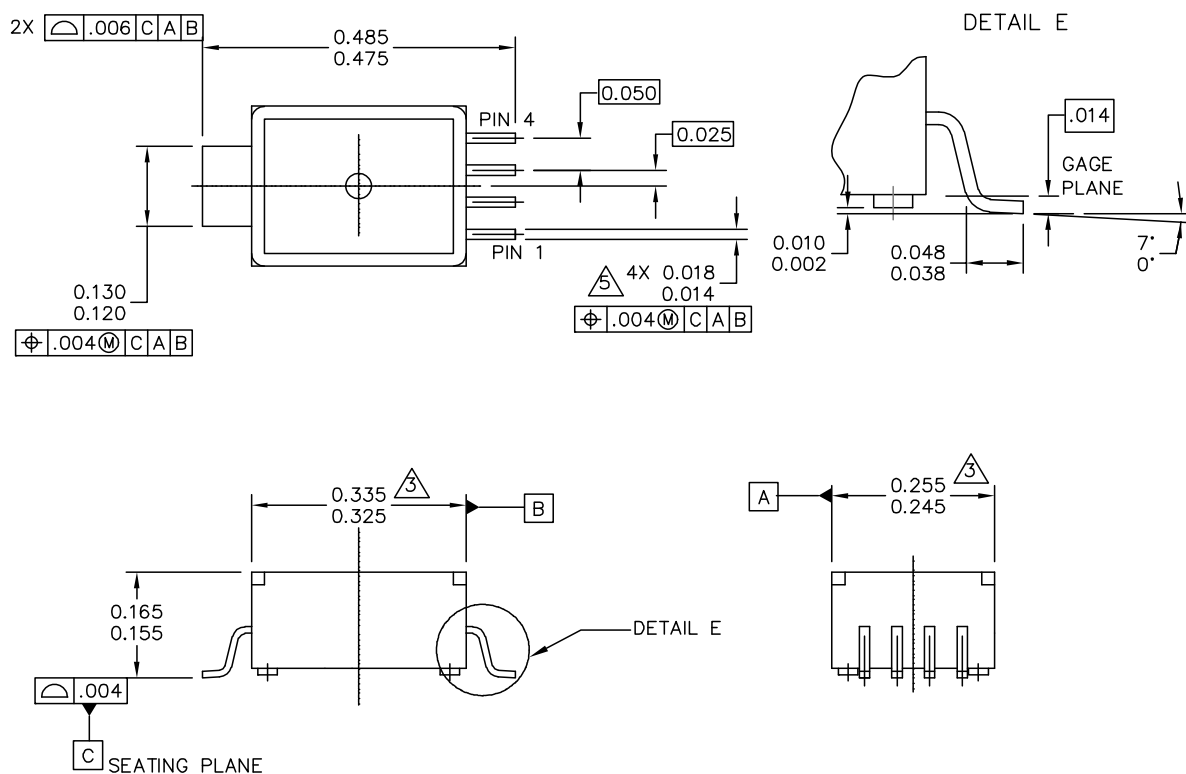

|                                                         |                           |                            |
|---------------------------------------------------------|---------------------------|----------------------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |
| TITLE:<br><br>5 LD M-PAC                                | DOCUMENT NO: 98ARH99088A  | REV: B                     |
|                                                         | CASE NUMBER: 1320-02      | 22 JUL 2005                |
|                                                         | STANDARD: NON-JEDEC       |                            |

**CASE 1320-02  
ISSUE B  
MPAK**


## NOTES:

1. DIMENSIONS ARE IN INCHES.
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
3. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSION. MOLD FLASH OR PROTRUSION SHALL NOT EXCEED .006" PER SIDE.
4. ALL VERTICAL SURFACES TO BE 5° MAXIMUM.
5. DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .008 MAXIMUM.

PIN 1: GND  
 PIN 2: +Vout  
 PIN 3: Vs  
 PIN 4: -Vout

|                                                         |                           |                            |             |
|---------------------------------------------------------|---------------------------|----------------------------|-------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. | <b>MECHANICAL OUTLINE</b> | PRINT VERSION NOT TO SCALE |             |
| TITLE:<br><br>5 LD M-PAC                                | DOCUMENT NO: 98ARH99088A  |                            | REV: B      |
|                                                         | CASE NUMBER: 1320-02      |                            | 22 JUL 2005 |
|                                                         | STANDARD: NON-JEDEC       |                            |             |

**CASE 1320-02  
 ISSUE B  
 MPAK**

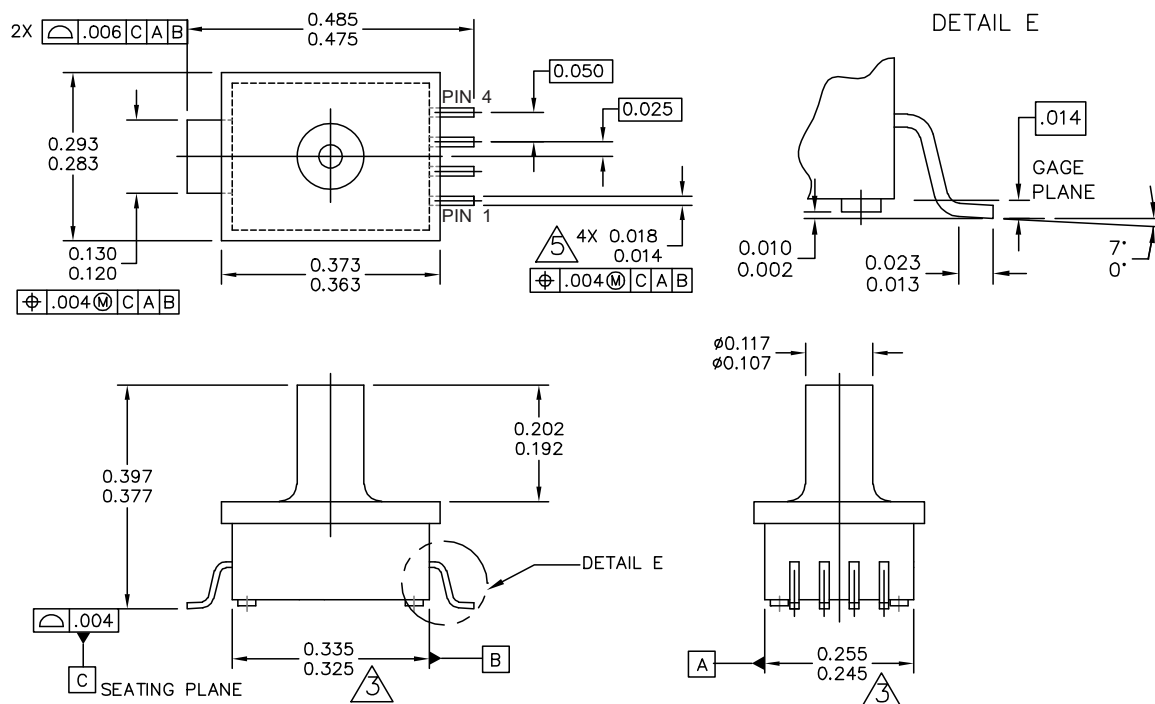

|                                                         |  |                           |                          |                            |             |
|---------------------------------------------------------|--|---------------------------|--------------------------|----------------------------|-------------|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. |  | <b>MECHANICAL OUTLINE</b> |                          | PRINT VERSION NOT TO SCALE |             |
| TITLE:<br><br>5 LD M-PAC, PORTED                        |  |                           | DOCUMENT NO: 98ARH99087A |                            | REV: A      |
|                                                         |  |                           | CASE NUMBER: 1320A-02    |                            | 22 JUL 2005 |
|                                                         |  |                           | STANDARD: NON-JEDEC      |                            |             |

**CASE 1320A-02  
ISSUE A  
MPAK**

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M–1994.
3. DIMENSIONS DOES NOT INCLUDE MOLD FLASH OR PROTRUSION. MOLD FLASH OR PROTRUSION SHALL NOT EXCEED .006” PER SIDE.
4. ALL VERTICAL SURFACES TO BE 5” MAXIMUM.
5. DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .008 MAXIMUM.

|                                                         |  |                          |  |                            |  |
|---------------------------------------------------------|--|--------------------------|--|----------------------------|--|
| © FREESCALE SEMICONDUCTOR, INC.<br>ALL RIGHTS RESERVED. |  | MECHANICAL OUTLINE       |  | PRINT VERSION NOT TO SCALE |  |
| TITLE:<br><br>5 LD M-PAC, PORTED                        |  | DOCUMENT NO: 98ARH99087A |  | REV: A                     |  |
|                                                         |  | CASE NUMBER: 1320A-02    |  | 22 JUL 2005                |  |
|                                                         |  | STANDARD: NON-JEDEC      |  |                            |  |

**CASE 1320A-02  
ISSUE A  
MPAK**

# REVISION HISTORY

| Revision number | Revision date | Description of changes                                                                                                                                                                                                                       |
|-----------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 9               | 01/2012       | <ul style="list-style-type: none"> <li>In Table 1. Operating Characteristics, in the Characteristic column under Pressure Range, added rows for Absolute Pressure Range MPX2102A and Differential Pressure Range MPX2102D devices</li> </ul> |



## **How to Reach Us:**

### **Home Page:**

[www.freescale.com](http://www.freescale.com)

### **Web Support:**

<http://www.freescale.com/support>

### **USA/Europe or Locations Not Listed:**

Freescale Semiconductor, Inc.  
Technical Information Center, EL516  
2100 East Elliot Road  
Tempe, Arizona 85284  
1-800-521-6274 or +1-480-768-2130  
[www.freescale.com/support](http://www.freescale.com/support)

### **Europe, Middle East, and Africa:**

Freescale Halbleiter Deutschland GmbH  
Technical Information Center  
Schatzbogen 7  
81829 Muenchen, Germany  
+44 1296 380 456 (English)  
+46 8 52200080 (English)  
+49 89 92103 559 (German)  
+33 1 69 35 48 48 (French)  
[www.freescale.com/support](http://www.freescale.com/support)

### **Japan:**

Freescale Semiconductor Japan Ltd.  
Headquarters  
ARCO Tower 15F  
1-8-1, Shimo-Meguro, Meguro-ku,  
Tokyo 153-0064  
Japan  
0120 191014 or +81 3 5437 9125  
[support.japan@freescale.com](mailto:support.japan@freescale.com)

### **Asia/Pacific:**

Freescale Semiconductor China Ltd.  
Exchange Building 23F  
No. 118 Jianguo Road  
Chaoyang District  
Beijing 100022  
China  
+86 010 5879 8000  
[support.asia@freescale.com](mailto:support.asia@freescale.com)

### **For Literature Requests Only:**

Freescale Semiconductor Literature Distribution Center  
1-800-441-2447 or +1-303-675-2140  
Fax: +1-303-675-2150  
[LDCForFreescaleSemiconductor@hibbertgroup.com](mailto:LDCForFreescaleSemiconductor@hibbertgroup.com)

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale and the Freescale logo are trademarks of Freescale Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off.

All other product or service names are the property of their respective owners.

© 2012 Freescale Semiconductor, Inc. All rights reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)