

**LTM4636**  
**High Efficiency, PolyPhase 80A**  
**Step-Down Power  $\mu$ Module Regulator**

**DESCRIPTION**

Demonstration circuit DC2448A-A features a PolyPhase® design using the [LTM®4636EY](#), a 40A high efficiency, switch mode step-down power  $\mu$ Module® regulator. The input voltage range is from 4.7V to 15V. When  $V_{IN} < 5.5V$ , short PVCC to  $V_{IN}$  with  $R1 = 0\Omega$ , and set  $R3 = 0\Omega$  and remove  $R2$ . The output voltage range is 0.6V to 3.3V. The DC2448A-A can deliver a nominal 80A output current. As explained in the data sheet, output current derating is necessary for certain  $V_{IN}$ ,  $V_{OUT}$ , and thermal conditions. The board operates in continuous conduction mode in heavy load conditions. For high efficiency at low load currents, the MODE\_PLLIN jumper selects pulse-skipping mode for

noise sensitive applications or Burst Mode® operation in less noise sensitive applications. The MODE\_PLLIN pin also allows the LTM4636 to synchronize to an external clock signal. The phase shift between the two phases is 180 degree. DC2448A-A has the option of choosing both internal and external compensation circuit for LTM4636. The LTM4636 data sheet must be read in conjunction with this demo manual prior to working on or modifying demo circuit DC2448A-A.

**Design files for this circuit board are available at <http://www.analog.com/DC2448A-A>**

All registered trademarks and trademarks are the property of their respective owners.

**BOARD PHOTO**



# DEMO MANUAL

## DC2448A-A

### PERFORMANCE SUMMARY Specifications are at $T_A = 25^\circ\text{C}$

PARAMETER	CONDITIONS	VALUE
Input Voltage Range		4.7V to 15V
Output Voltages		$0.9\text{V} \pm 1.3\%$
Maximum Continuous Output Current	Derating is necessary for certain operating conditions. See data sheet for details.	$80\text{A}_{\text{DC}}$
Operating Frequency		350kHz
Efficiency	$V_{\text{IN}} = 12\text{V}$ , $V_{\text{OUT}} = 0.9\text{V}$ , $I_{\text{OUT}} = 80\text{A}$	87.0% Figure 2
Load Transient $V_{\text{OUT(P-P)}}$	$V_{\text{IN}} = 12\text{V}$ , $V_{\text{OUT}} = 0.9\text{V}$ , $I_{\text{STEP}} = 0\text{A TO } 20\text{A}$	109mV Figure 3

### QUICK START PROCEDURE

Demonstration circuit DC2448A-A is an easy way to evaluate the performance of PolyPhase operation of the LTM4636EY. Due to the high input/output current, the user should select the proper input supply/load/cable which can sustain the full load operation. Please refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Place jumpers in the following positions for a typical application:

MODE	RUN
CCM	ON

2. With power off, connect the input power supply, load and meters as shown in Figure 1. Preset the load to 0A and  $V_{\text{IN}}$  supply to 12V.
3. Turn on the power supply at the input. The output voltage should be  $0.9\text{V} \pm 1.3\%$  (0.888V to 0.912V).

4. Vary the input voltage from 6V to 15V and adjust the load current from 0A to 80A. Observe the output voltage regulation, ripple voltage, efficiency and other parameters.
5. (Optional) For optional load transient test, apply an adjustable pulse signal between IOSTEP\_CLK and GND test points. The pulse amplitude sets the load step current amplitude. Keep the pulse width short (<1ms) and pulse duty cycle low (<5%) to limit the thermal stress on the load transient circuit.
6. (Optional) LTM4636 can be synchronized to an external clock signal. Apply a clock signal (0V to 5V, square wave) on the MODE\_PLLIN test point.
7. (Optional) The outputs of LTM4636 can track another supply. The output voltage tracks the voltage on TRACK when a valid signal is applied on the test point.

# QUICK START PROCEDURE

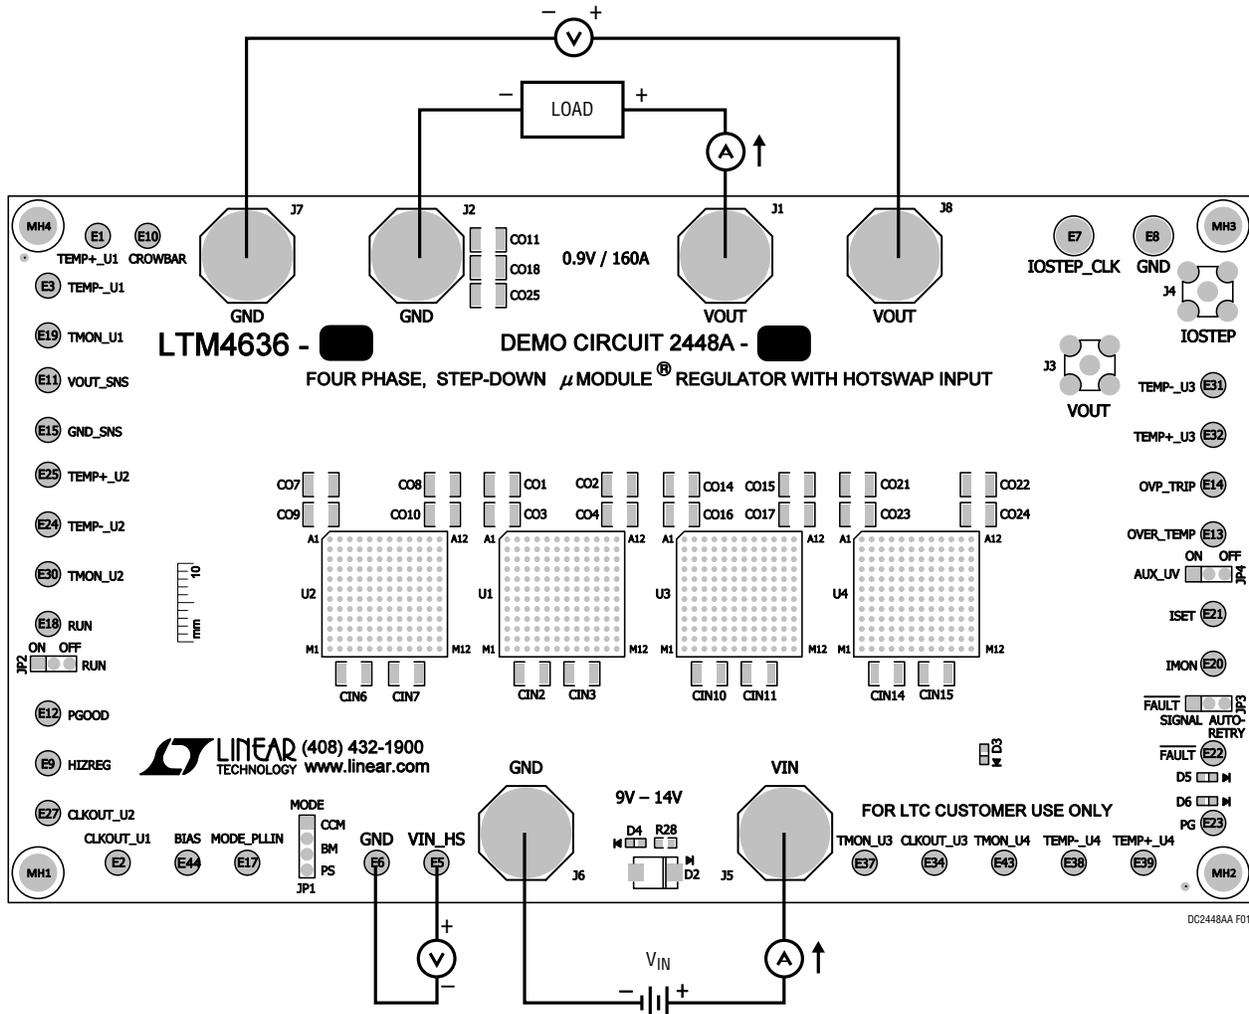


Figure 1. Measurement Setup of DC2448A-A

### QUICK START PROCEDURE

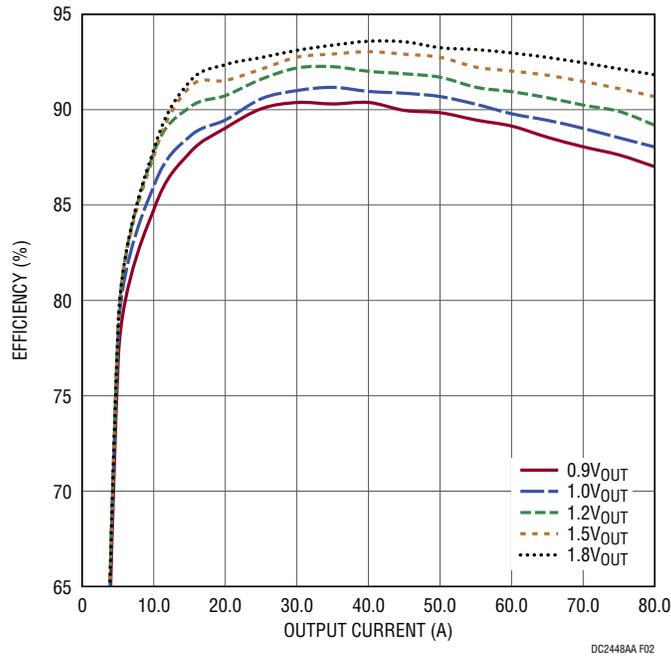


Figure 2. Measured Efficiency at  $V_{IN} = 12V$ ,  $f_{SW} = 350kHz$ , CCM

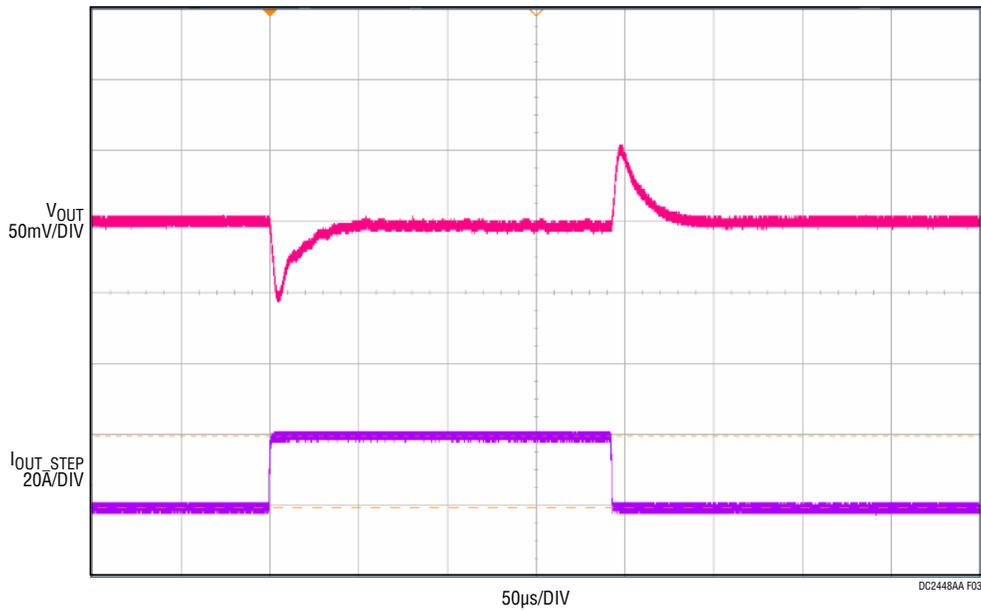


Figure 3. Measured Load Transient  
 $V_{IN} = 12V$ ,  $V_{OUT} = 0.9V$ ,  $I_{STEP} = 0A$  to  $20A$

## QUICK START PROCEDURE

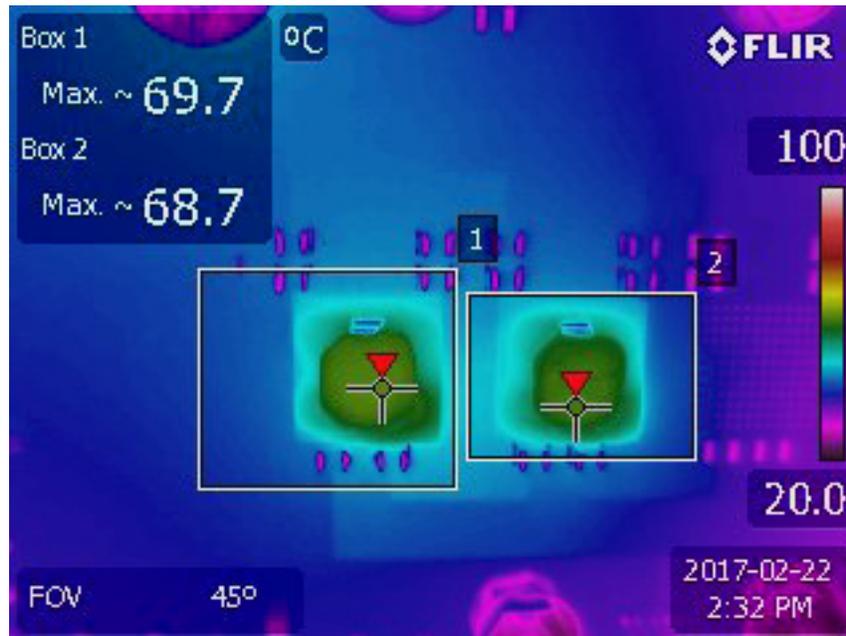


Figure 4. Thermal Capture at  $V_{IN} = 12V$ ,  $V_{OUT} = 0.9V$ , 80A ( $T_A = 25^\circ C$ , 200LFM Airflow and No Heat Sink)

# DEMO MANUAL

## DC2448A-A

### PARTS LIST


ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
<b>Required Circuit Components</b>				
1	2	C1, C14	CAP, 22 $\mu$ F, X7R, 10V, 10%, 1206	MURATA, GRM31CR71A226KE15L
2	2	C2, C15	CAP, 4.7 $\mu$ F, X5R, 25V, 20%, 0805	MURATA, GRM21BR61E475MA12L
3	1	C8	CAP, 100pF, X7R, 50V, 10%, 0603	AVX, 06035C101KAT2A
4	2	C9, C10	CAP, 0.47 $\mu$ F, X7R, 10V, 10%, 0603	AVX, 0603ZC474KAT2A MURATA, GRM188R71A474KA61D
5	2	C29, C30	CAP, 10 $\mu$ F, X5R, 6.3V, 10%, 0805	MURATA, GRM21BR60J106KE19L
6	11	C31, C32, C01, C02, C03, C04, C07, C08, C09, C010, C011	CAP, 100 $\mu$ F, X5R, 6.3V, 20%, 1210	MURATA, GRM32ER60J107ME20L
7	1	CIN1	CAP, 150 $\mu$ F, ALUM., 35V, 20%, 10x10.5mm, SMD, HVH Series	SUN ELECTRONIC INDUSTRIES CORP, 35HVH150M
8	8	CIN2, CIN3, CIN4, CIN5, CIN6, CIN7, CIN8, CIN9	CAP, 22 $\mu$ F, X5R, 25V, 10%, 1210	AVX, 12103D226KAT2A MURATA, GRM32ER61E226KE15L
9	4	C05, C06, C012, C013	CAP, 470 $\mu$ F, TANT. POLY., 4V, 20%, 7343, D3L	PANASONIC, 4TPE470MCL
10	1	R14	RES., 10k, 1%, 1/10W, 0603	KOA SPEER, RK73H1JTTD1002F PANASONIC, ERJ3EKF1002V VISHAY, CRCW060310K0FKEA
11	1	R20	RES., 4.99k, 1%, 1/10W, 0603	NIC, NRC06F4991TRF VISHAY, CRCW06034K99FKEA
12	2	R22, R51	RES., 34.8k, 1%, 1/10W, 0603	VISHAY, CRCW060334K8FKEA YAGEO, RC0603FR-0734K8L
13	2	U1, U2	IC, HIGH EFFICIENCY 40A $\mu$ MODULE	LINEAR TECHNOLOGY, LTM4636EY#PBF
<b>Additional Demo Board Circuit Components</b>				
1	2	C6, C17	CAP, 2200pF, X7R, 50V, 10%, 0603	AVX, 06035C222KAT2A
2	1	C33	CAP, 1 $\mu$ F, X7R, 16V, 10%, 0603	AVX, 0603YC105KAT2A NIC, NMC0603X7R105K16TRPF TDK, C1608X7R1C105K080AC
3	1	Q3	XSTR., MOSFET, N-CH, 40V, TO-252	VISHAY, SUD50N04-8M8P-4GE3
4	5	R2, R16, R19, R45, R50	RES., 0 $\Omega$ , 1/10W, 0603	NIC, NRC06Z0TRF VISHAY, CRCW06030000Z0EA
5	4	R4, R5, R12, R15	RES., 10k, 5%, 1/10W, 0603, AEC-Q200	PANASONIC, ERJ3GEYJ103V VISHAY, CRCW060310K0JNEA
6	1	R7	RES., 0.01 $\Omega$ , 1%, 1W, 2010, HIGH POWER	VISHAY, WSL2010R0100FEA18
7	2	R8, R9	RES., 51 $\Omega$ , 5%, 1/10W, 0603	VISHAY, CRCW060351R0JNEA
8	2	R18, R49	RES., 2.2 $\Omega$ , 5%, 1/8W, 0805, AEC-Q200	VISHAY, CRCW08052R20JNEA
9	4	R24, R26, R32, R37	RES., 0 $\Omega$ , 3/4W, 2010, AEC-Q200	VISHAY, CRCW20100000Z0EF
10	1	R25	RES., 0 $\Omega$ , 1W, 2512, SENSE	VISHAY, WSL251200000ZEA9
11	1	R76	RES., 0 $\Omega$ , 1W, 2010, SENSE, AEC-Q200	VISHAY, WSL201000000ZEA9

## PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
<b>Hardware: For Demo Board Only</b>				
1	27	E1, E2, E3, E5, E6, E9, E10, E11, E12, E13, E14, E15, E17, E18, E19, E24, E25, E27, E30, E31, E32, E34, E37, E38, E39, E43, E44	TEST POINT, TURRET, 0.064", MTG. HOLE	MILL-MAX, 2308-2-00-80-00-00-07-0
2	2	E7, E8	TEST POINT, TURRET, 0.094", MTG. HOLE	MILL-MAX, 2501-2-00-80-00-00-07-0
3	6	J1, J2, J5, J6, J7, J8	WASHER, FLAT, STEEL, ZINC PLATE, OD: 0.436 [11.1]	KEYSTONE, 4703
4	6	J1, J2, J5, J6, J7, J8	RING, LUG, CRIMP, #10, NON-INSULATED, SOLDERLESS TERMINALS	KEYSTONE, 8205
5	6	J1, J2, J5, J6, J7, J8	STUD, FASTENER, #10-32	PENNINGENGINEERING, KFH-032-10ET
6	6	J1, J2, J5, J6, J7, J8	NUT, HEX, STEEL, ZINC PLATE, 10-32	KEYSTONE, 4705
7	2	J3, J4	CONN., SMA RF COAX, PCB JACK RCPT, THT, STR	MOLEX, 73391-0060
8	1	JP1	CONN., HDR., MALE, 1x4, 2mm, THT, STR	SAMTEC, TMM-104-02-L-S
9	1	JP2	CONN., HDR., MALE, 1x3, 2mm, THT, STR	SAMTEC, TMM-103-02-L-S
10	4	MH1, MH2, MH3, MH4	STANDOFF, NYLON, SNAP-ON, 0.250"	KEYSTONE, 8831 WURTH ELEKTRONIK, 702931000
11	2	XJP1, XJP2	CONN., SHUNT, FEMALE, 2 POS, 2mm	SAMTEC, 2SN-BK-G




## SCHEMATIC DIAGRAM

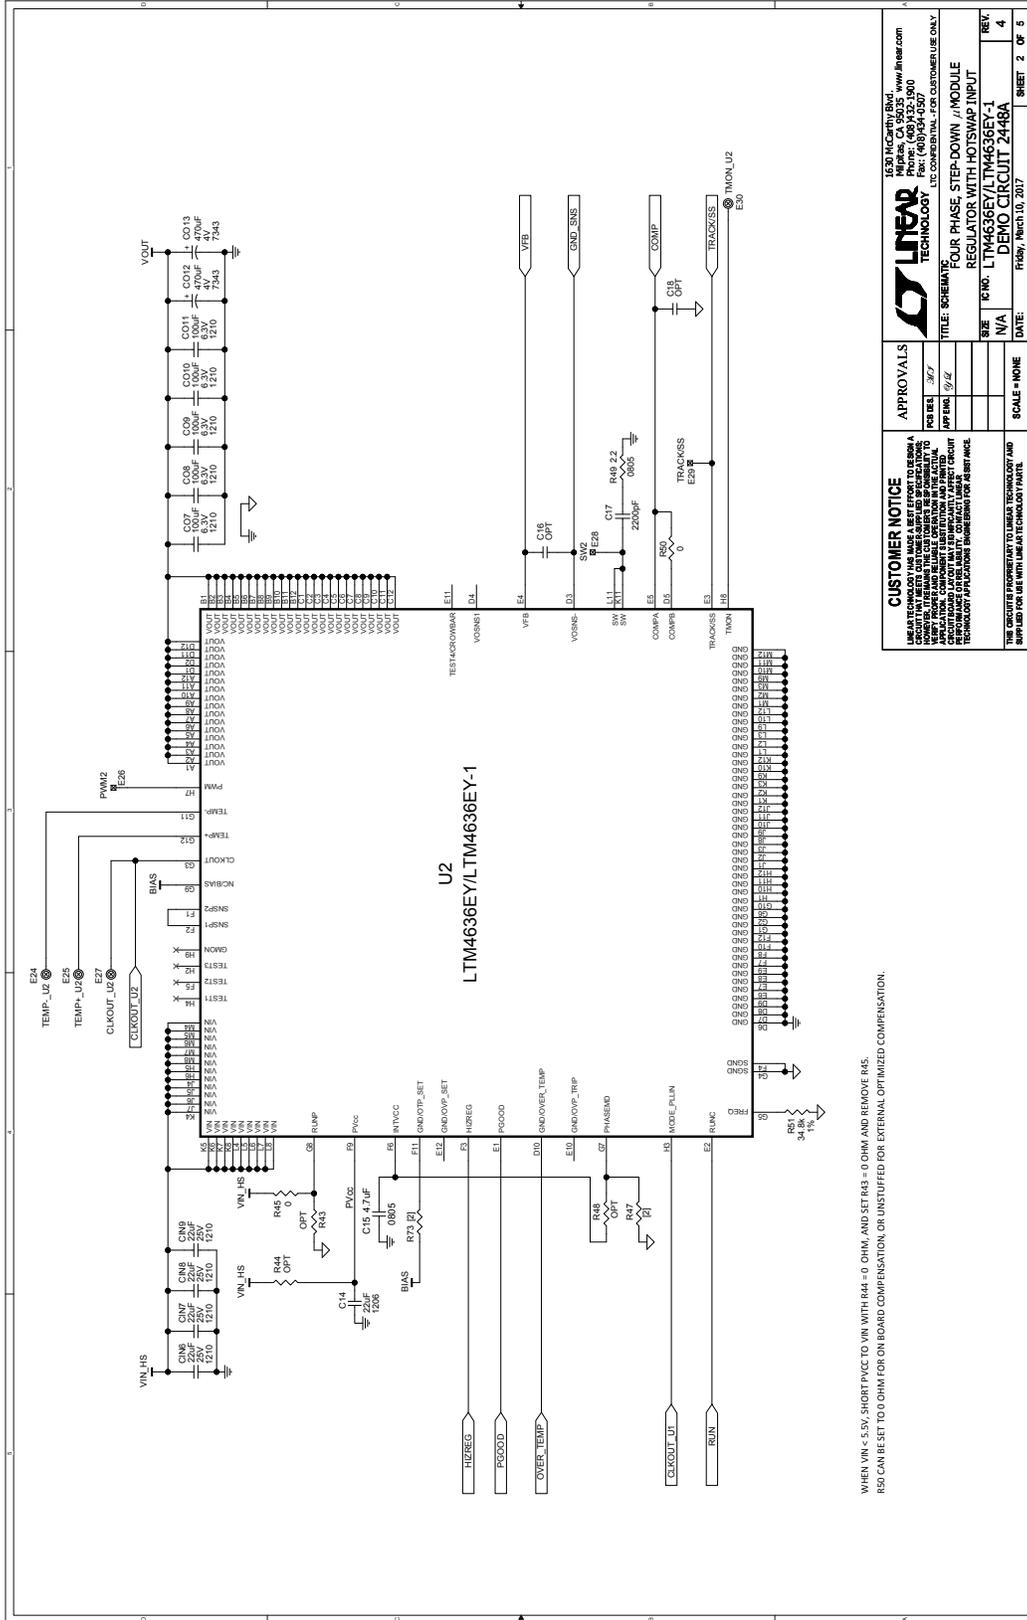

# DEMO MANUAL

## DC2448A-A

### SCHEMATIC DIAGRAM

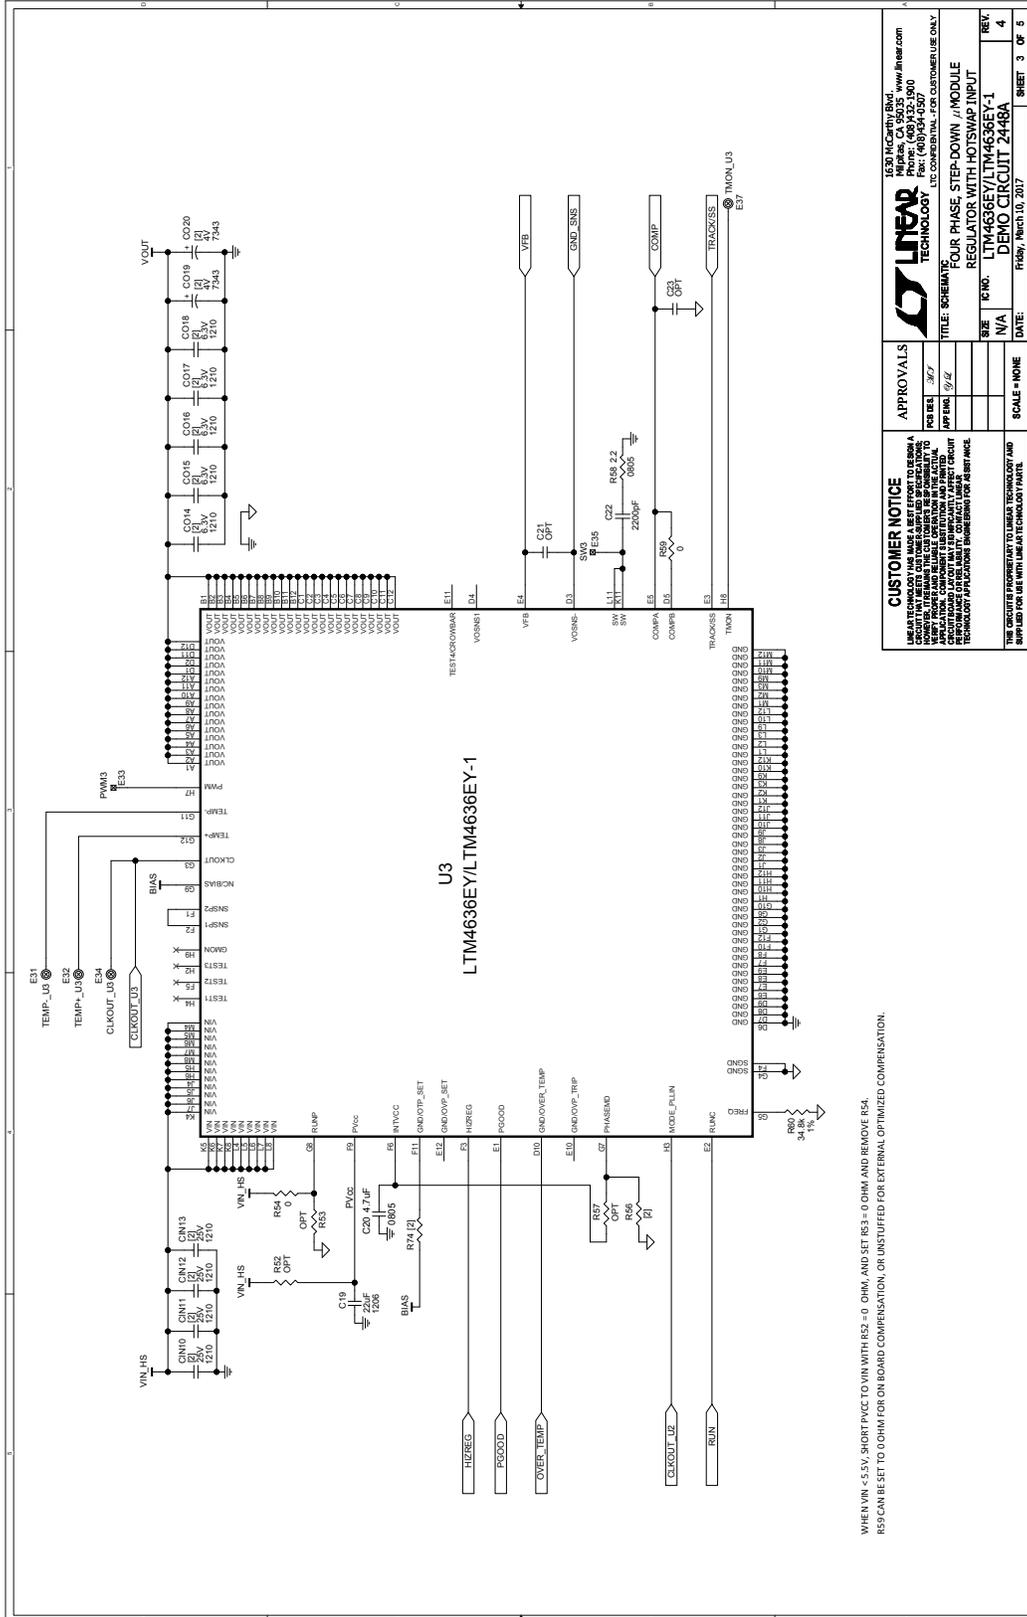





### ESD Caution

**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

### Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)