

Counters

24 x 48 digital counters

Types FKA01, FKA02, FKA03

CARLO GAVAZZI



- 8-digit LCD display
- 8 mm digits
- Reset button with locking function
- 8 years battery lifetime
- 2 inputs (FKA01, FKA02); 1 input (FKA03)
- Up-down counting mode (through electrical control)
- For front panel mounting
- 24 x 48 mm housing
- Filter function for bounce-free counting with mechanical contacts

Product Description

24 x 48 mm up to 2 inputs up-down counters for flush mounting. NPN, PNP or voltage inputs allow connection to any type of sensors or

open collector output. The front key, which can be locked, allows fast and easy counting reset.

Ordering Key

FKA 01 X 724

Housing _____
 Function _____
 Type _____
 Item number _____
 Output _____
 Input range _____

Type Selection

Mounting	Input	Counting mode	Max. counting frequency	Model
Front panel	NPN or voltage free contact	Adding/Subtracting	7 KHz	FKA01X724
Front panel	NPN, PNP or voltage free contact	Adding/Subtracting	12 KHz	FKA02X724
Front panel	Voltage	Adding	30 Hz	FKA03XW24

Input Specifications

Input A (FKA01) Input type Low level High level Max counting frequency Input resistance	NPN open collector or voltage free contact 0 to 0,7 V DC 3 to 30 V DC 7 kHz ≈1 MΩ	Input B (Reset) (FKA03) Input type Low level High level Min pulse time Max counting frequency Input resistance	Voltage (10 to 260 V AC/DC) (galvanic insulation) 0 to 2 V AC/DC 10 to 260 V AC/DC 16 ms 30 Hz ≈160 kΩ
Input A (FKA02) Input type Low level High level Max counting frequency Input resistance	PNP open collector or voltage free contact 0 to 0,7 V DC 4 to 30 V DC 12kHz ≈100 kΩ	Reset (FKA01, FKA02) Input type Low level High level Min pulse time Input resistance	NPN open collector or voltage free contact 0 to 0,7 VDC 3 to 30 V DC 50 ms ≈2 MΩ
Input A (FKA03) Input type Low level High level Min pulse time Max counting frequency Input resistance	Voltage (10 to 260 V AC/DC) (galvanic insulation) 0 to 2 V AC/DC 10 to 260 V AC/DC 16 ms 30 Hz ≈160 kΩ	Electrical locking of the reset key Input type Low level High level Input not active Input in contact with GND Input resistance	NPN open collector or voltage free contact 0 to 0,7 V DC 3 to 5 V DC Reset key locked Reset key unlocked ≈2,2 MΩ
Input B (FKA01, FKA02) Input type Low level High level Max counting frequency Input resistance	NPN open collector or voltage free contact 0 to 0,7 V DC 3 to 30 V DC 30 Hz ≈1 MΩ	Operating mode switch (FKA01, FKA02) Input type Low level High level Input not active Input in contact with GND Input resistance	NPN open collector or voltage free contact 0 to 0,7 V DC 3 to 5 V DC Adding mode Subtracting mode ≈2,2 MΩ

General Specifications


Power supply	Non-replaceable lithium battery (lifetime up to 8 years at 20°C)	Housing dimensions	24 x 48 mm
Overvoltage category (FKA03: Inp A, Inp B)	II (EN 61010 Part 1)	Weight	50 g
Display		Panel cut out	22,2 ^{+0,3} x 45 ^{+0,6} mm
Counting range		Screw terminals Tightening torque	Max. 0.5 Nm according to IEC EN 60947
FKA01, FKA02	-9999999 to 99999999	Approvals	UL
FKA03	0 to 99999999	CE Marking	Yes
Counting direction		EMC	
FKA01, FKA02	Up or down	Immunity	Electromagnetic Compatibility
FKA03	Up	Emission	According to EN61000-6-2
Digit height	8 mm		According to EN61000-6-3
Environment	(EN 60529)		
Degree of protection	IP 65 front		
Pollution degree	2		
Operating temperature	-10° to +55°C, R.H.<85%		
Storage temperature	-20° to +70°C		

Pin assignment and adjustable operating modes

Screw terminal	1	2	3	4	5	6	7	8
Designation	INP A	INP B	Reset	Reset Enable	Operating mode control inputs (Mode)	GND	-	-
Model								
FKA01X724	7 kHz (NPN)	30 Hz (NPN)	Reset input (NPN)	Reset key locking input (NPN)	Not active = Adding Contact with GND = Subtracting	0 VDC	No function	No function
FKA02X724	12 kHz (PNP)							


Screw terminal	1	2	3	4	5	6	7	8
Designation	INP A	Common	INP B	Reset Enable	-	GND	-	-
Model								
FKA03XW24	Count input	Common connection for INP A and INP B	Reset input	Reset key locking input (NPN)	No function	0 VDC	No function	No function

Wiring Diagram

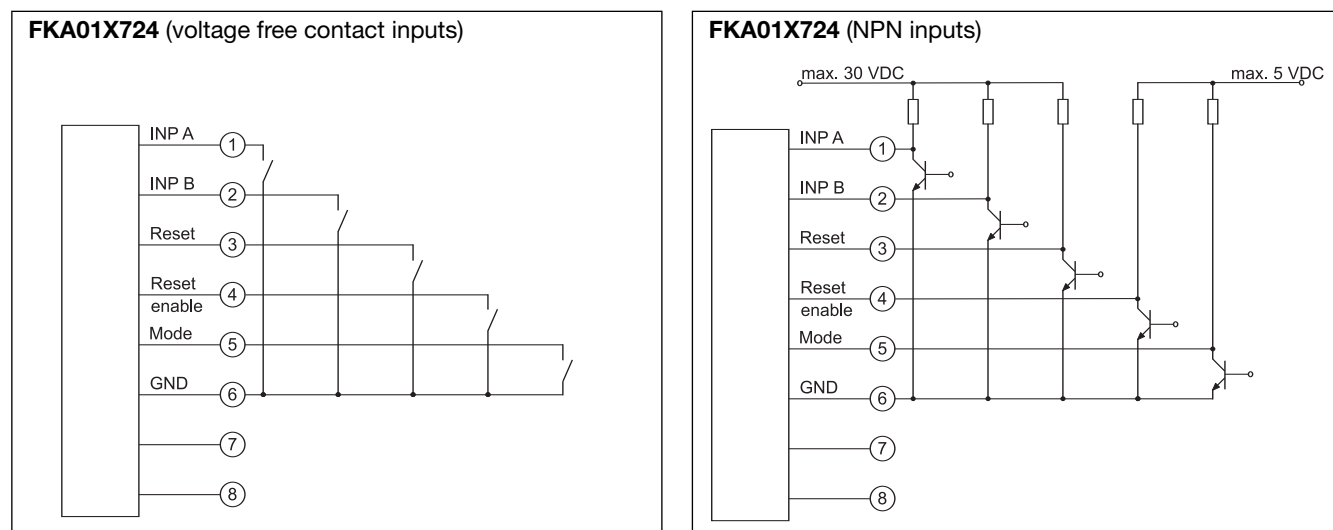


Wiring Diagram (cont.)


FKA02X724 (voltage free contact inputs, except for INP A)

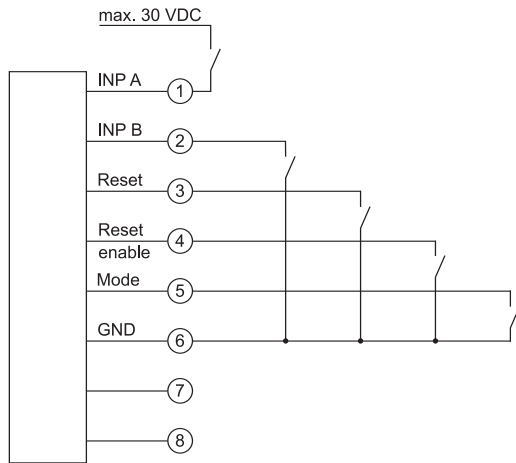


FKA02X724 (NPN inputs, except for INP A (PNP))

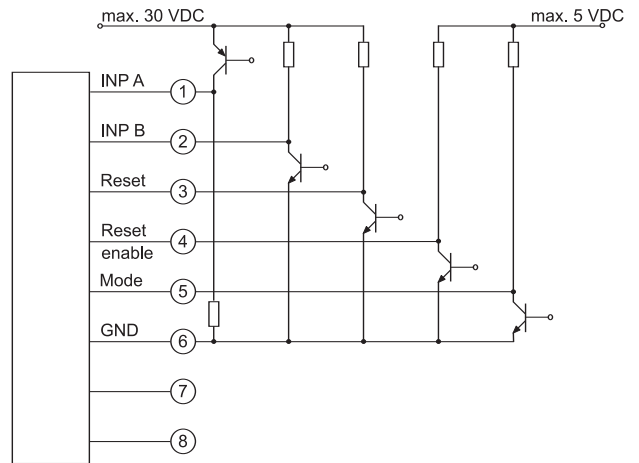

FKA03XW24 (Reset enable: voltage free contact input)

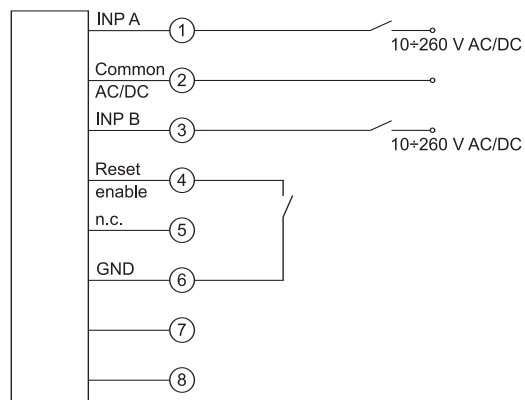


FKA03XW24 (Reset enable: NPN input)

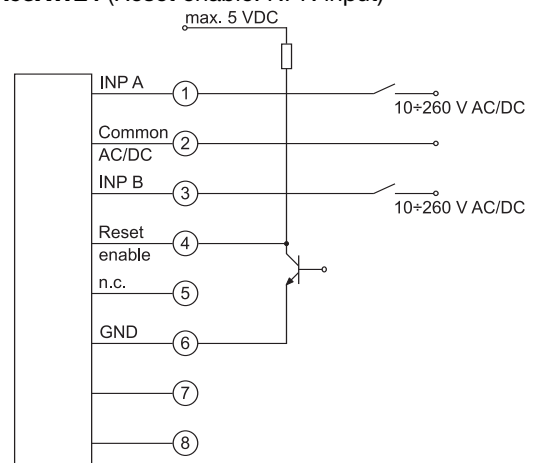

Dimensions

(FKA01, FKA02, FKA03)

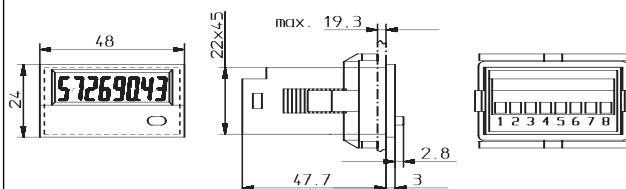

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru