



KMY22



KMY20



KMZ20

## KMY\_KMZ


### Linear Magnetic Field Sensors

#### SPECIFICATIONS

- ✦ **AMR sensor**
- ✦ **Very high sensitivity**
- ✦ **Almost no hysteresis**
- ✦ **Various applications**
- ✦ **Available with internal magnet**
- ✦ **Available in several packages**

Due to its featured properties - high sensitivity and almost no hysteresis – the **KMY** / **KMZ** sensors are used in a wide range of applications, like magnetic field measurement, revolution counters, proximity detecting, and position measurement.

An uniaxial linear magnetic field will generate a linear output within the specified magnetic field range.

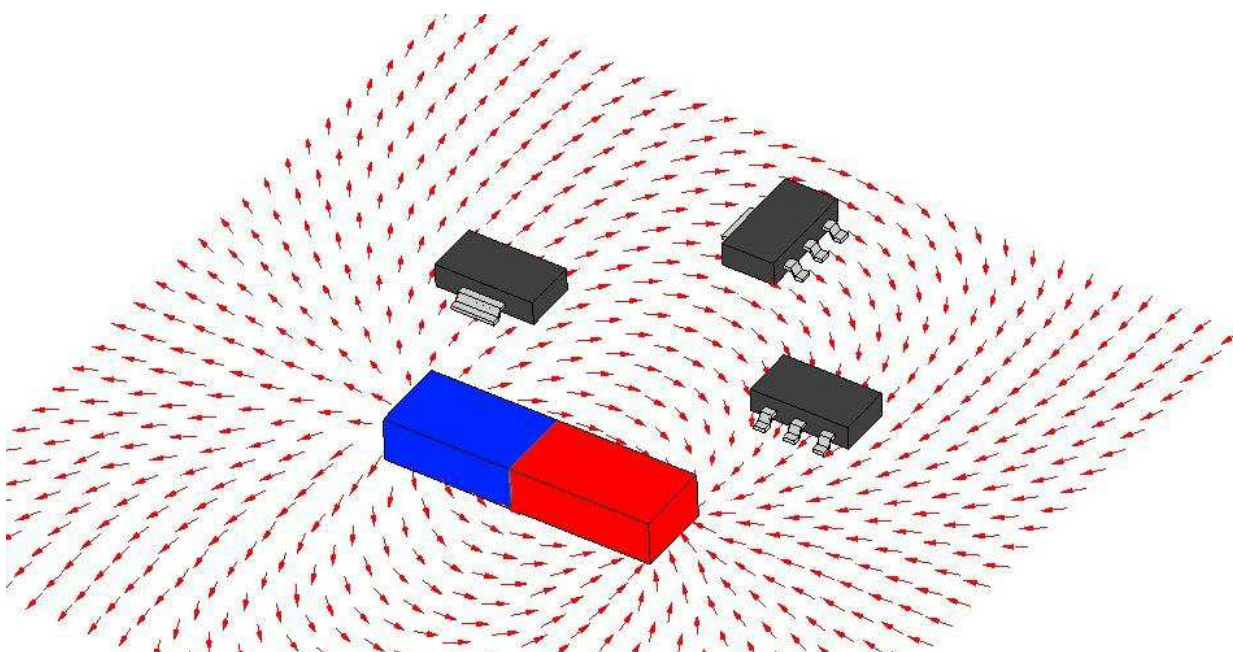

## FEATURES

- ✦ Output proportional to magnetic field strength with very high sensitivity
- ✦ Very small hysteresis
- ✦ Large operating temperature range, from -40°C up to +150 °C
- ✦ Highly reliable
- ✦ With / without internal magnet

## APPLICATIONS

- ✦ Detection of very weak magnetic fields, like earth magnetic field, or field generated by small magnetic particles
- ✦ Detection of objects that distort non-local magnetic fields
- ✦ Revolution measurement on ferromagnetic gears
- ✦ Contactless switch
- ✦ Contactless displacement / position sensor


## DESCRIPTION

An uniaxial linear magnetic field (in y-direction) will generate a linear output within the specified magnetic field range. The sensor is available in two types: the **KMY 20 M**, **KMY 21 M** and **KMZ 20 M** sensor types contain intrinsic magnets which provide an auxiliary magnetic field (in x-direction) at the sensor die which prevents magnetic domains from flipping irregularly.

If the dies **MR174B** or the components **KMY22**, **KMY20S** or **KMZ20S** are used, the auxiliary field has to be provided by the user. The dependence of the sensitivity with auxiliary field strength is depicted in the figure aside.

**Figure 1:** Sensitivity dependence on auxiliary field strength

Auxiliary Field Dependence

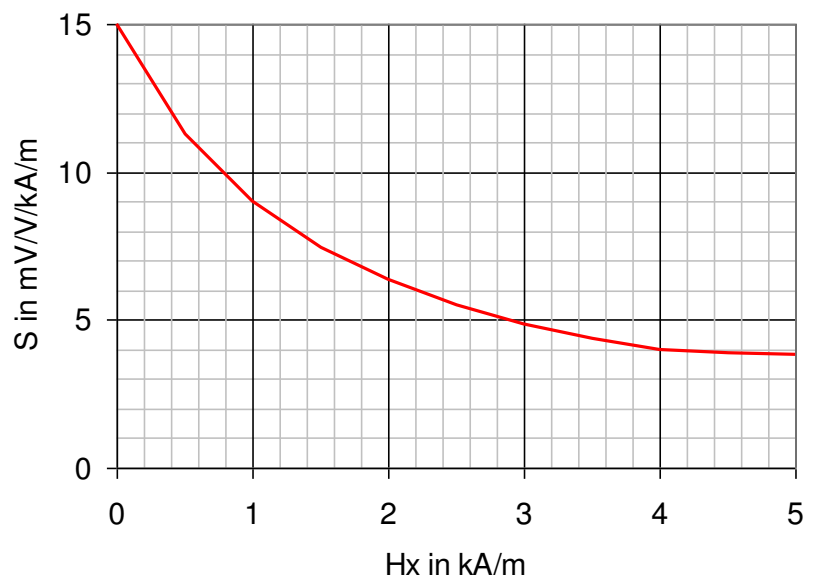

Auxiliary field strengths below  $H_x < 1.5$  kA/m are not recommended, as small disturbances may flip the magnetization domains. Sometimes, the magnetic conditions in the application may provide enough  $H_x$  bias field stabilization. MEAS Germany can provide advice for customer specific magnet arrangements.

If a bias field  $H_x$  is not applied or  $H_x$  is less than 2.5 kA/m, the sensor may be used only in a limited field range  $H_y$ , depending on the present total bias field  $H_{x,tot}$ . In this case, it is strongly recommended to 'premagnetize' the sensor, i.e. align all magnetic domains consistently, prior to the measurement.

$H_{x,tot}$  is the sum of all acting magnetic fields in x direction at the sensor die.

**Do not use the sensor outside the safe operating area.** Leaving the safe operating area can destroy an existing premagnetization and therefore will lead to unreproducible sensor signals.

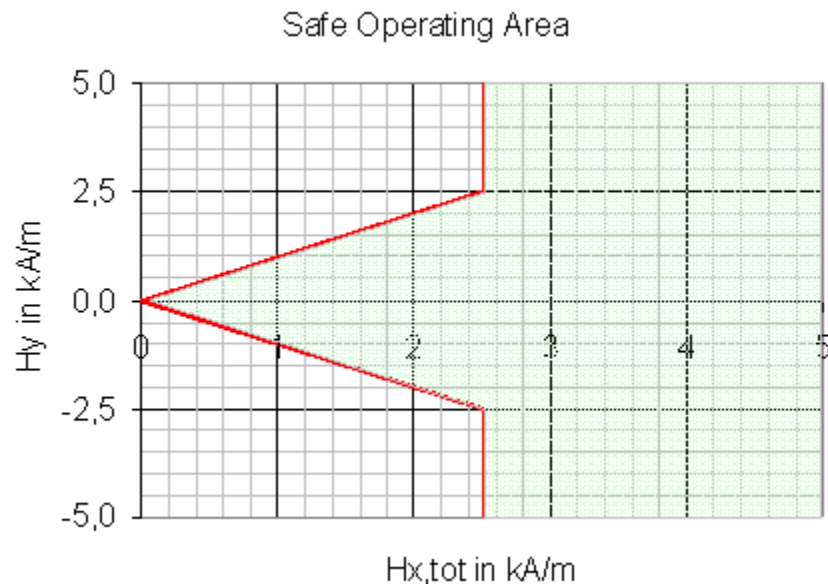


Figure 2: Safe operating area

## CHARACTERISTIC VALUES / SENSOR SPECIFICATIONS



| Parameter                                                                                                          | Symbol           | Condition      | Min  | Typ   | Max  | Unit        |
|--------------------------------------------------------------------------------------------------------------------|------------------|----------------|------|-------|------|-------------|
| <b>Operating Limits</b>                                                                                            |                  |                |      |       |      |             |
| max. supply voltage                                                                                                | $V_{cc,max}$     |                |      |       | 10   | V           |
| max. current                                                                                                       | $I_{cc,max}$     |                |      |       | 9    | mA          |
| operating temperature                                                                                              | $T_{op}$         |                | -40  |       | +150 | °C          |
| storage temperature                                                                                                | $T_{st}$         |                | -40  |       | +150 | °C          |
| <b>General Sensor Specifications</b>                                                                               |                  |                |      |       |      |             |
| TC of amplitude                                                                                                    | TCSV             | Condition A, C |      | -0.35 |      | %/K         |
| TC of resistance                                                                                                   | TCBR             | Condition A, C |      | +0.35 |      | %/K         |
| TC of offset                                                                                                       | TCVoff           | Condition A, C | -4   | 0     | +4   | $\mu V/V/K$ |
| <b>Sensor Specifications KMY 20 S, KMZ 20 S, KMY 22 (<math>T=25</math> °C, <math>H_x=3</math> kA/m externally)</b> |                  |                |      |       |      |             |
| Supply voltage                                                                                                     | $V_{cc}$         | Condition A, B |      | 5     |      | V           |
| Bridge resistance                                                                                                  | $R_b$            | Condition A, B | 1200 | 1700  | 2200 | $\Omega$    |
| Output signal range                                                                                                | $\pm V_o/V_{cc}$ | Condition A, B | 16   | 20    | 24   | mV/V        |
| Offset voltage                                                                                                     | $V_{off}/V_{cc}$ | Condition A, B | -1   | 0     | +1   | mV/V        |
| Sensitivity                                                                                                        | S                | Condition A, B | 3.7  | 4.7   | 5.7  | mV/V/kA/m   |
| Hysteresis                                                                                                         | $V_H/V_{cc}$     | Condition A, B | -    | -     | 50   | $\mu V/V$   |

| Sensor Specifications KMY 20 M, KMZ 20 M (T=25 °C, Hx=1.5±0.5 kA/m internally) |                  |                |      |      |      |           |
|--------------------------------------------------------------------------------|------------------|----------------|------|------|------|-----------|
| Supply voltage                                                                 | $V_{cc}$         | Condition A, B |      | 5    |      | V         |
| Bridge resistance                                                              | $R_b$            | Condition A, B | 1200 | 1700 | 2200 | Ω         |
| Output signal range                                                            | $\pm V_o/V_{cc}$ | Condition A, B | 16   | 20   | 24   | mV/V      |
| Offset voltage                                                                 | $V_{off}/V_{cc}$ | Condition A, B | -1.5 | 0    | +1.5 | mV/V      |
| Sensitivity                                                                    | S                | Condition A, B | 4    | 5.5  | 7    | mV/V/kA/m |
| Hysteresis                                                                     | $V_H/V_{cc}$     | Condition A, B | -    | -    | 50   | μV/V      |
| Sensor Specifications KMY 21 M (T=25 °C, Hx=2.5±1.0 kA/m internally)           |                  |                |      |      |      |           |
| Supply voltage                                                                 | $V_{cc}$         | Condition A, B |      | 5    |      | V         |
| Bridge resistance                                                              | $R_b$            | Condition A, B | 1100 | 1500 | 1900 | Ω         |
| Output signal range                                                            | $\pm V_o/V_{cc}$ | Condition A, B | 8    | 9.5  | 12   | mV/V      |
| Offset voltage                                                                 | $V_{off}/V_{cc}$ | Condition A, B | 48   | 50   | 52   | %Vcc      |
| Sensitivity                                                                    | S                | Condition A, B | 2.05 | 2.50 | 3.10 | mV/V/kA/m |
| Hysteresis                                                                     | $V_H/V_{cc}$     | Condition A, B | -    | -    | 50   | μV/V      |

Stress above one or more of the limiting values may cause permanent damage to the device. Exposure to limiting values for extended periods may affect device reliability.

## MEASUREMENT CONDITIONS

| Parameter                                                          | Symbol                | Unit                                  | Condition                                                                                                                                                                                               |
|--------------------------------------------------------------------|-----------------------|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Condition A: Set Up Conditions</b>                              |                       |                                       |                                                                                                                                                                                                         |
| Ambient temperature                                                | T                     | °C                                    | 23±5<br>Measurement results are extrapolated to 25°C by using the given temperature coefficients                                                                                                        |
| Supply voltage                                                     | $V_{cc}$              | V                                     | 5                                                                                                                                                                                                       |
| Output voltage                                                     | $V_o$<br>$V_o/V_{cc}$ | mV<br>mV/V                            | $V_o = (V_{o+} - V_{o-})$<br>Output voltages are also given independently on supply voltage: example: $V_o/V_{cc} = (V_{o+} - V_{o-})/V_{cc}$ ;<br>measure MR half bridge against reference half bridge |
| Reference half bridge                                              |                       |                                       | 2* 2 kΩ 0.1% (KMY21M only)                                                                                                                                                                              |
| for full bridge sensors<br>(KMY20S, KMY20M, KMY22, KMZ20S, KMZ20M) |                       | for half bridge sensors<br>(KMY 21 M) |                                                                                                                                                                                                         |
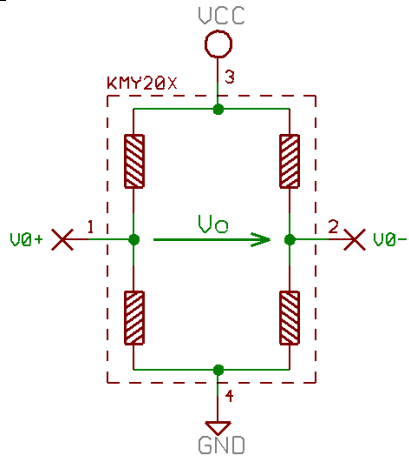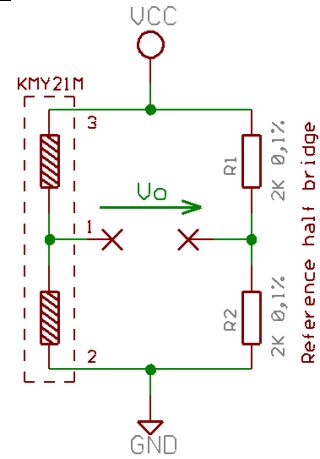
|                                                                                      |                                                                                    |                 |                                                                                                                     |
|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------------------|
|     |  |                 |                                                                                                                     |
| The output voltage of the MR half bridge is measured against a reference half bridge |                                                                                    |                 |                                                                                                                     |
| Condition B: Sensor Specifications (T=25 °C, S-Type: Hx=3.0←0.5 kA/m)                |                                                                                    |                 |                                                                                                                     |
| Output voltage range                                                                 | $\pm V_O/V_{CC}$                                                                   | mV/V            | $H_y \bullet \dots \bullet kA/m; V_O \bullet \dots \bullet V_{O,max} \bullet V_{O,min}$                             |
| Offset voltage                                                                       | $V_{off}/V_{CC}$                                                                   | mV/V            | $H_y \bullet 0; V_{off} \bullet V_O \bullet H_y$                                                                    |
| Sensitivity                                                                          | S                                                                                  | (mV/V)/(kA/m)   | $H_y \bullet 1kA/m; S \bullet \frac{V_0(H_y \bullet 1kA/m) - V_0(H_y \bullet 0)}{2 \bullet V_{CC}}$                 |
| Hysteresis                                                                           | $V_H/V_{CC}$                                                                       | $\mu V/V$       | $H_y$ in kA/m<br>$(V_0(H_y \bullet 0; H_y \bullet 1) - V_0(H_y \bullet 1; H_y \bullet 0)) / V_{CC}$                 |
| Condition C: Sensor Specifications (reference temperatures T=-25°C, +125°C)          |                                                                                    |                 |                                                                                                                     |
| Ambient temperatures                                                                 | T                                                                                  | °C              | $T_1=-25\text{ °C}, T_0=+25\text{ °C}, T_2=+125\text{ °C}$                                                          |
| TC of amplitude                                                                      | TCSV                                                                               | %/K             | $TCV \bullet \frac{1}{(T_2 - T_1)} \bullet \frac{V_0/V_{CC}(T_2) - V_0/V_{CC}(T_1)}{V_0/V_{CC}(T_1)} \bullet 100\%$ |
| TC of resistance                                                                     | TGBR                                                                               | %/K             | $TCR \bullet \frac{1}{(T_2 - T_1)} \bullet \frac{R(T_2) - R(T_1)}{R(T_1)} \bullet 100\%$                            |
| TC of offset                                                                         | TCVoff                                                                             | ( $\mu V/V$ )/K | $TCVoff \bullet \frac{V_{off}(T_2) - V_{off}(T_1)}{(T_2 - T_1)}$                                                    |

## SENSOR MODELS

### KMY 20 / KMY 22 / KMZ 20

The KMY and KMZ sensors are highly sensitive magnetic field sensors which utilize the anisotropic magneto resistance effect. The KMY 20 and KMZ 20 sensors contain a Wheatstone bridge.

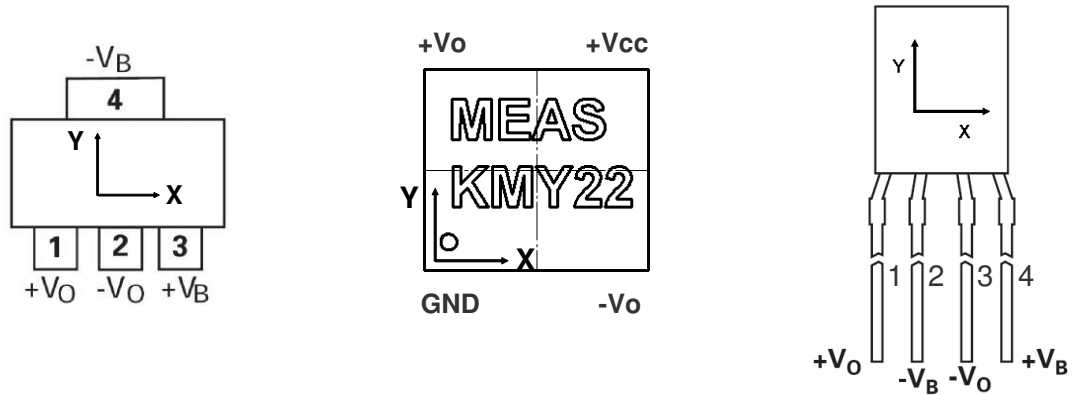


Figure 3: Pad annotation and definition of field direction for KMY & KMZ


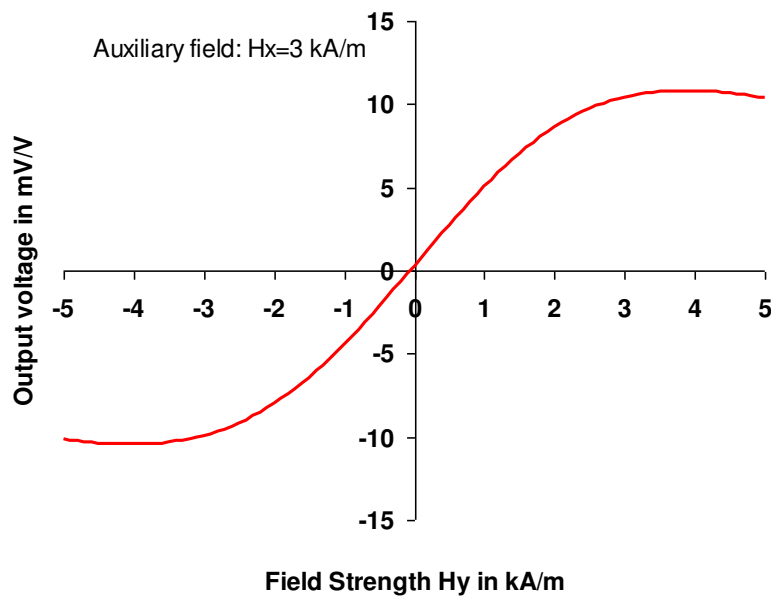


Figure 4: Characteristic output curve of KMY 20 S / KMY 22 / KMZ 20 S for an auxiliary field strength of  $H_x=3$  kA/m


## KMY 21

In contrast to the KMY20 sensor products, the **KMY 21 M** consists of a half bridge, making the sensor well suited for dynamic measurements.



It contains an internal magnet, which provides an auxiliary field of approx. 2.5 kA/m.

Figure 5: Characteristic curve for KMY21M

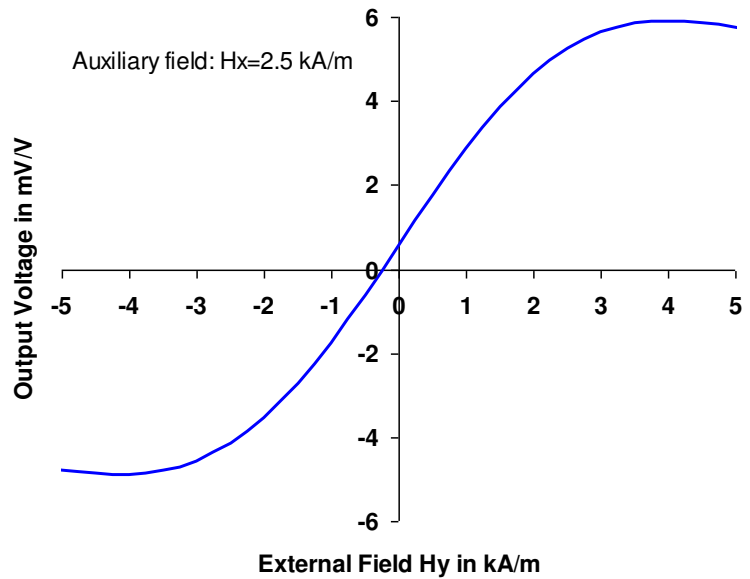

## TEMPERATURE DEPENDENCIES

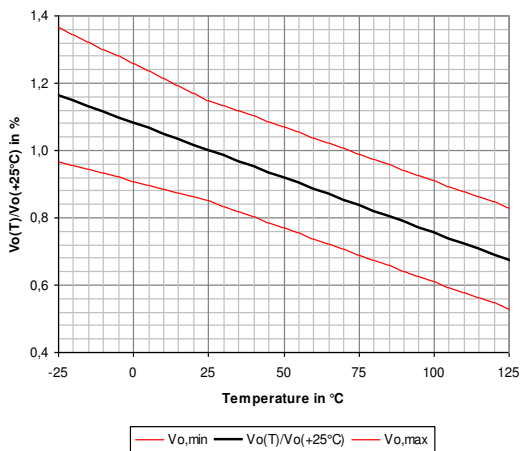


Figure 6: signal amplitude related to room temperature value


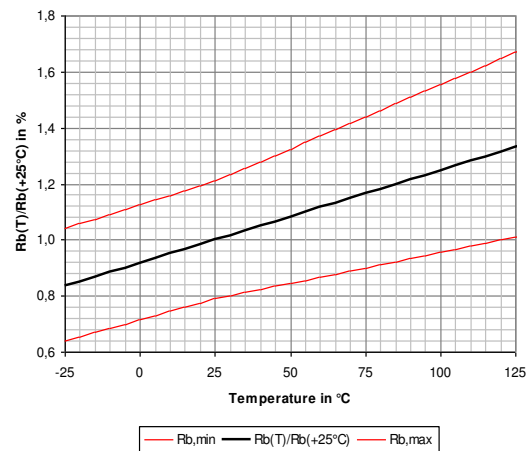


Figure 7: bridge resistance related to room temperature value

## PACKAGES

### SOT223


Recommended solder reflow process for all packages according to IPC/JEDEC J-STD-020D (Pb-Free Process)

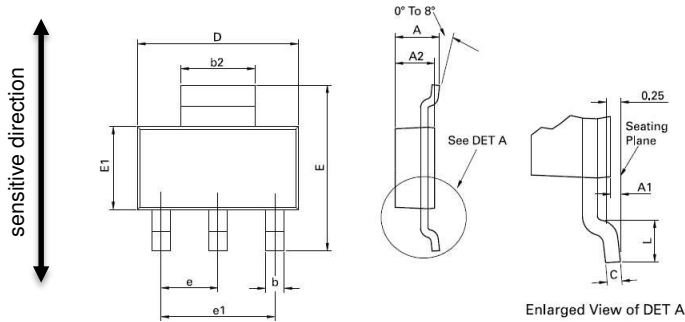

| DIM | Millimeters |      | Inches |       | DIM | Millimeters |      | Inches     |       |
|-----|-------------|------|--------|-------|-----|-------------|------|------------|-------|
|     | Min         | Max  | Min    | Max   |     | Min         | Max  | Min        | Max   |
| A   | -           | 1.80 | -      | 0.071 | e   | 2.30 BSC    |      | 0.0905 BSC |       |
| A1  | 0.02        | 0.10 | 0.0008 | 0.004 | e1  | 4.60 BSC    |      | 0.181 BSC  |       |
| b   | 0.66        | 0.84 | 0.026  | 0.033 | E   | 6.70        | 7.30 | 0.264      | 0.287 |
| b2  | 2.90        | 3.10 | 0.114  | 0.122 | E1  | 3.30        | 3.70 | 0.130      | 0.146 |
| C   | 0.23        | 0.33 | 0.009  | 0.013 | L   | 0.90        | -    | 0.355      | -     |
| D   | 6.30        | 6.70 | 0.248  | 0.264 |     | -           | -    | -          | -     |

Note: Controlling dimensions are in millimeters. Approximate dimensions are provided in inches


### E-LINE 4 PIN

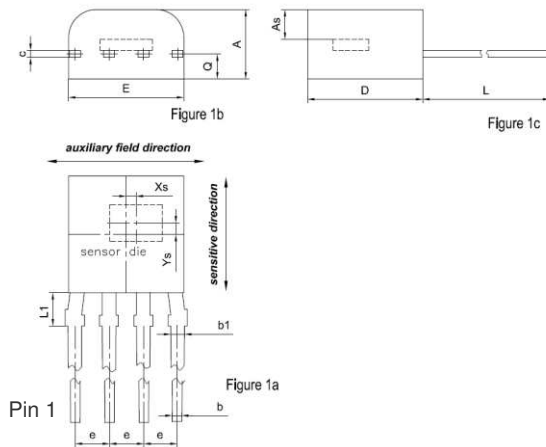

| DIE POS. | Millimeter |        |            | Inches |        |            |
|----------|------------|--------|------------|--------|--------|------------|
|          | KMZ20S     | KMZ20M | tolerances | KMZ20S | KMZ20M | tolerances |
| Xs       | +0.05      | +0.05  | +/-0.10    | +0.002 | +0.002 | +/-0.004   |
| Ys       | +0.50      | +0.50  | +/-0.10    | +0.02  | +0.02  | +/- 0.004  |
| As       | 1.05       | 1.05   | +/-0.10    | 0.041  | 0.041  | +/-0.004   |

| DIM | Millimeter |      |      | Inches     |      |        |
|-----|------------|------|------|------------|------|--------|
|     | min.       | typ. | max. | min.       | typ. | max.   |
| A   | 2.4        |      | 2.8  | 0.094      |      | 0.110  |
| b   | 0.35       |      | 0.48 | 0.0138     |      | 0.0189 |
| b1  | 0.45       |      | 0.60 | 0.0178     |      | 0.024  |
| c   | 0.25       |      | 0.35 | 0.0098     |      | 0.0138 |
| D   | 4.0        |      | 4.4  | 0.157      |      | 0.173  |
| E   | 3.8        |      | 4.4  | 0.150      |      | 0.173  |
| L   | 12.0       |      | 14.0 | 0.472      |      | 0.551  |
| e   | NOM. 1.25  |      |      | NOM. 0.049 |      |        |
| L1  | 1.1        |      | 1.3  | 0.043      |      | 0.051  |

### UTDFN8 2.5X2.8 MM

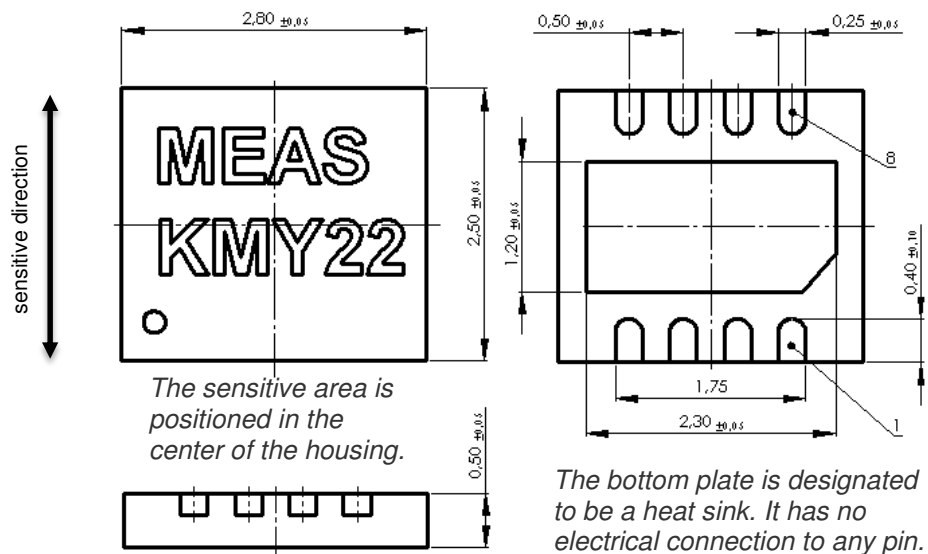

**ORDERING CODE**

| DEVICE         | DIE         | PACKAGE | INTERNAL MAGNET | PART NUMBER       |
|----------------|-------------|---------|-----------------|-------------------|
| <b>KMY20 S</b> | full bridge | SOT-223 | NO              | <b>G-MRCO-006</b> |
| <b>KMY20 M</b> | full bridge | SOT-223 | YES             | <b>G-MRCO-001</b> |
| <b>KMY21 M</b> | half bridge | SOT-223 | YES             | <b>G-MRCO-011</b> |
| <b>KMZ20 S</b> | full bridge | E-Line  | NO              | <b>G-MRCO-007</b> |
| <b>KMZ20 M</b> | full bridge | E-Line  | YES             | <b>G-MRCO-003</b> |
| <b>KMY22</b>   | full bridge | UTDFN8  | NO              | <i>on request</i> |

**ORDERING INFORMATION****NORTH AMERICA**

Measurement Specialties, Inc.,  
a TE Connectivity Company  
Phone: +1-800-522-6752  
Email: [customercare.hmpt@te.com](mailto:customercare.hmpt@te.com)

**EUROPE**

MEAS Deutschland GmbH (Europe)  
a TE Connectivity Company  
Phone: +49-800-440-5100  
Email: [customercare.dtmtd@te.com](mailto:customercare.dtmtd@te.com)

**ASIA**

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
Phone: +86-400-820-6015  
Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

**TE.com/sensorsolutions**

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)