



**SBSM**  
10Amp / 20Amp




■ Tin plated solderable termination area  
■ Solder joint from filter manufacture

|    | 2220                           |
|----|--------------------------------|
| L1 | 5.7 ± 0.4<br>(0.224 ± 0.015)   |
| L2 | 6.6 ± 0.4<br>(0.260 ± 0.015)   |
| W  | 5.0 ± 0.4<br>(0.197 ± 0.015)   |
| T  | 3.18 ± 0.2<br>(0.125 ± 0.008)  |
| B1 | 2.25 ± 0.4<br>(0.088 ± 0.015)  |
| B2 | 0.30 ± 0.25<br>(0.012 ± 0.010) |

### Recommended pad/track details

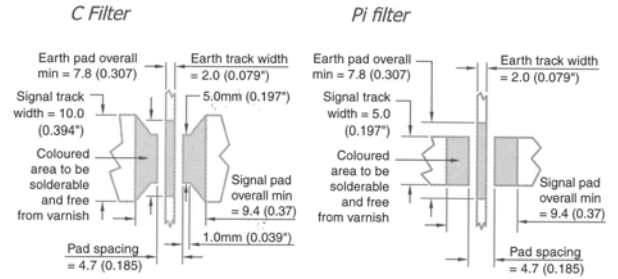

| Type          |            | SBSMC                                  | SBSMP       |
|---------------|------------|--|-------------|
| Chip Size     |            | 2220                                   | 2220        |
| Max Current   |            | 20A                                    | 10A         |
| Rated Voltage | Dielectric | Minimum and maximum capacitance values |             |
| 50Vdc         | COG/NPO    | -                                      | -           |
|               | X7R        | 470nF                                  | 470nF       |
| 100Vdc        | COG/NPO    | -                                      | -           |
|               | X7R        | 220nF-330nF                            | 220nF-330nF |
| 200Vdc        | COG/NPO    | -                                      | -           |
|               | X7R        | 100nF-150nF                            | 100nF-150nF |
| 500Vdc        | COG/NPO    | -                                      | -           |
|               | X7R        | 1nF-68nF                               | 1nF-68nF    |


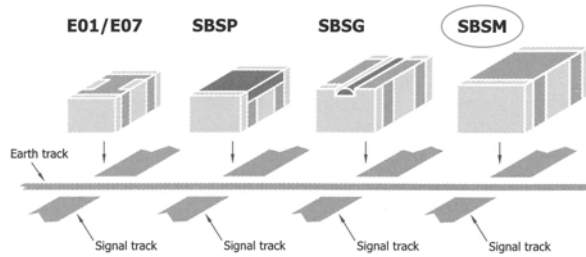


### Effects of mounting method on insertion loss

C and Pi filters are mounted to PCBs and soldered in identical manner to chip capacitors. Solder connections made to each end (signal lines) and each side band (earth track).

Whilst SBSG, SBSM and SBSP filters can be mounted conventionally on PCBs, they are also suitable for mounting in a wall or partition on a board. This greatly improves the screening between filter input and output, thereby enhancing the high frequency response.

The following insertion loss curves (for SBSP, SBSG, SBSM Pi filters), based on actual measurements, show the effect. It can be seen that the filters conventionally mounted (Fig. 1) exhibit a drop in attenuation at higher frequencies. Improved shielding methods (Fig. 2), maintain excellent suppression characteristics to 1GHz and above. See below for application example.

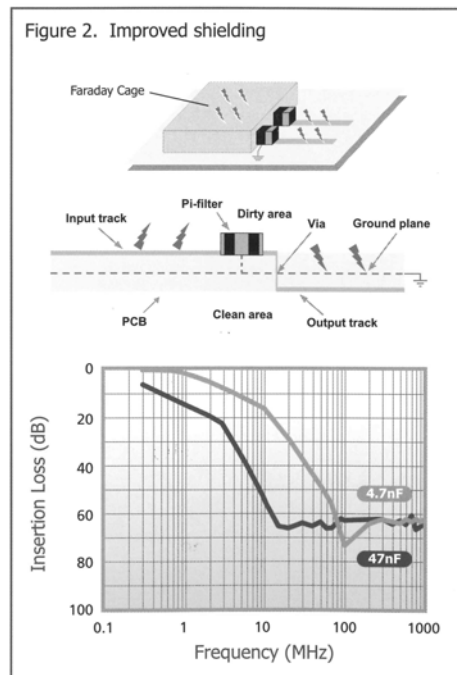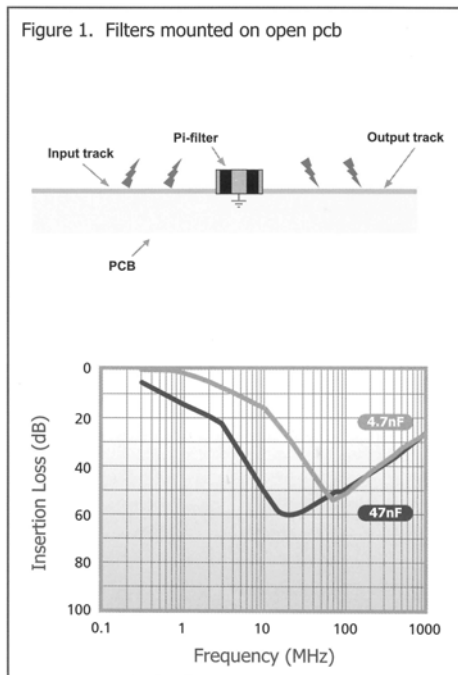

### Insertion loss tables for surface mount EMI filters - C filter

| Product Code   | Packing  | Capacitance<br>(±20%) | Dielectric | Rated Voltage<br>(dc) | DWV<br>(dc) | Approximate<br>Resonant<br>Frequency<br>(MHz) | Typical No-Load Insertion Loss (dB)* |      |       |        |      |
|----------------|--|-----------------------|------------|-----------------------|-------------|---|--------------------------------------|------|-------|--------|------|
|                |  |                       |            |                       |             |   | 0.1MHz                               | 1MHz | 10MHz | 100MHz | 1GHz |
| SBSMC5000102MX | B = Bulk Packed<br>T = Tape-and-Reel (178mm / 7" reels)<br>R = Tape-and-Reel (330mm / 13" reels) | 1.0nF                 | X7R        | 500                   | 750         | 270   | 0                                    | 0    | 5     | 24     | 21   |
| SBSMC5000152MX |  | 1.5nF                 | X7R        | 500                   | 750         | 265   | 0                                    | 0    | 7     | 25     | 21   |
| SBSMC5000222MX |  | 2.2nF                 | X7R        | 500                   | 750         | 235   | 0                                    | 0    | 11    | 31     | 21   |
| SBSMC5000332MX |  | 3.3nF                 | X7R        | 500                   | 750         | 185   | 0                                    | 1    | 15    | 35     | 21   |
| SBSMC5000472MX |  | 4.7nF                 | X7R        | 500                   | 750         | 154   | 0                                    | 2    | 17    | 40     | 21   |
| SBSMC5000682MX |  | 6.8nF                 | X7R        | 500                   | 750         | 125   | 0                                    | 4    | 21    | 44     | 21   |
| SBSMC5000103MX |  | 10nF                  | X7R        | 500                   | 750         | 100   | 0                                    | 5    | 24    | 50     | 21   |
| SBSMC5000153MX |  | 15nF                  | X7R        | 500                   | 750         | 80  | 0                                    | 7    | 27    | 43     | 21   |
| SBSMC5000223MX |  | 22nF                  | X7R        | 500                   | 750         | 65  | 0                                    | 11   | 31    | 43     | 21   |
| SBSMC5000333MX |  | 33nF                  | X7R        | 500                   | 750         | 54  | 1                                    | 15   | 34    | 43     | 21   |
| SBSMC5000473MX |  | 47nF                  | X7R        | 500                   | 750         | 46  | 2                                    | 17   | 37    | 43     | 21   |
| SBSMC5000683MX |  | 68nF                  | X7R        | 500                   | 750         | 39  | 3                                    | 21   | 41    | 43     | 21   |
| SBSMC2000104MX |  | 100nF                 | X7R        | 200                   | 500         | 33  | 5                                    | 24   | 44    | 43     | 21   |
| SBSMC2000154MX |  | 150nF                 | X7R        | 200                   | 500         | 26  | 7                                    | 26   | 47    | 43     | 21   |
| SBSMC1000224MX |  | 220nF                 | X7R        | 100                   | 250         | 21  | 11                                   | 31   | 52    | 43     | 21   |
| SBSMC1000334MX |  | 330nF                 | X7R        | 100                   | 250         | 20  | 14                                   | 33   | 54    | 43     | 21   |
| SBSMC0500474MX |  | 470nF                 | X7R        | 50                    | 125         | 19  | 17                                   | 36   | 54    | 43     | 21   |

\* - Insertion Loss performance quoted is measured on an open board mounted on a brass backplane in a 50Ω system. Performance curves can be supplied on request. Performance in circuit is liable to be different and is affected by board material, track layout, grounding efficiency and circuit impedances. Shielding can be used to improve high frequency performance.

### Insertion loss tables for surface mount EMI filters - P filter

| Product Code   | Packing  | Capacitance<br>(±20%) | Dielectric | Rated Voltage<br>(dc) | DWV<br>(dc) | Approximate<br>Resonant<br>Frequency<br>(MHz) | Typical No-Load Insertion Loss (dB)* |      |       |        |      |
|----------------|--|-----------------------|------------|-----------------------|-------------|---|--------------------------------------|------|-------|--------|------|
|                |  |                       |            |                       |             |   | 0.1MHz                               | 1MHz | 10MHz | 100MHz | 1GHz |
| SBSMP5000102MX | B = Bulk Packed<br>T = Tape-and-Reel (178mm / 7" reels)<br>R = Tape-and-Reel (330mm / 13" reels) | 1.0nF                 | X7R        | 500                   | 750         | 150   | 0                                    | 0    | 5     | 34     | 21   |
| SBSMP5000152MX |  | 1.5nF                 | X7R        | 500                   | 750         | 130   | 0                                    | 0    | 7     | 39     | 21   |
| SBSMP5000222MX |  | 2.2nF                 | X7R        | 500                   | 750         | 100   | 0                                    | 0    | 11    | 38     | 21   |
| SBSMP5000332MX |  | 3.3nF                 | X7R        | 500                   | 750         | 80  | 0                                    | 1    | 12    | 44     | 21   |
| SBSMP5000472MX |  | 4.7nF                 | X7R        | 500                   | 750         | 63  | 0                                    | 2    | 15    | 44     | 21   |
| SBSMP5000682MX |  | 6.8nF                 | X7R        | 500                   | 750         | 55  | 0                                    | 3    | 18    | 44     | 21   |
| SBSMP5000103MX |  | 10nF                  | X7R        | 500                   | 750         | 43  | 0                                    | 5    | 24    | 44     | 21   |
| SBSMP5000153MX |  | 15nF                  | X7R        | 500                   | 750         | 35  | 0                                    | 8    | 28    | 44     | 21   |
| SBSMP5000223MX |  | 22nF                  | X7R        | 500                   | 750         | 30  | 0                                    | 10   | 35    | 44     | 21   |
| SBSMP5000333MX |  | 33nF                  | X7R        | 500                   | 750         | 23  | 1                                    | 12   | 48    | 44     | 21   |
| SBSMP5000473MX |  | 47nF                  | X7R        | 500                   | 750         | 19  | 2                                    | 16   | 50    | 44     | 21   |
| SBSMP5000683MX |  | 68nF                  | X7R        | 500                   | 750         | 15  | 3                                    | 19   | 55    | 44     | 21   |
| SBSMP2000104MX |  | 100nF                 | X7R        | 200                   | 500         | 12  | 5                                    | 21   | 58    | 44     | 21   |
| SBSMP2000154MX |  | 150nF                 | X7R        | 200                   | 500         | 10  | 8                                    | 23   | 62    | 44     | 21   |
| SBSMP1000224MX |  | 220nF                 | X7R        | 100                   | 250         | 8   | 11                                   | 25   | 63    | 44     | 21   |
| SBSMP1000334MX |  | 330nF                 | X7R        | 100                   | 250         | 6   | 14                                   | 22   | 62    | 44     | 21   |
| SBSMP0500474MX |  | 470nF                 | X7R        | 50                    | 125         | 5   | 16                                   | 20   | 64    | 44     | 21   |

\* - Insertion Loss performance quoted is measured on an open board mounted on a brass backplane in a 50Ω system. Performance curves can be supplied on request. Performance in circuit is liable to be different and is affected by board material, track layout, grounding efficiency and circuit impedances. Shielding can be used to improve high frequency performance.

## Ordering Information

| SBS                        | M        | P                               | 050   | 0474  | M         | X          | T   |
|----------------------------|----------|---------------------------------|---|---|-----------|------------|---|
| Type                       | Size     | Configuration                   | Rated Voltage   | Capacitance in Pico farads (pF)   | Tolerance | Dielectric | Packaging   |
| Surface mount board filter | M = 2220 | C = C section<br>P = Pi Section | 050 = 50Vdc<br>100 = 100Vdc<br>200 = 200Vdc<br>500 = 500Vdc | First digit is 0.<br>Second and third digits are significant figures of capacitance code. The fourth digit is number of zeros following.<br>Example:<br><b>0471</b> = 470nF | M = ±20%  | X = X7R    | T=178mm (7") reel<br>R=330mm (13") reel<br>B = Bulk |


## Reeled Quantities

|                 |      |                  |      |
|-----------------|------|------------------|------|
| 178mm (7") reel | 2220 | 330mm (13") reel | 2220 |
|                 | 500  |                  | 2000 |

## Surface mount and panel mount solder-in filters

Solder pad layouts are included with the detailed information for each part.

### Recommended soldering profile

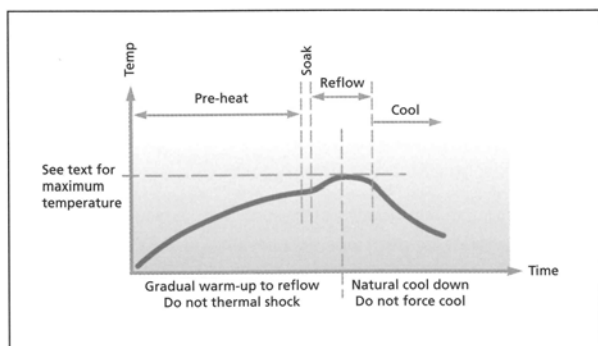

### Soldering of filters

The soldering process should be controlled such that the filter does not experience any thermal shocks which may induce thermal cracks in the ceramic dielectric.

The pre-heat temperature rise of the filter should be kept to around 2°C per second. In practice successful temperature rises tend to be in the region of 1.5°C to 4°C per second dependent upon substrate and components.

The introduction of a soak after pre-heat can be useful as it allows temperature uniformity to be established across the substrate thus preventing substrate warping. The magnitude or direction of any warping may change on cooling imposing damaging stresses upon the filter.

E01, E03, E07 SBSP ranges are compatible with all standard solder types including lead-free, maximum temperature

260°C. For SBSG, SBSM and SFSS ranges, solder time should be minimised, and the temperature controlled to a maximum of 220°C. For SFSR, SFST and SFSU ranges the maximum temperature is 250°C.

Cooling to ambient temperature should be allowed to occur naturally. Natural cooling allows a gradual relaxation of thermal mismatch stresses in the solder joints. Draughts should be avoided. Forced air cooling can induce thermal breakage, and cleaning with cold fluids immediately after a soldering process may result in cracked filters.

Note: The use of FlexiCap™ terminations is strongly recommended to reduce the risk of mechanical cracking.

### Soldering to axial wire leads

#### Soldering temperature

The tip temperature of the iron should not exceed 300°C.

#### Dwell time

Dwell time should be 3-5 seconds maximum to minimise the risk of cracking the capacitor due to thermal shock.

#### Heat sink

Where possible, a heat sink should be used between the solder joint and the body, especially if longer dwell times are required.

### Bending or cropping of wire leads

Bending or cropping of the filter terminations should not be carried out within 4mm (0.157") of the epoxy encapsulation, the wire should be supported when cropping.

**A more comprehensive application note covering installation of all Syfer products is available on the Syfer website.**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)