

# IS31AP2145A

## 2.9W@5.0V MONO CLIP-LESS & FILTER-LESS CLASS-D AUDIO POWER AMPLIFIER

December 2011

### GENERAL DESCRIPTION

The IS31AP2145A is a 2.9W@5.0V mono, clip-less, filter-less, high efficiency Class-D audio power amplifier with automatic gain control.

The IS31AP2145A integrates AGC (Automatic Gain Control) function to automatically prevent distortion of the audio signal by which we can enhance audio quality and also protect the speaker from damage at high power levels. The AGC function and its attack time/release time are selectable via the CTRL pin. The IS31AP2145A also provides thermal and over current protection functions.

In addition to these features, 90% high efficiency, improved RF-rectification immunity, a fast start-up time and small package size make IS31AP2145A ideal choice for cellular handsets, PDAs and other portable applications.

IS31AP2145A is available in a 1.5mm×1.5mm UTQFN-9 package.

### FEATURES

- Filter-less Class-D architecture
- AGC enable/disable function
- 2.9W into 4Ω at 5.0V (10% THD+N)
- Power supply range: 2.7V to 5.5V
- Selectable attack and release times
- Minimum external components
- High efficiency: 90%
- Click-and-pop suppression
- Low shutdown current: 0.1μA
- Short-circuit and thermal protection
- Space-saving UTQFN-9, 1.5mm × 1.5mm

### APPLICATIONS

- Wireless or cellular handsets and PDAs
- Portable navigation devices
- Portable DVD player
- Notebook PC
- Educational toys
- USB speakers
- Portable gaming

### TYPICAL APPLICATION CIRCUIT

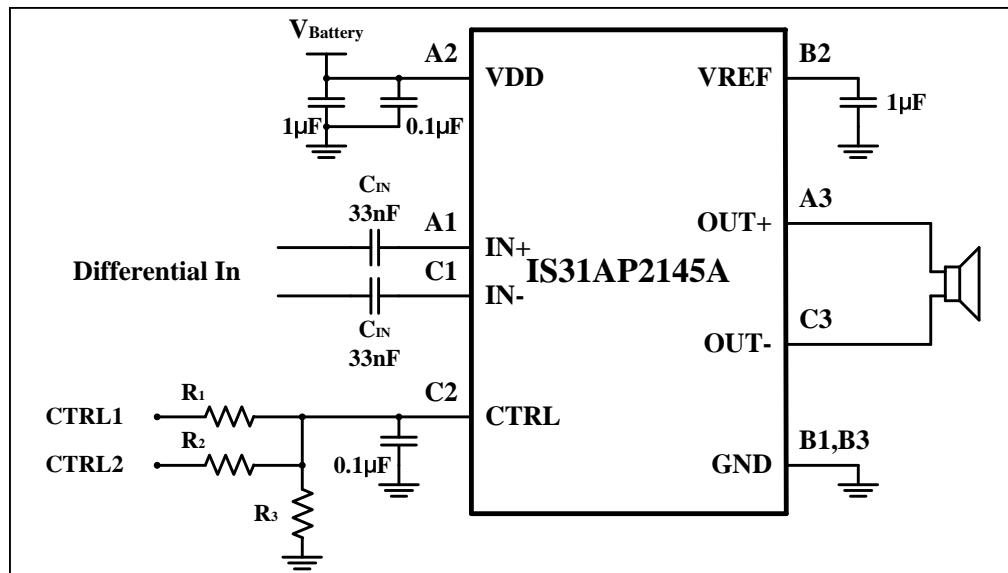


Figure 1 Typical Application Circuit (Differential Input)

# IS31AP2145A

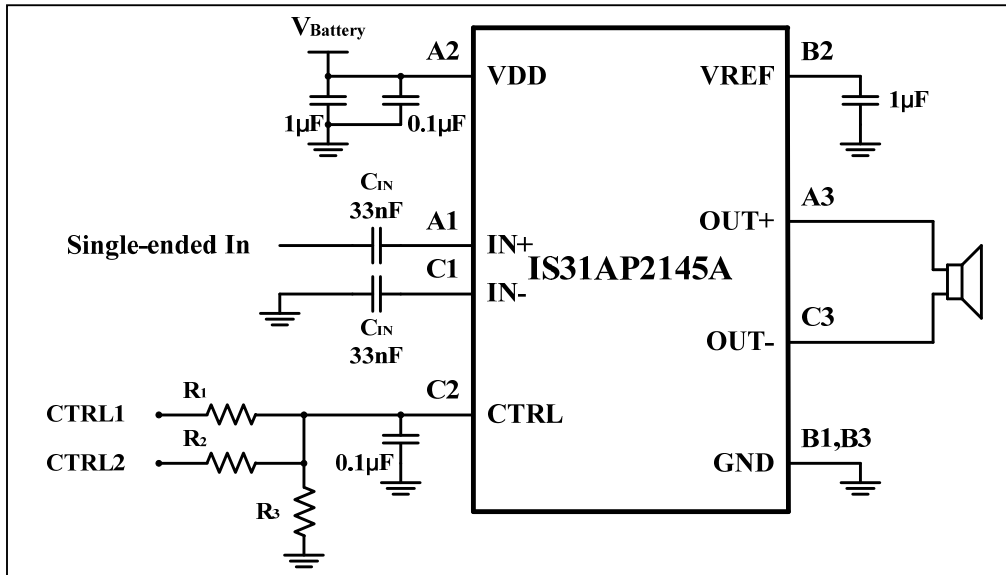



Figure 2 Typical Application Circuit (Single-Ended Input)

# IS31AP2145A

## PIN CONFIGURATION

| Package | Pin Configuration (Top View)   |
|---------|--|
| UTQFN-9 |  <p>           • IN+    VDD    OUT+<br/>           (A1)    (A2)    (A3)<br/>           GND    VREF    GND<br/>           (B1)    (B2)    (B3)<br/>           IN-    CTRL    OUT-<br/>           (C1)    (C2)    (C3)         </p> |

## PIN DESCRIPTION

| No.    | Pin  | Description                             |
|--------|------|---|
| A1     | IN+  | Positive input terminal.                |
| A2     | VDD  | Power supply.                           |
| A3     | OUT+ | Positive output terminal.               |
| B1, B3 | GND  | Ground.                                 |
| B2     | VREF | Analog reference power supply terminal. |
| C1     | IN-  | Negative input terminal.                |
| C2     | CTRL | Power down and AGC control terminal.    |
| C3     | OUT- | Negative output terminal.               |

Copyright © 2011 Integrated Silicon Solution, Inc. All rights reserved. ISSI reserves the right to make changes to this specification and its products at any time without notice. ISSI assumes no liability arising out of the application or use of any information, products or services described herein. Customers are advised to obtain the latest version of this device specification before relying on any published information and before placing orders for products. Integrated Silicon Solution, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless Integrated Silicon Solution, Inc. receives written assurance to its satisfaction, that:

- a.) the risk of injury or damage has been minimized;
- b.) the user assume all such risks; and
- c.) potential liability of Integrated Silicon Solution, Inc is adequately protected under the circumstances



# IS31AP2145A

---

## ORDERING INFORMATION

Industrial Range: -40°C to +85°C

---

| Order Part No.       | Package            | QTY/Reel |
|----------------------|--------------------|----------|
| IS31AP2145A-UTLS2-TR | UTQFN-9, Lead-free | 3000     |

---



# IS31AP2145A

## ABSOLUTE MAXIMUM RATINGS (NOTE 1)

|                                      |                       |
|--------------------------------------|-----------------------|
| Supply voltage, $V_{DD}$             | -0.3V ~ +6.0V         |
| Voltage at any input pin             | -0.3V ~ $V_{DD}+0.3V$ |
| Junction temperature, $T_{JMAX}$     | 150°C                 |
| Storage temperature range, $T_{STG}$ | -65°C ~ +150°C        |
| Operating temperature range          | -40°C ~ +85°C         |
| ESD (HBM)                            | 7kV                   |

### Note:

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

$T_A = -40^\circ\text{C} \sim +85^\circ\text{C}$ ,  $V_{DD} = 2.7V \sim 5.5V$ , unless otherwise noted. Typical value are  $V_{DD} = 3.6V$ ,  $T_A = +25^\circ\text{C}$ .

| Symbol   | Parameter           | Condition                 | Min. | Typ. | Max. | Unit          |
|----------|---------------------|---------------------------|------|------|------|---------------|
| $V_{DD}$ | Supply voltage      |                           | 2.7  |      | 5.5  | V             |
| $I_{DD}$ | Quiescent current   |                           |      | 2    |      | mA            |
| $I_{SD}$ | Shutdown current    | $V_{CTRL} = 0V$           |      | 0.1  |      | $\mu\text{A}$ |
| $f_{SW}$ | Switching frequency | $V_{DD} = 2.7V \sim 5.5V$ |      | 300  |      | kHz           |
| Gain     | Audio input gain    |                           |      | 18   |      | dB            |

## AGC Characteristics

|            |   |  |      |     |          |    |
|------------|---|--|------|-----|----------|----|
| $V_{AGC1}$ | AGC1 mode setting threshold voltage     |  | 1.4  |     | $V_{DD}$ | V  |
| $V_{AGC2}$ | AGC2 mode setting threshold voltage     |  | 0.64 |     | 1.05     | V  |
| $V_{OFF}$  | AGC OFF mode setting threshold voltage  |  | 0.36 |     | 0.6      | V  |
| $V_{SD}$   | Shutdown mode setting threshold voltage |  | 0    |     | 0.14     | V  |
| $t_{AT1}$  | Attack time 1                           |  |      | 45  |          | ms |
| $t_{RT1}$  | Release time 1                          |  |      | 2.6 |          | s  |
| $t_{AT2}$  | Attack time 2                           |  |      | 10  |          | ms |
| $t_{RT2}$  | Release time                            |  |      | 1.2 |          | s  |
| $A_{MAX}$  | Maximum attenuation gain                |  |      | -10 |          | dB |

# IS31AP2145A

## ELECTRICAL CHARACTERISTICS

AGC OFF,  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 3.6\text{V}$ , unless otherwise noted.

| Symbol    | Parameter                            | Condition   | Min.                   | Typ.  | Max. | Unit |   |
|-----------|--------------------------------------|---|------------------------|-------|------|------|---|
| $P_O$     | Output power                         | THD+N = 10%, $f = 1\text{kHz}$<br>$R_L = 4\Omega + 33\mu\text{H}$                                   | $V_{DD} = 5.0\text{V}$ |       | 2.90 |      | W |
|           |                                      | THD+N = 1%, $f = 1\text{kHz}$<br>$R_L = 4\Omega + 33\mu\text{H}$                                    | $V_{DD} = 5.0\text{V}$ |       | 2.30 |      | W |
|           |                                      | THD+N = 10%, $f = 1\text{kHz}$<br>$R_L = 8\Omega + 33\mu\text{H}$                                   | $V_{DD} = 5.0\text{V}$ |       | 1.68 |      | W |
|           |                                      | THD+N = 1%, $f = 1\text{kHz}$<br>$R_L = 8\Omega + 33\mu\text{H}$                                    | $V_{DD} = 5.0\text{V}$ |       | 1.38 |      | W |
| THD+N     | Total harmonic distortion plus noise | $V_{DD} = 3.6\text{V}$ , $P_O = 0.5\text{W}$ , $R_L = 8\Omega + 33\mu\text{H}$<br>$f = 1\text{kHz}$ |                        | 0.165 |      | %    |   |
|           |                                      | $V_{DD} = 3.6\text{V}$ , $P_O = 1.0\text{W}$ , $R_L = 4\Omega + 33\mu\text{H}$<br>$f = 1\text{kHz}$ |                        | 0.175 |      |      |   |
| PSRR      | Power supply rejection ratio         | $V_{P-P} = 200\text{mV}$ , $R_L = 8\Omega$ , $f = 217\text{Hz}$                                     |                        | -72   |      | dB   |   |
|           |                                      | $V_{P-P} = 200\text{mV}$ , $R_L = 8\Omega$ , $f = 1\text{kHz}$                                      |                        | -65   |      | dB   |   |
| $\eta$    | Maximum efficiency                   | $P_O = 1.0\text{W}$ , $R_L = 8\Omega + 33\mu\text{H}$ , $f = 1\text{kHz}$                           |                        | 90    |      | %    |   |
| $t_{ST}$  | Start-up time                        |   |                        | 34    |      | ms   |   |
| $t_{WK}$  | Wake-up time                         |   | 40                     |       |      | ms   |   |
| $t_{SD}$  | Shutdown time                        |   | 80                     |       |      | ms   |   |
| $t_{MOD}$ | Mode switching time                  |   | 0.1                    |       |      | ms   |   |

# IS31AP2145A

## TYPICAL PERFORMANCE CHARACTERISTICS

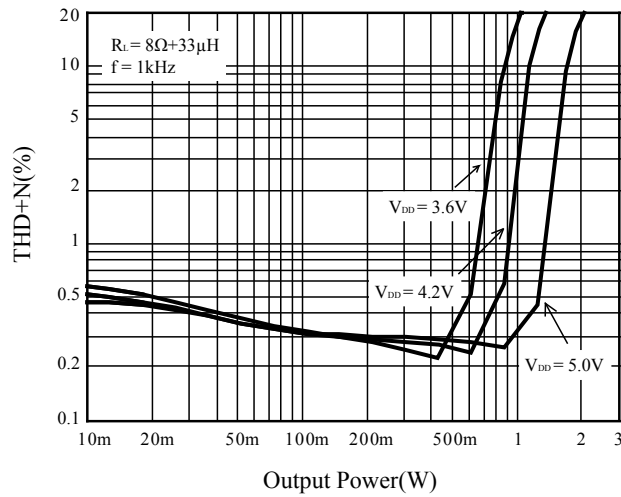


Figure 3 THD+N vs. Output Power

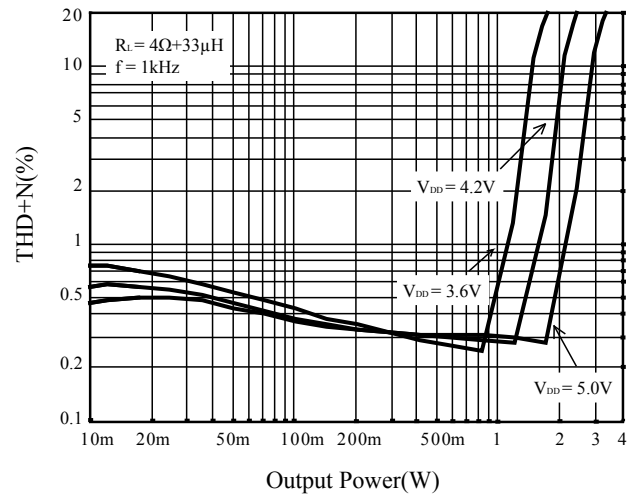


Figure 4 THD+N vs. Output Power

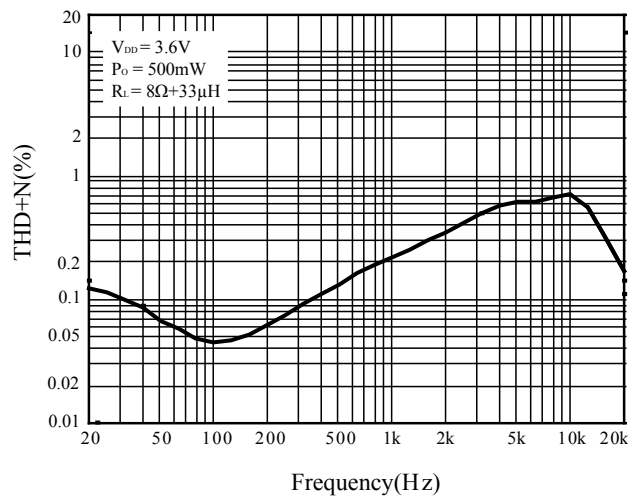


Figure 5 THD+N vs. Frequency

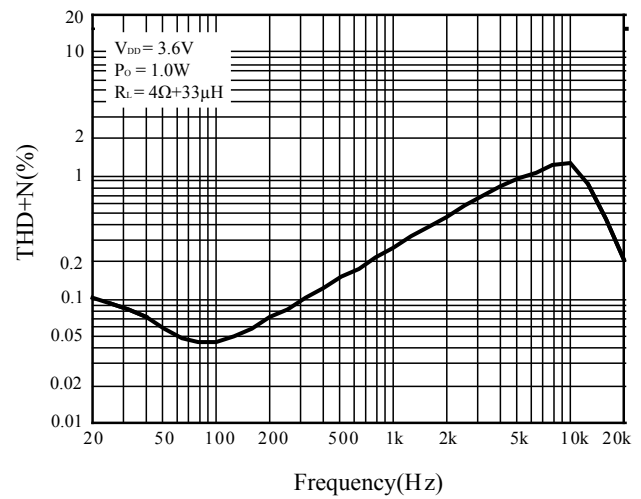


Figure 6 THD+N vs. Frequency

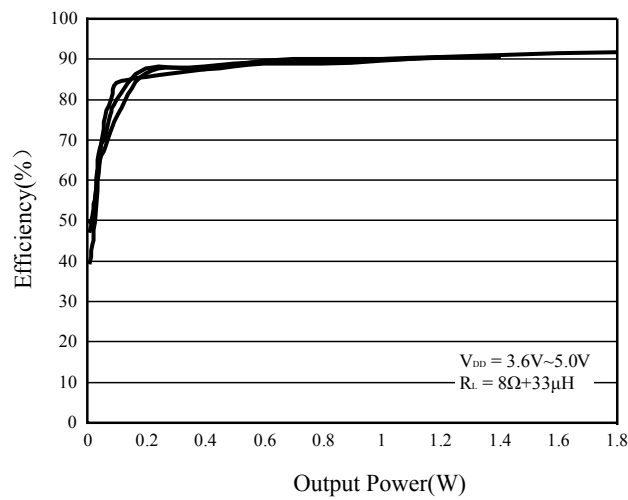


Figure 7 Efficiency vs. Output Power

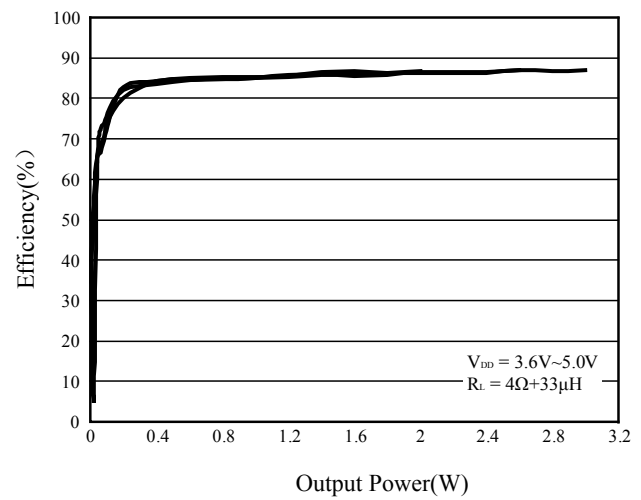


Figure 8 Efficiency vs. Output Power

# IS31AP2145A

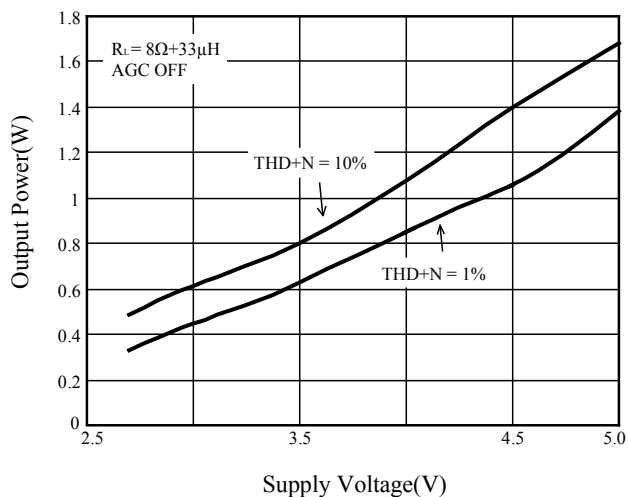


Figure 9 Output Power vs. Supply Voltage

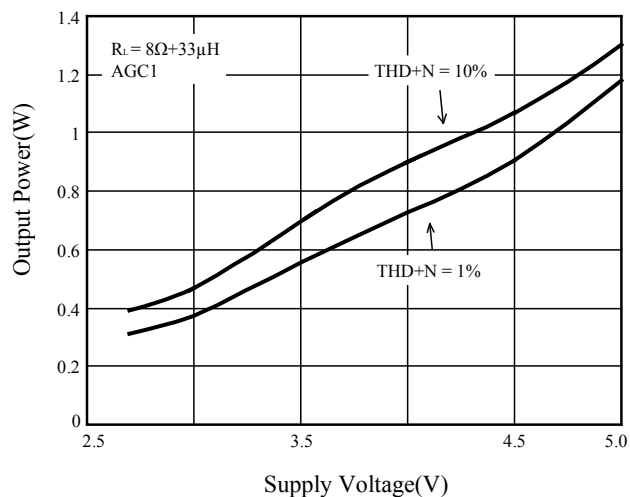


Figure 10 Output Power vs. Supply Voltage

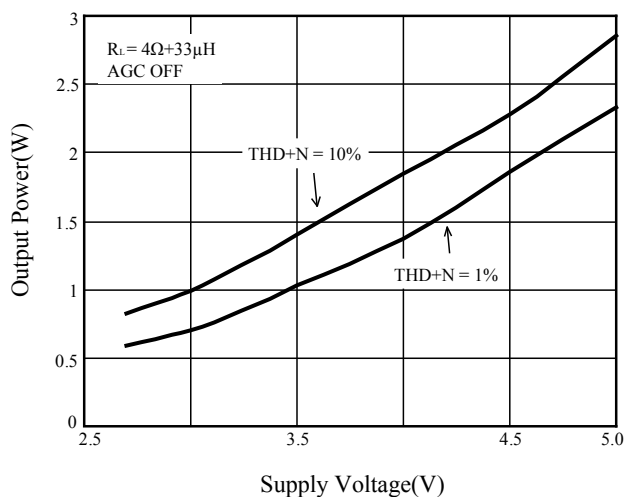


Figure 11 Output Power vs. Supply Voltage

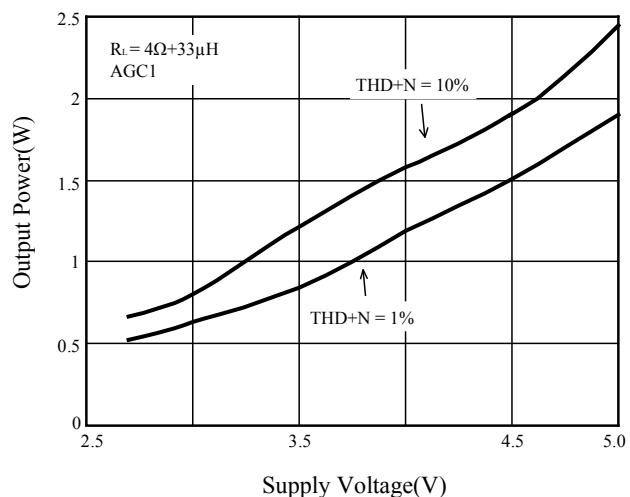


Figure 12 Output Power vs. Supply Voltage

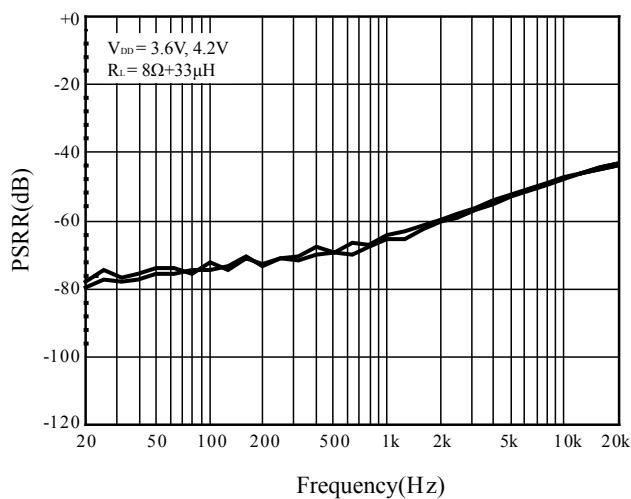


Figure 13 PSRR vs. Frequency



# IS31AP2145A

## APPLICATION INFORMATION

### DIGITAL AMPLIFIER

The IS31AP2145A is a 2.9W@5.0V mono, clip-less, filter-less, high efficiency Class-D audio power amplifier with automatic gain control.

The IS31AP2145A integrates AGC (Automatic Gain Control) function to automatically prevent distortion of the audio signal by which we can enhance audio quality and also protect speaker from damage at high power levels. In addition, IS31AP2145A has been designed so that high-efficiency can be maintained within an average power range that is used for mobile terminal.

### AGC (AUTOMATIC GAIN CONTROL) CONTROL FUNCTION

This is the function to control the output in order to obtain a maximum output level without distortion when an excessive input is applied which would otherwise cause clipping at the differential signal output. That is, with the AGC function, IS31AP2145A lowers the gain of the digital amplifier to an appropriate value so as not to cause clipping at the differential signal output (Figure 14).

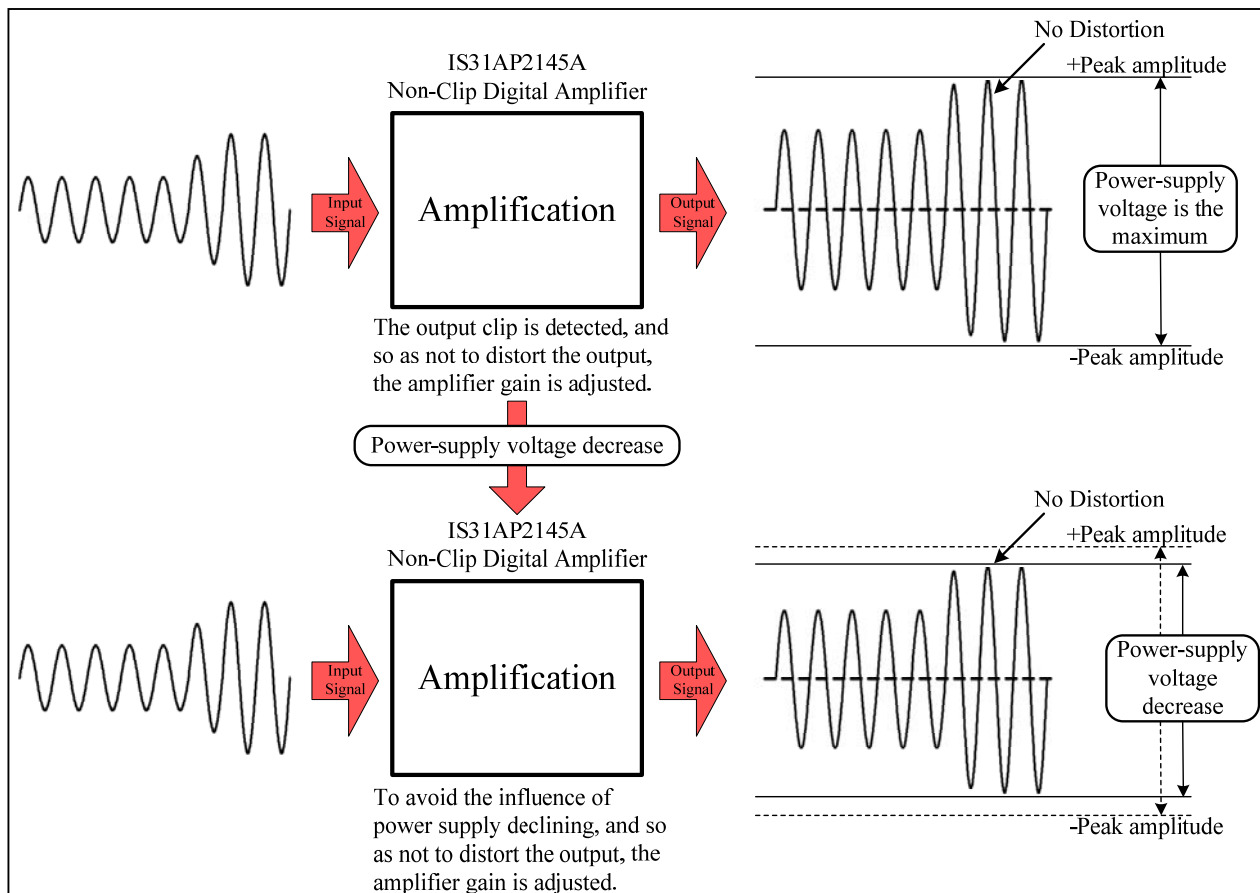


Figure 14 Operation of AGC Function


# IS31AP2145A

The attack time and the release time of AGC control have two levels (refer to Table 1). They are selected by the voltage at the CTRL terminal (refer to Table 2). The attack time is a time interval that gain falls from 18dB to 10dB with a big signal input enough. And the release time is a time from target attenuation to no AGC attenuation.

**Table 1 Attack Time and Release Time**


| AGC Mode              | Attack Time | Release Time |
|-----------------------|-------------|--------------|
| AGC1<br>(Recommended) | 45ms        | 2.6s         |
| AGC2                  | 10ms        | 1.2s         |

Assuming no limitation by the power supply, the audio output signal would be as in Figure 15.




**Figure 15** Assuming no Restriction from Power Supply, the Audio Output Signal

In normal operation without the AGC, the output is distorted because of the restriction from power supply, as shown in Figure 16.

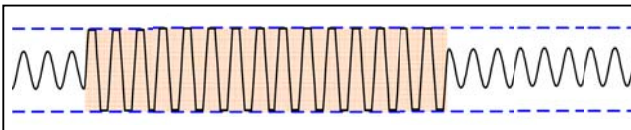

**Figure 16** AGC Function Off


With the AGC function of IS31AP2145A, the optimum output power can be obtained along with the minimal distortion. The Figure 17 shows the outcome of AGC function.

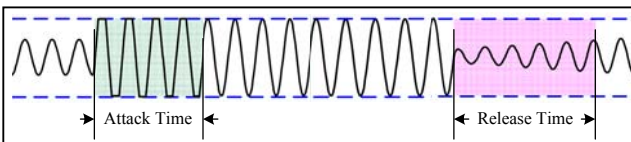

**Figure 17** AGC Function On

## CTRL TERMINAL FUNCTION

By setting the threshold voltage of each mode to CTRL terminal, the followings can be set: AGC1, AGC2, AGC OFF, and Shutdown Mode (Table 2 and Figure 18).

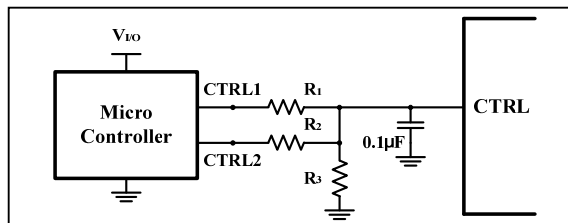

**Figure 18** AGC Function Mode Setting

**Table 2 Mode Setting**

| CTRL1 | CTRL2 | Mode     |
|-------|-------|----------|
| H     | H     | AGC1     |
| H     | GND   | AGC2     |
| GND   | H     | AGC OFF  |
| GND   | GND   | Shutdown |

“H” level indicates a microcomputer’s I/O port H level output voltage that is input to CTRL1 and CTRL2 terminals and GND indicates GND of the microcomputer.

GND level of the microcomputer must be the same as that of IS31AP2145A.


The control of CTRL terminal is based on I/O port H level output voltage of microcomputer that is connected.

Set resistance constants according to I/O port H level output voltage of each microcomputer as Table 3 below.

**Table 3 Resistors Setting**

| V <sub>I/O</sub> | 1.8V | 2.6V | 2.8V | 3.0V | 3.3V | 5.0V  |
|------------------|------|------|------|------|------|-------|
| R1               | 27kΩ | 33kΩ | 33kΩ | 33kΩ | 33kΩ | 56kΩ  |
| R2               | 56kΩ | 68kΩ | 68kΩ | 68kΩ | 68kΩ | 120kΩ |
| R3               | 82kΩ | 27kΩ | 24kΩ | 22kΩ | 18kΩ | 15kΩ  |

Functions of CTRL pin are designed with their control by two control pins (CTRL1 and CTRL3). Only a switching control between AGC1 Mode and Shutdown Mode is available when a single control terminal is used (Table 4 and Figure 19).

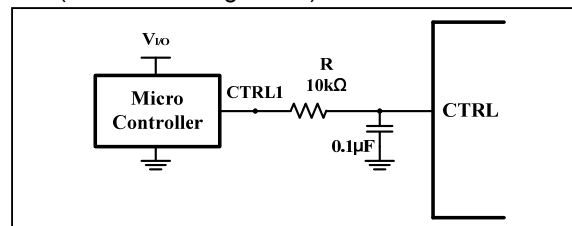

**Figure 19** AGC1 Mode Circuit

**Table 4 Mode Setting**

| CTRL1 | Mode     |
|-------|----------|
| H     | AGC1     |
| GND   | Shutdown |

## SYSTEM TIMING

The CTRL terminal should be configured as the Figure 20. When in the Shutdown Mode, the level of the terminal must not be changed from GND level during t<sub>SD</sub>. When the IS31AP2145A wakes up, the CTRL terminal must be set to H level first, then enter the setting mode.

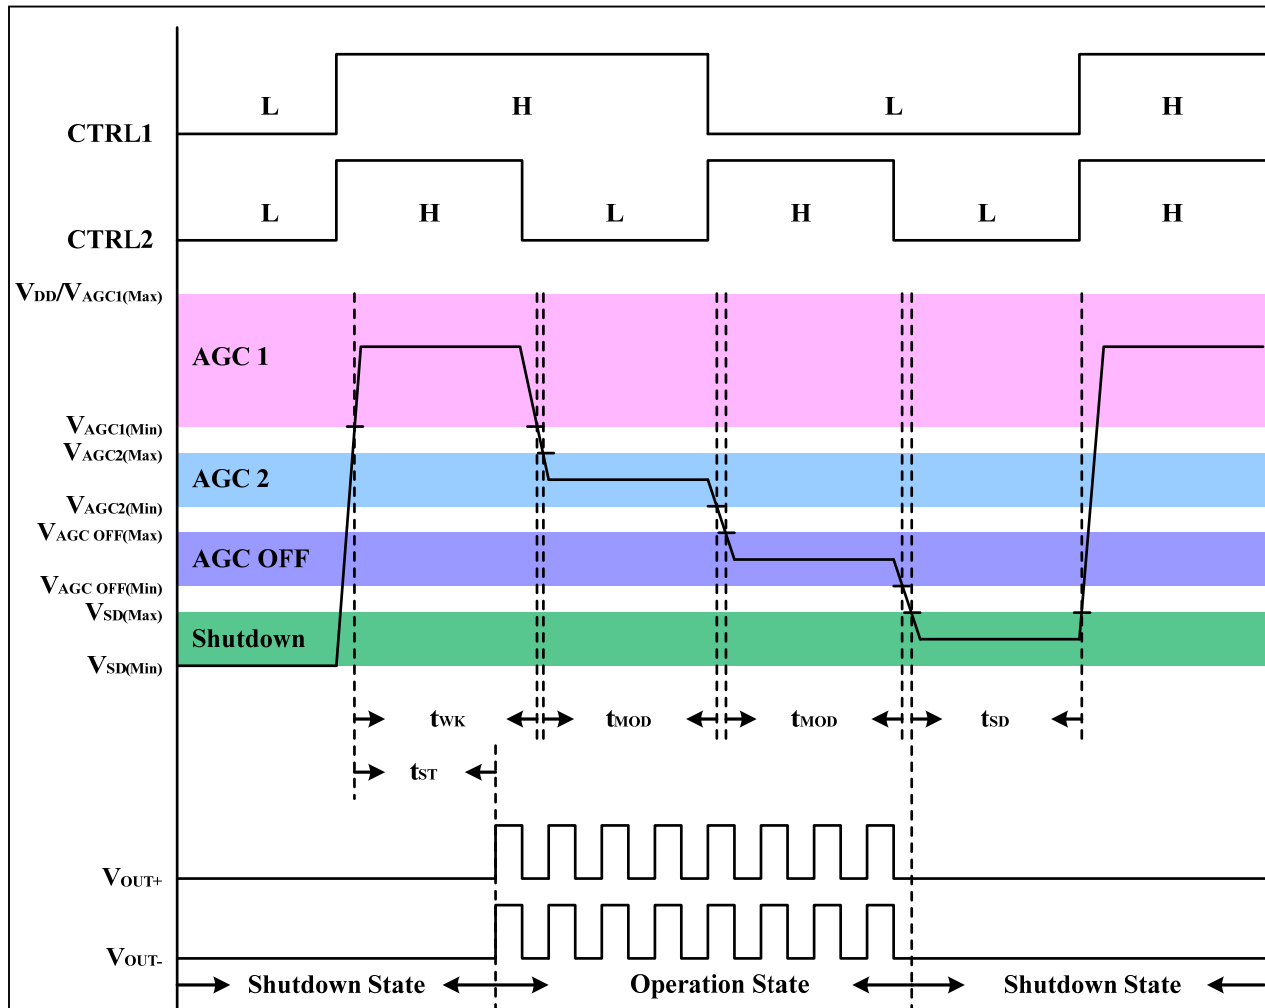


Figure 20 System Timing

## INPUT CAPACITORS (C<sub>IN</sub>)

The input capacitors (C<sub>IN</sub>) and internal resistor (R<sub>IN</sub> = 28.5kΩ) form a high-pass filter with the corner frequency, f<sub>c</sub>, determined in Equation (1).

$$f_c = \frac{1}{2\pi R_{IN} C_{IN}} \quad (1)$$

For example, in figure 1,  
C<sub>IN</sub> = 33nF, R<sub>IN</sub> = 28.5kΩ,

So, 
$$f_c = \frac{1}{2\pi \times 28.5k\Omega \times 33nF} \approx 169Hz$$

The capacitors should have a tolerance of ±10% or better, because any mismatch in capacitance causes an impedance mismatch at the corner frequency and below.

## DECOUPLING CAPACITOR (C<sub>S</sub>)

The IS31AP2145A is a high performance class-D audio amplifier that requires adequate power supply decoupling to ensure the efficiency is high and total harmonic distortion (THD) is low. For higher frequency transients, spikes, or digital hash on the line, a good low equivalent-series-resistance (ESR) ceramic capacitor, typically 0.1μF, placed as close as possible to the device V<sub>DD</sub> lead works best. Placing this decoupling capacitor close to the IS31AP2145A is very important for the efficiency of the class-D amplifier, because any resistance or inductance in the trace between the device and the capacitor can cause a loss in efficiency. For filtering lower frequency noise signals, a 1μF or greater capacitor placed near the audio power amplifier would also help.

# IS31AP2145A

## CLASSIFICATION REFLOW PROFILES

| Profile Feature   | Pb-Free Assembly                 |
|---|----------------------------------|
| <b>Preheat &amp; Soak</b><br>Temperature min (T <sub>smin</sub> )<br>Temperature max (T <sub>smax</sub> )<br>Time (T <sub>smin</sub> to T <sub>smax</sub> ) (t <sub>s</sub> ) | 150°C<br>200°C<br>60-120 seconds |
| Average ramp-up rate (T <sub>smax</sub> to T <sub>p</sub> )   | 3°C/second max.                  |
| Liquidous temperature (T <sub>L</sub> )<br>Time at liquidous (t <sub>L</sub> )  | 217°C<br>60-150 seconds          |
| Peak package body temperature (T <sub>p</sub> )*  | Max 260°C                        |
| Time (t <sub>p</sub> )** within 5°C of the specified classification temperature (T <sub>c</sub> )   | Max 30 seconds                   |
| Average ramp-down rate (T <sub>p</sub> to T <sub>smax</sub> )   | 6°C/second max.                  |
| Time 25°C to peak temperature   | 8 minutes max.                   |


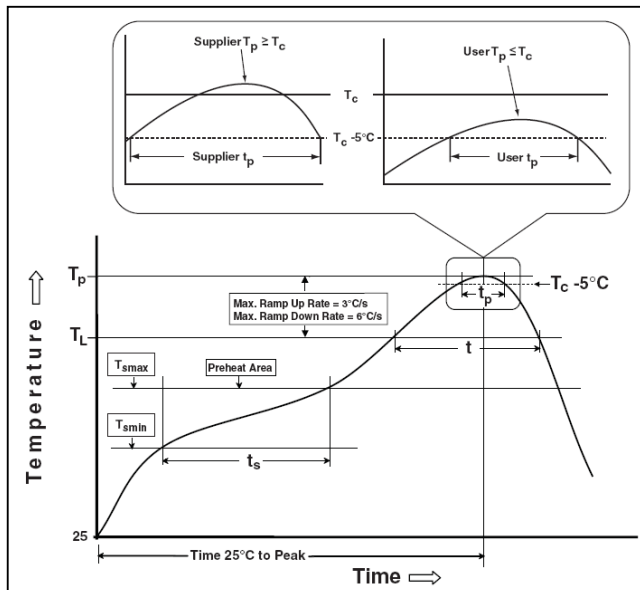


Figure 21 Classification Profile

# IS31AP2145A

## TAPE AND REEL INFORMATION

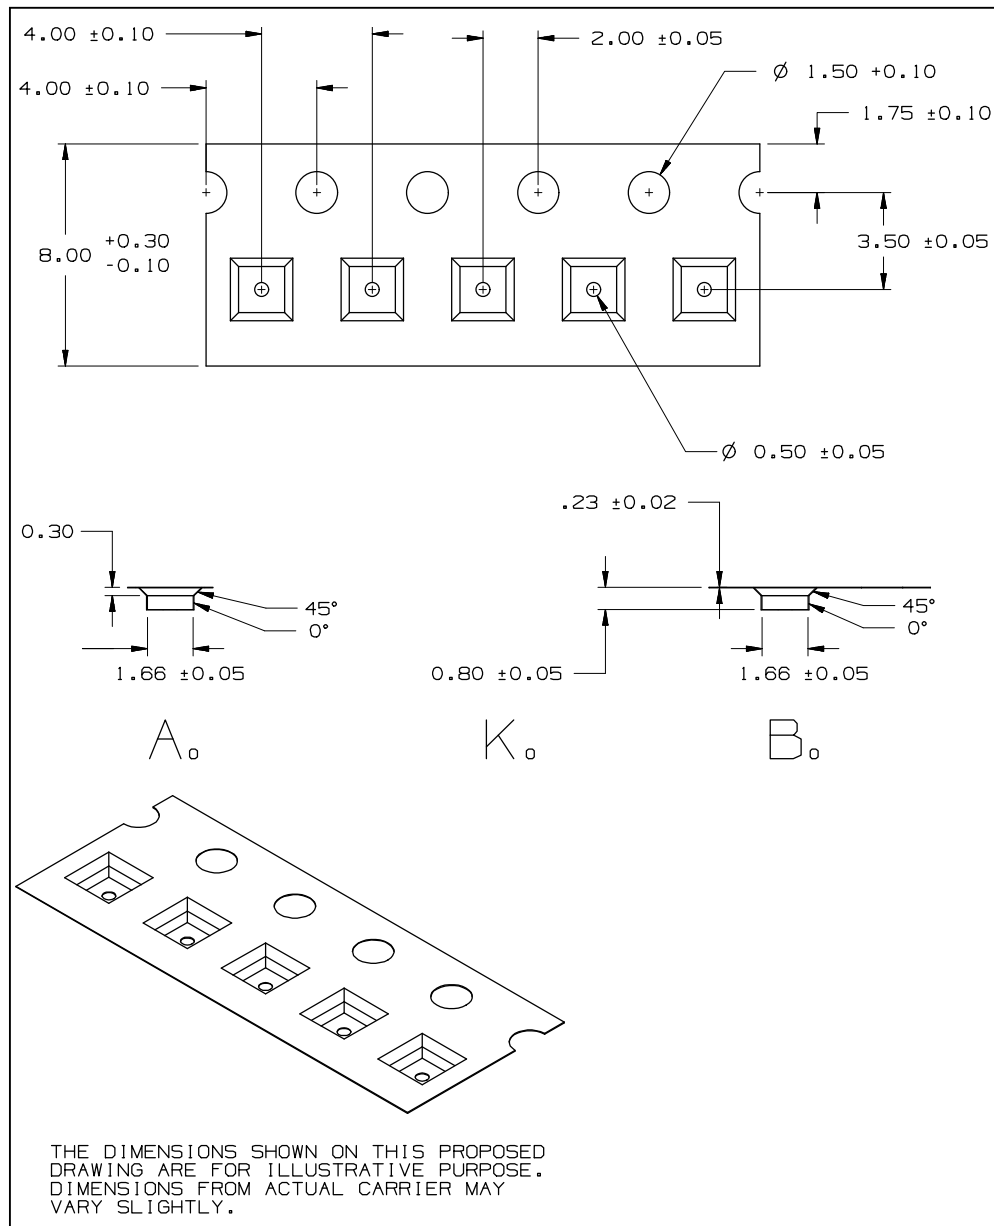


**Note:** All dimensions in millimeters unless otherwise stated.

# IS31AP2145A

## PACKAGING INFORMATION

### UTQFN-9

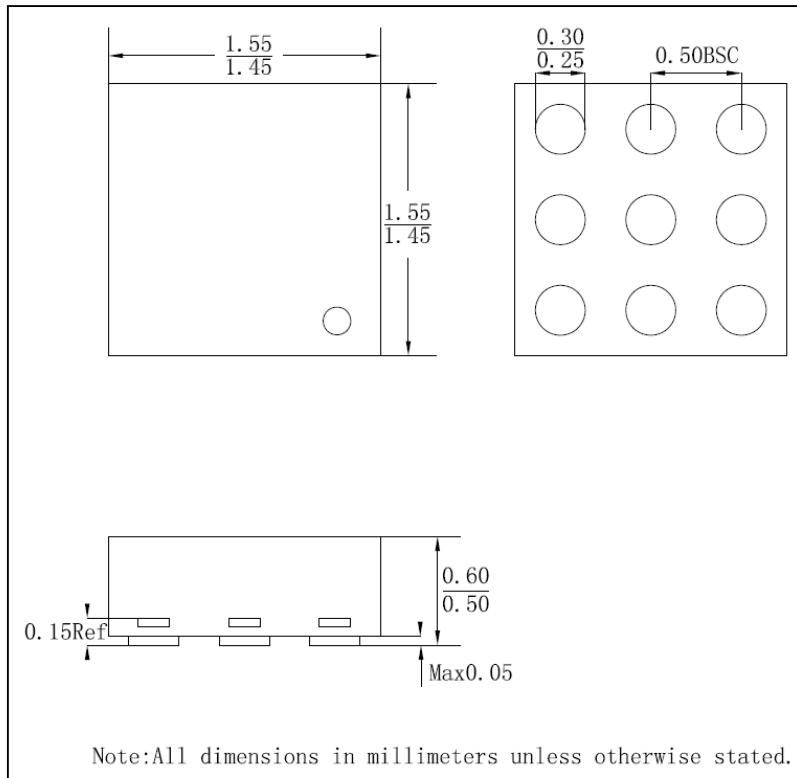

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)