

HIGH EFFICIENCY, HIGH DENSITY, DUAL-OUTPUT  
 (3.3V/5A and 2.5V/5A) REGULATOR

## DESCRIPTION

Demonstration circuit 1586A is a high efficiency, dual-output (3.3V and 2.5V), synchronous buck converter with 4.5V to 25V input range. It can supply 5A maximum load current at 3.3V and 2.5V outputs. The demo board uses the LTC3855EUJ controller. The LTC3855 is a feature-rich dual-output dual-phase synchronous buck controller with on-chip drivers, remote output voltage sensing ( $V_{OUT2}$ ) and inductor DCR temperature compensation. It is suitable for input from 4.5V to 38V and output up to 12.5V. The LTC3855 can provide high efficiency, high power density and versatile power solutions for telecom and datacom systems, industrial and medical instruments, DC power distribution systems and computer systems. The controller is available in 40-pin 6mm × 6mm QFN and 38-pin TSSOP packages.

The RUN pins (JP1 and JP4) provides enable feature. To shut down the converter, one simple way is to force the RUN pins below 1.2V (JP1: OFF; JP4: OFF). Use JP2 jumper to select burst mode, pulse skipping mode or forced continuous mode operation. The phase of CLKOUT is set by JP3. Switching frequency is pre-set at about 500kHz, and it can be easily modified from 250kHz to 770kHz. Please see LTC3855 datasheet for detailed information.

**Design files for this circuit board are available. Call the LTC factory.**

**Table 1. Performance Summary ( $T_A = 25^\circ\text{C}$ )**

| PARAMETER                          | CONDITION   | VALUE          |
|------------------------------------|---|----------------|
| Input Voltage Range                |   | 4.5V to 25V    |
| Output Voltage, $V_{OUT1}$         | $V_{IN} = 4.5\text{-}25\text{V}$ , $I_{OUT1} = 0\text{A to }5\text{A}$    | 3.3V $\pm 2\%$ |
| Output Voltage, $V_{OUT2}$         | $V_{IN} = 4.5\text{-}25\text{V}$ , $I_{OUT2} = 0\text{A to }5\text{A}$    | 2.5V $\pm 2\%$ |
| Maximum Output Current, $I_{OUT1}$ | $V_{IN} = 4.5\text{-}25\text{V}$ , $V_{OUT1} = 3.3\text{V}$               | 5A             |
| Maximum Output Current, $I_{OUT2}$ | $V_{IN} = 4.5\text{-}25\text{V}$ , $V_{OUT2} = 3.3\text{V}$               | 5A             |
| Typical Efficiency for $V_{OUT1}$  | $V_{IN} = 12\text{V}$ , $V_{OUT1} = 3.3\text{V}$ , $I_{OUT1} = 5\text{A}$ | 92.1%          |
| Typical Efficiency for $V_{OUT2}$  | $V_{IN} = 12\text{V}$ , $V_{OUT2} = 2.5\text{V}$ , $I_{OUT2} = 5\text{A}$ | 90.3%          |
| Typical Switching Frequency        |   | 500kHz         |

## QUICK START PROCEDURE

Demonstration circuit 1586A is easy to set up to evaluate the performance of the LTC3855EUJ. Refer to Figure 1 for the proper measurement equipment setup and follow the procedure below:

1. With power off, connect the input power supply to Vin (4.5V-25V) and GND (input return).
2. Connect the 3.3V output load between Vout1 and GND (Initial load: no load).
3. Connect the 2.5V output load between Vout2 and GND (Initial load: no load).
4. Connect the DVMs to the input and outputs.
5. Turn on the input power supply and check for the proper output voltages. Vout1 should be 3.3V $\pm$ 2%. Vout2 should be 2.5V $\pm$ 2%.
6. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage and other parameters.

Note: When measuring the output or input voltage ripple, do not use the long ground lead on the oscilloscope probe. See Figure 2 for the proper scope probe technique. Short, stiff leads need to be soldered to the (+) and (-) terminals of an output capacitor. The probe's ground ring needs to touch the (-) lead and the probe tip needs to touch the (+) lead.

# LTC3855EUJ

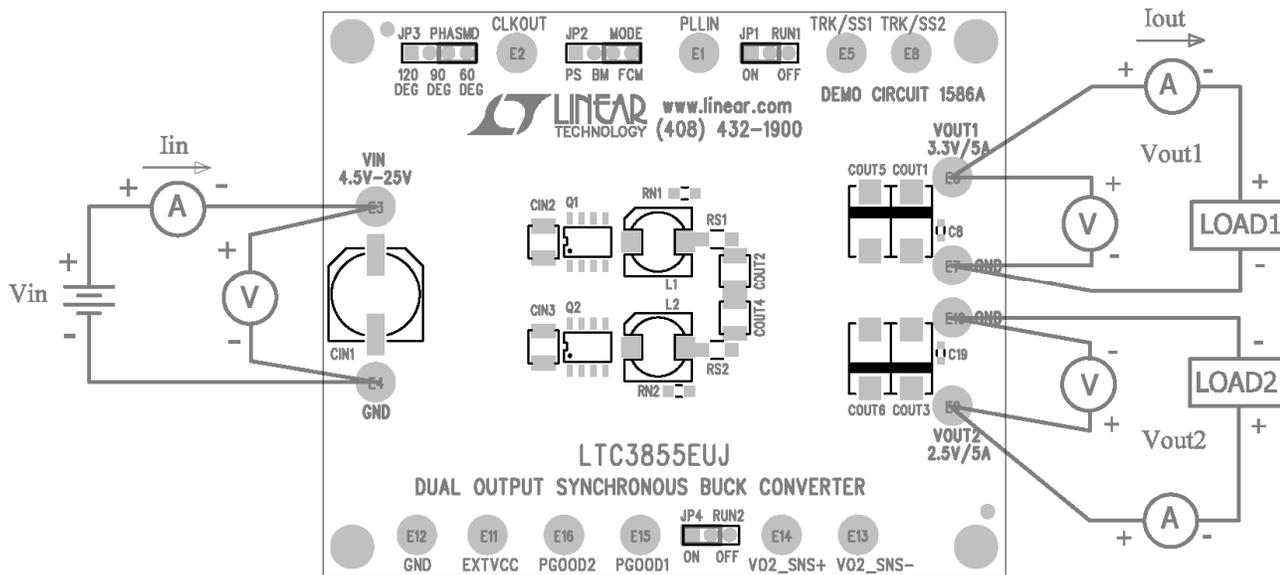


Figure 1. Proper Measurement Equipment Setup

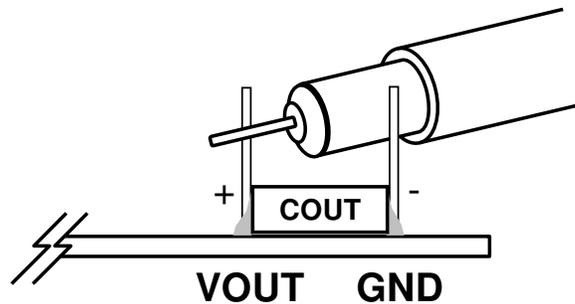


Figure 2. Measuring Output Voltage Ripple

## EFFICIENCY VS. LOAD CURRENT

LTC3855\_DC1586A\_Rev.1

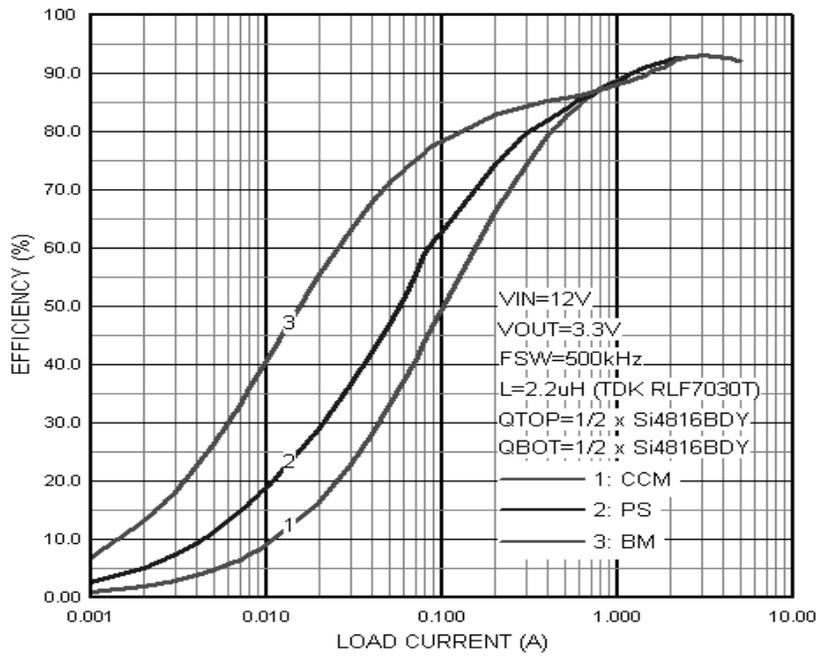


Figure 3. Efficiency vs load current For Vout1

## EFFICIENCY vs. LOAD CURRENT

LTC3855\_DC1586A


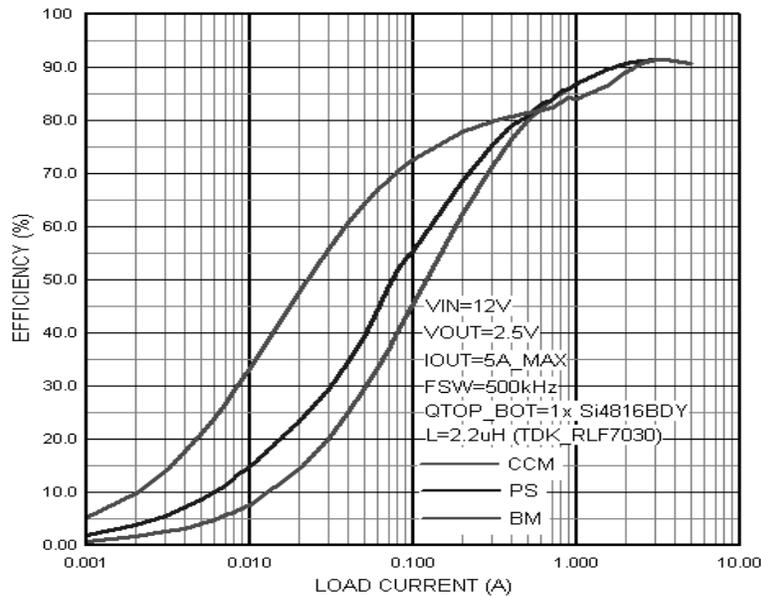


Figure 4. Efficiency vs load current For Vout2

# LTC3855EUJ

| REVISION HISTORY |     |             |               |
|------------------|-----|-------------|---------------|
| ECO              | REV | DESCRIPTION | APPROVED DATE |
|                  | 2   | PRODUCTION  | JAN11 4:15:10 |

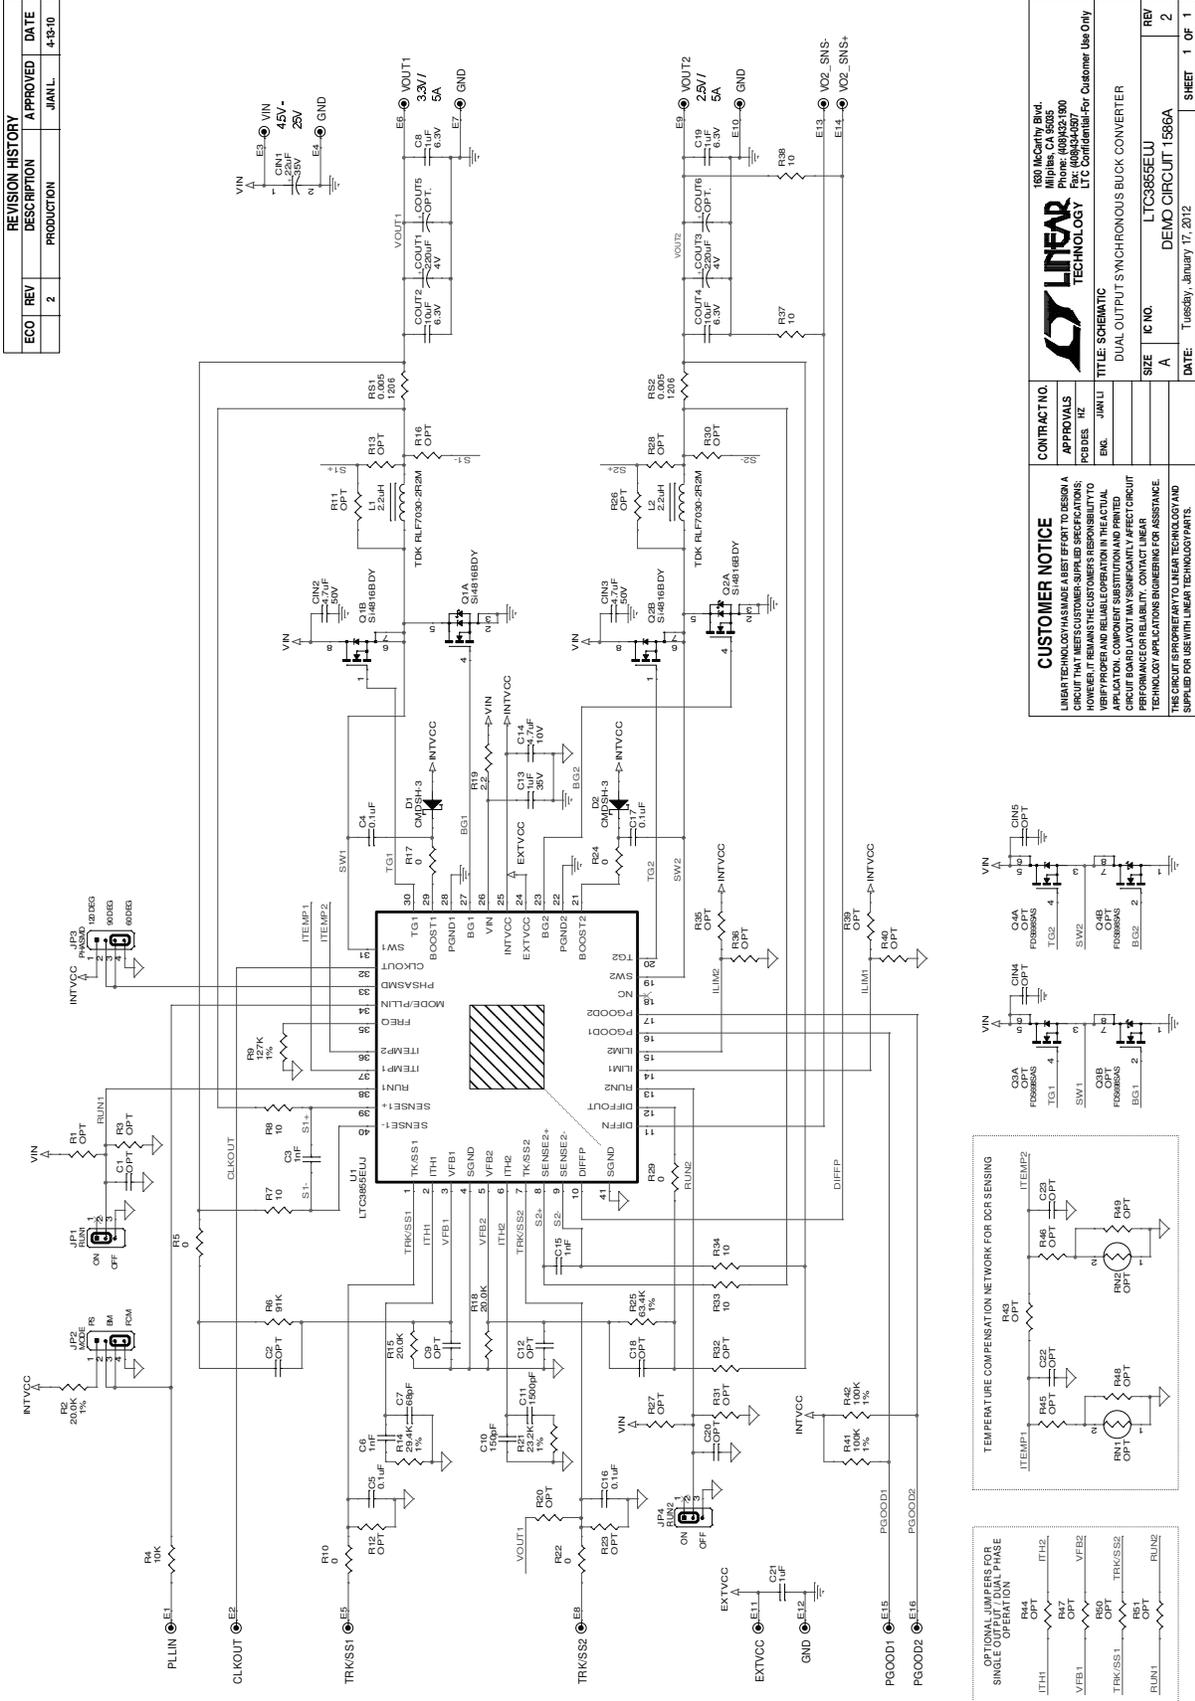

|              |            |   |
|--------------|------------|---|
|              |            | 1680 McCarthy Blvd.<br>Milpitas, CA 95035<br>Phone: (408)328-9900<br>Fax: (408)328-0077<br>LTC Confidential-For Customer Use Only |
| CONTRACT NO. | APPROVALS  | TITLE SCHEMATIC   |
| REV DATES    | ENG. JAN11 | SIZE A  |
|              |            | IC NO. LTC3855EUJ   |
|              |            | DEMO CIRCUIT '1566A   |
|              |            | DATE: Tuesday, January 17, 2012   |
|              |            | SHEET 1 OF 1  |

**CUSTOMER NOTICE**  
 LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS. HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL CIRCUIT BOARD. VOLTAGE MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE. THIS CIRCUIT IS PREPARATORY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

**TEMPERATURE COMPENSATION NETWORK FOR DCR SENSING**

**OPTIONAL NUMBERS FOR SINGLE OUTPUT DUAL PHASE OPERATION**

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)