



# GaAs, MMIC Fundamental Mixer, 2.5 GHz to 7.0 GHz

Data Sheet

**HMC557A****FEATURES**

- Conversion loss: 8 dB**
- LO to RF isolation: 50 dB**
- LO to IF isolation: 35 dB**
- Input third-order intercept (IP3): 18 dBm**
- Input second-order intercept (IP2): 55 dBm**
- LO port return loss: 8 dBm**
- RF port return loss: 10 dBm**
- Passive double balanced topology**
- Wide IF bandwidth: dc to 3 GHz**
- 24-terminal ceramic leadless chip carrier package**

**APPLICATIONS**

- WiMAX and fixed wireless**
- Point to point radios**
- Point to multipoint radios**
- Test equipment and sensors**
- Military end use**

**GENERAL DESCRIPTION**

The [HMC557A](#) is a general-purpose, double balanced mixer in a 24-terminal, ceramic leadless chip carrier, RoHS-compliant package. The device can be used as an upconverter or down-converter from 2.5 GHz to 7.0 GHz. This mixer is fabricated in a gallium arsenide (GaAs) metal semiconductor field effect transistor (MESFET) process and requires no external components or matching circuitry.

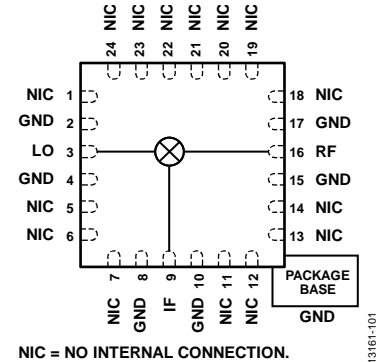
**FUNCTIONAL BLOCK DIAGRAM**

Figure 1.

The [HMC557A](#) provides excellent local oscillator (LO) to radio frequency (RF) and LO to intermediate frequency (IF) isolation due to optimized balun structures. The RoHS-compliant [HMC557A](#) eliminates the need for wire bonding and is compatible with high volume surface-mount manufacturing techniques.

Rev. B

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
Tel: 781.329.4700 ©2015–2016 Analog Devices, Inc. All rights reserved.  
[Technical Support](#) [www.analog.com](http://www.analog.com)

# HMC557A

# Data Sheet

## TABLE OF CONTENTS

|  |    |  |    |
|--|----|--|----|
| Features .....   | 1  | Downconverter Performance with Lower Sideband Selected, IF = 2000 MHz.....   | 13 |
| Applications.....  | 1  | P1dB Performance with Downconverter Mode Selected at LO Drive = 15 dBm ..... | 14 |
| Functional Block Diagram .....   | 1  | Upconverter Performance with Upper Sideband Selected, IF = 100 MHz.....      | 15 |
| General Description .....  | 1  | Upconverter Performance with Upper Sideband Selected, IF = 1000 MHz .....    | 16 |
| Revision History .....   | 2  | Upconverter Performance with Upper Sideband Selected, IF = 2000 MHz .....    | 17 |
| Electrical Specifications .....  | 3  | Upconverter Performance with Lower Sideband Selected, IF = 100 MHz.....      | 18 |
| 2.5 GHz to 5.0 GHz Frequency Range.....                                    | 3  | Upconverter Performance with Lower Sideband Selected, IF = 1000 MHz .....    | 19 |
| 5.0 GHz to 7.0 GHz Frequency Range.....                                    | 3  | Upconverter Performance with Lower Sideband Selected, IF = 2000 MHz .....    | 20 |
| Absolute Maximum Ratings.....  | 4  | Spurious Performance with Upper Sideband Selected, IF = 100 MHz .....        | 21 |
| ESD Caution.....   | 4  | Applications Information .....   | 22 |
| Pin Configuration and Function Descriptions.....                           | 5  | Outline Dimensions .....   | 23 |
| Interface Schematics.....  | 6  | Ordering Guide .....   | 23 |
| Typical Performance Characteristics .....                                  | 7  |  |    |
| Downconverter Performance with Upper Sideband Selected, IF = 100 MHz.....  | 7  |  |    |
| Downconverter Performance with Upper Sideband Selected, IF = 1000 MHz..... | 9  |  |    |
| Downconverter Performance with Upper Sideband Selected, IF = 2000 MHz..... | 10 |  |    |
| Downconverter Performance with Lower Sideband Selected, IF = 100 MHz.....  | 11 |  |    |
| Downconverter Performance with Lower Sideband Selected, IF = 1000 MHz..... | 12 |  |    |

## REVISION HISTORY

### 1/16—Rev. A to Rev. B

|  |   |
|--|---|
| Change to LO to RF Isolation Parameter, Table 2..... | 3 |
|--|---|

### 9/15—Rev. 0 to Rev. A

|  |    |
|--|----|
| Changes to Features Section.....                               | 1  |
| Added Maximum Peak Reflow Temperature Parameter, Table 3 ..... | 4  |
| Updated Outline Dimensions .....                               | 23 |
| Changes to Ordering Guide .....                                | 23 |

### 7/15—Revision 0: Initial Version

# Data Sheet

# HMC557A

## ELECTRICAL SPECIFICATIONS

### 2.5 GHz TO 5.0 GHz FREQUENCY RANGE

$T_A = 25^\circ\text{C}$ , IF = 100 MHz, LO drive = 15 dBm. All measurements performed as a downconverter with the upper sideband selected, unless otherwise noted.

**Table 1.**

| Parameter                               | Min | Typ | Max  | Unit |
|---|-----|-----|------|------|
| <b>OPERATING CONDITIONS</b>             |     |     |      |      |
| RF Frequency Range                      | 2.5 |     | 5.0  | GHz  |
| LO Frequency Range                      | 2.5 |     | 5.0  | GHz  |
| IF Frequency Range                      | DC  |     | 3    | GHz  |
| <b>PERFORMANCE</b>                      |     |     |      |      |
| Conversion Loss                         |     | 8   | 10.5 | dB   |
| Noise Figure, Single Sideband (SSB)     |     | 8   |      | dB   |
| LO to RF Isolation                      | 40  | 50  |      | dB   |
| LO to IF Isolation                      | 26  | 35  |      | dB   |
| RF to IF Isolation                      |     | 20  |      | dB   |
| Input Third-Order Intercept (IP3)       | 14  | 18  |      | dBm  |
| Input Second-Order Intercept (IP2)      |     | 55  |      | dBm  |
| Input Power for 1 dB Compression (P1dB) |     | 10  |      | dBm  |
| RF Port Return Loss                     |     | 10  |      | dB   |
| LO Port Return Loss                     |     | 8   |      | dB   |

### 5.0 GHz TO 7.0 GHz FREQUENCY RANGE

$T_A = 25^\circ\text{C}$ , IF = 100 MHz, LO drive = 15 dBm. All measurements performed as a downconverter with the upper sideband selected, unless otherwise noted.

**Table 2.**

| Parameter                               | Min | Typ | Max  | Unit |
|---|-----|-----|------|------|
| <b>OPERATING CONDITIONS</b>             |     |     |      |      |
| RF Frequency Range                      | 5.0 |     | 7.0  | GHz  |
| LO Frequency Range                      | 5.0 |     | 7.0  | GHz  |
| IF Frequency Range                      | DC  |     | 3    | GHz  |
| <b>PERFORMANCE</b>                      |     |     |      |      |
| Conversion Loss                         |     | 8.5 | 10.5 | dB   |
| Noise Figure, Single Sideband (SSB)     |     | 8.5 |      | dB   |
| LO to RF Isolation                      | 37  | 43  |      | dB   |
| LO to IF Isolation                      | 25  | 33  |      | dB   |
| RF to IF Isolation                      |     | 25  |      | dB   |
| Input Third-Order Intercept (IP3)       | 14  | 18  |      | dBm  |
| Input Second-Order Intercept (IP2)      |     | 55  |      | dBm  |
| Input Power for 1 dB Compression (P1dB) |     | 10  |      | dBm  |
| RF Port Return Loss                     |     | 12  |      | dB   |
| LO Port Return Loss                     |     | 12  |      | dB   |

## HMC557A

## Data Sheet

## ABSOLUTE MAXIMUM RATINGS

Table 3.


| Parameter  | Rating            |
|--|-------------------|
| RF Input Power   | 25 dBm            |
| LO Input Power   | 27 dBm            |
| Channel Temperature  | 175°C             |
| Continuous P <sub>DISS</sub> (T = 85°C), Derate<br>10.81 mW/°C Above 85°C) | 972 mW            |
| Thermal Resistance (Channel to Ground Pad)                                 | 92.5°C/W          |
| Maximum Peak Reflow Temperature  | 260°C             |
| Storage Temperature Range  | -65°C to +150°C   |
| Operating Temperature Range  | -40°C to +85°C    |
| ESD Sensitivity, Human Body Model (HBM)                                    | 1000 V (Class 1C) |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

**ESD CAUTION****ESD (electrostatic discharge) sensitive device.**

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS



- NOTES**
1. NIC = NO INTERNAL CONNECTION.
  2. CONNECT THE EXPOSED PAD TO A LOW IMPEDANCE THERMAL AND ELECTRICAL GROUND PLANE.

13161-102

Figure 2. Pin Configuration

Table 4. Pin Function Descriptions

| Pin No.                       | Mnemonic | Description  |
|-------------------------------|----------|--|
| 1, 5 to 7, 11 to 14, 18 to 24 | NIC      | No Internal Connection. No connection is required on these pins. These pins are not internally connected. However, all data is measured with these pins connected to RF/dc ground externally.  |
| 2, 4, 8, 10, 15, 17           | GND      | Ground Connect. Connect these pins and the package bottom to RF/dc ground.   |
| 3                             | LO       | Local Oscillator Port. This pin is dc-coupled and matched to 50 Ω.   |
| 9                             | IF       | Intermediate Frequency Port. This pin is dc-coupled. For applications not requiring operation to dc, block this pin externally using a series capacitor with a value chosen to pass the necessary IF frequency range. For operation to dc, this pin must not source or sink more than 2 mA of current or device nonfunctionality or device failure may result. |
| 16                            | RF       | Radio Frequency Port. This pin is dc-coupled and matched to 50 Ω.  |
|                               | EPAD     | Exposed Pad. Connect the exposed pad to a low impedance thermal and electrical ground plane.   |

# HMC557A

# Data Sheet

## INTERFACE SCHEMATICS



Figure 3. GND Interface Schematic




Figure 5. IF Interface Schematic




Figure 4. LO Interface Schematic




Figure 6. RF Interface Schematic

# TYPICAL PERFORMANCE CHARACTERISTICS

## DOWNCONVERTER PERFORMANCE WITH UPPER SIDEBAND SELECTED, IF = 100 MHz

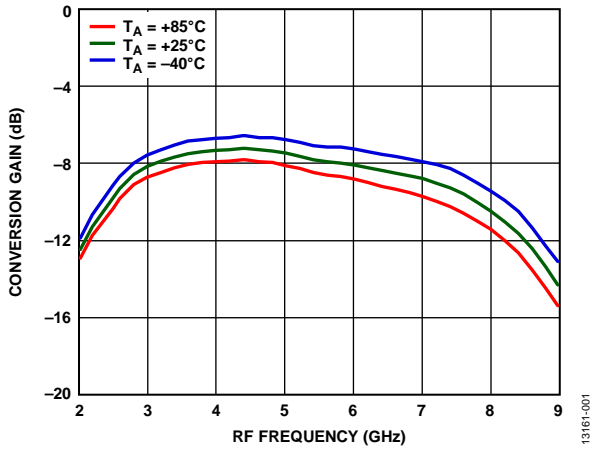


Figure 7. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

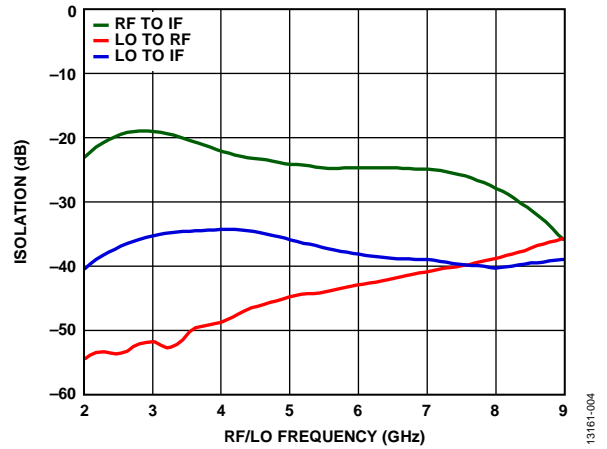


Figure 10. Isolation vs. RF/LO Frequency

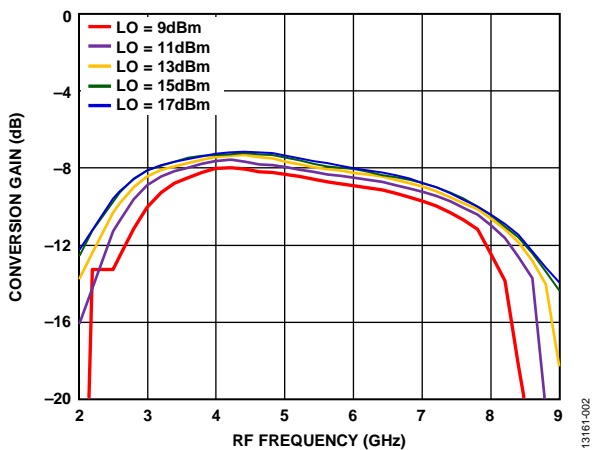


Figure 8. Conversion Gain vs. RF Frequency at Various LO Drives

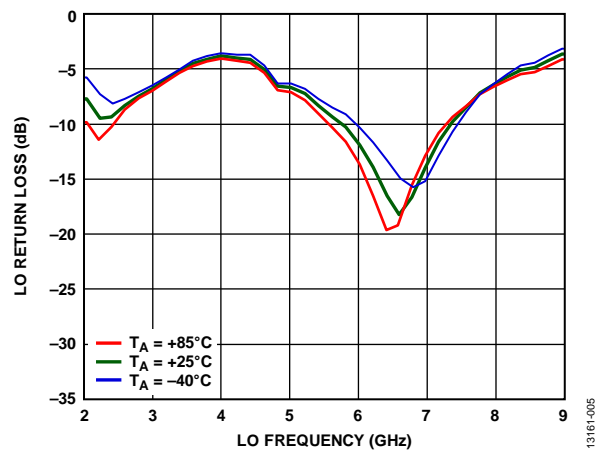


Figure 11. LO Port Return Loss vs. LO Frequency, LO Drive = 15 dBm

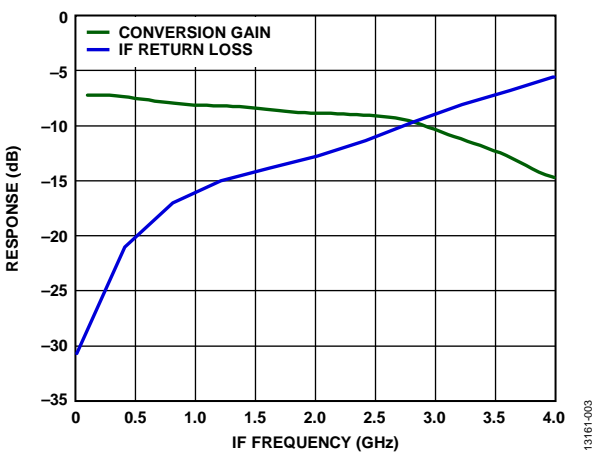


Figure 9. Conversion Gain and IF Return Loss Response vs. IF Frequency, LO Frequency = 4.5 GHz

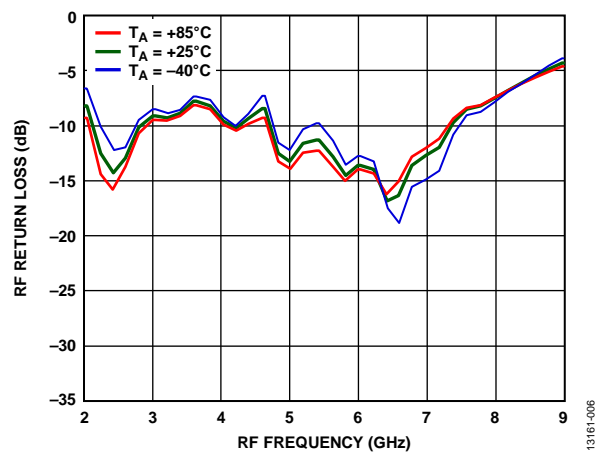


Figure 12. RF Port Return Loss vs. RF Frequency, LO Frequency = 4.6 GHz, LO Drive = 15 dBm

# HMC557A

# Data Sheet

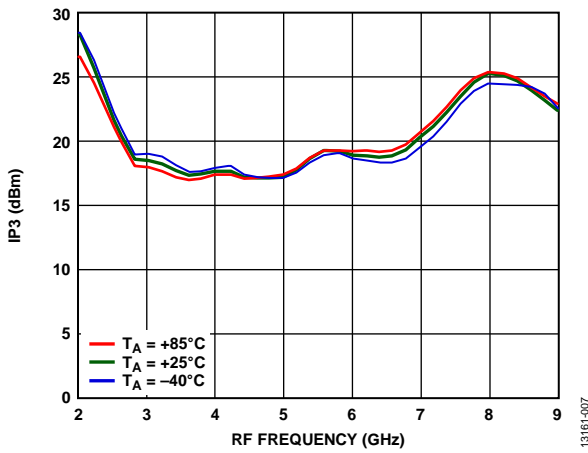


Figure 13. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

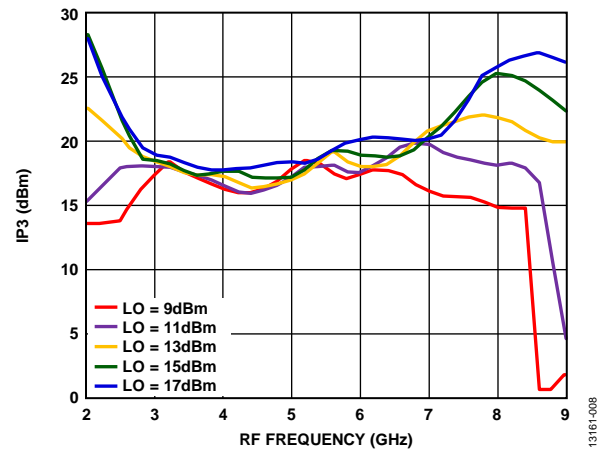


Figure 15. Input IP3 vs. RF Frequency at Various LO Drives

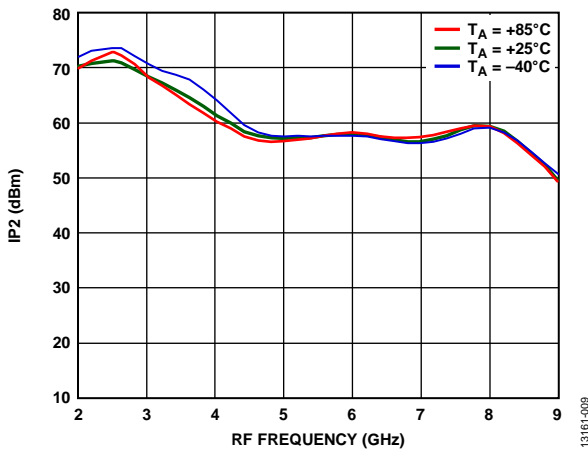


Figure 14. Input IP2 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

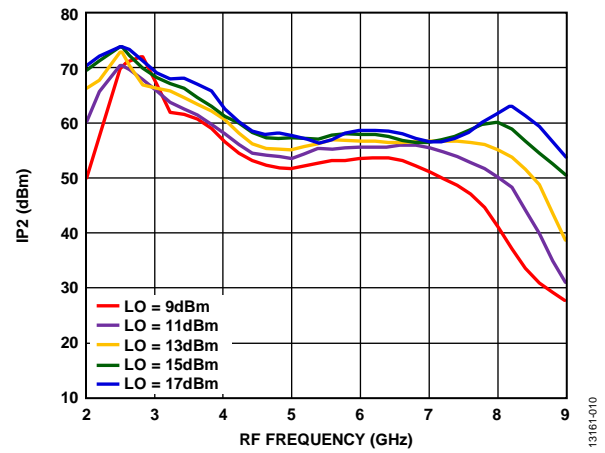


Figure 16. Input IP2 vs. RF Frequency at Various LO Drives



**DOWNCONVERTER PERFORMANCE WITH UPPER SIDEBAND SELECTED, IF = 1000 MHz**

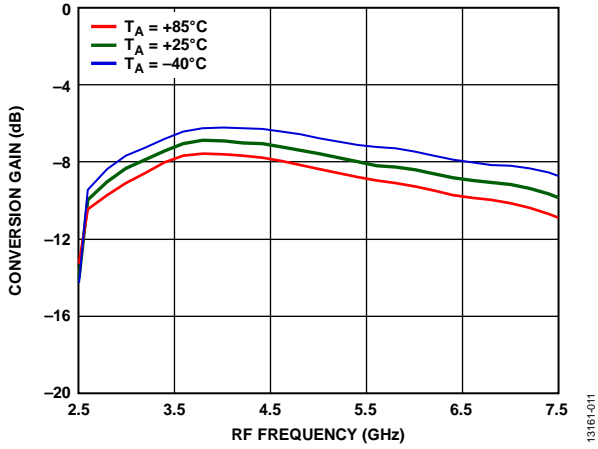


Figure 17. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

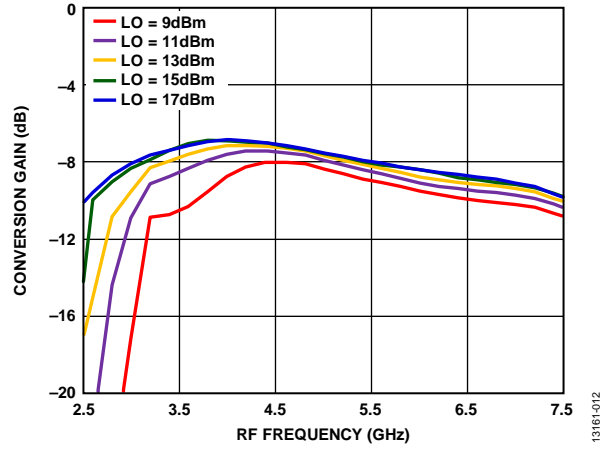


Figure 20. Conversion Gain vs. RF Frequency at Various LO Drives

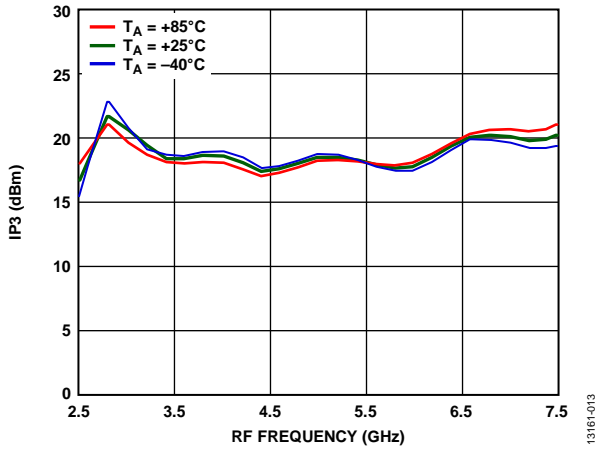


Figure 18. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

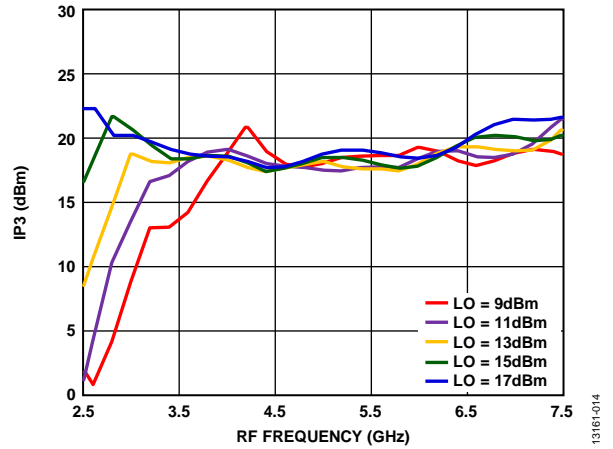


Figure 21. Input IP3 vs. RF Frequency at Various LO Drives

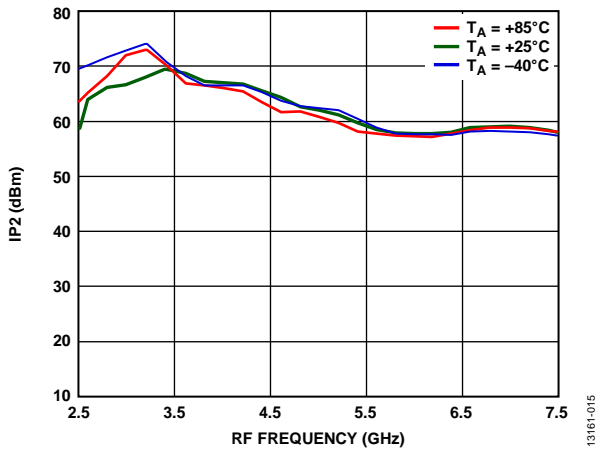


Figure 19. Input IP2 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

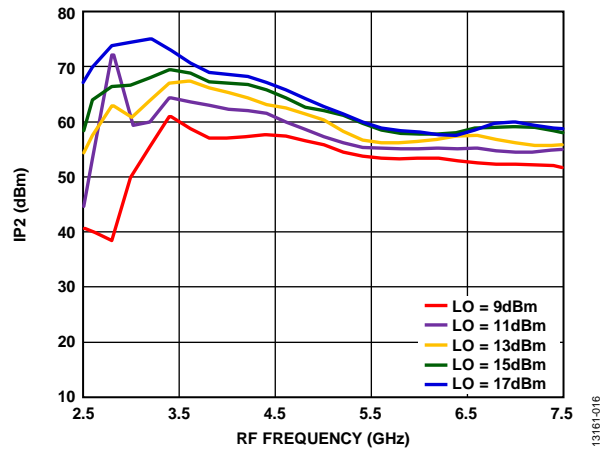


Figure 22. Input IP2 vs. RF Frequency at Various LO Drives

# HMC557A

# Data Sheet

## DOWNCONVERTER PERFORMANCE WITH UPPER SIDEBAND SELECTED, IF = 2000 MHz

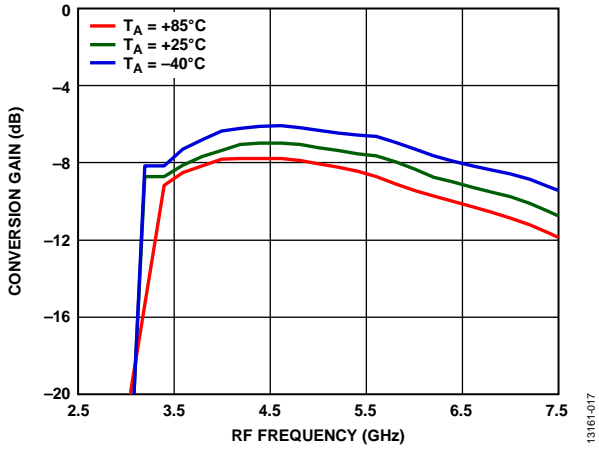


Figure 23. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

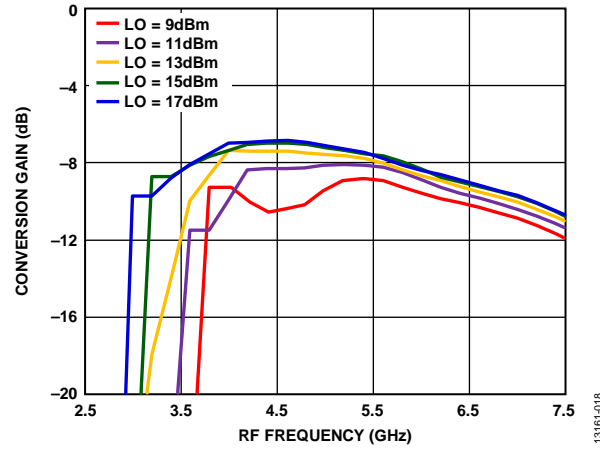


Figure 26. Conversion Gain vs. RF Frequency at Various LO Drives

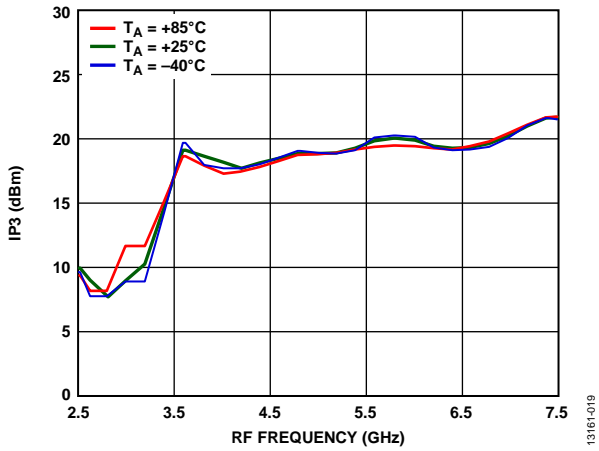


Figure 24. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

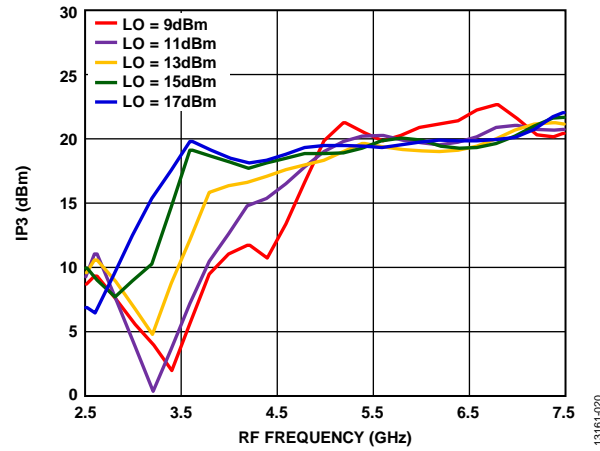


Figure 27. Input IP3 vs. RF Frequency at Various LO Drives

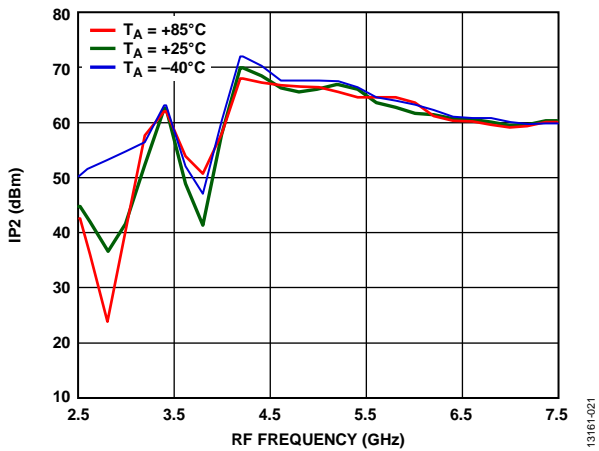


Figure 25. Input IP2 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

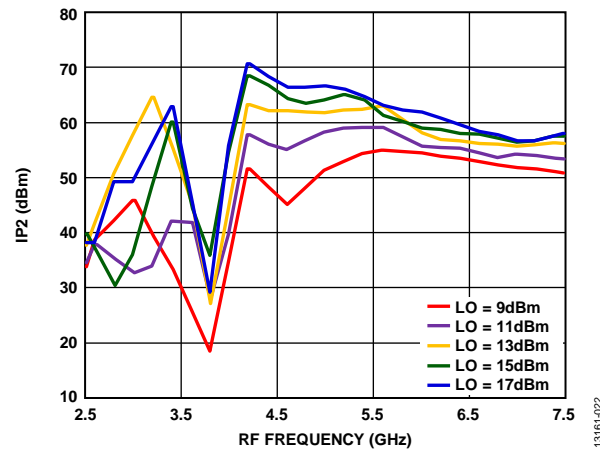


Figure 28. Input IP2 vs. RF Frequency at Various LO Drives

**DOWNCONVERTER PERFORMANCE WITH LOWER SIDEBAND SELECTED, IF = 100 MHz**

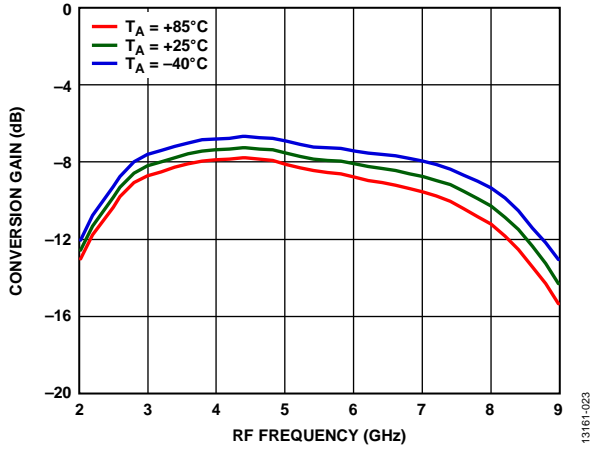


Figure 29. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

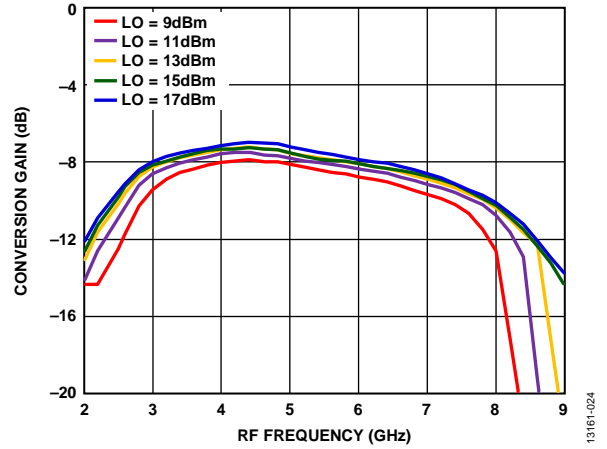


Figure 32. Conversion Gain vs. RF Frequency at Various LO Drives

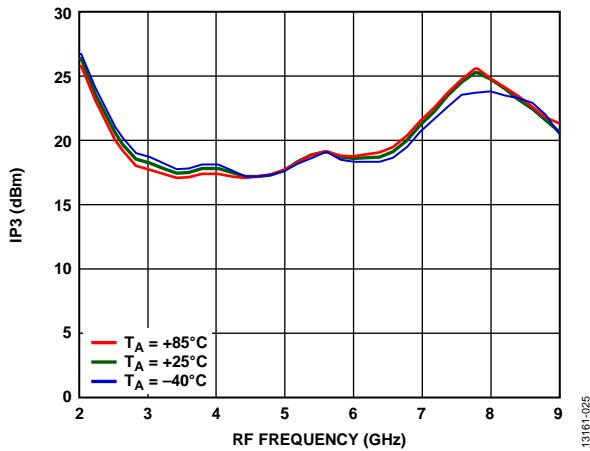


Figure 30. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

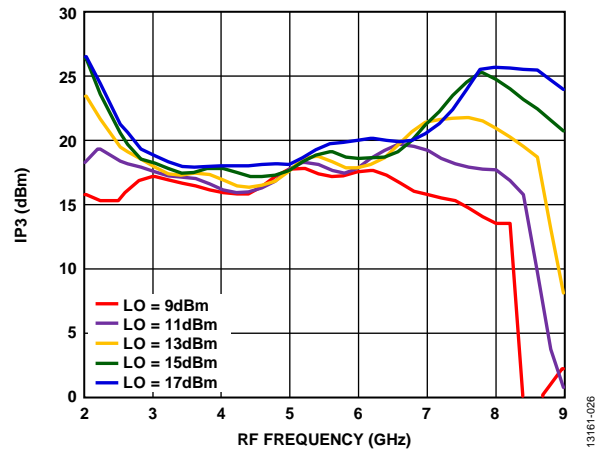


Figure 33. Input IP3 vs. RF Frequency at Various LO Drives

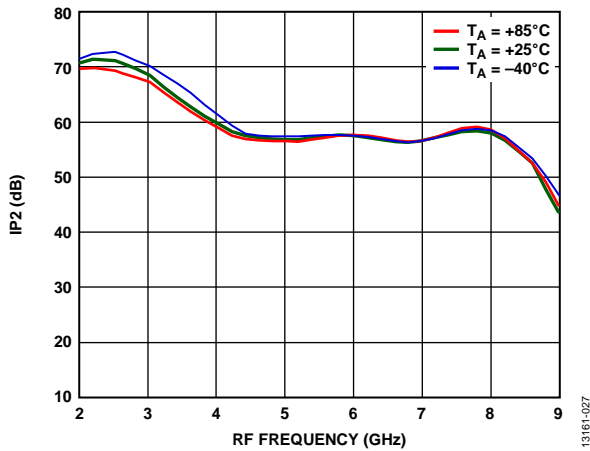


Figure 31. Input IP2 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

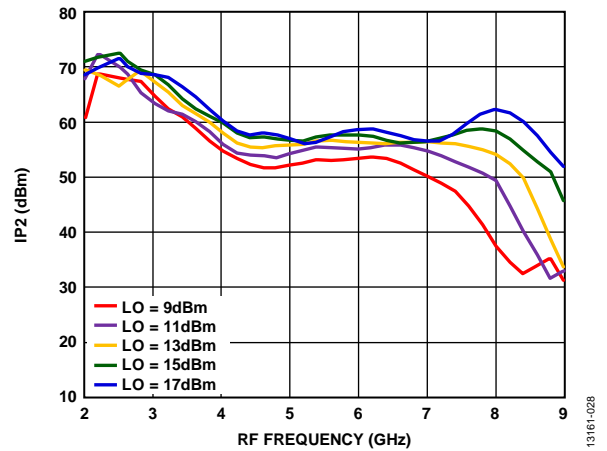


Figure 34. Input IP2 vs. RF Frequency at Various LO Drives

# HMC557A

# Data Sheet

## DOWNCONVERTER PERFORMANCE WITH LOWER SIDEBAND SELECTED, IF = 1000 MHz

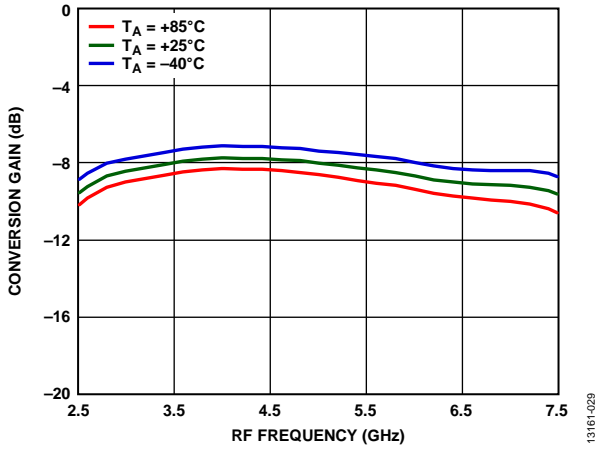


Figure 35. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

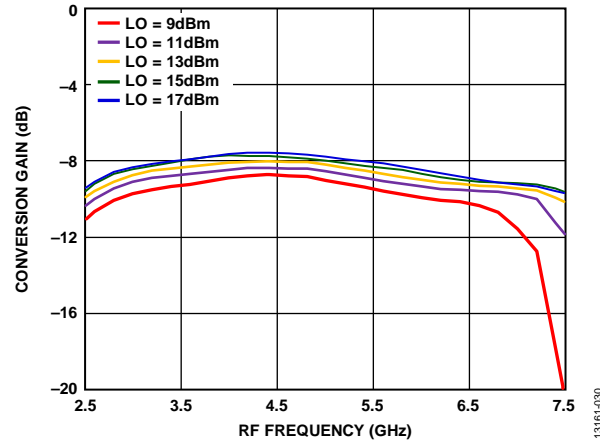


Figure 38. Conversion Gain vs. RF Frequency at Various LO Drives

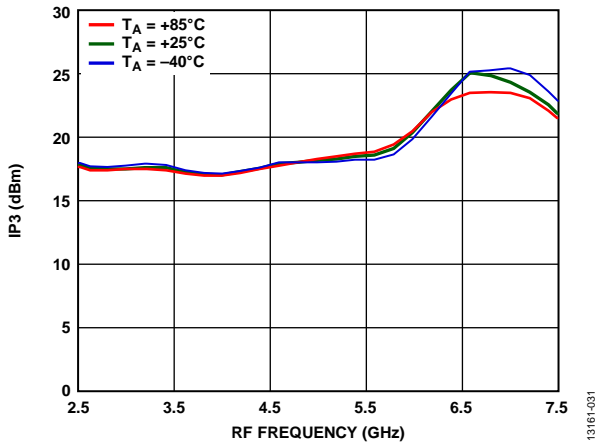


Figure 36. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

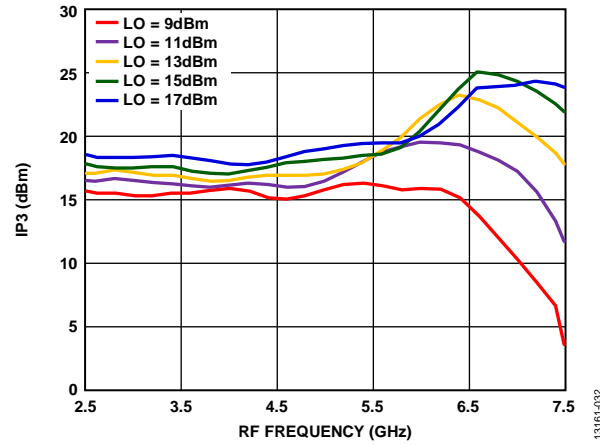


Figure 39. Input IP3 vs. RF Frequency at Various LO Drives

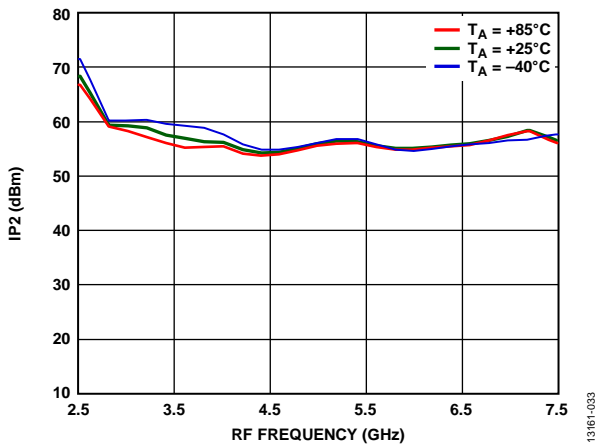


Figure 37. Input IP2 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

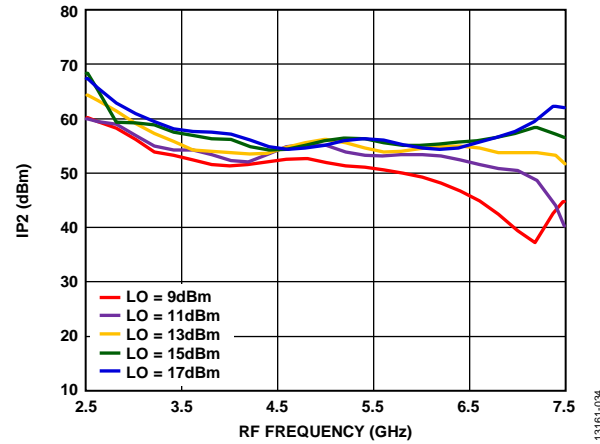


Figure 40. Input IP2 vs. RF Frequency at Various LO Drives

**DOWNCONVERTER PERFORMANCE WITH LOWER SIDEBAND SELECTED, IF = 2000 MHz**

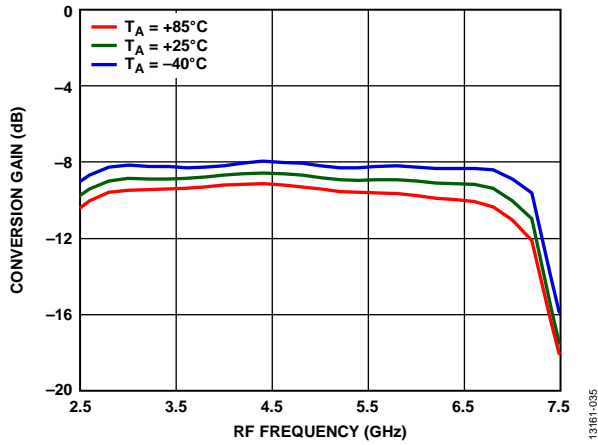


Figure 41. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

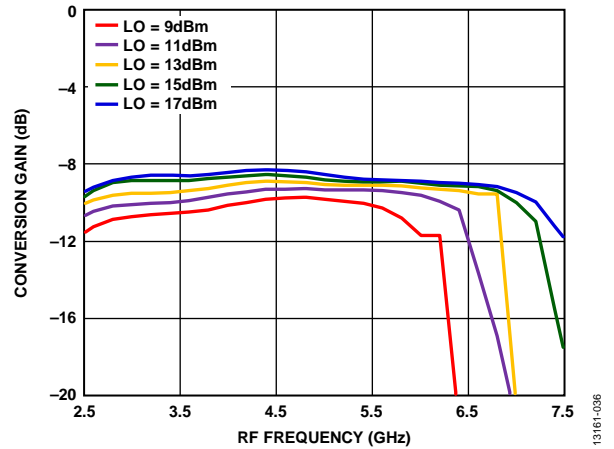


Figure 44. Conversion Gain vs. RF Frequency at Various LO Drives

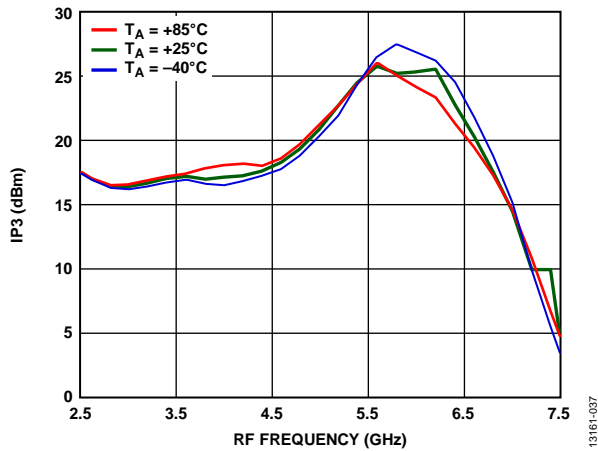


Figure 42. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

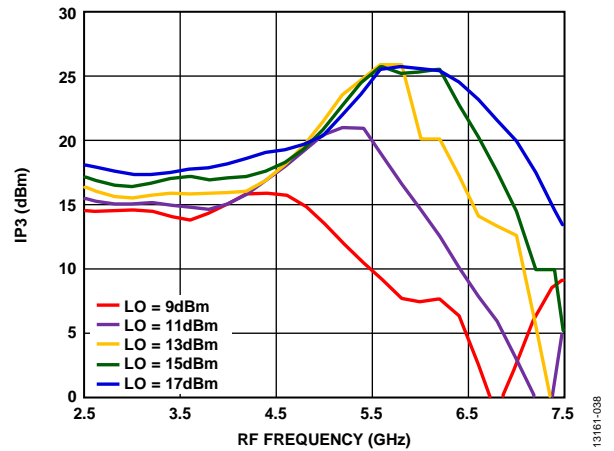


Figure 45. Input IP3 vs. RF Frequency at Various LO Drives

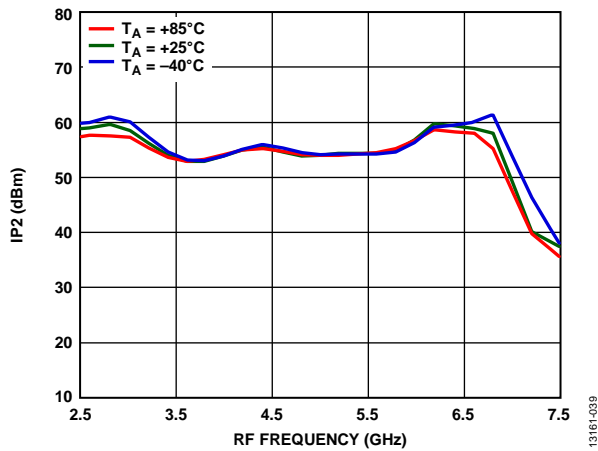


Figure 43. Input IP2 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

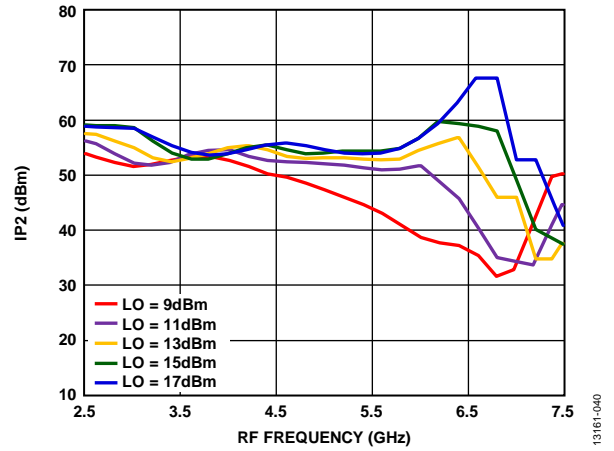


Figure 46. Input IP2 vs. RF Frequency at Various LO Drives

# HMC557A

# Data Sheet

## P1dB PERFORMANCE WITH DOWNCONVERTER MODE SELECTED AT LO DRIVE = 15 dBm

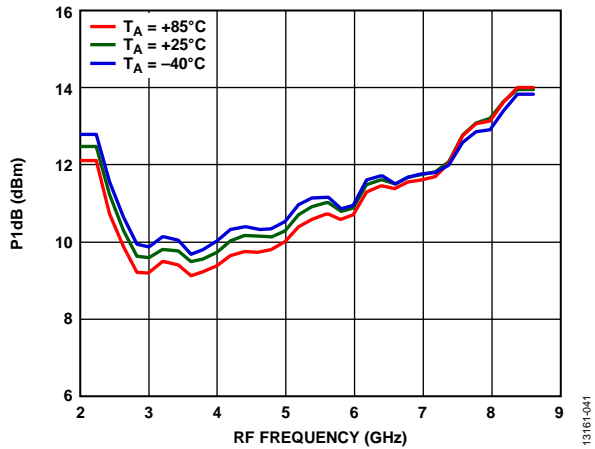


Figure 47. Input P1dB vs. RF Frequency at Various Temperatures, IF = 100 MHz, USB

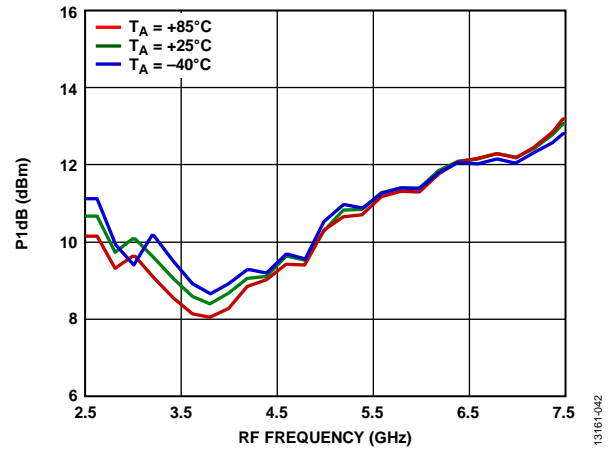


Figure 50. Input P1dB vs. RF Frequency at Various Temperatures, IF = 1000 MHz, USB

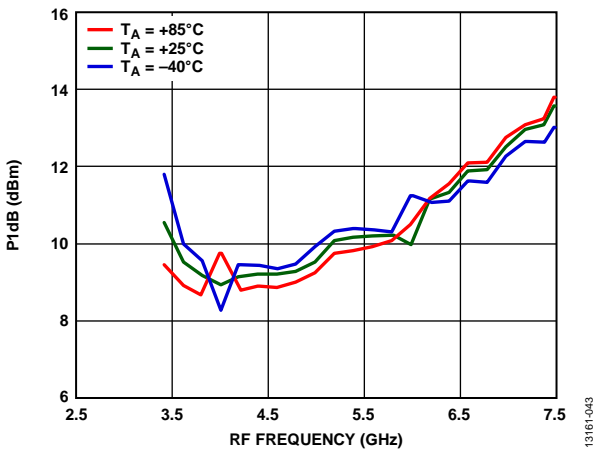


Figure 48. Input P1dB vs. RF Frequency at Various Temperatures, IF = 2000 MHz, USB

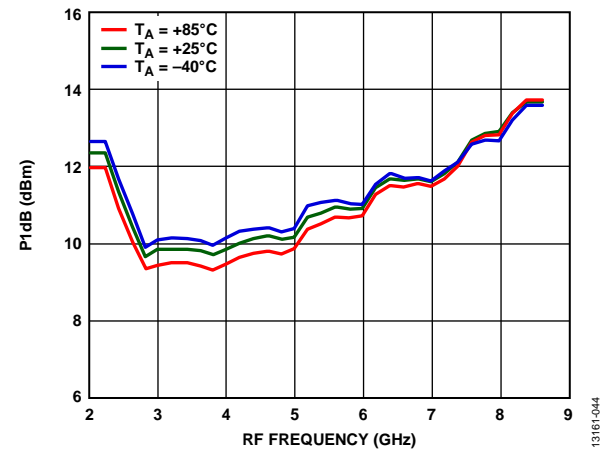


Figure 51. Input P1dB vs. RF Frequency at Various Temperatures, IF = 100 MHz, LSB

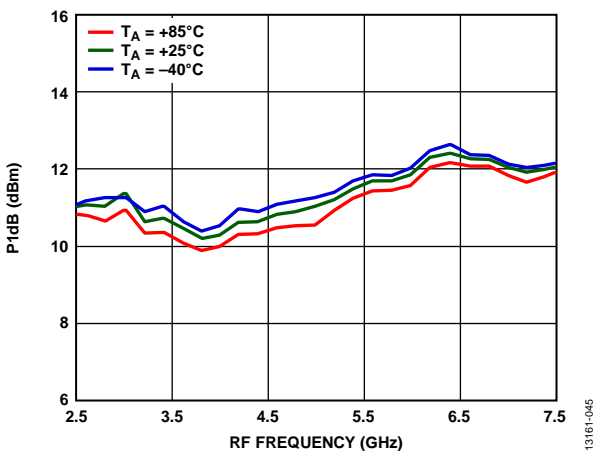


Figure 49. Input P1dB vs. RF Frequency at Various Temperatures, IF = 1000 MHz, LSB

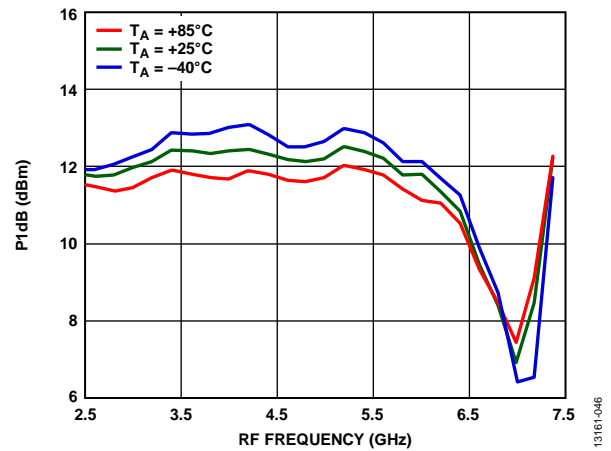


Figure 52. Input P1dB vs. RF Frequency at Various Temperatures, IF = 2000 MHz, LSB

UPCONVERTER PERFORMANCE WITH UPPER SIDEBAND SELECTED, IF = 100 MHz

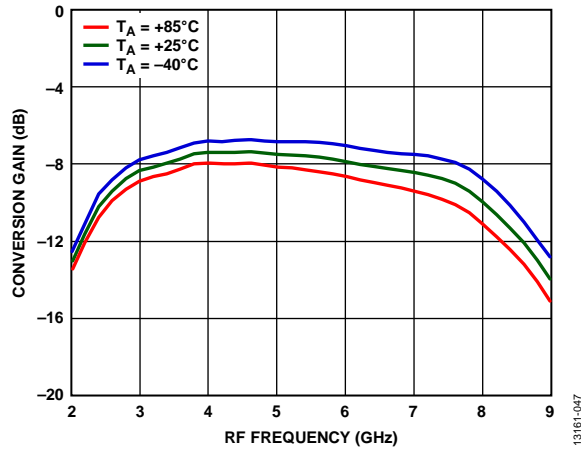


Figure 53. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

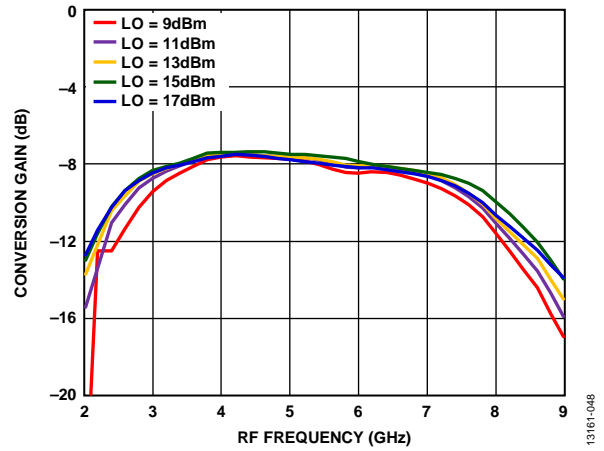


Figure 56. Conversion Gain vs. RF Frequency at Various LO Drives

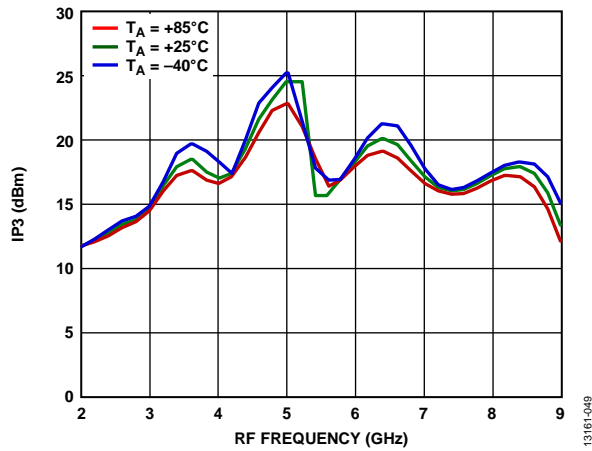


Figure 54. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

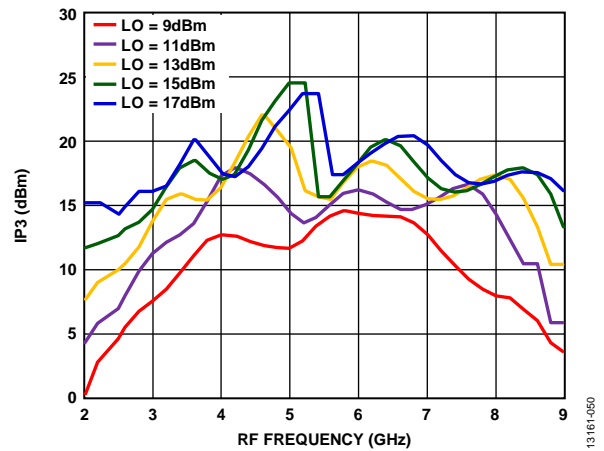


Figure 57. Input IP3 vs. RF Frequency at Various LO Drives

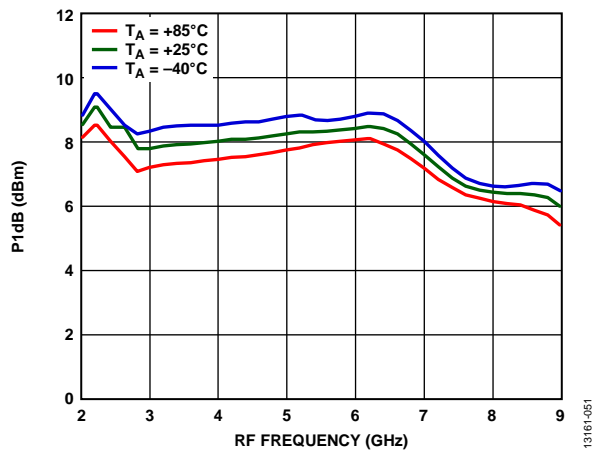


Figure 55. Input P1dB vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

# HMC557A

# Data Sheet

## UPCONVERTER PERFORMANCE WITH UPPER SIDEBAND SELECTED, IF = 1000 MHz

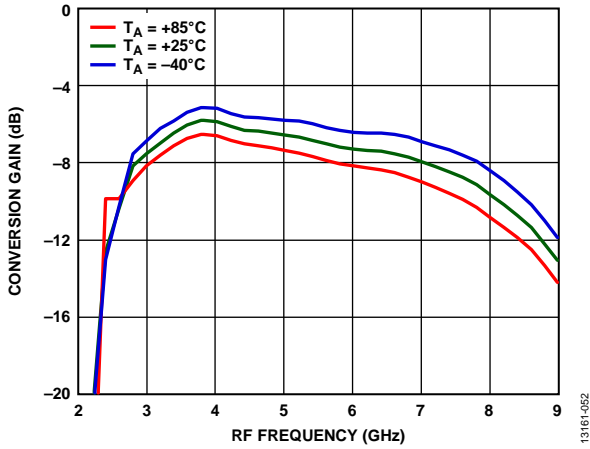


Figure 58. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

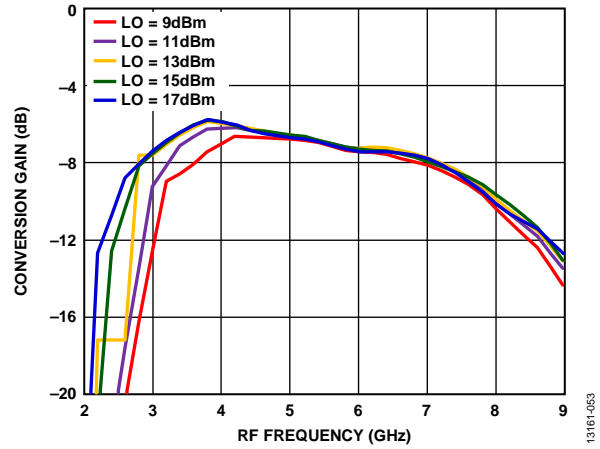


Figure 61. Conversion Gain vs. RF Frequency at Various LO Drives

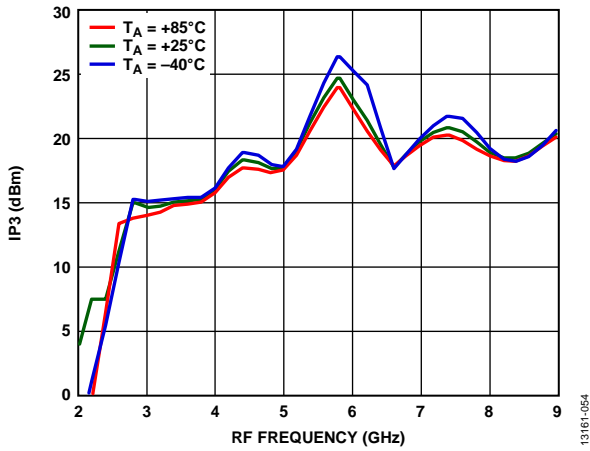


Figure 59. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

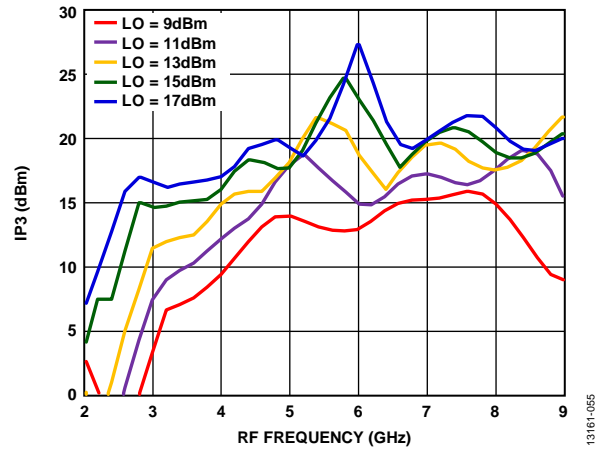


Figure 62. Input IP3 vs. RF Frequency at Various LO Drives

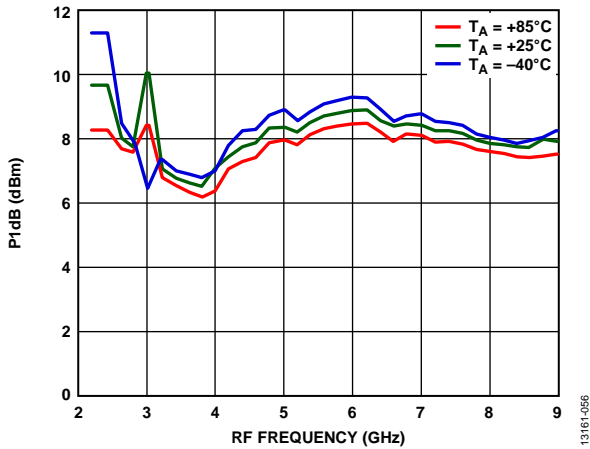


Figure 60. Input P1dB vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm



UPCONVERTER PERFORMANCE WITH UPPER SIDEBAND SELECTED, IF = 2000 MHz

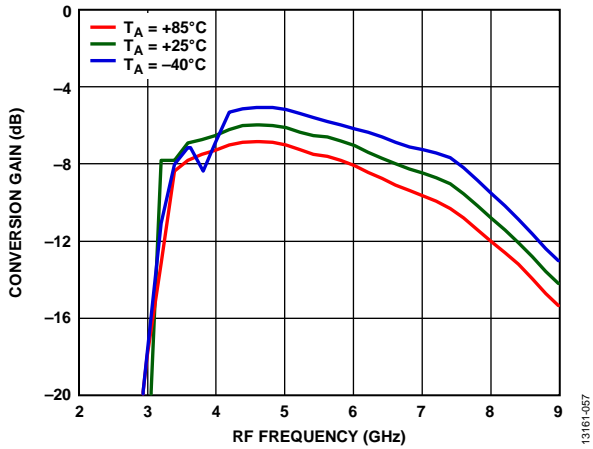


Figure 63. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

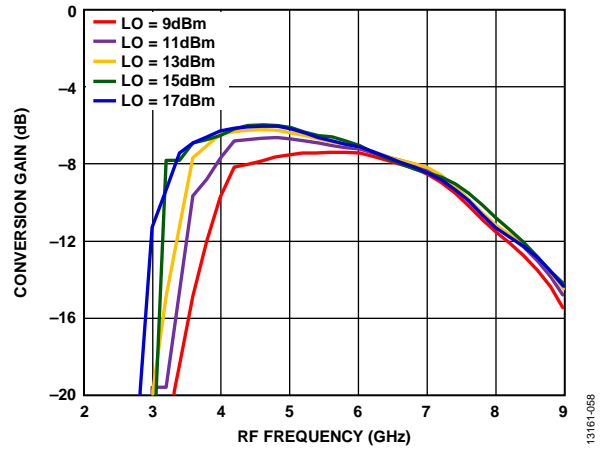


Figure 66. Conversion Gain vs. RF Frequency at Various LO Drives

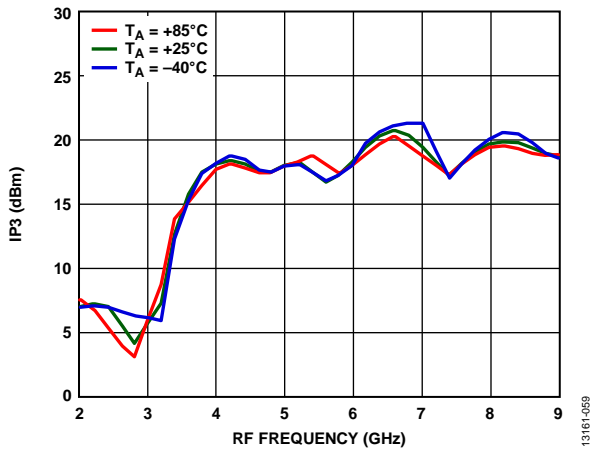


Figure 64. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

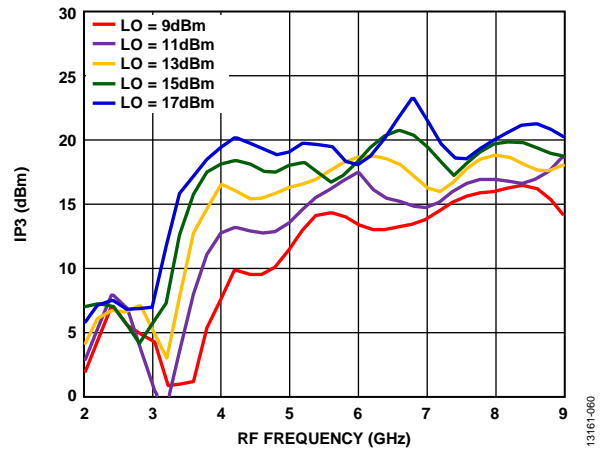


Figure 67. Input IP3 vs. RF Frequency at Various LO Drives

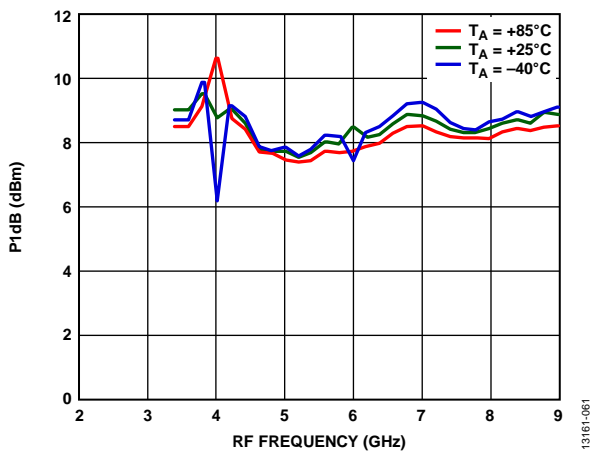


Figure 65. Input P1dB vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

# HMC557A

# Data Sheet

## UPCONVERTER PERFORMANCE WITH LOWER SIDEBAND SELECTED, IF = 100 MHz

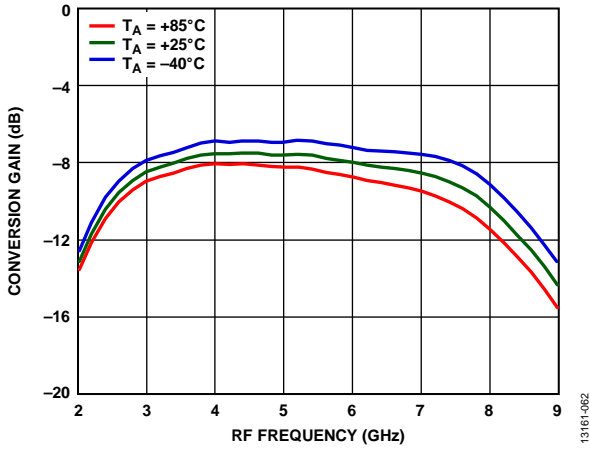


Figure 68. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

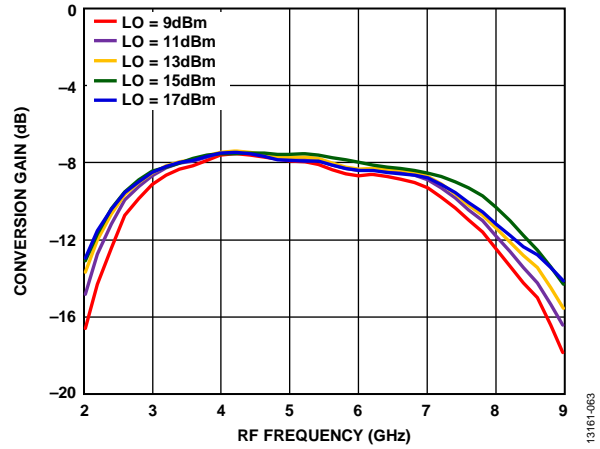


Figure 71. Conversion Gain vs. RF Frequency at Various LO Drives

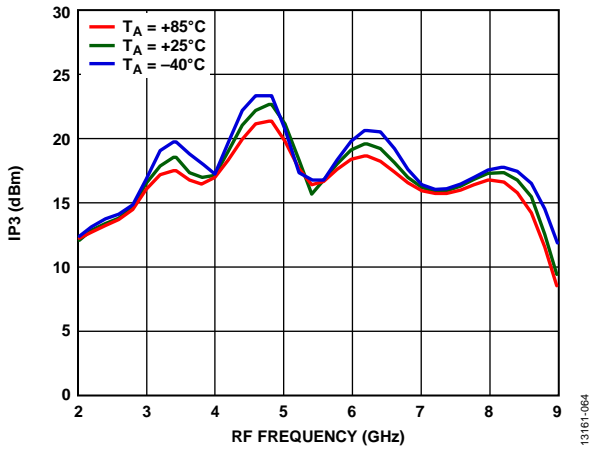


Figure 69. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

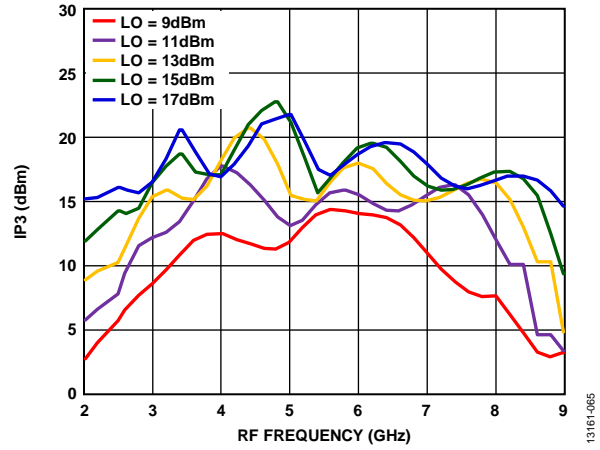


Figure 72. Input IP3 vs. RF Frequency at Various LO Drives

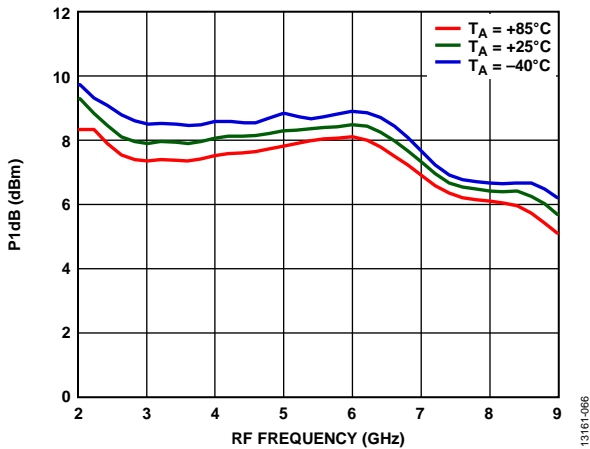


Figure 70. Input P1dB vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

UPCONVERTER PERFORMANCE WITH LOWER SIDEBAND SELECTED, IF = 1000 MHz

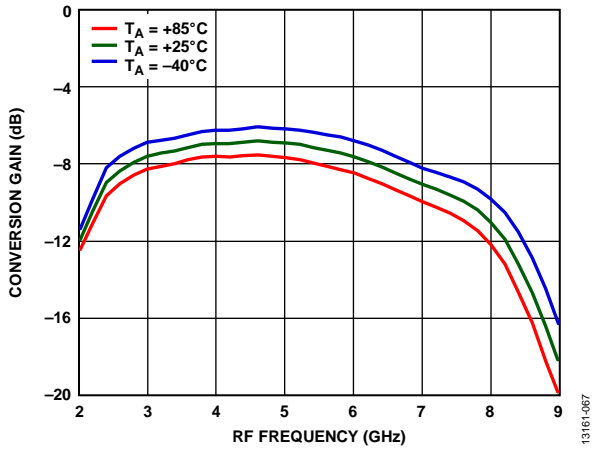


Figure 73. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

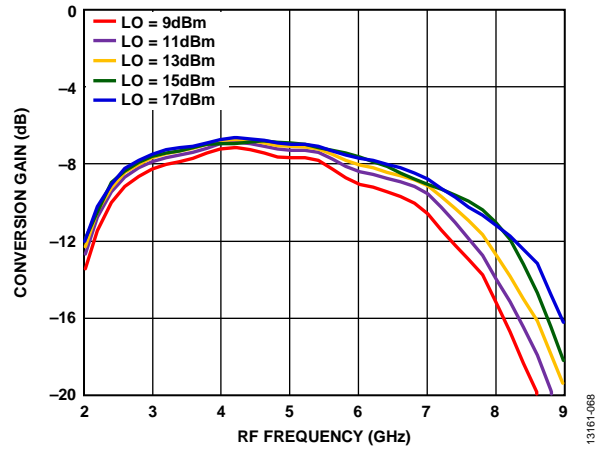


Figure 76. Conversion Gain vs. RF Frequency at Various LO Drives

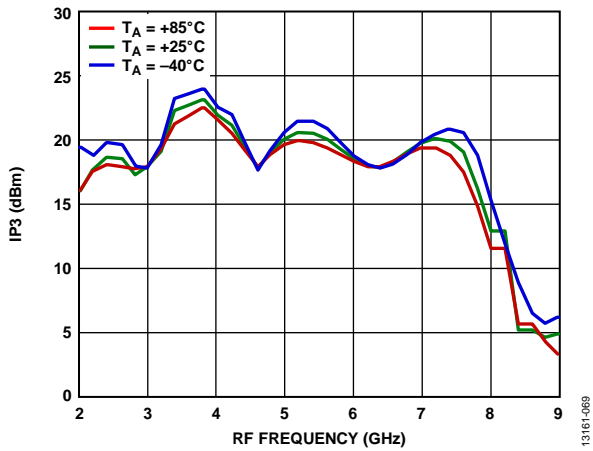


Figure 74. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

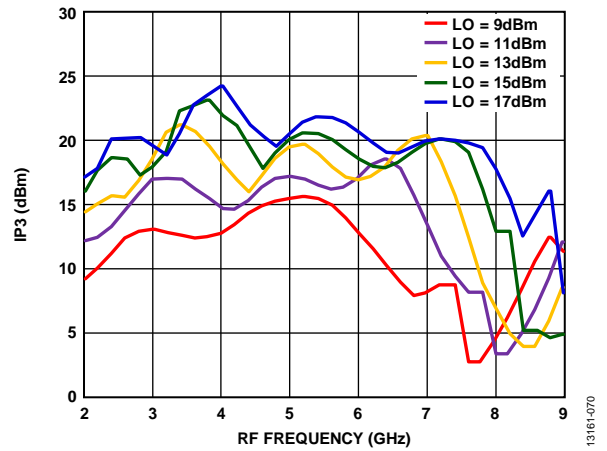


Figure 77. Input IP3 vs. RF Frequency at Various LO Drives

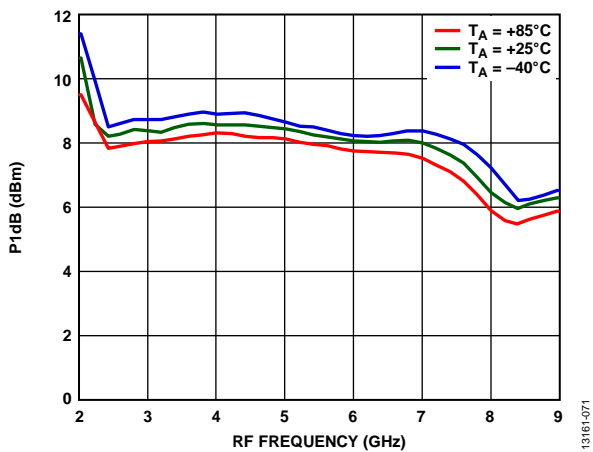


Figure 75. Input P1dB vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

# HMC557A

# Data Sheet

## UPCONVERTER PERFORMANCE WITH LOWER SIDEBAND SELECTED, IF = 2000 MHz

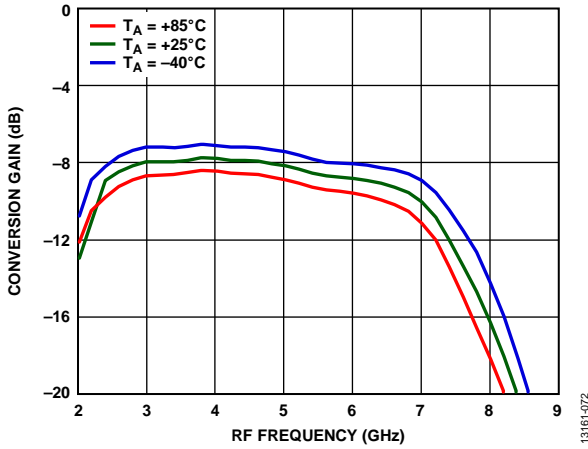


Figure 78. Conversion Gain vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

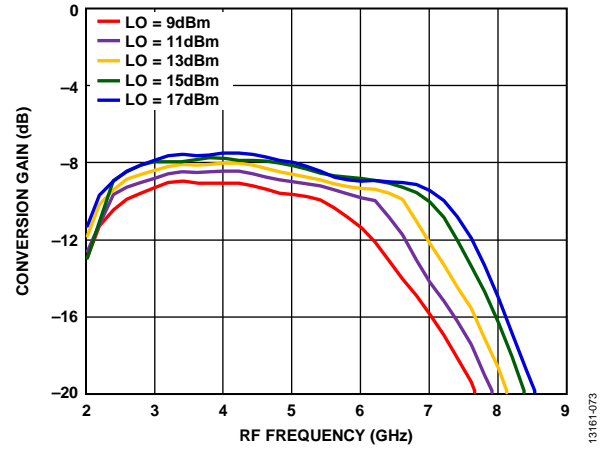


Figure 81. Conversion Gain vs. RF Frequency at Various LO Drives

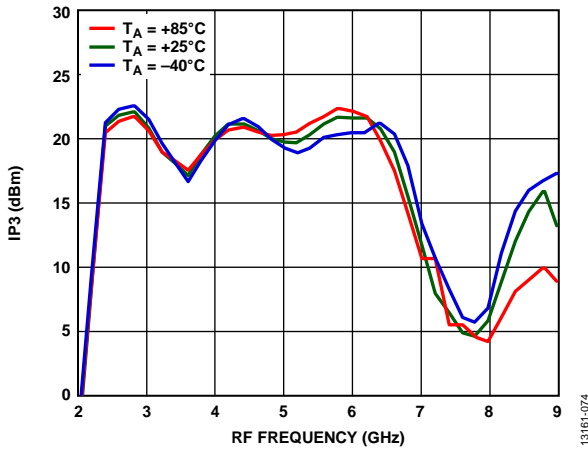


Figure 79. Input IP3 vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

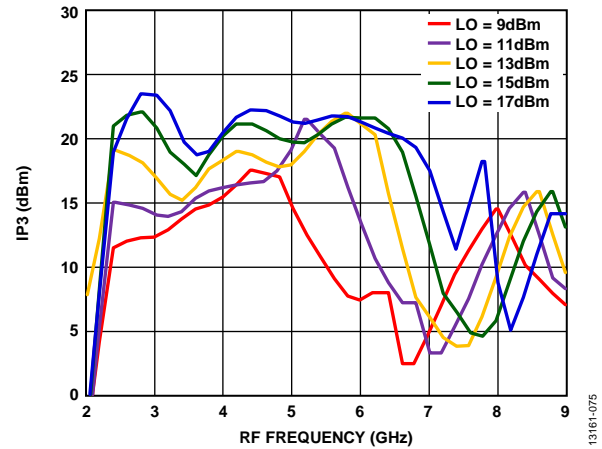


Figure 82. Input IP3 vs. RF Frequency at Various LO Drives

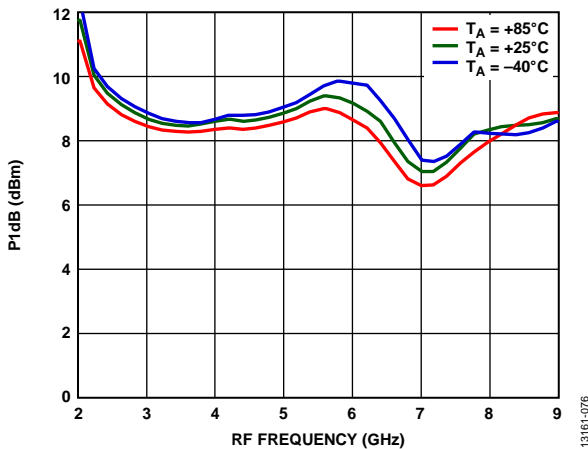


Figure 80. Input P1dB vs. RF Frequency at Various Temperatures, LO Drive = 15 dBm

# Data Sheet

# HMC557A

## SPURIOUS PERFORMANCE WITH UPPER SIDEBAND SELECTED, IF = 100 MHz

Mixer spurious products are measured in dBc from the IF output power level. Spur values are  $(M \times RF) - (N \times LO)$ .


### ***M × N Spurious Outputs***

RF frequency = 5 GHz, RF input power = -10 dBm, LO frequency = 4.9 GHz, LO drive = 15 dBm.

|        |   | N × LO           |       |       |       |       |       |
|--------|---|------------------|-------|-------|-------|-------|-------|
|        |   | 0                | 1     | 2     | 3     | 4     | 5     |
| M × RF | 0 | N/A <sup>1</sup> | +3.6  | +33.3 | +25.2 | +43.3 | +28.6 |
|        | 1 | +15.9            | +0.00 | +31.7 | +38.1 | +60.8 | +73.4 |
|        | 2 | +74.8            | +64.7 | +61.2 | +63.6 | +79.5 | +75.1 |
|        | 3 | +74.2            | +78.6 | +80.8 | +72   | +78.5 | +79.2 |
|        | 4 | +73.2            | +77.5 | +75.3 | +78   | +90.7 | +79.3 |
|        | 5 | -92.8            | +72.7 | +76.7 | +77.6 | +81.3 | +88.9 |

<sup>1</sup> N/A means not applicable.

APPLICATIONS INFORMATION

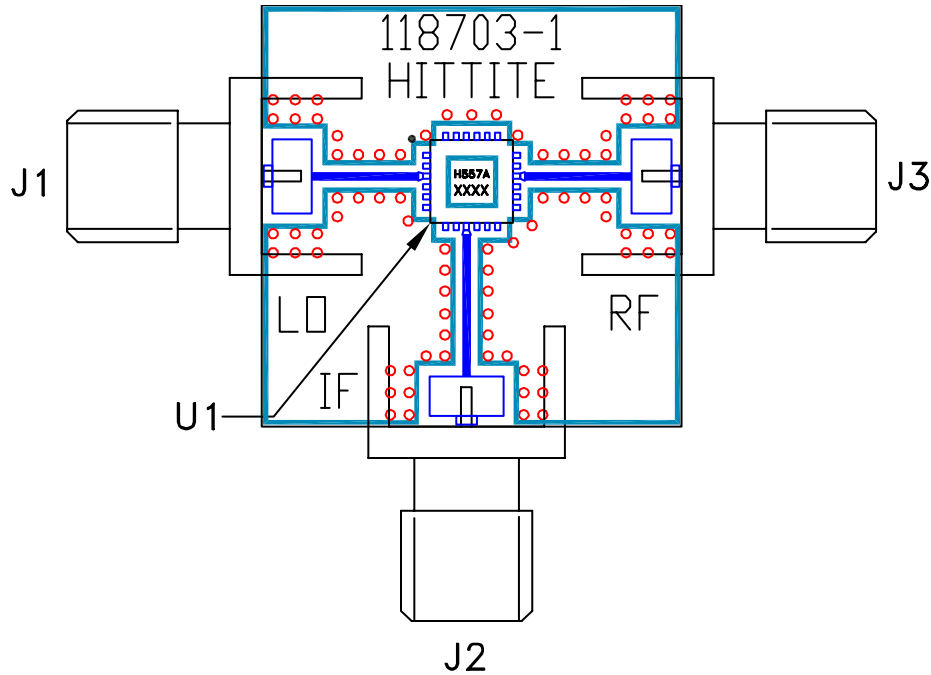

13161-082

Figure 83. Evaluation Printed Circuit Board (PCB)

Table 5. List of Materials for Evaluation PCB EV1HMC557ALC4<sup>1</sup>

| Item             | Description                        |
|------------------|------------------------------------|
| J1, J2, J3       | Johnson SMA connector              |
| U1               | HMC557ALC4 mixer                   |
| PCB <sup>2</sup> | 118703 evaluation PCB <sup>3</sup> |

<sup>1</sup> Reference this number when ordering the complete evaluation PCB.  
<sup>2</sup> The circuit board material is Rogers 4350.  
<sup>3</sup> This is the bare PCB of the evaluation PCB kit (see Figure 83).

It is recommended that the application circuit board use RF circuit design techniques. Use signal lines with a 50 Ω impedance, and connect the package ground leads and exposed pad directly to the ground plane. Use a sufficient number of via holes to connect the top and bottom ground planes. The evaluation circuit board shown in Figure 83 is available from Analog Devices, Inc., upon request.

### OUTLINE DIMENSIONS

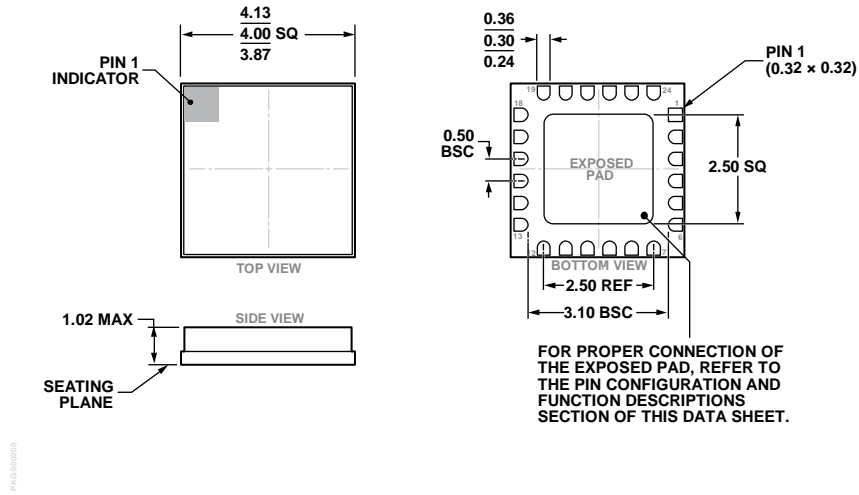


Figure 84. 24-Terminal Ceramic Leadless Chip Carrier [LCC] (E-24-1)  
Dimensions shown in millimeters

### ORDERING GUIDE

| Model           | Temperature Range | Package Body Material | Lead Finish      | MSL Rating <sup>1</sup> | Branding <sup>2</sup> | Package Description | Package Option |
|-----------------|-------------------|-----------------------|------------------|-------------------------|-----------------------|---------------------|----------------|
| HMC557ALC4      | -40°C to +85°C    | Alumina Ceramic       | Gold over Nickel | MSL3                    | H557A<br>XXXX         | 24-Lead LCC         | E-24-1         |
| HMC557ALC4TR    | -40°C to +85°C    | Alumina Ceramic       | Gold over Nickel | MLS3                    | H557A<br>XXXX         | 24-Lead LCC         | E-24-1         |
| HMC557ALC4TR-R5 | -40°C to +85°C    | Alumina Ceramic       | Gold over Nickel | MLS3                    | H557A<br>XXXX         | 24-Lead LCC         | E-24-1         |
| EV1HMC557ALC4   |                   |                       |                  |                         |                       | Evaluation Board    |                |

<sup>1</sup> Maximum peak reflow temperature of 260°C.  
<sup>2</sup> Four-digit lot number = XXXX.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкуренеспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)