

NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output

bel
POWER PRODUCTS

xRPF-20A1A0

RoHS Compliant

Rev.A

- Non-Isolated
- Fixed Frequency (275 kHz)
- High Efficiency
- High Power Density
- Power Good Output Signal (open collector)
- Under-Voltage Lockout (UVLO)
- Wide Trim Range
- Converter Can Sink and Source Current
- OCP/SCP
- Remote On/Off
- Low Cost



Description

The Bel xRPF-20A1A0 is a new high density open frame non-isolated converter series for space sensitive applications. Each model has a wide input range (10.2 Vdc - 13.8 Vdc) and offers a wide range of output voltage (0.9 Vdc - 5.0 Vdc) with a 20 A load. An external resistor adjusts the output voltage from its pre-set value of 0.9 Vdc to any value up to the 5.0 Vdc maximum. Typical efficiency is 92% at $V_o=5$ Vdc, $V_{in}=12$ Vdc at full load. Typical features include remote on/off, under-voltage lockout, over-current protection and short circuit protection.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Vertical Mount	Model Number Horizontal Mount
0.9 V - 5.0 V	12 V	20 A	100 W	92%	VRPF-20A1A0	ORPF-20A1A0

Notes: 1. Add "G" suffix at the end of the model number to indicate Tray Packaging.

3. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3 V	-	13.8 V	
Output Enable Terminal Voltage	-0.3 V	-	13.8 V	
Ambient Temperature	0 °C	-	80 °C	
Storage Temperature	-40 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	10.2 V	-	13.8 V	
Input Current (Source)				
$V_o=5.0$ V	-	9.1 A	-	
$V_o=2.5$ V	-	4.9 A	-	
$V_o=0.9$ V	-	2.2 A	-	
Input Current (Sink)				
$V_o=2.5$ V	-	-3.44 A	-	Able to sink 20 A output current at any output voltage up to and including 2.5 V.
$V_o=0.9$ V	-	-0.97 A	-	
Input Current (No Load)	-	95 mA	-	
Remote Off Input Current	-	5 mA	10 mA	

NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output



Input Specifications (continued)

Parameter	Min	Typ	Max	Notes
Input Reflected Ripple Current (pk-pk)				Tested with simulated source impedance of 1.5 μ H 5Hz to 20 MHz, and 2 $\times$ 270 μ F/16 V Oscon capacitors (ESR $\leq$ 20 m Ω) at the input
Vo=5.0 V	-	280 mA	350 mA	
Vo=3.3 V	-	250 mA	320 mA	
Vo=2.5 V	-	200 mA	280 mA	
Vo=0.9 V	-	150 mA	250 mA	
Input Reflected Ripple Current (rms)				
Vo=5.0 V	-	80 mA	120 mA	
Vo=3.3 V	-	70 mA	100 mA	
Vo=2.5 V	-	45 mA	80 mA	
Vo=0.9 V	-	40 mA	60 mA	
External Input Capacitance	-	540 μ F	-	
Turn-on Voltage Threshold	8.5 V	9.0 V	9.5 V	
Turn-off Voltage Threshold	7.0 V	7.6 V	8.3 V	

Note: All specifications are typical at 25 °C unless otherwise stated.

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point	-2.5%Vo,set	-	2.5%Vo,set	Vin=12 V, Io=Iomax, full load
Output Voltage Set Point	-3.5%Vo,set	-	3.5%Vo,set	Over all operating input voltage, resistive load, and temperature conditions
Load Regulation				Io=Iomin to Iomax
Vo=5.0 V	-	-	0.4%Vo,set	
Vo=3.3 V	-	-	0.4%Vo,set	
Vo=2.5 V	-	-	0.5%Vo,set	
Vo=0.9 V	-	-	1%Vo,set	
Line Regulation	-	-	0.5%Vo,set	Vin=Vinmin to Vinmax
Output Ripple and Noise (pk-pk)				Tested at 0-20 MHz BW, with a 680 μ F/6.3 V Oscon capacitor (ESR $\leq$ 12 m Ω), 10 μ F/16V Tantalum capacitor, and 10nF ceramic capacitor at the output.
Vo=5.0 V	-	65 mV	80 mV	
Vo=3.3 V	-	60 mV	75 mV	
Vo=2.5 V	-	55 mV	70 mV	
Vo=0.9 V	-	45 mV	55 mV	
Output Ripple and Noise (rms)				
Vo=5.0 V	-	18 mV	25 mV	
Vo=3.3 V	-	15 mV	25 mV	
Vo=2.5 V	-	15 mV	20 mV	
Vo=0.9 V	-	10 mV	15 mV	
Output Current	0 A	-	20 A	
Current Limit Threshold	25 A	-	40 A	
Short Circuit Surge Transient	-	-	0.1 A ² s	
Turn on Time	-	5 mS	10 mS	
Overshoot at Turn on	-	0%Vo	3%Vo	
Output Capacitance				
Vo=5.0 V	680 μ F	-	5080 μ F	
Vo=2.5 V	680 μ F	-	7840 μ F	
Vo=0.9 V	680 μ F	-	11000 μ F	
Transient Response				
50% ~ 75% Max Load	Vo=0.9 V-5.0 V	-	100 mV	di/dt=2.5 A/ μ S; Vin=12 V; with a 680 μ F/6.3 V Oscon capacitor (ESR $\leq$ 12 m Ω), 10 μ F/16 V Tantalum capacitor and 10 nF ceramic capacitor at the output.
Settling Time		-	40 μ S	
75% ~ 50% Max Load		-	100 mV	
Settling Time		-	40 μ S	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency (Current Source)				Measured at Vin=12 V, full load.
Vo=5.0 V	89%	92%	-	
Vo=3.3 V	86%	89%	-	
Vo=2.5 V	83%	86%	-	
Vo=0.9 V	65%	69%	-	
Efficiency (Current Sink)				
Vo=2.5 V	79%	82%	-	
Vo=0.9 V	60%	63%	-	
Switching Frequency	240 kHz	275 kHz	310 kHz	
Output Voltage Trim Range	0.9 V	-	5.0 V	Vo=0.9 V when the Trim pin is open.
MTBF	5,570,000 hours			Calculated Per Bell Core SR-332 (Io = Nominal; Ta = 25 °C)
Dimensions				VRPF-20A1A0
Inches (L × W × H)	1.2 x 1.1 x 0.457			
Millimeters (L × W × H)	30.48 x 27.94 x 11.6			
Dimensions				0RPF-20A1A0
Inches (L × W × H)	1.2 x 1.1 x 0.508			
Millimeters (L × W × H)	30.48 x 27.94 x 12.91			
Weight	-	15 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Control Specifications

Parameter	Min	Typ	Max	Notes
Remote On/Off				
Signal Low (Unit Off)	-0.3 V	-	0.8 V	Remote On/Off pin open, unit on.
Signal High (Unit On)	2.4 V	-	13.8 V	
Power Good				
Power Good Delay ¹	-	-	8 mS	


Note: All specifications are typical at 25 °C unless otherwise stated.

1. The power good signal is an open collector output. When the output of the module reaches 90% of the nominal set point, the power good pin is set high.

Output Trim Equations


Equation for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) is shown below. The Trim Up resistor should be connected between the Trim pin and Ground. Trim values should not be less than 280Ω.

$$R_{trim} = \frac{1.17}{V_{adj} - 0.9}$$

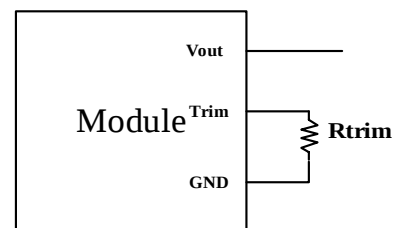

Equation for calculating the trim voltage (in V) given the desired adjusted voltage (Vadj) is shown below. The Trim Up voltage should be connected between the Trim pin and Ground.

$$R_t = \frac{R_s \times (1.3V_t - 1.17)}{1.17 - R_s \times (V_{adj} - 0.9)}$$

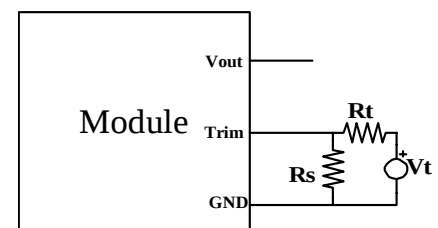




NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output



Efficiency Data

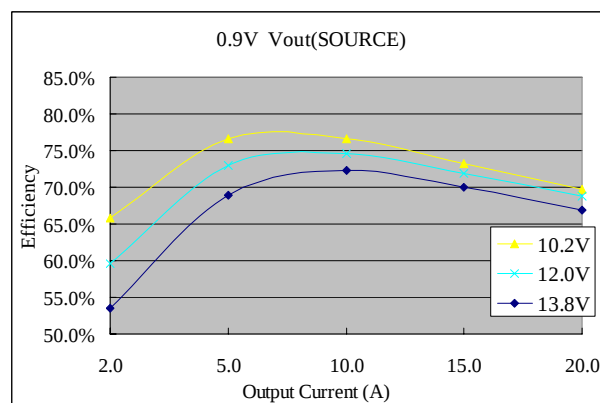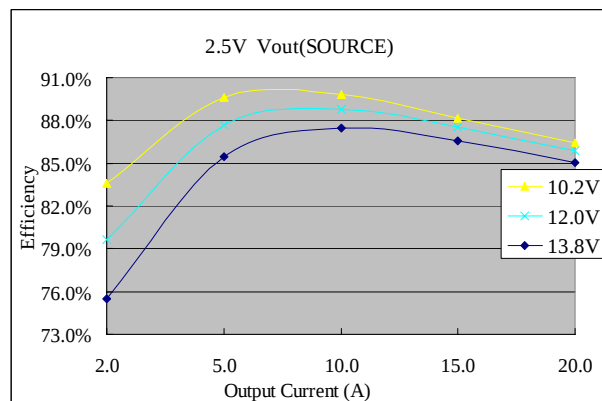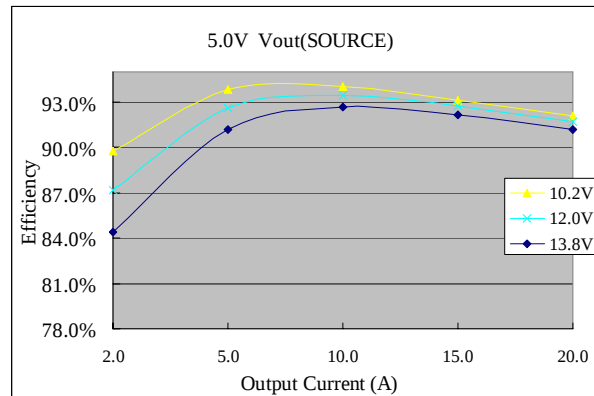


NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input


0.9 Vdc - 5.0 Vdc/20 A Output

bel
POWER PRODUCTS


Thermal Derating Curves

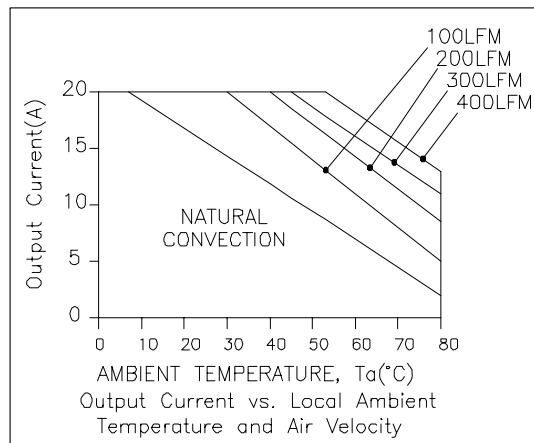

Vo=5 V; Vin=12 V

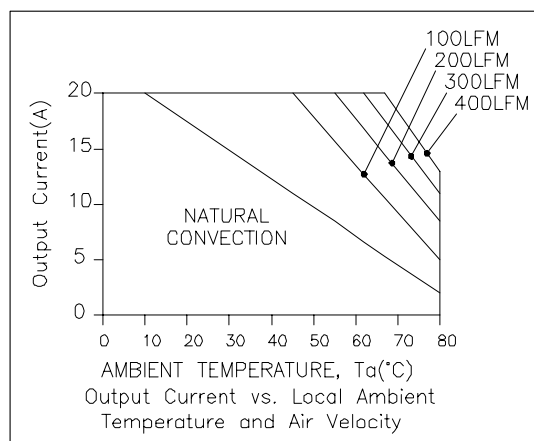

Vo=2.5 V; Vin=12 V

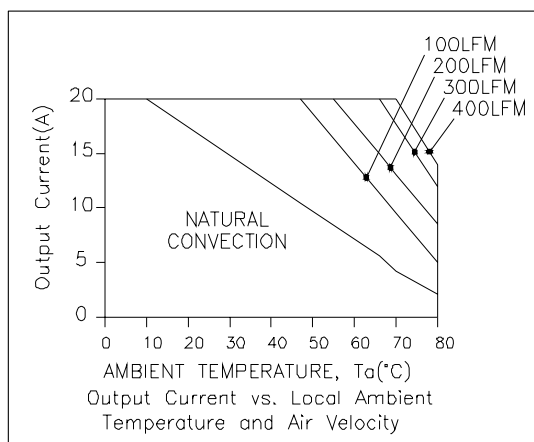

Vo=0.9 V; Vin=12 V


NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input


0.9 Vdc - 5.0 Vdc/20 A Output

bel
POWER PRODUCTS


Ripple and Noise Waveforms

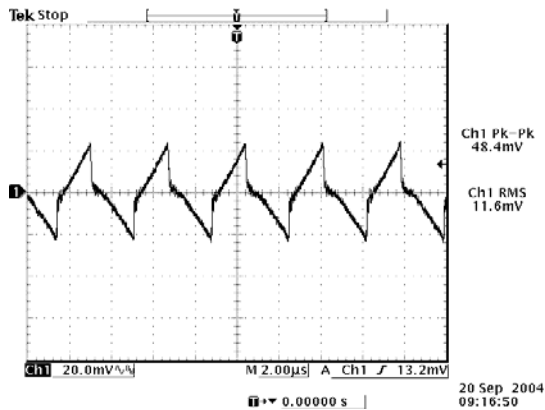

12 V input, 5.0 V output

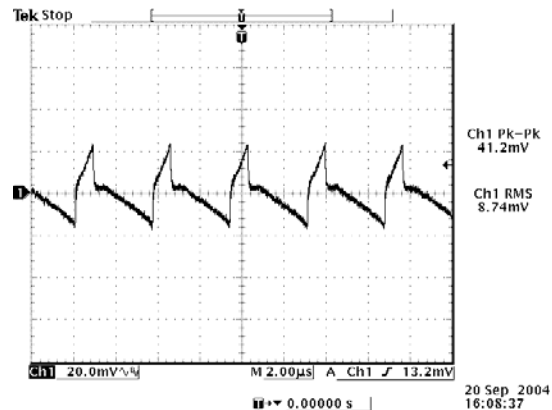

12 V input, 2.5 V output

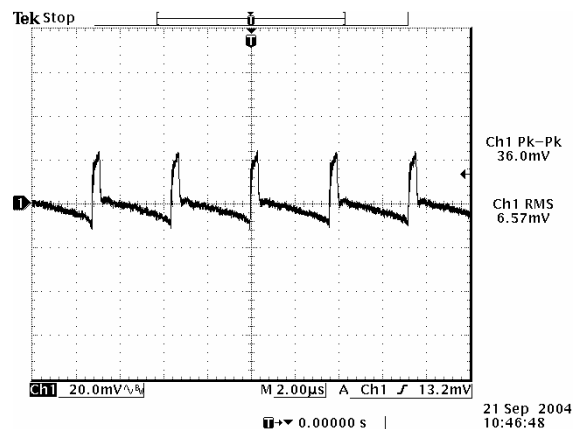

12 V input, 0.9 V output

Note: Ripple and noise at full load, 0-20MHz BW, with 680 uF/6.3 V Oscon cap, 10 uF/16 V Tan cap and 10 nF ceramic cap at the output, $T_a=25$ deg C.


NON-ISOLATED DC/DC CONVERTERS

12 Vdc Input


0.9 Vdc - 5.0 Vdc/20 A Output

bel
POWER PRODUCTS


Transient Response Waveforms

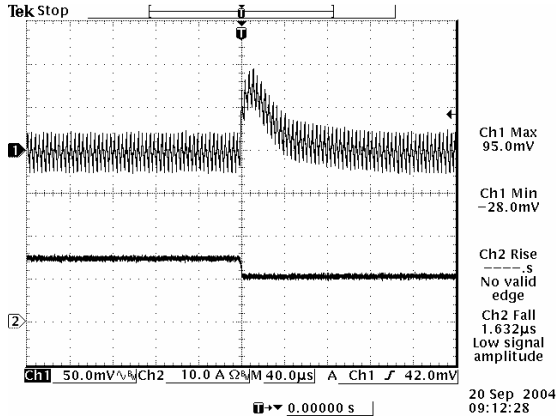


75% to 50% load step, 5.0 Vdc output

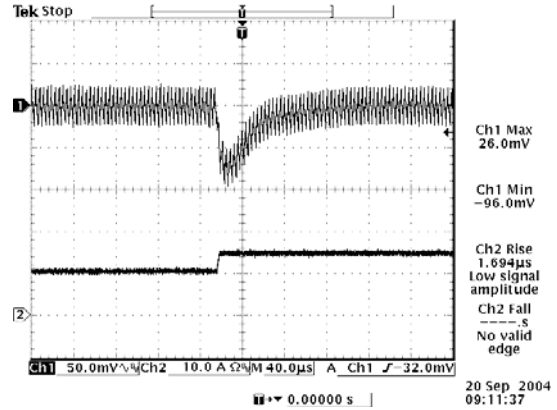


50% to 75% load step, 5.0 Vdc output

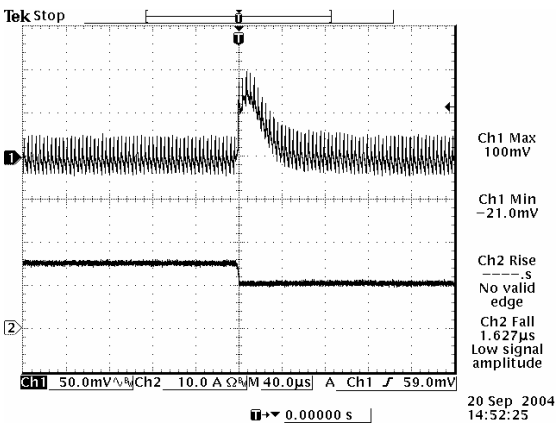


75% to 50% load step, 2.5 Vdc output

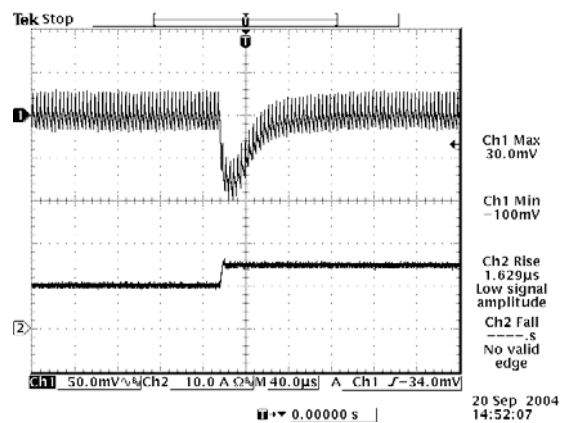

50% to 75% load step, 2.5 Vdc output

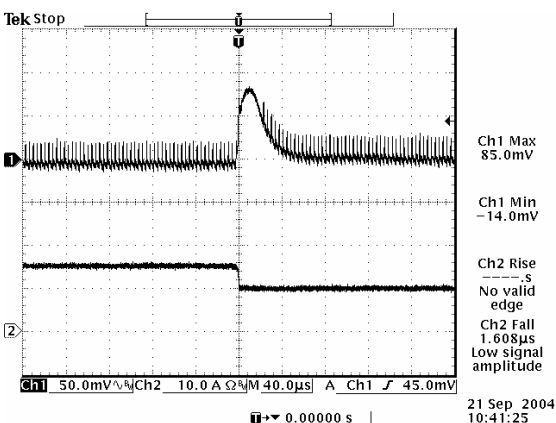

75% to 50% load step, 0.9 Vdc output

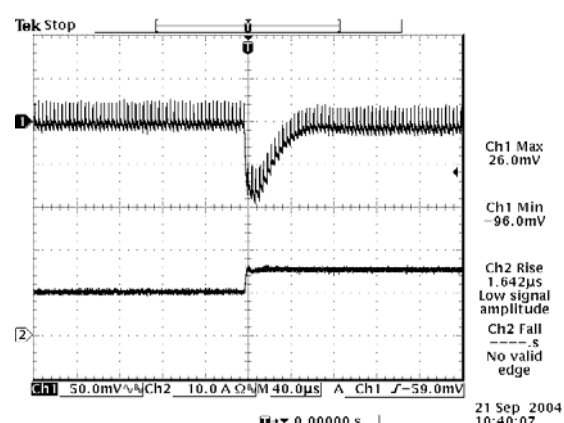

50% to 75% load step, 0.9 Vdc output

Note: Transient response at $di/dt=2.5 \text{ A}/\mu\text{S}$, with a 680 $\mu\text{F}/6.3 \text{ V}$ Oscon cap, a 10 $\mu\text{F}/16 \text{ V}$ Tan cap and a 10 nF ceramic cap at the output, $T_a=25 \text{ deg C}$.

NON-ISOLATED DC/DC CONVERTERS



12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output


bel
POWER PRODUCTS

Mechanical Outline

VRPF-20A1A0

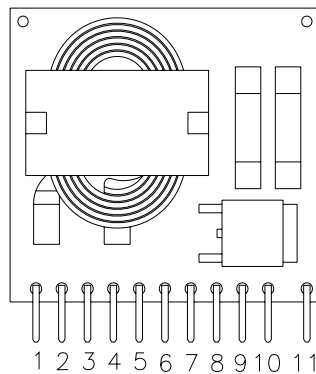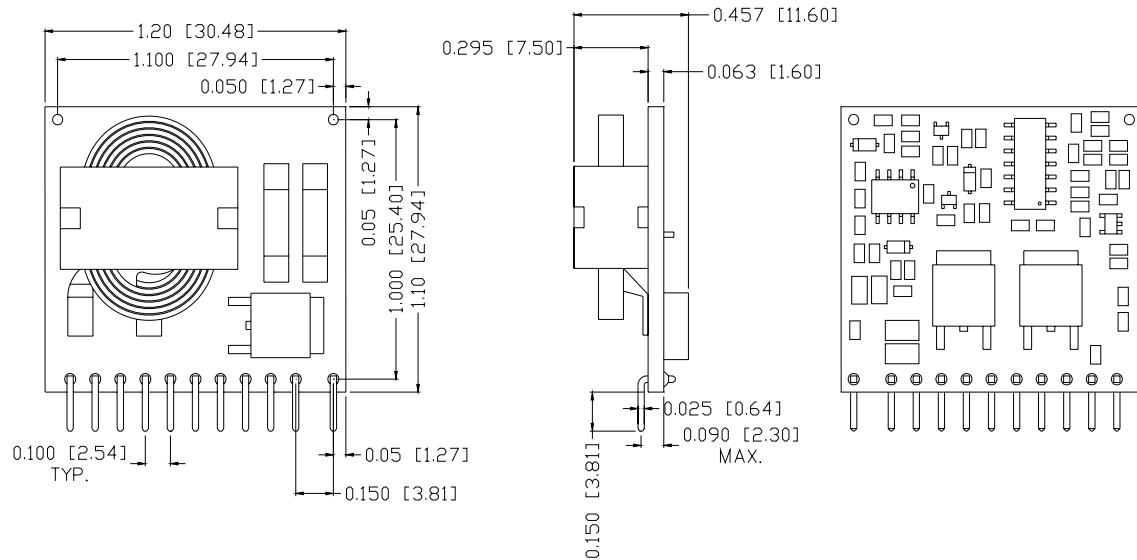

RECOMMENDED PCB LAYOUT

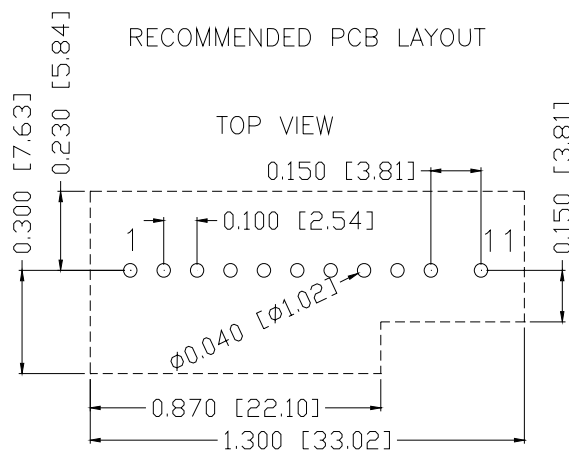

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Vout
4	Trim
5	Remote On/Off
6	Power Good
7	Ground
8	Ground
9	Reserved
10	Vin
11	Vin

NON-ISOLATED DC/DC CONVERTERS




12 Vdc Input

0.9 Vdc - 5.0 Vdc/20 A Output

bel
POWER PRODUCTS

Mechanical Outline (continued)

0RPF-20A1A0

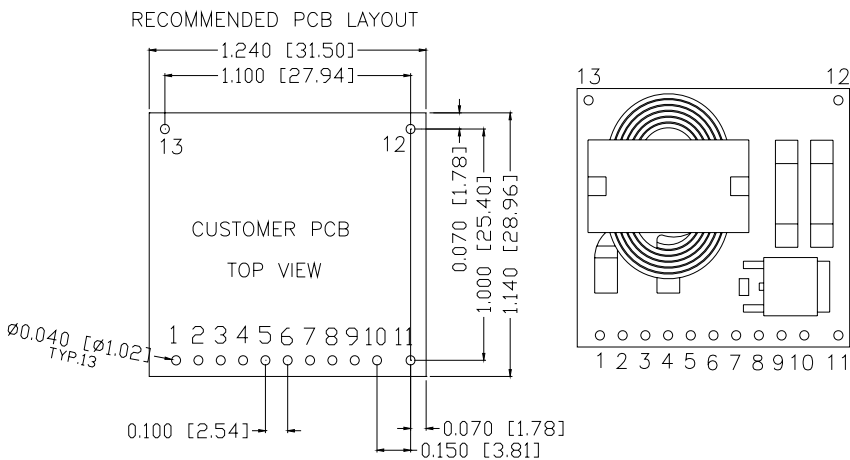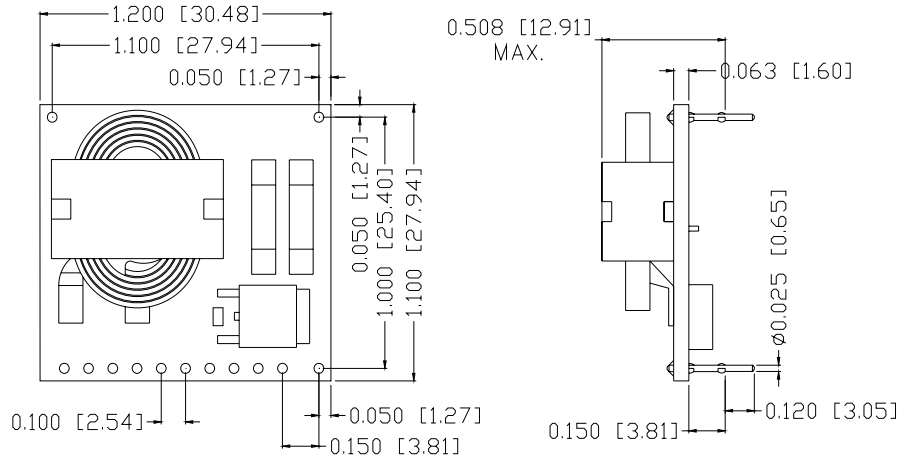

Pin Connections

Pin	Function
1	Vout
2	Vout
3	Vout
4	Trim
5	Remote On/Off
6	Power Good
7	Ground
8	Ground
9	Pwrgd_set
10	Vin
11	Vin
12	Support Pin
13	Support Pin

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 020507

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: org@lifeelectronics.ru

www.lifeelectronics.ru