

# LM26

*LM26 SOT-23,  $\pm 3^{\circ}\text{C}$  Accurate, Factory Preset Thermostat*



Literature Number: SNIS115Q

# LM26

## SOT-23, $\pm 3^{\circ}\text{C}$ Accurate, Factory Preset Thermostat

### General Description

The LM26 is a precision, single digital-output, low-power thermostat comprised of an internal reference, DAC, temperature sensor and comparator. Utilizing factory programming, it can be manufactured with different trip points as well as different digital output functionality. The trip point ( $T_{OS}$ ) can be preset at the factory to any temperature in the range of  $-55^{\circ}\text{C}$  to  $+110^{\circ}\text{C}$  in  $1^{\circ}\text{C}$  increments. The LM26 has one digital output ( $OS/\overline{OS}/US/\overline{US}$ ), one digital input (HYST) and one analog output ( $V_{TEMP}$ ). The digital output stage can be preset as either open-drain or push-pull. In addition, it can be factory programmed to be active HIGH or LOW. The digital output can be factory programmed to indicate an over temperature shutdown event ( $OS$  or  $\overline{OS}$ ) or an under temperature shutdown event ( $US$  or  $\overline{US}$ ). When preset as an overtemperature shutdown ( $OS$ ) it will go LOW to indicate that the die temperature is over the internally preset  $T_{OS}$  and go HIGH when the temperature goes below ( $T_{OS}-T_{HYST}$ ). Similarly, when pre-programmed as an undertemperature shutdown ( $US$ ) it will go HIGH to indicate that the temperature is below  $T_{US}$  and go LOW when the temperature is above ( $T_{US}+T_{HYST}$ ). The typical hysteresis,  $T_{HYST}$ , can be set to  $2^{\circ}\text{C}$  or  $10^{\circ}\text{C}$  and is controlled by the state of the HYST pin. A  $V_{TEMP}$  analog output provides a voltage that is proportional to temperature and has a  $-10.82\text{mV}/^{\circ}\text{C}$  output slope.

Available parts are detailed in the ordering information. For other part options, contact a National Semiconductor Distributor or Sales Representative for information on minimum order qualification. The LM26 is currently available in a 5-lead SOT-23 package.

### Applications

- Microprocessor Thermal Management
- Appliances
- Portable Battery Powered Systems

- Fan Control
- Industrial Process Control
- HVAC Systems
- Remote Temperature Sensing
- Electronic System Protection

### Features

- Internal comparator with pin programmable  $2^{\circ}\text{C}$  or  $10^{\circ}\text{C}$  hysteresis
- No external components required
- Open Drain or push-pull digital output; supports CMOS logic levels
- Internal temperature sensor with  $V_{TEMP}$  output pin
- $V_{TEMP}$  output allows after-assembly system testing
- Internal voltage reference and DAC for trip-point setting
- Currently available in 5-pin SOT-23 plastic package
- Excellent power supply noise rejection
- UL Recognized Component 


### Key Specifications

- Power Supply Voltage 2.7V to 5.5V
- Power Supply Current 40 $\mu\text{A}$  (max)  
20 $\mu\text{A}$  (typ)
- Hysteresis Temperature  $2^{\circ}\text{C}$  or  $10^{\circ}\text{C}$  (typ)


#### Temperature Trip Point Accuracy

| Temperature Range                               | LM26CIM                       |
|-------------------------------------------------|-------------------------------|
| $-55^{\circ}\text{C}$ to $+110^{\circ}\text{C}$ | $\pm 3^{\circ}\text{C}$ (max) |
| $+120^{\circ}\text{C}$                          | $\pm 4^{\circ}\text{C}$ (max) |

## LM26CIM5-TPA Simplified Block Diagram and Connection Diagram

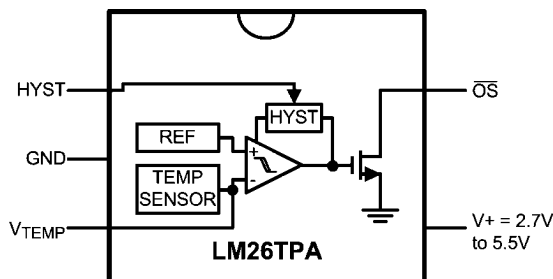

HYST=GND for  $10^{\circ}\text{C}$  Hysteresis  
HYST =  $V+$  for  $2^{\circ}\text{C}$  Hysteresis  
 $V_{TEMP} = (-3.479 \times 10^{-6} \times (T-30)^2) + (-1.082 \times 10^{-2} \times (T-30)) + 1.8015\text{V}$

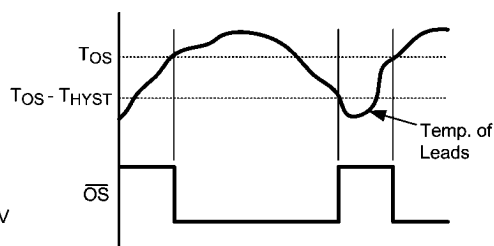

The LM26CIM5-TPA has a fixed trip point of  $85^{\circ}\text{C}$ .  
For other trip point and output function availability,  
please see ordering information or contact National Semiconductor.


10132301

## Ordering Information

For more detailed information on the suffix meaning see the part number template at the end of the Electrical Characteristics Section. Contact National Semiconductor for other set points and output options.

| Order Number<br>Bulk Rail | 3000 Units in Tape &<br>Reel | Top Mark | NS Package<br>Number | Trip Point Setting | Output Function            |
|---------------------------|------------------------------|----------|----------------------|--------------------|----------------------------|
| LM26CIM5-BPB              | LM26CIM5X-BPB                | TBPB     | MA05B                | -45°C              | Open Drain $\overline{US}$ |
| LM26CIM5-DPB              | LM26CIM5X-DPB                | TDPB     | MA05B                | -25°C              | Open Drain $\overline{US}$ |
| LM26CIM5-HHD              | LM26CIM5X-HHD                | THHD     | MA05B                | 0°C                | Push Pull US               |
| LM26CIM5-NPA              | LM26CIM5X-NPA                | TNPA     | MA05B                | 45°C               | Open Drain $\overline{OS}$ |
| LM26CIM5-PHA              | LM26CIM5X-PHA                | TPHA     | MA05B                | 50°C               | Open Drain $\overline{OS}$ |
| LM26CIM5-RPA              | LM26CIM5X-RPA                | TRPA     | MA05B                | 65°C               | Open Drain $\overline{OS}$ |
| LM26CIM5-SHA              | LM26CIM5X-SHA                | TSHA     | MA05B                | 70°C               | Open Drain $\overline{OS}$ |
| LM26CIM5-SPA              | LM26CIM5X-SPA                | TSPA     | MA05B                | 75°C               | Open Drain $\overline{OS}$ |
| LM26CIM5-TPA              | LM26CIM5X-TPA                | TTPA     | MA05B                | 85°C               | Open Drain $\overline{OS}$ |
| LM26CIM5-VHA              | LM26CIM5X-VHA                | TVHA     | MA05B                | 90°C               | Open Drain $\overline{OS}$ |
| LM26CIM5-VPA              | LM26CIM5X-VPA                | TVPA     | MA05B                | 95°C               | Open Drain $\overline{OS}$ |
| LM26CIM5-XHA              | LM26CIM5X-XHA                | TXHA     | MA05B                | 100°C              | Open Drain $\overline{OS}$ |
| LM26CIM5-XPA              | LM26CIM5X-XPA                | TXPA     | MA05B                | 105°C              | Open Drain $\overline{OS}$ |
| LM26CIM5-YHA              | LM26CIM5X-YHA                | TYHA     | MA05B                | 110°C              | Open Drain $\overline{OS}$ |
| LM26CIM5-YPA              | LM26CIM5X-YPA                | TYPA     | MA05B                | 115°C              | Open Drain $\overline{OS}$ |
| LM26CIM5-ZHA              | LM26CIM5X-ZHA                | TZHA     | MA05B                | 120°C              | Open Drain $\overline{OS}$ |

## Connection Diagram

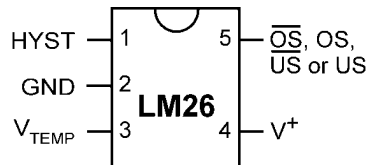

## Pin Descriptions

| Pin Number | Pin Name          | Function                                                                  | Connection                                                                                                        |
|------------|-------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| 1          | HYST              | Hysteresis control, digital input                                         | GND for 10°C or V+ for 2°C                                                                                        |
| 2          | GND               | Ground, connected to the back side of the die through lead frame.         | System GND                                                                                                        |
| 3          | V <sub>TEMP</sub> | Analog output voltage proportional to temperature                         | Leave floating or connect to a high impedance node.                                                               |
| 4          | V+                | Supply input                                                              | 2.7V to 5.5V with a 0.1μF bypass capacitor. For PSRR information see <i>Section Titled NOISE CONSIDERATIONS</i> . |
| 5          | $\overline{OS}$   | Overtemperature Shutdown open-drain active low thermostat digital output  | Controller interrupt, system or power supply shutdown; pull-up resistor $\geq 10k\Omega$                          |
|            | OS                | Overtemperature Shutdown push-pull active high thermostat digital output  | Controller interrupt, system or power supply shutdown                                                             |
|            | $\overline{US}$   | Undertemperature Shutdown open-drain active low thermostat digital output | System or power supply shutdown; pull-up resistor $\geq 10k\Omega$                                                |
|            | US                | Undertemperature Shutdown push-pull active high thermostat digital output | System or power supply shutdown                                                                                   |

Note: pin 5 functionality and trip point setting are programmed during LM26 manufacture.

**Absolute Maximum Ratings** (Note 1)

|                                                             |       |
|-------------------------------------------------------------|-------|
| Input Voltage                                               | 6.0V  |
| Input Current at any pin (Note 2)                           | 5mA   |
| Package Input Current (Note 2)                              | 20mA  |
| Package Dissipation at $T_A = 25^\circ\text{C}$<br>(Note 3) | 500mW |
| Soldering Information                                       |       |
| SOT23 Package                                               |       |
| Vapor Phase (60 seconds)                                    | 215°C |
| Infrared (15 seconds)                                       | 220°C |

|                             |                 |
|-----------------------------|-----------------|
| Storage Temperature         | -65°C to +150°C |
| ESD Susceptibility (Note 4) |                 |
| Human Body Model            | 2500V           |
| Machine Model               | 250V            |

**Operating Ratings** (Note 1)

|                                   |                                                      |
|-----------------------------------|------------------------------------------------------|
| Specified Temperature Range       | $T_{\text{MIN}} \leq T_A \leq T_{\text{MAX}}$        |
| LM26CIM                           | $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ |
| Positive Supply Voltage ( $V^+$ ) | +2.7V to +5.5V                                       |
| Maximum $V_{\text{OUT}}$          | +5.5V                                                |

**LM26 Electrical Characteristics**

The following specifications apply for  $V^+ = 2.7V_{\text{DC}}$  to  $5.5V_{\text{DC}}$ , and  $V_{\text{TEMP}}$  load current = 0 $\mu\text{A}$  unless otherwise specified. **Boldface limits apply for  $T_A = T_J = T_{\text{MIN}}$  to  $T_{\text{MAX}}$** ; all other limits  $T_A = T_J = 25^\circ\text{C}$  unless otherwise specified.

| Symbol                   | Parameter                                                                                                                                                                             | Conditions                                                                                                                      | Typical<br>( <i>Note 6</i> ) | LM26CIM<br>Limits<br>( <i>Note 7</i> ) | Units<br>(Limits)    |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|------------------------------|----------------------------------------|----------------------|
| Temperature Sensor       |                                                                                                                                                                                       |                                                                                                                                 |                              |                                        |                      |
|                          | Trip Point Accuracy (Includes V <sub>REF</sub> , DAC, Comparator Offset, and Temperature Sensitivity errors)                                                                          | -55°C ≤ T <sub>A</sub> ≤ +110°C                                                                                                 |                              | ±3                                     | °C (max)             |
|                          |                                                                                                                                                                                       | +120°C                                                                                                                          |                              | ±4                                     | °C (max)             |
|                          | Trip Point Hysteresis                                                                                                                                                                 | HYST = GND                                                                                                                      | 11                           |                                        | °C                   |
|                          |                                                                                                                                                                                       | HYST = V <sup>+</sup>                                                                                                           | 2                            |                                        | °C                   |
|                          | V <sub>TEMP</sub> Output Temperature Sensitivity                                                                                                                                      |                                                                                                                                 | -10.82                       |                                        | mV/°C                |
|                          | V <sub>TEMP</sub> Temperature Sensitivity Error to Equation:<br><br>V <sub>O</sub> = (-3.479×10 <sup>-6</sup> ×(T-30) <sup>2</sup> )<br>+ (-1.082×10 <sup>-2</sup> ×(T-30)) + 1.8015V | -30°C ≤ T <sub>A</sub> ≤ 120°C,<br>2.7V ≤ V <sup>+</sup> ≤ 5.5V                                                                 |                              | ±3                                     | °C (max)             |
|                          |                                                                                                                                                                                       | -55°C ≤ T <sub>A</sub> ≤ 120°C,<br>4.5V ≤ V <sup>+</sup> ≤ 5.5V                                                                 |                              | ±3                                     | °C (max)             |
|                          |                                                                                                                                                                                       | T <sub>A</sub> = 30°C                                                                                                           |                              | ±2.5                                   | °C (max)             |
|                          | V <sub>TEMP</sub> Load Regulation                                                                                                                                                     | Source ≤ 1 μA                                                                                                                   | 0.070                        |                                        | mV                   |
|                          |                                                                                                                                                                                       | Sink ≤ 40 μA                                                                                                                    |                              | 0.7                                    | mV (max)             |
|                          | V <sub>TEMP</sub> Line Regulation                                                                                                                                                     | +2.7V ≤ V <sup>+</sup> ≤ +5.5V,<br>-30°C ≤ T <sub>A</sub> ≤ +120°C                                                              | -0.2                         |                                        | mV/V                 |
| I <sub>S</sub>           | Supply Current                                                                                                                                                                        |                                                                                                                                 | 16                           | 20<br>40                               | μA (max)<br>μA (max) |
| Digital Output and Input |                                                                                                                                                                                       |                                                                                                                                 |                              |                                        |                      |
| I <sub>OUT</sub> ("1")   | Logical "1" Output Leakage Current<br>( <i>Note 9</i> )                                                                                                                               | V <sup>+</sup> = +5.0V                                                                                                          | 0.001                        | 1                                      | μA (max)             |
| V <sub>OUT</sub> ("0")   | Logical "0" Output Voltage                                                                                                                                                            | I <sub>OUT</sub> = +1.2mA and<br>V <sup>+</sup> ≥2.7V; I <sub>OUT</sub> = +3.2mA<br>and V <sup>+</sup> ≥4.5V; ( <i>Note 8</i> ) |                              | 0.4                                    | V (max)              |
| V <sub>OUT</sub> ("1")   | Logical "1" Push-Pull Output Voltage                                                                                                                                                  | I <sub>SOURCE</sub> = 500μA, V <sup>+</sup> ≥<br>2.7V                                                                           |                              | 0.8 × V <sup>+</sup>                   | V (min)              |
|                          |                                                                                                                                                                                       | I <sub>SOURCE</sub> = 800μA, V <sup>+</sup><br>≥4.5V                                                                            |                              | V <sup>+</sup> – 1.5                   | V (min)              |
| V <sub>IH</sub>          | HYST Input Logical "1" Threshold<br>Voltage                                                                                                                                           |                                                                                                                                 |                              | 0.8 × V <sup>+</sup>                   | V (min)              |
| V <sub>IL</sub>          | HYST Input Logical "0" Threshold<br>Voltage                                                                                                                                           |                                                                                                                                 |                              | 0.2 × V <sup>+</sup>                   | V (max)              |

**Note 1:** *Absolute Maximum Ratings* indicate limits beyond which damage to the device may occur. *Operating Ratings* indicate conditions for which the device is functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the *Electrical Characteristics*. The guaranteed specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.

**Note 2:** When the input voltage ( $V_i$ ) at any pin exceeds the power supply ( $V_i < \text{GND}$  or  $V_i > V^+$ ), the current at that pin should be limited to 5mA. The 20mA maximum package input current rating limits the number of pins that can safely exceed the power supplies with an input current of 5mA to four. Under normal operating conditions the maximum current that pins 2, 4 or 5 can handle is limited to 5mA each.

**Note 3:** The maximum power dissipation must be derated at elevated temperatures and is dictated by  $T_{JMAX}$  (maximum junction temperature),  $\theta_{JA}$  (junction to ambient thermal resistance) and  $T_A$  (ambient temperature). The maximum allowable power dissipation at any temperature is  $P_D = (T_{JMAX} - T_A) / \theta_{JA}$  or the number given in the *Absolute Maximum Ratings*, whichever is lower. For this device,  $T_{JMAX} = 150^\circ\text{C}$ . For this device the typical thermal resistance ( $\theta_{JA}$ ) of the different package types when board mounted follow:

| Package Type   | $\theta_{JA}$ |
|----------------|---------------|
| SOT23-5, MA05B | 250°C/W       |

**Note 4:** The human body model is a 100pF capacitor discharge through a 1.5k $\Omega$  resistor into each pin. The machine model is a 200pF capacitor discharged directly into each pin.

**Note 5:** See the URL "<http://www.national.com/packaging/>" for other recommendations and methods of soldering surface mount devices.

**Note 6:** Typicals are at  $T_J = T_A = 25^\circ\text{C}$  and represent most likely parametric norm.

**Note 7:** Limits are guaranteed to National's AOQL (Average Outgoing Quality Level).

**Note 8:** Care should be taken to include the effects of self heating when setting the maximum output load current. The power dissipation of the LM26 would increase by 1.28mW when  $I_{OUT} = 3.2\text{mA}$  and  $V_{OUT} = 0.4\text{V}$ . With a thermal resistance of 250°C/W, this power dissipation would cause an increase in the die temperature of about 0.32°C due to self heating. Self heating is not included in the trip point accuracy specification.

**Note 9:** The 1 $\mu\text{A}$  limit is based on a testing limitation and does not reflect the actual performance of the part. Expect to see a doubling of the current for every 15°C increase in temperature. For example, the 1nA typical current at 25°C would increase to 16nA at 85°C.

## Part Number Template

The series of digits labeled xyz in the part number LM26CIM-xyz, describe the set point value and the function of the output as follows:

The place holders xy describe the set point temperature as shown in the following table.

| x (10x) | y (1x) | Temperature ( $^\circ\text{C}$ ) |
|---------|--------|----------------------------------|
| A       | -      | -5                               |
| B       | -      | -4                               |
| C       | -      | -3                               |
| D       | -      | -2                               |
| E       | -      | -1                               |
| F       | -      | -0                               |
| H       | H      | 0                                |
| J       | J      | 1                                |
| K       | K      | 2                                |
| L       | L      | 3                                |

| x (10x) | y (1x) | Temperature ( $^\circ\text{C}$ ) |
|---------|--------|----------------------------------|
| N       | N      | 4                                |
| P       | P      | 5                                |
| R       | R      | 6                                |
| S       | S      | 7                                |
| T       | T      | 8                                |
| V       | V      | 9                                |
| X       | -      | 10                               |
| Y       | -      | 11                               |
| Z       | -      | 12                               |

The value of z describes the assignment/function of the output as shown in the following table:

| Active-Low/High | Open-Drain/ Push-Pull | $\overline{\text{OS}}/\text{US}$ | Value of z | Digital Output Function                               |
|-----------------|-----------------------|----------------------------------|------------|-------------------------------------------------------|
| 0               | 0                     | 0                                | A          | Active-Low, Open-Drain, $\overline{\text{OS}}$ output |
| 0               | 0                     | 1                                | B          | Active-Low, Open-Drain, $\overline{\text{US}}$ output |
| 1               | 1                     | 0                                | C          | Active-High, Push-Pull, OS output                     |
| 1               | 1                     | 1                                | D          | Active-High, Push-Pull, US output                     |

For example:

- the part number LM26CIM5-TPA has  $T_{OS} = 85^\circ\text{C}$ , and programmed as an active-low open-drain overtemperature shutdown output.
- the part number LM26CIM5-FPD has  $T_{US} = -5^\circ\text{C}$ , and programmed as an active-high, push-pull undertemperature shutdown output.

Active-high open-drain and active-low push-pull options are available, please contact National Semiconductor for more information.

## Functional Description

### LM26 OPTIONS

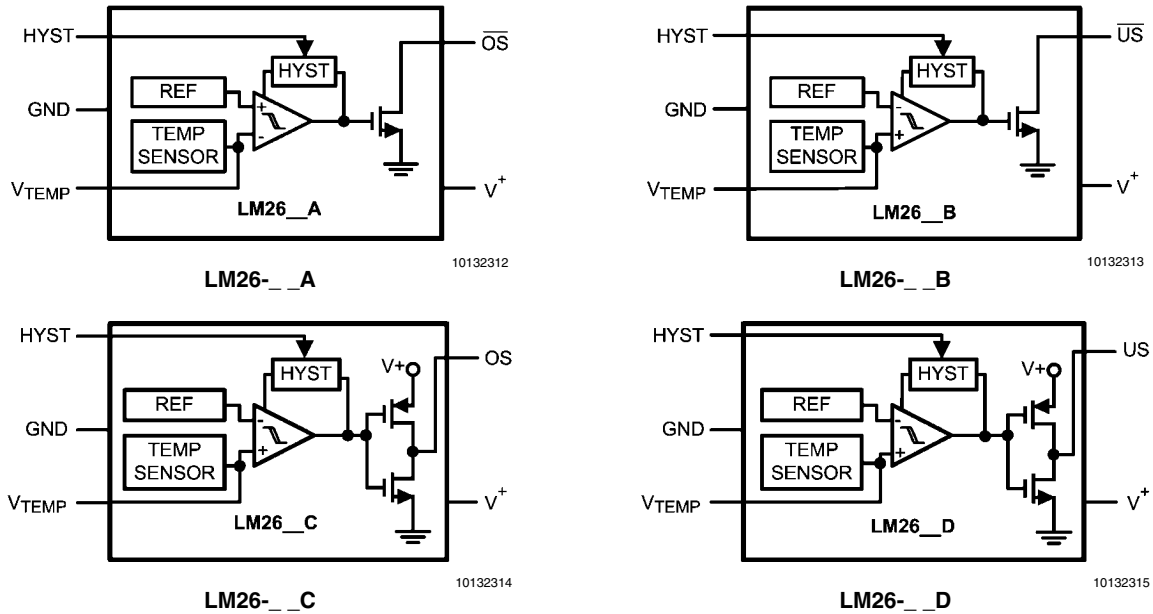


FIGURE 1. Output Pin Options Block Diagrams

The LM26 can be factory programmed to have a trip point anywhere in the range of  $-55^{\circ}\text{C}$  to  $+110^{\circ}\text{C}$ .

## Applications Hints

### AFTER-ASSEMBLY PCB TESTING

The LM26's  $V_{\text{TEMP}}$  output allows after-assembly PCB testing by following a simple test procedure. Simply measuring the  $V_{\text{TEMP}}$  output voltage will verify that the LM26 has been assembled properly and that its temperature sensing circuitry is functional. The  $V_{\text{TEMP}}$  output has very weak drive capability that can be overdriven by 1.5mA. Therefore, one can simply force the  $V_{\text{TEMP}}$  voltage to cause the digital output to change state, thereby verifying that the comparator and output circuitry function after assembly. Here is a sample test procedure that can be used to test the LM26CIM5-TPA which has an  $85^{\circ}\text{C}$  trip point.

1. Turn on  $V^+$  and measure  $V_{\text{TEMP}}$ . Then calculate the temperature reading of the LM26 using the equation:

$$V_O = (-3.479 \times 10^{-6} \times (T - 30)^2) + (-1.082 \times 10^{-2} \times (T - 30)) + 1.8015\text{V} \quad (1)$$

or

$$T = -1525.04 + \sqrt{2.4182 \times 10^5 + \frac{1.8015 - V_{\text{TEMP}}}{3.479 \times 10^{-6}}} \quad (2)$$

2. Verify that the temperature measured in step one is within ( $\pm 3^{\circ}\text{C}$  + error of reference temperature sensor) of the ambient/board temperature. The ambient/board temperature (reference temperature) should be measured using an extremely accurate calibrated temperature sensor.


3.
  - A. Observe that  $\overline{\text{OS}}$  is high.
  - B. Drive  $V_{\text{TEMP}}$  to ground.
  - C. Observe that  $\overline{\text{OS}}$  is now low.
  - D. Release the  $V_{\text{TEMP}}$  pin.
  - E. Observe that  $\overline{\text{OS}}$  is now high.
4.
  - A. Observe that  $\overline{\text{OS}}$  is high.
  - B. Drive  $V_{\text{TEMP}}$  voltage down gradually.
  - C. When  $\overline{\text{OS}}$  goes low, note the  $V_{\text{TEMP}}$  voltage.
  - D.  $V_{\text{TEMP}}\text{Trig} = V_{\text{TEMP}}$  at  $\overline{\text{OS}}$  trigger (HIGH->LOW)
  - E. Calculate  $T_{\text{trig}}$  using [Equation 2](#).
5.
  - A. Gradually raise  $V_{\text{TEMP}}$  until  $\overline{\text{OS}}$  goes HIGH. Note  $V_{\text{TEMP}}$ .
  - B. Calculate  $T_{\text{HYST}}$  using [Equation 2](#).

### $V_{\text{TEMP}}$ LOADING


The  $V_{\text{TEMP}}$  output has very weak drive capability (1  $\mu\text{A}$  source, 40  $\mu\text{A}$  sink). So care should be taken when attaching circuitry to this pin. Capacitive loading may cause the  $V_{\text{TEMP}}$  output to oscillate. Simply adding a resistor in series as shown in [Figure 2](#) will prevent oscillations from occurring. To determine the value of the resistor follow the guidelines given in [Table 1](#). The same value resistor will work for either placement of the resistor. If an additional capacitive load is placed directly on the LM26 output, rather than across  $C_{\text{LOAD}}$ , it should be at least a factor of 10 smaller than  $C_{\text{LOAD}}$ .

**TABLE 1. Resistive compensation for capacitive loading of  $V_{TEMP}$** 

| $C_{LOAD}$          | R ( $\Omega$ ) |
|---------------------|----------------|
| $\leq 100\text{pF}$ | 0              |
| 1nF                 | 8200           |
| 10nF                | 3000           |
| 100nF               | 1000           |
| $\geq 1\mu\text{F}$ | 430            |

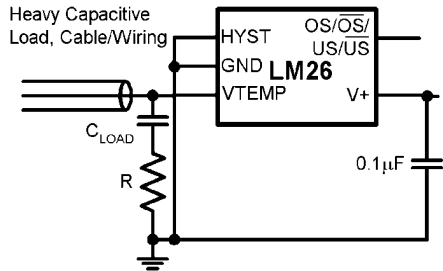**a) R in series with capacitor**

10132317

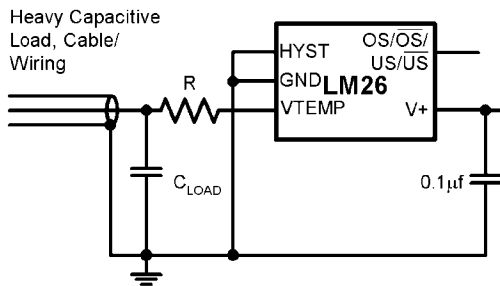**b) R in series with signal path**

10132318

**FIGURE 2. Resistor placement for capacitive loading compensation of  $V_{TEMP}$** 

### NOISE CONSIDERATIONS

The LM26 has excellent power supply noise rejection. Listed below is a variety of signals used to test the LM26 power supply rejection. False triggering of the output was not observed when these signals were coupled into the V+ pin of the LM26.

- square wave 400kHz, 1Vp-p
- square wave 2kHz, 200mVp-p
- sine wave 100Hz to 1MHz, 200mVp-p

Testing was done while maintaining the temperature of the LM26 one degree centigrade away from the trip point with the output not activated.

### MOUNTING CONSIDERATIONS

The LM26 can be applied easily in the same way as other integrated-circuit temperature sensors. It can be glued or ce-

mented to a surface. The temperature that the LM26 is sensing will be within about  $+0.06^{\circ}\text{C}$  of the surface temperature to which the LM26's leads are attached to.

This presumes that the ambient air temperature is almost the same as the surface temperature; if the air temperature were much higher or lower than the surface temperature, the actual temperature measured would be at an intermediate temperature between the surface temperature and the air temperature.

To ensure good thermal conductivity, the backside of the LM26 die is directly attached to the GND pin (pin 2). The temperatures of the lands and traces to the other leads of the LM26 will also affect the temperature that is being sensed.

Alternatively, the LM26 can be mounted inside a sealed-end metal tube, and can then be dipped into a bath or screwed into a threaded hole in a tank. As with any IC, the LM26 and accompanying wiring and circuits must be kept insulated and dry, to avoid leakage and corrosion. This is especially true if the circuit may operate at cold temperatures where condensation can occur. Printed-circuit coatings and varnishes such as Humiseal and epoxy paints or dips are often used to ensure that moisture cannot corrode the LM26 or its connections.

The junction to ambient thermal resistance ( $\theta_{JA}$ ) is the parameter used to calculate the rise of a part's junction temperature due to its power dissipation. For the LM26 the equation used to calculate the rise in the die junction temperature is as follows:


$$T_J = T_A + \theta_{JA}(V^+ I_Q + (V^+ - V_{TEMP}) I_{L\_TEMP} + V_{DO} I_{DO}) \quad (3)$$

where  $T_A$  is the ambient temperature,  $V^+$  is the power supply voltage,  $I_Q$  is the quiescent current,  $I_{L\_TEMP}$  is the load current on the  $V_{TEMP}$  output,  $V_{DO}$  is the voltage on the digital output, and  $I_{DO}$  is the load current on the digital output. Since the LM26's junction temperature is the actual temperature being measured, care should be taken to minimize the load current that the LM26 is required to drive.

The tables shown in [Figure 3](#) summarize the thermal resistance for different conditions and the rise in die temperature of the LM26 without any loading on  $V_{TEMP}$  and a 10k pull-up resistor on an open-drain digital output with a 5.5V power supply.

|            | SOT23-5<br>no heat sink                   |                                       | SOT23-5<br>small heat sink                |                                       |
|------------|-------------------------------------------|---------------------------------------|-------------------------------------------|---------------------------------------|
|            | $\theta_{JA}$<br>( $^{\circ}\text{C/W}$ ) | $T_J - T_A$<br>( $^{\circ}\text{C}$ ) | $\theta_{JA}$<br>( $^{\circ}\text{C/W}$ ) | $T_J - T_A$<br>( $^{\circ}\text{C}$ ) |
| Still Air  | 250                                       | 0.11                                  | TBD                                       | TBD                                   |
| Moving Air | TBD                                       | TBD                                   | TBD                                       | TBD                                   |


**FIGURE 3. Thermal resistance ( $\theta_{JA}$ ) and temperature rise due to self heating ( $T_J - T_A$ )**

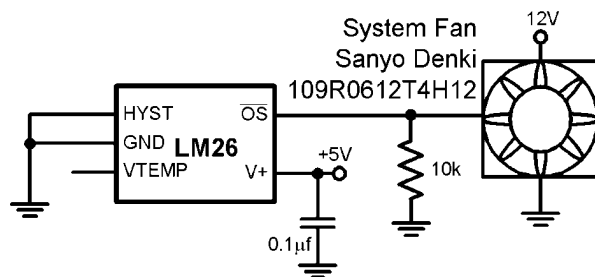

10132303


Note: The fan's control pin has internal pull-up. The 10k pull-down sets a slow fan speed. When the output of the LM26 goes low, the fan will speed up.

**FIGURE 4. Two Speed Fan Speed Control**

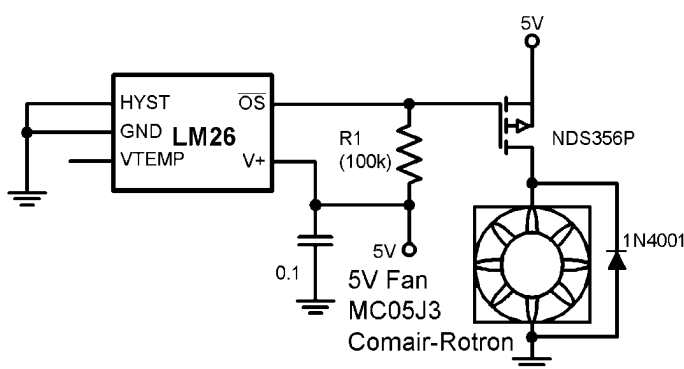


10132320

**FIGURE 5. Fan High Side Drive**

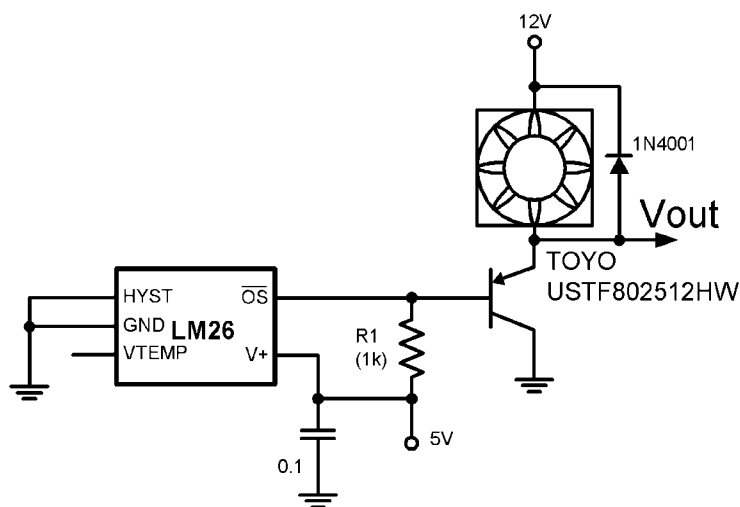


10132321

**FIGURE 6. Fan Low Side Drive**

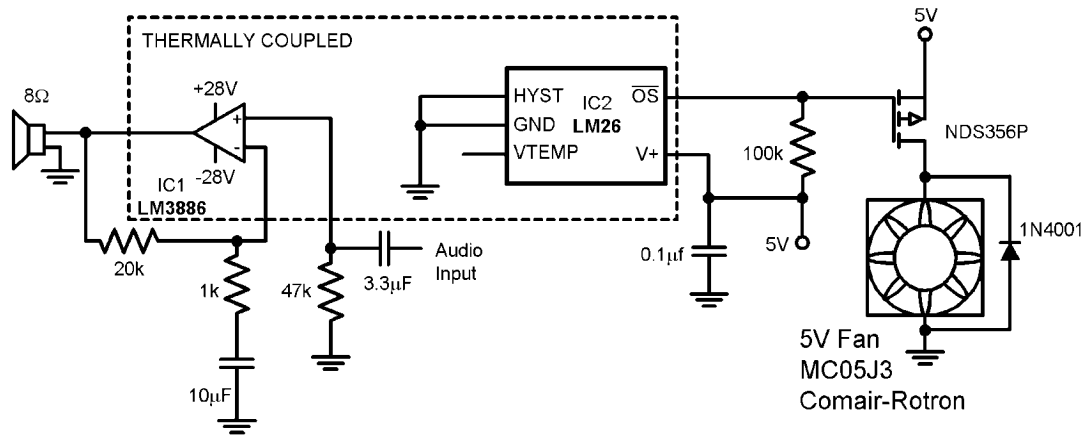

10132322


FIGURE 7. Audio Power Amplifier Thermal Protection

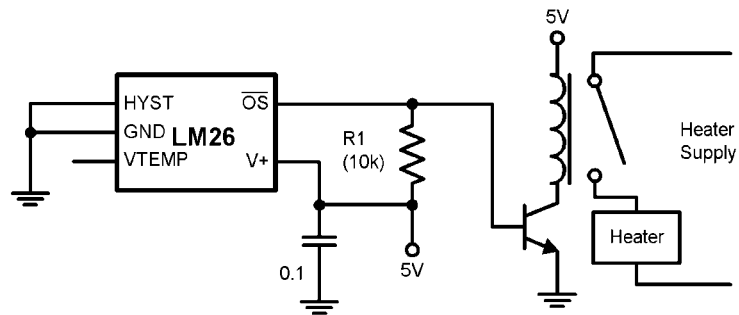

10132323

FIGURE 8. Simple Thermostat

# Physical Dimensions inches (millimeters) unless otherwise noted

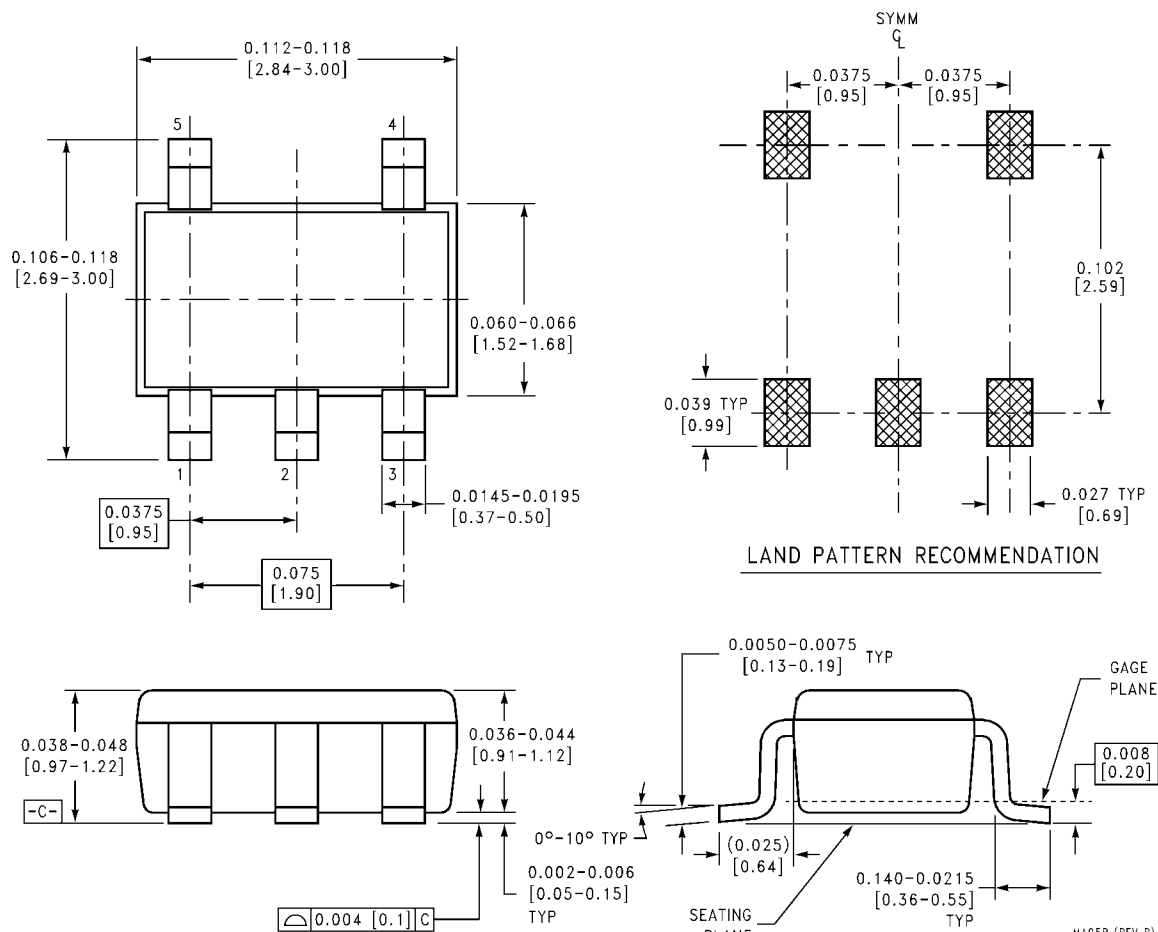

**5-Lead Molded SOT-23 Plastic Package, JEDEC  
Order Number LM26CIM5 or LM26CIM5X  
NS Package Number MA05B**

## Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:  
[www.national.com](http://www.national.com)

| Products                       |                                                                                | Design Support               |                                                                                    |
|--------------------------------|--------------------------------------------------------------------------------|------------------------------|------------------------------------------------------------------------------------|
| Amplifiers                     | <a href="http://www.national.com/amplifiers">www.national.com/amplifiers</a>   | WEBENCH® Tools               | <a href="http://www.national.com/webench">www.national.com/webench</a>             |
| Audio                          | <a href="http://www.national.com/audio">www.national.com/audio</a>             | App Notes                    | <a href="http://www.national.com/appnotes">www.national.com/appnotes</a>           |
| Clock and Timing               | <a href="http://www.national.com/timing">www.national.com/timing</a>           | Reference Designs            | <a href="http://www.national.com/refdesigns">www.national.com/refdesigns</a>       |
| Data Converters                | <a href="http://www.national.com/adac">www.national.com/adac</a>               | Samples                      | <a href="http://www.national.com/samples">www.national.com/samples</a>             |
| Interface                      | <a href="http://www.national.com/interface">www.national.com/interface</a>     | Eval Boards                  | <a href="http://www.national.com/evalboards">www.national.com/evalboards</a>       |
| LVDS                           | <a href="http://www.national.com/lvds">www.national.com/lvds</a>               | Packaging                    | <a href="http://www.national.com/packaging">www.national.com/packaging</a>         |
| Power Management               | <a href="http://www.national.com/power">www.national.com/power</a>             | Green Compliance             | <a href="http://www.national.com/quality/green">www.national.com/quality/green</a> |
| Switching Regulators           | <a href="http://www.national.com/switchers">www.national.com/switchers</a>     | Distributors                 | <a href="http://www.national.com/contacts">www.national.com/contacts</a>           |
| LDOs                           | <a href="http://www.national.com/ldo">www.national.com/ldo</a>                 | Quality and Reliability      | <a href="http://www.national.com/quality">www.national.com/quality</a>             |
| LED Lighting                   | <a href="http://www.national.com/led">www.national.com/led</a>                 | Feedback/Support             | <a href="http://www.national.com/feedback">www.national.com/feedback</a>           |
| Voltage References             | <a href="http://www.national.com/vref">www.national.com/vref</a>               | Design Made Easy             | <a href="http://www.national.com/easy">www.national.com/easy</a>                   |
| PowerWise® Solutions           | <a href="http://www.national.com/powerwise">www.national.com/powerwise</a>     | Applications & Markets       | <a href="http://www.national.com/solutions">www.national.com/solutions</a>         |
| Serial Digital Interface (SDI) | <a href="http://www.national.com/sdi">www.national.com/sdi</a>                 | Mil/Aero                     | <a href="http://www.national.com/milaero">www.national.com/milaero</a>             |
| Temperature Sensors            | <a href="http://www.national.com/tempsensors">www.national.com/tempsensors</a> | SolarMagic™                  | <a href="http://www.national.com/solarmagic">www.national.com/solarmagic</a>       |
| PLL/VCO                        | <a href="http://www.national.com/wireless">www.national.com/wireless</a>       | PowerWise® Design University | <a href="http://www.national.com/training">www.national.com/training</a>           |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

### LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2011 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)



**National Semiconductor  
Americas Technical  
Support Center**  
Email: [support@nsc.com](mailto:support@nsc.com)  
Tel: 1-800-272-9959

**National Semiconductor Europe  
Technical Support Center**  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)

**National Semiconductor Asia  
Pacific Technical Support Center**  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan  
Technical Support Center**  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                        |                                                                                      |
|------------------------|--------------------------------------------------------------------------------------|
| Audio                  | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers             | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters        | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products          | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                    | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers      | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface              | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                  | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt             | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers       | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                   | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Mobile Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity  | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Transportation and Automotive | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2011, Texas Instruments Incorporated

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)