
# Piezoelectric Sound Components

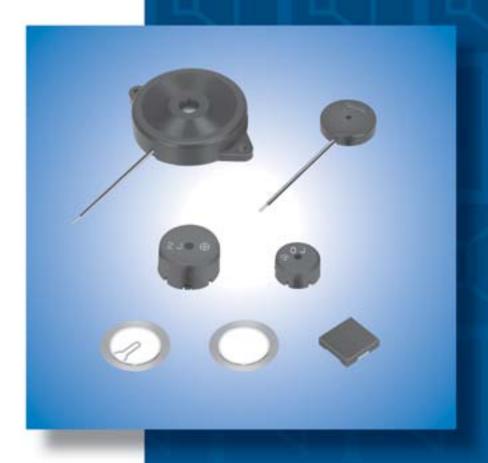

muRata

Innovator in Electronics

Murata Manufacturing Co., Ltd.

#### **EU RoHS Compliant**

- · All the products in this catalog comply with EU RoHS.
- EU RoHS is "the European Directive 2011/65/EU on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment."
- · For more details, please refer to our website 'Murata's Approach for EU RoHS' (http://www.murata.com/info/rohs.html).



# CONTENTS

PIEZORINGER® and "PIEZORINGER" in this catalog are the trademarks of Murata Manufacturing Co., Ltd.

Part Numbering	
Application Matrix	
1 Piezoelectric Diaphragms	
External Drive Type	
Self Drive Type	
Piezoelectric Diaphragms Notice	
Piezoelectric Sounders External Drive Pin Type	
Piezoelectric Sounders (External Drive Pin Type) Circuit/Notice	1
Piezoelectric Sounders External Drive Pin Type Taping	1
Piezoelectric Sounders (External Drive Pin Type Taping) Circuit/Notice	1
4 Piezoelectric Sounders External Drive Lead Wire Type	1
Piezoelectric Sounders (External Drive Lead Wire Type) Circuit/Notice	1
5 Piezoelectric Sounders External Drive SMD Type	2
Piezoelectric Sounders (External Drive SMD Type) Circuit/Notice	2
6 Piezoelectric Ringers (PIEZORINGER®)	2
Pin Type	2
Lead Wire Type	2
Piezoelectric Ringers (PIEZORINGER®) Notice	2
7 Piezoelectric Sounders Self Drive Pin Type	2
Piezoelectric Sounders (Self Drive) Notice	2
8 Piezoelectric Buzzers Pin Type	2
Piezoelectric Buzzers Notice	2
Piezoelectric Sound Components Notice	3
Package	3

2

3

4

5

6

7

#### Part Numbering

#### Piezoelectric Diaphragms

(Part Number) 7 N B -31R2 DM -1R5 L 10

#### Product ID

Product ID	
7	Ceramic Material

#### **2**Material

Code	Metal Plate Material
В	Brass
N	Nickel Alloy
S	SUS

#### 3Product

Code	Product
В	Piezoelectric Diaphragms

#### **4**Metal Plate Diameter

Code	Metal Plate Diameter
-31R2	A hyphen (-) plus four-digit alphanumerics express metal plate outer dimensions. A decimal point is expressed by the capital letter "R."

If there is no decimal point, the decimal point code is omitted.

#### **5**Form of Piezoelectric Style

Code	Form of Piezoelectric Style
DM	Two digits express the shape of ceramics.

For an Ag electrode, this digit remains blank; the corresponding code is omitted.

#### **6**Resonant Frequency Type

Code	Resonant Frequency (kHz)
-1R5	A hyphen (-) and three-digit alphanumerics express resonant frequency. A decimal point is expressed by the capital letter "R."

If there is no decimal point, the decimal point code is omitted.

#### With Feedback Electrode

Code	With Feedback Electrode
С	With Feedback Electrode
_	Without Feedback Electrode

#### 8 Product Specification

Code	Product Specification
L	With lead (available for RoHS)
_	No lead (omitted)

#### Individual Specification Code

Code	Individual Specification Code
10	These digits express a lead length, lead number, and the presence/absence of a connector.

If the product has no individual specification, the corresponding code is omitted.



#### Piezoelectric Sounders/Piezoelectric Buzzers/Piezoelectric Ringers (PIEZORINGER®)

(Part Number) PK M 13 E P YH 40 00 P -A0

#### Product ID

Product ID	
PK	Piezoelectric Sound Components

#### 2Product

Code	Product
М	Sounder, Ringer
В	Buzzer

#### **3**Outer Dimensions

Expressed by two figures in mm.

Ex.)	Code	Outer Dimensions
	13	ø12.6mm

#### 4 Drive

Code	Drive
E	External-Drive
s	Self-Drive

#### **6**Outer Electrode Style

Code	Outer Electrode Style		
Р	Pin Type		
W	Lead Wire Type		

#### **6**Structure

Code	Structure		
T□	Standing Type		
P□	Flat Type Auto-assemble		
Υ□	Flat Type/Available for Taping		
C□	Flat Type/Semi-auto-assemble		
	Exclude above mentioned		

 $<sup>\</sup>overline{\ }$  signifies specification of the outer electrode.

#### SMD Piezoelectric Sounder

(Part Number)	PK	LCS	1212	Е	40	01	-R1
	0	2	3	4	6	6	7

#### ●Product ID

Product ID	
PK	Piezoelectric Sound Components

#### 2Product

Code	Product
LCS	SMD Sounder

#### **3**Dimensions

Code	Outer Dimensions
1212	□12mm

#### **4**Drive

Code	Drive
E	External Drive

#### Oscillating Frequency Type

Code	Oscillating Frequency Type			
40	Expressed resonant frequency by two-digit alphanumerics. The unit is in 100 hertz (Hz). In case of 4kHz (4000Hz), expressed as "40."			

#### 8 Individual Specification Code

Code	Individual Specification Code			
00	Two digits express custom specification in characteristics.			

#### Special Quality Guarantee

Code	Special Quality Guarantee		
Р	Post Plated Terminal		
_	Blank		

#### Packaging

Code	Packaging
-B0	Bulk
-A0	Radial Taping

Radial taping is not available for all types. Please contact us.

#### **5**Oscillating Frequency Type

Code	Oscillating Frequency Type
40	Expressed resonant frequency by two-digit alphanumerics. The unit is in 100 hertz (Hz.) 4kHz (4000Hz) is denoted as "40."

#### 6 Individual Specification Code

Code	Individual Specification Code
01	Two digits express specific specification in characteristics.

#### Packaging

Code	Packaging
-R1	Plastic taping



## **Application Matrix**

		Application Part Number	Phone	Watch	Clock	Medical Equip- ment	Fire/ Gas Alarm	Digital Camera	Toy	Bar Code Scanner	Printer	Note- PC PDA	DVD- Player	Micro- wave Oven	A/C	Fan Heater	Cluste
		7BB-12-9		•	•	•		•	•			•					
		7BB-15-6			•	•		•	•			•					
		7BB-20-3	•	•	•	•	•		•	•		_					
	e Se	7BB-20-6			•	•	_	•	•			•					
	Ē	7BB-20-6L0			•	•			•			•					
ive	7BB-27-4	•		•	•			•	•								
	۵	7BB-27-4L0	•		•	•			•	•							
g	r.	7BB-35-3	•		•				•	•							
hra	External Drive Type	7BB-35-3L0	•		•		•		•	•							
iap	ш	7BB-41-2	•				_										
0		7BB-41-2L0	•														
Piezoelectric Diaphragm	7NB-31R2-1				•	•											
ele		7BB-20-6C	•			<u> </u>		•	•								
iezc		7BB-20-6CL0	•					•	•								
Ф	9	7BB-27-4C	•				•		•	•							
	Self Drive Type	7BB-27-4CL0	•				•		•	•							
	<u>«</u>	7BB-35-3C	•				•			•							
	۵	7BB-35-3CL0	•				•			•							
	Self	7BB-41-2C	•				_										
	•	7BB-41-2CL0	•														
		7SB-34R7-3C					•										
		PKM13EPYH4000-A0	•		•	•	_	•	•	•	•	•	•		•	•	•
		PKM13EPYH4002-B0			•	•		•	•	•	•	•	•	•	•	•	•
		PKM17EPP-2002-B0	•		•	•			•	•	•		•	•	•	•	•
		PKM17EPPH4001-B0	•		•	•			•	•	•		•	•	•	•	•
		PKM17EWH2001	•		•	•		•	•	•	•	•	•		•		
	e O	PKM17EWH4000	•		•	•		•	•	•	•	•	•		•		
ē	Ě	PKM22EPH2001			_				•		•	_	•	•	•	•	•
pur	ΪÝ	PKM22EPPH2001-B0	•		•	•			•		•		•	•	•	•	•
Sot	ā	PKM22EPPH4001-B0			•	•			•		•		•	•	•	•	•
i,	rua Lua	PKM22EPPH4005-B0			•	•			•		•		•	•	•	•	
ect	External Drive Type	PKM22EPPH4007-B0			•	•	•		•		•		•	•	•	•	•
oel	ш	PKM22EPTH2001-B0							•		•		•	•	•	•	
Piezoelectric Sounder		PKLCS1212E2400-R1	•			•		•	•	•	•	•			•		
_		PKLCS1212E24A0-R1										_					
		PKLCS1212E4001-R1	•			•		•	•	•	•	•			•		
		PKLCS1212E40A1-R1															•
	Self Drive Type	PKM24SPH3805	•				•		•					•	•	•	
	oelectric	PKB24SPCH3601-B0	•			•			•		•	•	•		•	•	
		PKM33EPH1201C	•														
Diar	o o lo o tuit -	DIGITO A ENGLISHED	•														
	oelectric linger	PKM34EWH1201C	•														
		PKM44EWH1001C	•													1	

Alarm, Laundry Machine, Bath, Intercom, Chime, Back Buzzer, ME Instruments, Measuring Instruments, Vending Machine, Calculator, Automobile, Communication Radio, Hemadynamometer, Thermometer, Facsimile, Audio Timer, Automatic Controlling Devices.



#### Feb 1 2012

# Piezoelectric Sound Components




### **Piezoelectric Diaphragms**

#### ■ Features

- 1. Clear sound
- 2. Ultra thin and lightweight
- 3. No contacts; therefore, noiseless and highly reliable
- 4. Low power consumption for voltage type

#### ■ Applications


Clocks/Calculators/Digital camera/Various alarms (Burglar alarms, etc.)

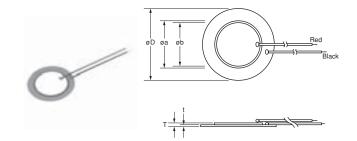

#### **External Drive Type**

Part Number	Resonant Frequency (kHz)	Resonant Impedance (ohm)	Capacitance (nF)	Plate Size dia. D (mm)	Element Size dia. a (mm)	Electrode Size dia. b (mm)	Thickness T (mm)	Plate Thickness t (mm)	Plate Material
7BB-12-9	9.0 ±1.0kHz	1000 max.	8.0 ±30% [1kHz]	12.0	9.0	8.0	0.22	0.10	Brass
7BB-15-6	6.0 ±1.0kHz	800 max.	10.0 ±30% [1kHz]	15.0	10.0	9.0	0.22	0.10	Brass
7BB-20-3	3.6 ±0.6kHz	500 max.	20.0 ±30% [1kHz]	20.0	14.0	12.8	0.22	0.10	Brass
7BB-20-6	6.3 ±0.6kHz	350 max.	10.0 ±30% [1kHz]	20.0	14.0	12.8	0.42	0.20	Brass
7BB-20-6L0	6.3 ±0.6kHz	1000 max.	10.0 ±30% [1kHz]	20.0	14.0	12.8	0.42	0.20	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-27-4	4.6 ±0.5kHz	200 max.	20.0 ±30% [1kHz]	27.0	19.7	18.2	0.54	0.30	Brass
7BB-27-4L0	4.6 ±0.5kHz	300 max.	20.0 ±30% [1kHz]	27.0	19.7	18.2	0.54	0.30	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-35-3	2.8 ±0.5kHz	200 max.	30.0 ±30% [1kHz]	35.0	25.0	23.0	0.53	0.30	Brass
7BB-35-3L0	2.8 ±0.5kHz	200 max.	30.0 ±30% [1kHz]	35.0	25.0	23.0	0.53	0.30	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-41-2	2.2 ±0.3kHz	250 max.	30.0 ±30% [1kHz]	41.0	25.0	23.0	0.63	0.40	Brass
7BB-41-2L0	2.2 ±0.3kHz	300 max.	30.0 ±30% [1kHz]	41.0	25.0	23.0	0.63	0.40	Brass (with Lead Wire: AWG32 Length 50mm)
7NB-31R2-1	1.3 ±0.5kHz	300 max.	40.0 ±30% [120Hz]	31.2	19.7	18.2	0.22	0.10	Nickel Alloy





### **Self Drive Type**

Part Number	Resonant Frequency (kHz)	Resonant Impedance (ohm)	Capacitance (nF)	Plate Size dia. D (mm)	Element Size dia. a (mm)	Electrode Size dia. b (mm)	Thickness T (mm)	Plate Thickness t (mm)	Plate Material
7BB-20-6C	6.3 ±0.6kHz	500 max.	8.5 ±30% [1kHz]	20.0	14.0	12.8	0.42	0.20	Brass
7BB-20-6CL0	6.3 ±0.6kHz	800 max.	8.5 ±30% [1kHz]	20.0	14.0	12.8	0.42	0.20	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-27-4C	4.6 ±0.5kHz	200 max.	18.0 ±30% [1kHz]	27.0	19.7	18.2	0.54	0.30	Brass
7BB-27-4CL0	4.6 ±0.5kHz	350 max.	18.0 ±30% [1kHz]	27.0	19.7	18.2	0.54	0.30	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-35-3C	2.8 ±0.5kHz	200 max.	26.0 ±30% [1kHz]	35.0	25.0	23.0	0.53	0.30	Brass
7BB-35-3CL0	2.8 ±0.5kHz	200 max.	26.0 ±30% [1kHz]	35.0	25.0	23.0	0.53	0.30	Brass (with Lead Wire: AWG32 Length 50mm)
7BB-41-2C	2.2 ±0.3kHz	250 max.	24.0 ±30% [1kHz]	41.0	25.0	23.0	0.63	0.40	Brass
7BB-41-2CL0	2.2 ±0.3kHz	350 max.	24.0 ±30% [1kHz]	41.0	25.0	23.0	0.63	0.40	Brass (with Lead Wire: AWG32 Length 50mm)
7SB-34R7-3C	3.1 ±0.3kHz	150 max.	24.0 ±30% [1kHz]	34.7	25.0	23.4	0.50	0.25	Stainless

#### ■ Node Diameter

Part Number	Node Diameter (mm)
7BB-20-6C	ø13.5
7BB-27-4C	ø17.5
7BB-35-3C	ø22.5
7BB-41-2C	ø26.5

<sup>•</sup> Sound diaphragms without feedback electrode also have the same node diameters.




#### Piezoelectric Diaphragms Notice

#### ■ Notice (Soldering and Mounting)

- 1. Applying load on the center area of the diaphragm may cause cracking in the ceramic element. When the diaphragm is supported by the edge, the load should be applied only around the edge.
- 2. Please consult with a Murata representative if soldering of the component is needed.

#### ■ Notice (Handling)

- 1. Please do not touch the component with a bare hand because the electrode may become corroded.
- 2. The component may be damaged if mechanical stress exceeding specifications is applied.
- 3. Take care to protect the operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- 4. If DC voltage is applied to the component, silver migration may occur. Please strictly avoid subjecting the component to DC voltage for long periods.
- 5. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably  $1k\Omega$  to  $2k\Omega$ . Instead of this measure, a diode may also be applied as shown in Fig. B.

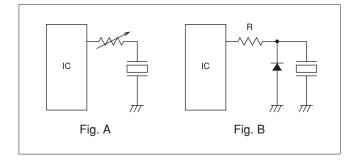

6. Avoid excessive pulling of the lead wire because the wire may break or the soldering point come off.



# **Piezoelectric Sound Components**



### Piezoelectric Sounders External Drive Pin Type

Microcomputers are widely used for microwave ovens, air conditioners, cars, toys, timers, and alarm equipment. Externally driven piezoelectric sounders are used in digital watches, electronic calculators, telephones and other equipment. They are driven by a signal (ex.: 2048Hz or 4096Hz) from an LSI and provide melodious sound.


#### ■ Features

- 1. Low power consumption
- 2. No contacts; therefore, noiseless and highly reliable


#### Applications

- 1. Various office equipment such as PPCs, printers and
- 2. Audible feedback-response to some action or input.
- 3. Confirmation sound of various audio equipment














PKM17EPPH4001-B0








PKM22EPH2001






PKM22EPPH2001-B0





PKM22EPPH4001-B0



Continued on the following page.






Continued from the preceding page.




PKM22EPPH4005-B0


















Part Number	Sound Pressure Level (dB)	Sound Pressure Level (Ref. only) (dB)	Operating Voltage Range	Capacitance (nF)	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKM13EPYH4002-B0	70 min. [3Vp-p,4kHz,square wave,10cm]	70 min. [1Vrms,4kHz,sine wave,10cm]	30.0Vp-p max.	5.5 ±30% [1kHz]	-40 to +85	-40 to +85
PKM17EPP-2002-B0	70 min. [3Vo-p,2kHz,square wave,10cm]	70 min. [1Vrms,2kHz,sine wave,10cm]	25.0Vo-p max. [with polarity]	34.0 ±30% [120Hz]	-20 to +70	-30 to +80
PKM17EPPH4001-B0	72 min. [3Vp-p,4kHz,square wave,10cm]	72 min. [1Vrms,4kHz,sine wave,10cm]	25.0Vp-p max.	7.0 ±30% [1kHz]	-20 to +70	-30 to +80
PKM22EPH2001	75 min. [3Vp-p,2kHz,square wave,10cm]	75 min. [1Vrms,2kHz,sine wave,10cm]	25.0Vp-p max.	17.0 ±30% [120Hz]	-20 to +70	-30 to +80
PKM22EPPH2001-B0	70 min. [3Vp-p,2kHz,square wave,10cm]	70 min. [1Vrms,2kHz,sine wave,10cm]	30.0Vp-p max.	19.0 ±30% [120Hz]	-20 to +70	-30 to +80
PKM22EPPH4001-B0	75 min. [3Vp-p,4kHz,square wave,10cm]	75 min. [1Vrms,4kHz,sine wave,10cm]	30.0Vp-p max.	12.0 ±30% [1kHz]	-20 to +70	-30 to +80
PKM22EPPH4005-B0	75 min. [3Vp-p,4kHz,square wave,10cm]	75 min. [1Vrms,4kHz,sine wave,10cm]	30.0Vp-p max.	12.0 ±30% [1kHz]	-20 to +70	-30 to +80
PKM22EPPH4007-B0	85 min. [3Vp-p,4kHz,square wave,10cm]	85 min. [1Vrms,4kHz,sine wave,10cm]	30.0Vp-p max.	12.0 ±30% [1kHz]	-20 to +70	-30 to +80
PKM22EPTH2001-B0	70 min. [3Vp-p,2kHz,square wave,10cm]	70 min. [1Vrms,2kHz,sine wave,10cm]	25.0Vp-p max.	19.0 ±30% [120Hz]	-20 to +70	-30 to +80


#### ■ Freq. Response (Square Wave 3Vp-p, 10cm) PKM13EPYH4002-B0




#### PKM17EPPH4001-B0




#### PKM22EPPH2001-B0




#### PKM22EPPH4005-B0




#### PKM17EPP-2002-B0




#### PKM22EPH2001



#### PKM22EPPH4001-B0



#### PKM22EPPH4007-B0




Continued on the following page.







#### ■ Freq. Response (Square Wave 3Vp-p, 10cm) PKM22EPTH2001-B0




#### ■ Freq. Response (Sine Wave 1Vrms, 10cm) PKM13EPYH4002-B0




#### PKM17EPPH4001-B0




#### PKM22EPPH2001-B0




#### PKM17EPP-2002-B0



#### PKM22EPH2001



#### PKM22EPPH4001-B0




Continued on the following page.






Continued from the preceding page.


# ■ Freq. Response (Sine Wave 1Vrms, 10cm) PKM22EPPH4005-B0



#### PKM22EPTH2001-B0



#### PKM22EPPH4007-B0




#### Piezoelectric Sounders (External Drive Pin Type) Circuit/Notice

#### ■ Circuit

The following are examples of externally driven circuits.

- (1) Unstable multi-vibrator using Tr.
- (2) Circuits using inverters or NAND gates.



#### ■ Notice (Soldering and Mounting)


- 1. Notice (Soldering and Mounting)
  - (1) Soldering Iron
    - (a) Immerse lead terminals up to 1.5mm from component's body in soldering bath of +260±5°C for 10±1.0 seconds, and then leave components in natural conditions for 4 hours.
    - (b) Directly contact the lead terminal with the tip of the soldering iron for +350±5°C for 3.0±0.5 seconds, and then leave components in natural conditions for 4 hours.
  - (2) Reflow

The component cannot withstand reflow soldering.

#### ■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- 2. Take care to protect the operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- 3. If DC voltage is applied to the component, silver migration may occur. Please strictly avoid subjecting the component to DC voltage for long periods.
- 4. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably  $1k\Omega$  to  $2k\Omega$ . Instead of this measure, a diode may also be applied as shown in Fig. B.

- 2. Washing of the component is prohibited because it is not sealed.
- 3. For Part Numbers mentioned below, please do not insert the component on double-sided PCB with plated through hole. When melted solder touches the base of lead terminal, a part of the plastic case may melt, causing electrical failure.
  - · Part Number PKM13EPYH4002-B0/PKM17EPP-2002-B0 PKM17EPPH4001-B0/PKM22EPPH2001-B0 PKM22EPPH4001-B0/PKM22EPPH4007-B0

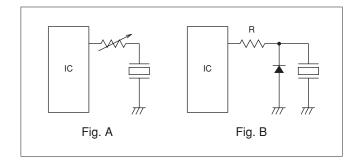

5. Avoid excessive pulling of the lead wire because the wire may break or the soldering point come off.




# **Piezoelectric Sound Components**



# Piezoelectric Sounders External Drive Pin Type Taping

Taking advantage of extensive automatic insertion design technology and materials experience, Murata has developed standard taping type piezoelectric sounders.

This Murata technology supports labor and cost saving measures.




(in mm)

#### ■ Features


- Lead dimension: Improved mounting reliability (cut & clinch) due to round terminal
- 2. High, stable mountability
- 3. Ammo packaging

Part Number	Sound Pressure Level (dB)	Sound Pressure Level (Ref. only) (dB)	Operating Voltage Range	Capacitance (nF)	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKM13EPYH4000-A0	70 min. [3Vp-p,4kHz,square wave,10cm]	70 min. [1Vrms,4kHz,sine wave,10cm]	30.0Vp-p max.	5.5 ±30% [1kHz]	-40 to +85	-40 to +85


#### ■ Freq. Response (Square Wave 3Vp-p, 10cm)



#### ■ Freq. Response (Sine Wave 1Vrms, 10cm)



#### ■ Taping Dimension

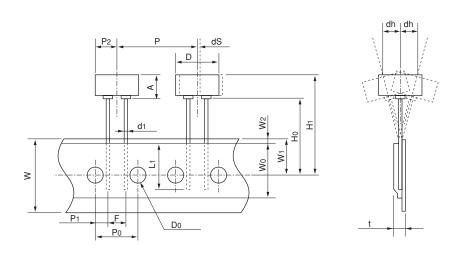

Item	Code	Nominal Value	Tol.	Notes
Width of diameter	D	ø12.6	±0.5	
Height of component	Α	6.9	±0.5	
Dimensions of terminal	d1	ø0.5	±0.1	
Lead length under the hold-down tape	L1	8.0 min.	_	
Pitch of component	Р	25.4	±0.5	
Pitch of sprocket	P0	12.7	±0.2	Tolerance for Pitches 10×P0=127±2mm
Length from hole center to lead	P1	3.85	±0.7	
Length from hole center to component center	P2	6.35	±0.7	
Lead spacing	F	5.0	±0.5	
Slant forward or backward	dh	0	±1.0	360°: 1mm max.
Width of carrier tape	W	18.0	±0.5	
Width of hold-down tape	Wo	12.5 min.	_	Hold-down tape does not exceed the carrier tape.
Position of sprocket hole	W1	9.0	±0.5	
Gap of hold-down tape and carrier tape	W2	2.0 max.	_	
Distance between the center of sprocket hole and lead stopper	Ho	18.0	±0.5	
Total height of component	H1	26.0 max.	_	
Diameter of sprocket hole	D0	ø4.0	±0.2	
Total thickness of tape	t	0.6	±0.2	
Body tilt	dS	0	±1.0	


(in mm)

#### Piezoelectric Sounders (External Drive Pin Type Taping) Circuit/Notice

#### ■ Circuit

The following are examples of externally driven circuits.

- (1) Unstable multi-vibrator using Tr.
- (2) Circuits using inverters or NAND gates.



#### ■ Notice (Soldering and Mounting)


- 1. Notice (Soldering and Mounting)
  - (1) Soldering Iron
    - (a) Immerse lead terminals up to 1.5mm from component's body in soldering bath of +260±5°C for 10±1.0 seconds, and then leave components in natural conditions for 4 hours.
    - (b) Directly contact the lead terminal with the tip of the soldering iron for +350±5 °C for 3.0±0.5 seconds, and then leave components in natural conditions for 4 hours.
  - (2) Reflow

The component cannot withstand reflow soldering.

#### ■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- Take care to protect the operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- 3. If DC voltage is applied to the component, silver migration may occur. Please strictly avoid subjecting the component to DC voltage for long periods.
- 4. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably  $1k\Omega$  to  $2k\Omega$ . Instead of this measure, a diode may also be applied as shown in Fig. B.

- Please do not insert the component on double-sided PCB with plated through hole. When melted solder touches the base of lead terminal, a part of the plastic case may melt, causing electrical failure.
- 3. Washing of the component is not acceptable. Because it is not sealed.

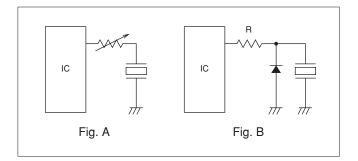

Avoid excessive pulling of the lead wire because the wire may break or the soldering point come off.



# **Piezoelectric Sound Components**



## Piezoelectric Sounders External Drive Lead Wire Type

Microcomputers are widely used for microwave ovens, air conditioners, cars, toys, timers, and alarm equipment. Externally driven piezoelectric sounders are used in digital watches, electronic calculators, telephones and other equipment. They are driven by a signal (ex.: 2048Hz or 4096Hz) from an LSI and provide melodious sound.


#### ■ Features

- 1. Low power consumption
- 2. No contacts; therefore, noiseless and highly reliable


#### Applications

- Various office equipment such as PPCs, printers and keyboards
- 2. Audible feedback-response to some action or input.
- 3. Confirmation sound of various audio equipment











Part Number	Sound Pressure Level (dB)	Sound Pressure Level (Ref. only) (dB)	Operating Voltage Range	Capacitance (nF)	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKM17EWH2001	72 min. [3Vp-p,2kHz,square wave,10cm]	70 min. [1Vrms,2kHz,sine wave,10cm]	7.0Vp-p max.	40.0 ±30% [120Hz]	-20 to +70	-30 to +80
PKM17EWH4000	75 min. [3Vp-p,4kHz,square wave,10cm]	70 min. [1Vrms,4kHz,sine wave,10cm]	25.0Vp-p max.	9.5 ±30% [1kHz]	-20 to +70	-30 to +80

### ■ Freq. Response (Square Wave 3Vp-p, 10cm)



# 

# ■ Freq. Response (Sine Wave 1Vrms, 10cm) PKM17EWH2001




# 

#### Piezoelectric Sounders (External Drive Lead Wire Type) Circuit/Notice

#### ■ Circuit

The following are examples of externally driven circuits.

- (1) Unstable multi-vibrator using Tr.
- (2) Circuits using inverters or NAND gates.




#### ■ Notice (Soldering and Mounting)

Washing of the component is prohibited because it is not sealed.

#### ■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- 2. Take care to protect the operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- If DC voltage is applied to the component, silver migration may occur. Please strictly avoid subjecting the component to DC voltage for long periods.
- 4. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably  $1k\Omega$  to  $2k\Omega$ . Instead of this measure, a diode may also be applied as shown in Fig. B.

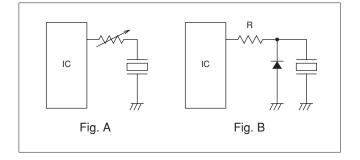

5. Avoid excessive pulling of the lead wire because the wire may break or the soldering point come off.



# Piezoelectric Sound Components




## **Piezoelectric Sounders External Drive SMD Type**


Taking advantage of extensive acoustic and mechanical design technology and high performance ceramics, Murata has developed SMD piezoelectric sounders that suit the thin, high-density design of electronic equipment.

#### ■ Features

- 1. Small, thin and lightweight
- 2. High sound pressure level and clear sound
- 3. Reflowable
- 4. Tape & Reel supply




PKLCS1212E2400-R1






PKLCS1212E4001-R1



Part Number	Sound Pressure Level (dB)	Operating Voltage Range	Operating Temp. Range (°C)	Storage Temp. Range (°C)	Use
PKLCS1212E2400-R1	75 min.[±1.5 Vo-p,2.4kHz,square wave,10cm]	±12.5 Vo-p max.	-20 to +70	-30 to +80	For consumer electronics
PKLCS1212E24A0-R1	75 min.[±1.5 Vo-p,2.4kHz,square wave,10cm]	±12.5 Vo-p max.	-40 to +85	-40 to +85	For automotive electronics
PKLCS1212E4001-R1	75 min.[3Vp-p,4kHz,square wave,10cm]	25 Vp-p max.	-20 to +70	-30 to +80	For consumer electronics
PKLCS1212E40A1-R1	75 min.[3Vp-p,4kHz,square wave,10cm]	25 Vp-p max.	-40 to +85	-40 to +85	For automotive electronics

#### ■ Standard Land Pattern Dimensions




(in mm)




100

#### ■ Freq. Response (Square Wave 3Vp-p, 10cm) PKLCS1212E2400-R1




# Input Voltage: 3.00Vp-p Square \_Distance: 10cm



PKLCS1212E4001-R1

#### ■ Taping Dimension

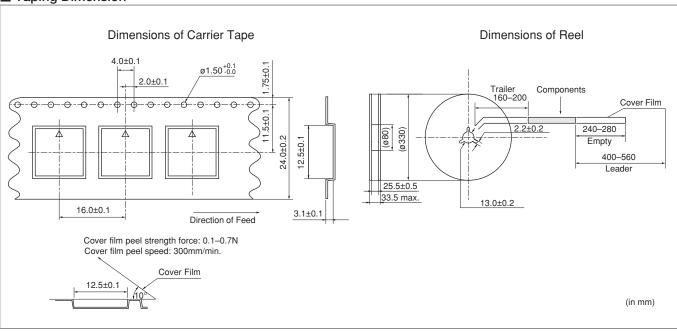


#### Piezoelectric Sounders (External Drive SMD Type) Circuit/Notice

#### ■ Circuit

The following are examples of externally driven circuits.

- (1) Unstable multi-vibrator using Tr.
- (2) Circuits using inverters or NAND gates.




#### ■ Notice (Soldering and Mounting)

Washing of the component is prohibited because it is not sealed.

#### ■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- 2. Take care to protect the operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- If DC voltage is applied to the component, silver migration may occur. Please strictly avoid subjecting the component to DC voltage for long periods.
- 4. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably  $1k\Omega$  to  $2k\Omega$ . Instead of this measure, a diode may also be applied as shown in Fig. B.

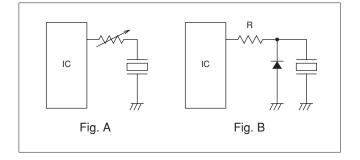

5. Avoid excessive pulling of the lead wire because the wire may break or the soldering point come off.



# **Piezoelectric Sound Components**




# Piezoelectric Ringers (PIEZORINGER®)


As the result of rapid development of ICs in telephones, demand for piezoelectric sounders as telephone ringers has also rapidly increased. To effectively satisfy this rising demand, Murata provides a suitable piezoelectric sounder called "PIEZORINGER" with the following features.


#### ■ Features

- 1. Extremely clear sound
- 2. Since it is voltage driven, the power consumption is negligible.
- 3. It can be driven directly from ICs.
- 4. Thin and lightweight









#### Pin Type


Part Number	Sound Pressure Level (dB)	Sound Pressure Level (Ref. only) (dB)	Operating Voltage Range	Capacitance (nF)	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKM33EPH1201C	68 min. [30Vp-p,1.2kHz,square wave,1m]	65 min. [1Vrms,1.2kHz,sine wave,10cm]	40.0Vp-p max.	40.0 ±30% [120Hz]	-20 to +70	-30 to +80

#### Lead Wire Type


Part Number	Sound Pressure Level (dB)	Sound Pressure Level (Ref. only) (dB)	Operating Voltage Range	Capacitance (nF)	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKM34EWH1101C	70 min. [30Vp-p,1.1kHz,square wave,1m]	60 min. [1Vrms,1.1kHz,sine wave,10cm]	40.0Vp-p max.	40.0 ±30% [120Hz]	-20 to +70	-30 to +80
PKM34EWH1201C	70 min. [30Vp-p,1.2kHz,square wave,1m]	60 min. [1Vrms,1.2kHz,sine wave,10cm]	60.0Vp-p max.	32.0 ±30% [120Hz]	-20 to +70	-30 to +80
PKM44EWH1001C	75 min. [30Vp-p,1kHz,square wave,1m]	70 min. [1Vrms,1kHz,sine wave,10cm]	30.0Vp-p max.	68.0 ±30% [120Hz]	-20 to +70	-30 to +80




#### ■ Freq. Response (Square Wave 30Vp-p, 1m) PKM33EPH1201C




#### PKM34EWH1201C




#### ■ Freq. Response (Sine Wave 1Vrms, 10cm) PKM33EPH1201C




#### PKM34EWH1201C




#### PKM34EWH1101C




#### PKM44EWH1001C



#### PKM34EWH1101C



#### PKM44EWH1001C



Continued on the following page.





#### Piezoelectric Ringers (PIEZORINGER®) Notice

#### ■ Notice (Soldering and Mounting)


- 1. Notice (Soldering and Mounting)
  - (1) Soldering Iron
    - (a) Immerse lead terminals up to 1.5mm from component's body in soldering bath of +260±5°C for 10±1.0 seconds, and then leave components in natural conditions for 4 hours.
    - (b) Directly contact the lead terminal with the tip of the soldering iron for +350±5°C for 3.0±0.5 seconds, and then leave components in natural conditions for 4 hours.
  - (2) Reflow

The component cannot withstand reflow soldering.

2. Washing of the component is prohibited because it is not sealed.

#### ■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- Take care to protect the operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- If DC voltage is applied to the component, silver migration may occur. Please strictly avoid subjecting the component to DC voltage for long periods.
- 4. The resistor should be used as shown in Fig. A. A suitable resistance value should be chosen, preferably  $1k\Omega$  to  $2k\Omega$ . Instead of this measure, a diode may also be applied as shown in Fig. B.

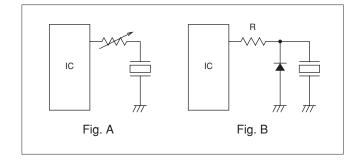

5. Avoid excessive pulling of the lead wire because the wire may break or the soldering point come off.




# muRata

# Piezoelectric Sounders Self Drive Pin Type

Piezoelectric sounder self drive type requires only a simple circuit and DC power supply. Since this type uses a resonant system, it is also available for alarms that need large sound volume.


#### ■ Applications

- 1. Gas alarms, burglar alarms, smoke detectors
- Air conditioners, microwave ovens, washing machines and other home-electronic appliances controlled by microcomputers
- 3. Toys, game machines



Part Number	Sound Pressure Level (dB)	Oscillating Frequency (kHz)	Current Consumption (mA)	Operating Voltage Range	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKM24SPH3805	90 min. [12Vdc,10cm]	3.8 ±0.4kHz [12Vdc]	12 max. [12Vdc]	3.0 to 20.0Vdc	-20 to +70	-30 to +80

#### ■ Standard Circuit Examples



Tr: 2SC1815Y or equivalent

#### Piezoelectric Sounders (Self Drive) Notice

#### ■ Notice (Soldering and Mounting)

- 1. Notice (Soldering and Mounting)
  - (1) Soldering Iron
    - (a) Immerse lead terminals up to 1.5mm from component's body in soldering bath of +260±5°C for 10±1.0 seconds, and then leave components in natural conditions for 4 hours.
    - (b) Directly contact the lead terminal with the tip of the soldering iron for +350±5°C for 3.0±0.5 seconds, and then leave components in natural conditions for 4 hours.
  - (2) Reflow

The component cannot withstand reflow soldering.

- 2. Washing of the component is prohibited because it is not sealed.
- Please do not cover the hole with tape or any other obstacle as this will produce irregular oscillation.
- Do not place any obstacle within 15mm of the top of the component as this will produce irregular oscillation.

#### ■ Notice (Handling)

- 1. The component may be damaged if mechanical stress exceeding specifications is applied.
- 2. Take care to protect the operating circuit from surge voltage resulting from excessive force, falling, shock or temperature change.
- If DC voltage is applied to the component, silver migration may occur. Please strictly avoid subjecting the component to DC voltage for long periods.
- 4. The standard self-driven circuits utilizes transistor switching. Since the circuit constants for hfe of the transistor are optimally chosen to maintain stable oscillation, please design a circuit following the standard.



# **Piezoelectric Sound Components**




### Piezoelectric Buzzers Pin Type

This is a unified piezoelectric sounder that has a piezoelectric diaphragm of 3 terminals connected to a self drive circuit, and it easily generates sound with only a DC power supply (DC3.0-15V). Using a suitably designed resonant system, this type can be used where large sound volumes are needed.

#### Applications


- 1. Gas alarms, burglar alarms
- Air conditioners, microwave ovens and various types of microcomputer controlled home-electronic appliances
- 3. Toys, games, and other simple electronic devices such as teaching aids





Part Number	Sound Pressure Level (dB)	Oscillating Frequency (kHz)	Current Consumption (mA)	Operating Voltage Range	Operating Temp. Range (°C)	Storage Temp. Range (°C)
PKB24SPCH3601-B0	90 min. [12Vdc,10cm]	3.6 ±0.5kHz [12Vdc]	16 max. [12Vdc]	3.0 to 15.0Vdc	-20 to +70	-30 to +80

#### ■ Voltage-Sound Pressure Level/Voltage-Consumption Current



28

#### **Piezoelectric Buzzers Notice**

#### ■ Notice (Soldering and Mounting)


- 1. Notice (Soldering and Mounting)
  - (1) Soldering Iron
    - (a) Immerse lead terminals up to 1.5mm from component's body in soldering bath of +260±5°C for 10±1.0 seconds, and then leave components in natural conditions for 4 hours.
    - (b) Directly contact the lead terminal with the tip of the soldering iron for +350±5°C for 3.0±0.5 seconds, and then leave components in natural conditions for 4 hours.
  - (2) Reflow

The component cannot withstand reflow soldering.

#### ■ Notice (Handling)

- 1. The component may be damaged if mechanical stress over this specification is applied.
- 2. Resistors should not be connected in series to the power supply as this will produce irregular oscillation. When a resistor is necessary to control sound volume, use a capacitor (1µF) in parallel with the buzzer together.

- 2. Washing of the component is prohibited because it is not sealed.
- Please do not cover the hole with tape or any other obstacle as this will produce irregular oscillation.
- Do not place any obstacle within 15mm of the top of the component as this will produce irregular oscillation.

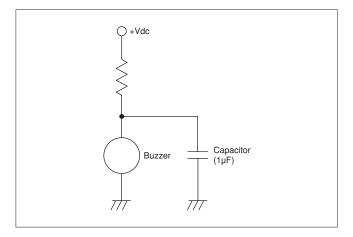

3. Avoid excessive pulling of the lead wire because the wire may break or the soldering point come off.



#### **Piezoelectric Sound Components Notice**

#### ■ Notice (Storage and Operating Condition)

1. Product Storage Condition

Please store the products in a room where the temperature/humidity is stable and avoid places where there are large temperature changes. Please store the products under the following conditions:

Temperature: -10 to + 40°C Humidity: 15 to 85% R.H.

2. Expiration Date on Storage

Expiration date (shelf life) of the products is six months after delivery under the conditions of a sealed and unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in solderability due to storage under poor conditions.

Please confirm solderability and characteristics for the products regularly.

- 3. Notice on Product Storage
  - (1) Please do not store the products in a chemical atmosphere (Acids, Alkali, Bases, Organic gas, Sulfides and so on), because the characteristics may be reduced in quality, may be degraded in solderability due to storage in a chemical atmosphere.

- (2) Please do not put the products directly on the floor without anything under them to avoid damp places and/or dusty places.
- (3) Please do not store the products in places such as: in a damp heated place or any place exposed to direct sunlight or excessive vibration.
- (4) Please use the products immediately after the package is opened, because the characteristics may be reduced in quality, and/or be degraded in the solderability due to storage under poor conditions.
- (5) Please do not drop the products to avoid cracking of the ceramic element.
- 4. Other

Please be sure to consult with our sales representative or engineer whenever the products are to be used in conditions not listed above.



#### **Package**

■ Minimum Quantity (pcs.)

Product Names	Part Number	Minimum Quantity  Amma Paul  Amma Paul  Amma Paul			
		Ø330mm Reel	Bulk (Box)	Ammo Pack	
Piezoelectric Diaphragms*					
External Drive Types	7BB-12-9		5120		
	7BB-15-6		8000		
	7BB-20-3		3000		
	7BB-20-6		1800		
	7BB-20-6L0		600		
	7BB-27-4		1500		
	7BB-27-4L0		600		
	7BB-35-3		800		
	7BB-35-3L0		400		
	7BB-41-2		400		
	7BB-41-2L0		250		
	7NB-31R2-1		3000		
Self Drive Types	7BB-20-6C		1800		
	7BB-20-6CL0		600		
	7BB-27-4C		1500		
	7BB-27-4CL0		600		
	7BB-35-3C		800		
	7BB-35-3CL0		400		
	7BB-41-2C		600		
	7BB-41-2CL0		250		
	7SB-34R7-3C		800		
Piezoelectric Sounders*					
External Drive Types	PKLCS1212E2400-R1	1000			
	PKLCS1212E24A0-R1	1000			
	PKLCS1212E4001-R1	1000			
	PKLCS1212E40A1-R1	1000			
	PKM13EPYH4000-A0			500	
	PKM13EPYH4002-B0		330		
	PKM17EPP-2002-B0		200		
	PKM17EPPH4001-B0		200		
	PKM17EPPH4002-B0		200		
	PKM17EWH2001		250		
	PKM17EWH4000		500		
	PKM22EPH2001		360		
	PKM22EPH2002		270		
	PKM22EPH2003		270		
	PKM22EPPH2001-B0		750		
	PKM22EPPH2002-B0		750		
	PKM22EPPH4001-B0		900		
	PKM22EPPH4002-B0		900		
	PKM22EPPH4005-B0		750		
	PKM22EPPH4005-B0				
			750		
	PKM22EPPH4012-B0		750		

Continued on the following page.

. \_\_

"Minimum Quantity" means the number of units of each delivery or order. The quantity should be an integral multiple of the "Minimum Quantity." (As for products series with \*mark, bulk (bag) quantities shown here differ from actual delivery quantities in a package) Please contact the nearest sales office for details and for any other products not listed above.



Package

Continued from the preceding page.

Product Names	Part Number	Minimum Quantity				
Product Names		Ø330mm Reel	Bulk (Box)	Ammo Pack		
Self Drive Types	PKM24SPH3801		270			
	PKM24SPH3805		360			
	PKM24SPH3807		270			
	PKM24SPH3810		270			
Piezoelectric Buzzers*	PKB24SPCH3601-B0		650			
● Piezoelectric Ringers (PIEZORINGER®)*	PKM33EPH1201C		300			
	PKM33EPH1202C		60			
	PKM34EWH1101C		25			
	PKM34EWH1201C		25			
	PKM44EWH1001C		25			



#### ♠ Note:

1. Export Control

<For customers outside Japan>

No Murata products should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to (1) any weapons (Weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or (2) goods or systems specially designed or intended for military end-use or utilization by military end-users.

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

- 2. Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this catalog.
  - Aircraft equipment 2 Aerospace equipment
  - ③ Undersea equipment Power plant equipment
  - ⑤ Medical equipment 6 Transportation equipment (vehicles, trains, ships, etc.)
  - Traffic signal equipment ® Disaster prevention / crime prevention equipment
- Data-processing equipment ① Application of similar complexity and/or reliability requirements to the applications listed above 3. Product specifications in this catalog are as of November 2011. They are subject to change or our products in it may be discontinued without advance notice.
- Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product engineers.
- 4. Please read rating and 🛆 CAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.
- 5. This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.
- 6. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.

International Division

7. No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.



http://www.murata.com/



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

#### Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru