Integrated Relay, Inductive Load Driver

This device is intended to replace an array of three to six discrete components with an integrated SMT part. It is available in a SOT-23 package. It can be used to switch 3 to 6 Vdc inductive loads such as relays, solenoids, incandescent lamps, and small DC motors without the need of a free-wheeling diode.

Features

- Provides a Robust Driver Interface between DC Relay Coil and Sensitive Logic Circuits
- Optimized to Switch Relays from a 3.0 V to 5.0 V Rail
- Capable of Driving Relay Coils Rated up to 2.5 W at 5.0 V
- Features Low Input Drive Current and Good Back-to-Front Transient Isolation
- Internal Zener Eliminates Need for Free-Wheeling Diode
- Internal Zener Clamp Routes Induced Current to Ground for Quieter System Operation
- Guaranteed Off State with No Input Connection
- Supports Large Systems with Minimal Off-State Leakage
- ESD Resistant in Accordance with the Class 1C Human Body Model
- Low Sat Voltage Reduces System Current Drain by Allowing Use of Higher Resistance Relay Coils
- Pb-Free Packages are Available

Applications

- Telecom: Line Cards, Modems, Answering Machines, FAX Machines, Feature Phone Electronic Hook Switch
- Computer and Office: Photocopiers, Printers, Desktop Computers
- Consumer: TVs and VCRs, Stereo Receivers, CD Players, Cassette Recorders, TV Set Top Boxes
- Industrial: Small Appliances, White Goods, Security Systems, Automated Test Equipment, Garage Door Openers
- **Automotive:** 5.0 V Driven Relays, Motor Controls, Power Latches, Lamp Drivers



ON Semiconductor®

http://onsemi.com

Relay, Inductive Load Driver

MARKING DIAGRAMS



SOT-23 CASE 318 STYLE 6





SC-74 CASE 318F STYLE 8





SOT-563 CASE 463A STYLE 4



JW = Specific Device Code

M = Date Code*

= Pb-Free Package


(Note: Microdot may be in either location)


*Date Code orientation and/or overbar may vary depending upon manufacturing location.


ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 3 of this data sheet.

INTERNAL CIRCUIT DIAGRAMS





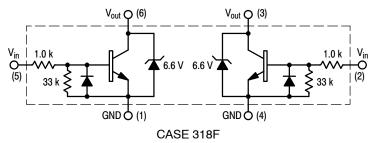

MAXIMUM RATINGS ($T_J = 25^{\circ}C$ unless otherwise noted)

Rating		Symbol	Value	Unit
Power Supply Voltage		V _{CC}	6.0	Vdc
Input Voltage		V _{in(fwd)}	6.0	Vdc
Reverse Input Voltage		V _{in(rev)}	-0.5	Vdc
Repetitive Pulse Zener Energy Limit (Duty Cycle ≤ 0.01%)	SOT-23	Ezpk	50	mJ
Output Sink Current - Continuous		I _O	500	mA
Junction Temperature		TJ	150	°C
Operating Ambient Temperature Range		T _A	-40 to +85	°C
Storage Temperature Range		T _{stg}	-65 to +150	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

THERMAL CHARACTERISTICS

Rating		Symbol	Value	Unit
Total Device Power Dissipation (Note 1) Derate above 25°C	SOT-23	P_{D}	225 1.8	mW mW/°C
Total Device Power Dissipation (Note 1) Derate above 25°C	SC-74	P _D	380 1.5	mW mW/°C
Total Device Power Dissipation (Note 1) Derate above 25°C	SOT-563	P _D	357 2.9	mW mW/°C
Thermal Resistance Junction-to-Ambient	SOT-23 SC-74 SOT-563	$R_{ hetaJA}$	556 329 250	°C/W

1. FR-5 PCB of 1" x 0.75" x 0.062", T_A = 25°C

ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}C$ unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
OFF CHARACTERISTICS	<u>.</u>	•			
Output Zener Breakdown Voltage (@ IT = 10 mA Pulse)	V(BRout) V(-BRout)	6.2	6.6 -0.7	7.0 -	V V
Output Leakage Current @ 0 Input Voltage $(V_O = 5.5 \text{ Vdc}, V_{in} = 0.C., T_A = 25^{\circ}C)$ $(V_O = 5.5 \text{ Vdc}, V_{in} = 0.C., T_A = 85^{\circ}C)$	I _{OO}	- -	- -	0.1 30	μΑ
Guaranteed "OFF" State Input Voltage ($I_0 \le 100 \mu A$)	V _{in(off)}	_	-	0.4	V
ON CHARACTERISTICS					
Input Bias Current (H _{FE} Limited) (I _O = 250 mA, V _O = 0.25 Vdc)	I _{in}	_	0.8	1.6	mAdc
Output Saturation Voltage (I _O = 250 mA, I _{in} = 1.5 mA)	V _{O(sat)}	-	0.12	0.16	Vdc
Output Sink Current - Continuous (V _{CE} = 0.25 Vdc, I _{in} = 1.5 mA)	I _{O(on)}	250	400	_	mA

ORDERING INFORMATION

Device	Package	Shipping [†]	
MDC3105LT1	SOT-23		
MDC3105LT1G	SOT-23 (Pb-Free)		
MDC3105DMT1	SC-74	3000 / Tape & Reel	
MDC3105DMT1G	SC-74 (Pb-Free)		
MDC3105XV6T1G	SOT-563 (Pb-Free)	4000 / Tape & Reel	

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

TYPICAL APPLICATION-DEPENDENT SWITCHING PERFORMANCE

SWITCHING CHARACTERISTICS

Characteristic	Symbol	Min	Тур	Max	Units
Propagation Delay Times:					nS
High to Low Propagation Delay; Figure 1 (5.0 V 74HC04)	t _{PHL}	_	55	_	
Low to High Propagation Delay; Figure 1 (5.0 V 74HC04)	t _{PLH}	_	430	-	
High to Low Propagation Delay; Figures 1, 13 (3.0 V 74HC04)	t _{PHL}	_	85	_	
Low to High Propagation Delay; Figures 1, 13 (3.0 V 74HC04)	t _{PLH}	_	315	-	
High to Low Propagation Delay; Figures 1, 14 (5.0 V 74LS04)	t _{PHL}	_	55	_	
Low to High Propagation Delay; Figures 1, 14 (5.0 V 74LS04)	t _{PLH}	_	2.4	-	μS
Transition Times:					nS
Fall Time; Figure 1 (5.0 V 74HC04)	t _f	_	45	_	
Rise Time; Figure 1 (5.0 V 74HC04)	tr	_	160	-	
Fall Time; Figures 1, 13 (3.0 V 74HC04)	t _f	_	70	_	
Rise Time; Figures 1, 13 (3.0 V 74HC04)	tr	-	195	-	
Fall Time; Figures 1, 14 (5.0 V 74LS04)	t _f	_	45	_	
Rise Time; Figures 1, 14 (5.0 V 74LS04)	t _r	_	2.4	-	μS

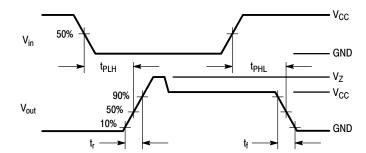


Figure 1. Switching Waveforms

TYPICAL PERFORMANCE CHARACTERISTICS

(ON CHARACTERISTICS)


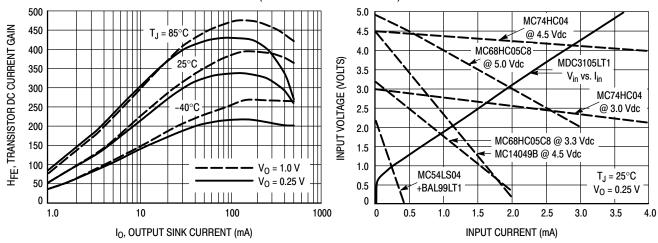


Figure 2. Transistor DC Current Gain

Figure 3. Input V-I Requirement Compared to **Possible Source Logic Outputs**

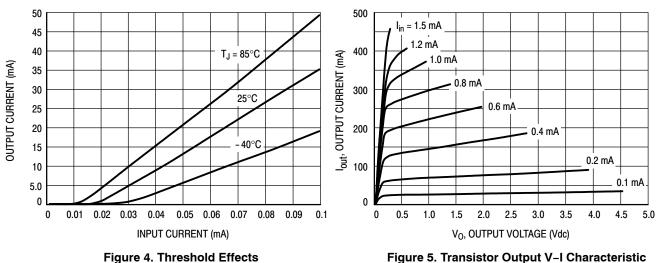

 $T_J = 25^{\circ}C$

 $T_J = -40^{\circ}C$

350 mA

- 175 mA

Figure 4. Threshold Effects

1.2

1.1

1.0

0.9 0.8

0.7 0.6 0.5

0.4

0.3

0.2

0.1

0.04

10 mA

0.1

V_{out}, OUTPUT VOLTAGE (Vdc)

8.5 ZENER CLAMP VOLTAGE (VOLTS) 8.0 7.5 T_J = 85°C 7.0 25°C 6.5 -40°C 6.0 1.0 100 1000 I₇, ZENER CURRENT (mA)

I_{out} = 500 mA

Figure 6. Output Saturation Voltage versus I_{out}/I_{in}

I_{in}, INPUT CURRENT (mA)

50 mA

125 mA

1.0

Figure 7. Zener Clamp Voltage versus Zener Current

10

TYPICAL PERFORMANCE CHARACTERISTICS

(OFF CHARACTERISTICS)

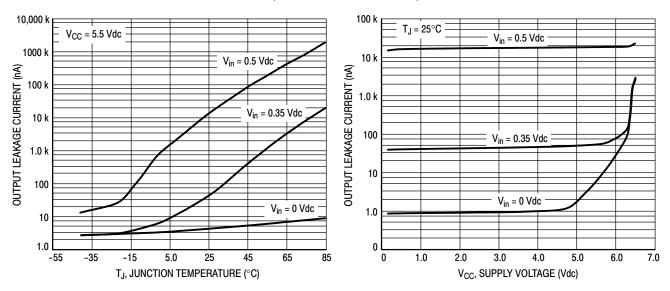


Figure 8. Output Leakage Current versus Temperature

Figure 9. Output Leakage Current versus Supply Voltage

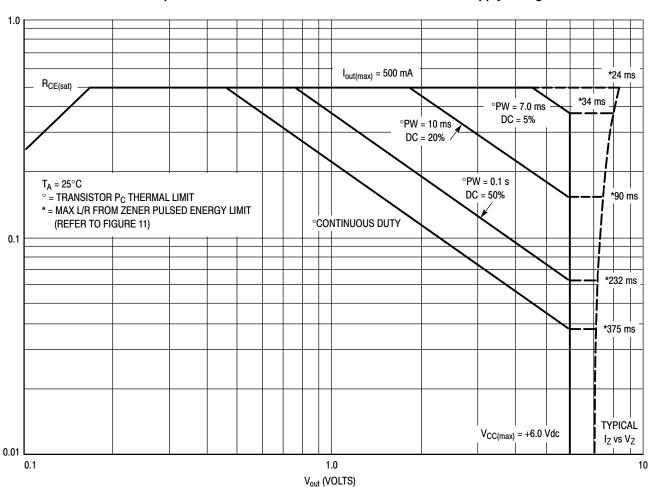


Figure 10. Safe Operating Area for MDC3105LT1

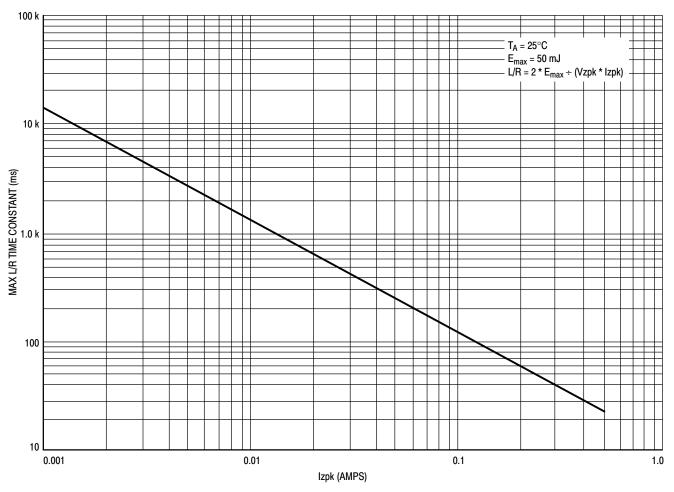


Figure 11. Zener Repetitive Pulse Energy Limit on L/R Time Constant for MDC3105LT1

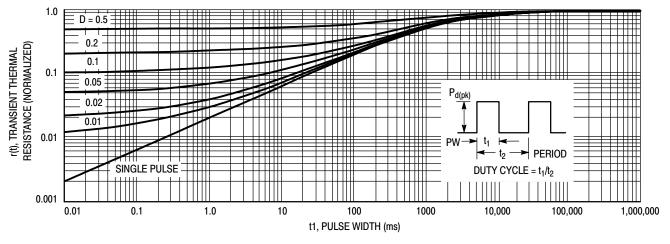


Figure 12. Transient Thermal Response for MDC3105LT1

Using TTR Designing for Pulsed Operation

For a repetitive pulse operating condition, time averaging allows one to increase a device's peak power dissipation rating above the average rating by dividing by the duty cycle of the repetitive pulse train. Thus, a continuous rating of 200 mW of dissipation is increased to 1.0 W peak for a 20% duty cycle pulse train. However, this only holds true for pulse widths which are short compared to the thermal time constant of the semiconductor device to which they are applied.

For pulse widths which are significant compared to the thermal time constant of the device, the peak operating condition begins to look more like a continuous duty operating condition over the time duration of the pulse. In these cases, the peak power dissipation rating cannot be merely time averaged by dividing the continuous power rating by the duty cycle of the pulse train. Instead, the average power rating can only be scaled up a reduced amount in accordance with the device's transient thermal response, so that the device's max junction temperature is not exceeded.

Figure 12 of the MDC3105 data sheet plots its transient thermal resistance, r(t) as a function of pulse width in ms for various pulse train duty cycles as well as for a single pulse and illustrates this effect. For short pulse widths near the left side of the chart, r(t), the factor, by which the continuous duty thermal resistance is multiplied to determine how much the peak power rating can be increased above the average power rating, approaches the duty cycle of the pulse train, which is the expected value. However, as the pulse width is increased, that factor eventually approaches 1.0 for all duty cycles indicating that the pulse width is sufficiently long to appear as a continuous duty condition to this device. For the MDC3105LT1, this pulse width is about 100 seconds. At this and larger pulse widths, the peak power dissipation capability is the same as the continuous duty power capability.

To use Figure 12 to determine the peak power rating for a specific application, enter the chart with the worst case pulse condition, that is the max pulse width and max duty cycle and determine the worst case r(t) for your application. Then calculate the peak power dissipation allowed by using the equation,

$$Pd(pk) = (T_{Jmax} - T_{Amax}) \div (R_{\theta JA} * r(t))$$

$$Pd(pk) = (150^{\circ}C - T_{Amax}) \div (556^{\circ}C/W * r(t))$$

Thus for a 20% duty cycle and a PW = 40 ms, Figure 12 yields r(t) = 0.3 and when entered in the above equation, the max allowable Pd(pk) = 390 mW for a max $T_A = 85$ °C.

Also note that these calculations assume a rectangular pulse shape for which the rise and fall times are insignificant compared to the pulse width. If this is not the case in a specific application, then the $V_{\rm O}$ and $I_{\rm O}$ waveforms should be multiplied together and the resulting power waveform integrated to find the total dissipation across the device. This then would be the number that has to be less than or equal to the Pd(pk) calculated above. A circuit simulator having a waveform calculator may prove very useful for this purpose.

Notes on SOA and Time Constant Limitations

Figure 10 is the Safe Operating Area (SOA) for the MDC3105. Device instantaneous operation should never be pushed beyond these limits. It shows the SOA for the Transistor "ON" condition as well as the SOA for the Zener during the turn-off transient. The max current is limited by the Izpk capability of the Zener as well as the transistor in addition to the max input current through the resistor. It should not be exceeded at any temperature. The BJT power dissipation limits are shown for various pulse widths and duty cycles at an ambient temperature of 25°C. The voltage limit is the max V_{CC} that can be applied to the device. When the input to the device is switched off, the BJT "ON" current is instantaneously dumped into the Zener diode where it begins its exponential decay. The Zener clamp voltage is a function of that BJT current level as can be seen by the bowing of the V_Z versus I_Z curve at the higher currents. In addition to the Zener's current limit impacting this device's 500 mA max rating, the clamping diode also has a peak energy limit as well. This energy limit was measured using a rectangular pulse and then translated to an exponential equivalent using the 2:1 relationship between the L/R time constant of an exponential pulse and the pulse width of a rectangular pulse having equal energy content. These L/R time constant limits in ms appear along the Vz versus Iz curve for the various values of IZ at which the Pd lines intersect the V_{CC} limit. The L/R time constant for a given load should not exceed these limits at their respective currents. Precise L/R limits on Zener energy at intermediate current levels can be obtained from Figure 11.

Designing with this Data Sheet

- 1. Determine the maximum inductive load current (at $\max V_{CC}$, min coil resistance and usually minimum temperature) that the MDC3105 will have to drive and make sure it is less than the max rated current.
- 2. For pulsed operation, use the Transient Thermal Response of Figure 12 and the instructions with it to determine the maximum limit on transistor power dissipation for the desired duty cycle and temperature range.
- 3. Use Figures 10 and 11 with the SOA notes above to insure that instantaneous operation does not push the device beyond the limits of the SOA plot.
- While keeping any V_{O(sat)} requirements in mind, determine the max input current needed to achieve that output current from Figures 2 and 6.
- 5. For levels of input current below 100 μA, use the input threshold curves of Figure 4 to verify that

- there will be adequate input current available to turn on the MDC3105 at all temperatures.
- 6. For levels of input current above 100 μ A, enter Figure 3 using that max input current and determine the input voltage required to drive the MDC3105 from the solid V_{in} versus I_{in} line. Select a suitable drive source family from those whose dotted lines cross the solid input characteristic line to the right of the I_{in} , V_{in} point.
- 7. Using the max output current calculated in step 1, check Figure 7 to insure that the range of Zener clamp voltage over temperature will satisfy all system and EMI requirements.
- 8. Using Figures 8 and 9, insure that "OFF" state leakage over temperature and voltage extremes does not violate any system requirements.
- 9. Review circuit operation and insure none of the device max ratings are being exceeded.

APPLICATIONS DIAGRAMS

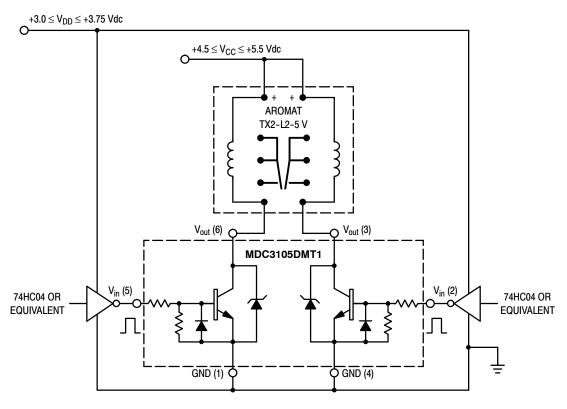


Figure 13. A 200 mW, 5.0 V Dual Coil Latching Relay Application with 3.0 V-HCMOS Level Translating Interface

Max Continuous Current Calculation

for TX2–5V Relay, R1 = 178 Ω Nominal @ R_A = 25°C Assuming $\pm 10\%$ Make Tolerance, R1 = 178 Ω * 0.9 = 160 Ω Min @ T_A = 25°C T_C for Annealed Copper Wire is 0.4%/°C R1 = 160 Ω * [1+(0.004) * (-40°-25°)] = 118 Ω Min @ -40°C I_O Max = (5.5 V Max – 0.25V) /118 Ω = 45 mA




Figure 14. A 140 mW, 5.0 V Relay with TTL Interface

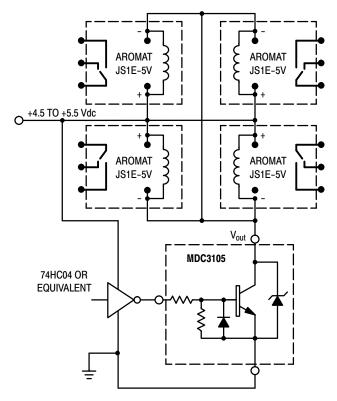


Figure 15. A Quad 5.0 V, 360 mW Coil Relay Bank

TYPICAL OPERATING WAVEFORMS

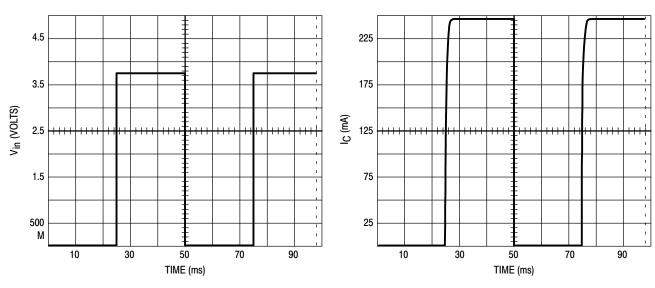


Figure 16. 20 Hz Square Wave Input

Figure 17. 20 Hz Square Wave Response


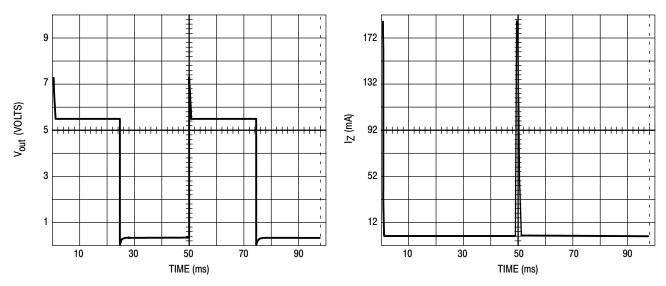


Figure 18. 20 Hz Square Wave Response

Figure 19. 20 Hz Square Wave Response

PACKAGE DIMENSIONS

SOT-23 (TO-236) CASE 318-08 **ISSUE AN**

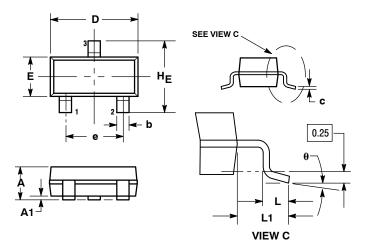

NOTES:


- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.
 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF PACE MATERIAL.
- BASE MATERIAL.
 318-01 THRU -07 AND -09 OBSOLETE, NEW STANDARD 318-08.

	М	ILLIMETE	RS			
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	0.89	1.00	1.11	0.035	0.040	0.044
A1	0.01	0.06	0.10	0.001	0.002	0.004
b	0.37	0.44	0.50	0.015	0.018	0.020
С	0.09	0.13	0.18	0.003	0.005	0.007
D	2.80	2.90	3.04	0.110	0.114	0.120
E	1.20	1.30	1.40	0.047	0.051	0.055
е	1.78	1.90	2.04	0.070	0.075	0.081
L	0.10	0.20	0.30	0.004	0.008	0.012
L1	0.35	0.54	0.69	0.014	0.021	0.029
HE	2.10	2.40	2.64	0.083	0.094	0.104

STYLE 6: PIN 1. BASE 2. EMITTER

- 3. COLLECTOR


SOLDERING FOOTPRINT*



*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PACKAGE DIMENSIONS

SC-74 CASE 318F-05 **ISSUE M**

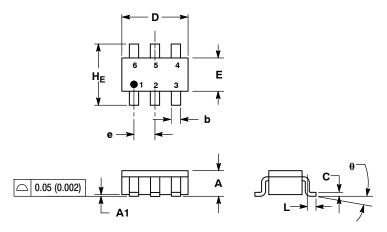

NOTES:

- NOTES:

 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

 2. CONTROLLING DIMENSION: INCH.

 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.


 4. 318F-01, -02, -03, -04 OBSOLETE. NEW STANDARD 318F-05.

	М	ILLIMETE	RS			
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	0.90	1.00	1.10	0.035	0.039	0.043
A1	0.01	0.06	0.10	0.001	0.002	0.004
b	0.25	0.37	0.50	0.010	0.015	0.020
C	0.10	0.18	0.26	0.004	0.007	0.010
D	2.90	3.00	3.10	0.114	0.118	0.122
E	1.30	1.50	1.70	0.051	0.059	0.067
е	0.85	0.95	1.05	0.034	0.037	0.041
L	0.20	0.40	0.60	0.008	0.016	0.024
HE	2.50	2.75	3.00	0.099	0.108	0.118
θ	0°	_	10°	0°	_	10°

- STYLE 8:
 PIN 1. EMITTER 1
 2. BASE 2
 3. COLLECTOR 2
 4. EMITTER 2

 - 5. BASE 1 6. COLLECTOR 1

SOLDERING FOOTPRINT*




*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PACKAGE DIMENSIONS

SOT-563, 6 LEAD

CASE 463A-01 ISSUE F



NOTES


- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. CONTROLLING DIMENSION: MILLIMETERS
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

	MIL	LIMETE	RS		3		
DIM	MIN	NOM	MAX	MIN	NOM	MAX	
Α	0.50	0.55	0.60	0.020	0.021	0.023	
b	0.17	0.22	0.27	0.007	0.009	0.011	
С	0.08	0.12	0.18	0.003	0.005	0.007	
D	1.50	1.60	1.70	0.059	0.062	0.066	
E	1.10	1.20	1.30	0.043	0.047	0.051	
е		0.5 BSC)	0.02 BSC			
L	0.10	0.20	0.30	0.004	0.008	0.012	
He	1.50	1.60	1.70	0.059	0.062	0.066	

STYLE 4: PIN 1. COLLECTOR

- 2. COLLECTOR 3. BASE
- 4. EMITTER 5. COLLECTOR
- 6. COLLECTOR

SOLDERING FOOTPRINT*



*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and 📖 are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor P.O. Box 5163, Denver, Colorado 80217 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center

Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative



OOO «ЛайфЭлектроникс" "LifeElectronics" LLC

ИНН 7805602321 КПП 780501001 P/C 40702810122510004610 ФАКБ "АБСОЛЮТ БАНК" (ЗАО) в г.Санкт-Петербурге К/С 3010181090000000703 БИК 044030703

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный) Email: org@lifeelectronics.ru