



# RF Power LDMOS Transistor

## N-Channel Enhancement-Mode Lateral MOSFET

This 12.5 W CW high efficiency RF power transistor is designed for consumer and commercial cooking applications operating in the 2450 MHz ISM band.

**Typical Performance:**  $V_{DD} = 28 \text{ Vdc}$ ,  $I_{DQ} = 110 \text{ mA}$

Frequency (MHz)	Signal Type	$G_{ps}$ (dB)	PAE (%)	$P_{out}$ (W)
2400	CW	18.5	55.7	12.5
2450		18.6	56.3	12.5
2500		18.1	54.2	12.5

### Load Mismatch/Ruggedness

Frequency (MHz)	Signal Type	VSWR	$P_{in}$ (dBm)	Test Voltage	Result
2450	CW	> 10:1 at all Phase Angles	26 (3 dB Overdrive)	32	No Device Degradation

### Features

- Characterized with series equivalent large-signal impedance parameters and common source S-parameters
- Qualified for operation at 32 Vdc
- Integrated ESD protection
- 150°C case operating temperature
- 150°C die temperature capability

### Target Applications


- Consumer cooking as PA driver
- Commercial cooking as PA driver

**MHT1108N**

**2450 MHz, 12.5 W CW, 28 V  
 RF POWER LDMOS TRANSISTOR  
 FOR CONSUMER AND  
 COMMERCIAL COOKING**



**DFN 4 x 6  
 PLASTIC**

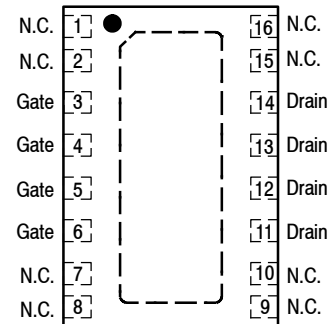

(Top View)

Note: Exposed backside of the package is the source terminal for the transistor.

**Figure 1. Pin Connections**

**Table 1. Maximum Ratings**

Rating	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	-0.5, +65	Vdc
Gate-Source Voltage	$V_{GS}$	-6.0, +10	Vdc
Operating Voltage	$V_{DD}$	32, +0	Vdc
Storage Temperature Range	$T_{stg}$	-65 to +150	°C
Case Operating Temperature Range	$T_C$	-40 to +150	°C
Operating Junction Temperature Range (1,2)	$T_J$	-40 to +150	°C
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	$P_D$	32.9 0.26	W W/°C

**Table 2. Thermal Characteristics**

Characteristic	Symbol	Value (2,3)	Unit
Thermal Resistance, Junction to Case Case Temperature 97°C, 12.6 W CW, 28 Vdc, $I_{DQ} = 110$ mA, 2450 MHz	$R_{\theta JC}$	3.8	°C/W

**Table 3. ESD Protection Characteristics**

Test Methodology	Class
Human Body Model (per JESD22-A114)	1C, passes 1000 V
Charge Device Model (per JESD22-C101)	C3, passes 1000 V

**Table 4. Moisture Sensitivity Level (MSL)**

Test Methodology	Rating	Package Peak Temperature	Unit
Per JESD22-A113, IPC/JEDEC J-STD-020	3	260	°C

**Table 5. Electrical Characteristics** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

**Off Characteristics**

Zero Gate Voltage Drain Leakage Current ( $V_{DS} = 65$ Vdc, $V_{GS} = 0$ Vdc)	$I_{DSS}$	—	—	10	$\mu\text{Adc}$
Zero Gate Voltage Drain Leakage Current ( $V_{DS} = 32$ Vdc, $V_{GS} = 0$ Vdc)	$I_{DSS}$	—	—	1	$\mu\text{Adc}$
Gate-Source Leakage Current ( $V_{GS} = 5$ Vdc, $V_{DS} = 0$ Vdc)	$I_{GSS}$	—	—	1	$\mu\text{Adc}$

**On Characteristics**

Gate Threshold Voltage ( $V_{DS} = 10$ Vdc, $I_D = 14.3$ $\mu\text{Adc}$ )	$V_{GS(th)}$	0.8	1.2	1.6	Vdc
Gate Quiescent Voltage ( $V_{DS} = 28$ Vdc, $I_D = 90$ mAdc)	$V_{GS(Q)}$	—	1.8	—	Vdc
Drain-Source On-Voltage ( $V_{GS} = 10$ Vdc, $I_D = 143$ mAdc)	$V_{DS(on)}$	0.1	0.2	0.3	Vdc

1. Continuous use at maximum temperature will affect MTTF.
2. MTTF calculator available at <http://www.nxp.com/RF/calculators>.
3. Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.nxp.com/RF> and search for AN1955.

**Table 6. Typical Performance**In NXP Reference Circuit, 50 ohm system,  $V_{DD} = 28$  Vdc,  $I_{DQ} = 110$  mA

Frequency	$G_{ps}$ (dB)	PAE (%)	$P_{out}$ (W)
2400 MHz	18.5	55.7	12.5
2450 MHz	18.6	56.3	12.5
2500 MHz	18.1	54.2	12.5


**Table 7. Load Mismatch/Ruggedness**In NXP Reference Circuit, 50 ohm system,  $I_{DQ} = 110$  mA

Frequency (MHz)	Signal Type	VSWR	$P_{in}$ (dBm)	Test Voltage, $V_{DD}$	Result
2450	CW	>10:1 at all Phase Angles	26 (3 dB Overdrive)	32	No Device Degradation

**Table 8. Ordering Information**

Device	Tape and Reel Information	Package
MHT1108NT1	T1 Suffix = 1,000 Units, 16 mm Tape Width, 7-inch Reel	DFN 4 × 6

## TYPICAL CHARACTERISTICS

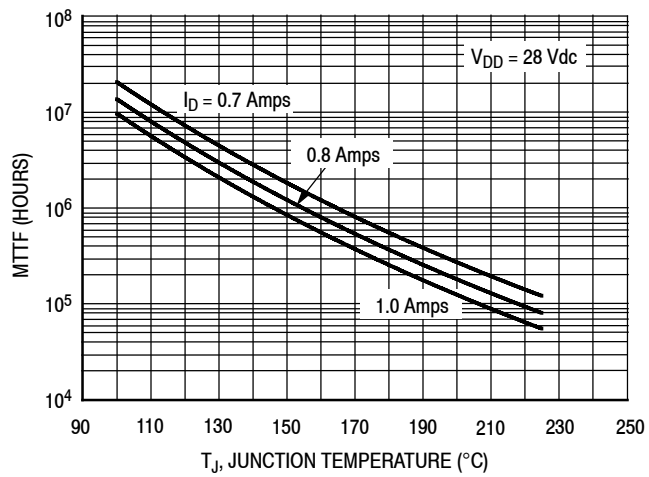

**Note:** MTTF value represents the total cumulative operating time under indicated test conditions.

MTTF calculator available at <http://www.nxp.com/RF/calculators>.

**Figure 2. MTTF versus Junction Temperature – CW**

**Table 9. Load Pull Performance — Maximum Power Tuning**

V<sub>DD</sub> = 28 Vdc, I<sub>DQ</sub> = 110 mA, Pulsed CW, 10 μsec(on), 10% Duty Cycle

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Output Power					
			P1dB					
			Z <sub>load</sub> <sup>(1)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	PAE (%)
2400	1.13 – j2.48	0.77 + j2.04	5.21 + j1.81	19.6	42.2	17	60.0	59.5
2450	1.03 – j2.77	0.74 + j2.24	5.37 + j1.51	19.1	42.2	16	58.4	57.7
2500	1.02 – j2.93	0.84 + j2.47	5.02 + j1.34	19.1	42.1	16	58.0	57.3

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Output Power					
			P3dB					
			Z <sub>load</sub> <sup>(2)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	PAE (%)
2400	1.13 – j2.48	0.75 + j2.25	6.22 + j1.32	17.3	43.0	20	59.4	58.4
2450	1.03 – j2.77	0.71 + j2.43	6.08 + j1.21	16.9	42.9	19	58.6	57.2
2500	1.02 – j2.93	0.84 + j2.68	5.76 + j0.92	16.9	42.8	19	57.8	56.6

(1) Load impedance for optimum P1dB power.

(2) Load impedance for optimum P3dB power.

Z<sub>source</sub> = Measured impedance presented to the input of the device at the package reference plane.

Z<sub>in</sub> = Impedance as measured from gate contact to ground.

Z<sub>load</sub> = Measured impedance presented to the output of the device at the package reference plane.

**Table 10. Load Pull Performance — Maximum Efficiency Tuning**

V<sub>DD</sub> = 28 Vdc, I<sub>DQ</sub> = 110 mA, Pulsed CW, 10 μsec(on), 10% Duty Cycle

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Efficiency					
			P1dB					
			Z <sub>load</sub> <sup>(1)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	PAE (%)
2400	1.13 – j2.48	0.65 + j2.01	3.94 + j3.57	20.9	41.5	14	65.8	65.2
2450	1.03 – j2.77	0.63 + j2.20	3.84 + j3.50	20.5	41.3	14	64.4	63.8
2500	1.02 – j2.93	0.70 + j2.42	3.32 + j3.15	20.6	41.1	13	63.5	63.0

f (MHz)	Z <sub>source</sub> (Ω)	Z <sub>in</sub> (Ω)	Max Efficiency					
			P3dB					
			Z <sub>load</sub> <sup>(2)</sup> (Ω)	Gain (dB)	(dBm)	(W)	η <sub>D</sub> (%)	PAE (%)
2400	1.13 – j2.48	0.63 + j2.19	4.12 + j3.59	18.9	42.1	16	65.6	64.7
2450	1.03 – j2.77	0.62 + j2.37	4.24 + j3.10	18.1	42.2	17	63.9	63.0
2500	1.02 – j2.93	0.73 + j2.63	4.05 + j3.04	18.4	42.0	16	63.2	62.9


(1) Load impedance for optimum P1dB efficiency.

(2) Load impedance for optimum P3dB efficiency.

Z<sub>source</sub> = Measured impedance presented to the input of the device at the package reference plane.

Z<sub>in</sub> = Impedance as measured from gate contact to ground.

Z<sub>load</sub> = Measured impedance presented to the output of the device at the package reference plane.

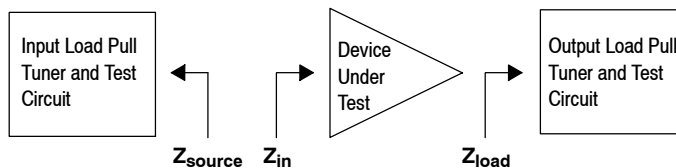

### P3dB – TYPICAL LOAD PULL CONTOURS — 2450 MHz

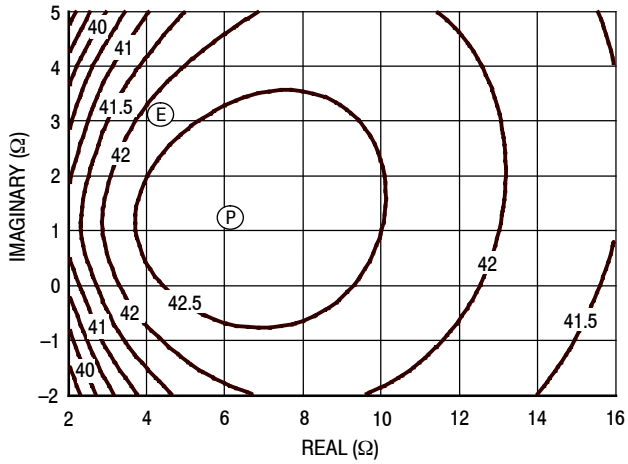


Figure 3. P3dB Load Pull Output Power Contours (dBm)

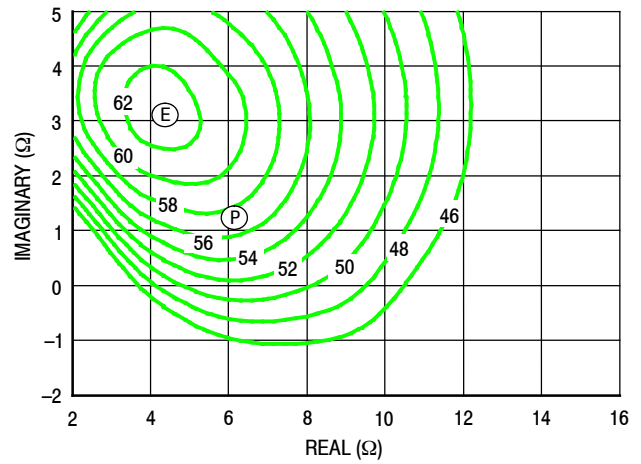


Figure 4. P3dB Load Pull PAE Contours (%)

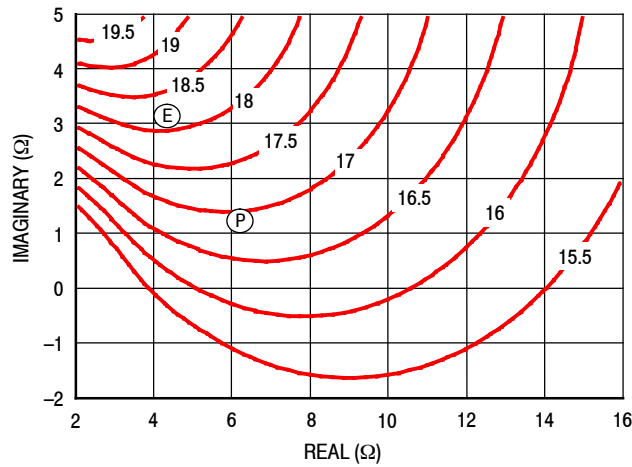
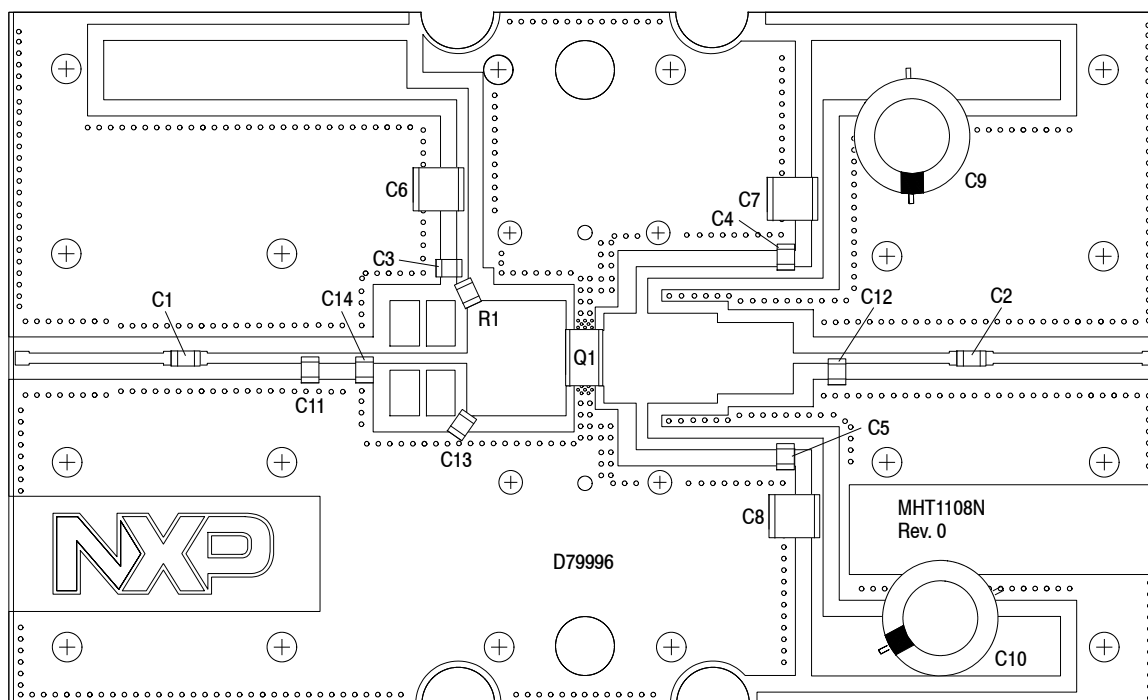


Figure 5. P3dB Load Pull Gain Contours (dB)

**NOTE:** (P) = Maximum Output Power  
(E) = Maximum Power Added Efficiency

- Gain
- Power Added Efficiency
- Output Power

## 2450 MHz REFERENCE CIRCUIT — 3" x 5" (7.6 cm x 12.7 cm)



**Figure 6. MHT1108N Reference Circuit Component Layout — 2450 MHz**

**Table 11. MHT1108N Reference Circuit Component Designations and Values — 2450 MHz**

Part	Description	Part Number	Manufacturer
C1, C2, C3, C4, C5	6.2 pF Chip Capacitor	ATC100B6R2FW1500XT	ATC
C6, C7, C8	10 $\mu$ F Chip Capacitor	C5750X7S2A106M	TDK
C9, C10	220 $\mu$ F, 50 V Electrolytic Capacitor	227CKS050M	Illinois Capacitor
C11	0.6 pF Chip Capacitor	ATC100B0R6FW1500XT	ATC
C12, C13	1.0 pF Chip Capacitor	ATC100B1R3FW1500XT	ATC
C14	0.3 pF Chip Capacitor	ATC100B0R3FW1500XT	ATC
Q1	RF Power LDMOS Transistor	MHT1108N	NXP Semiconductors
R1	4.7 $\Omega$ , 1/4 W Chip Resistor	CRCW12064R70FKEA	Vishay
PCB	Rogers RO4350B, 0.020", $\epsilon_r = 3.66$	D79996	MTL

TYPICAL CHARACTERISTICS — 2450 MHz REFERENCE CIRCUIT

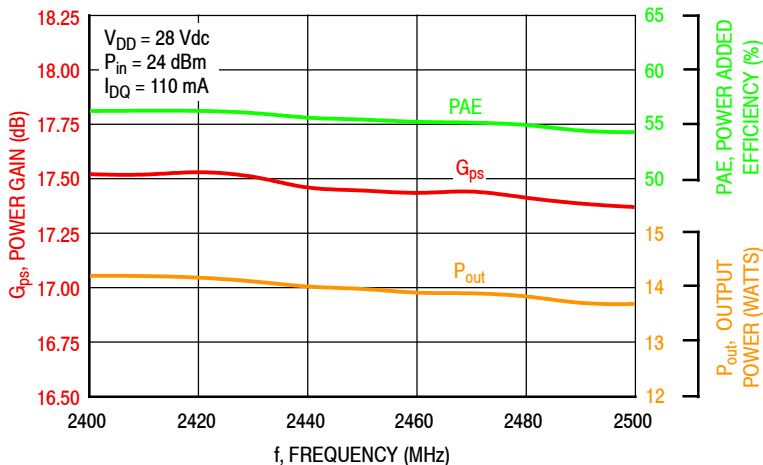


Figure 7. Power Gain, Power Added Efficiency and Output Power versus Frequency at a Constant Input Power

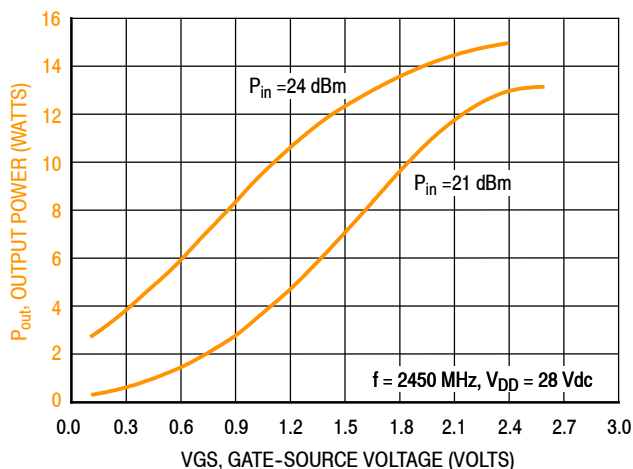


Figure 8. Output Power versus Gate-Source Voltage


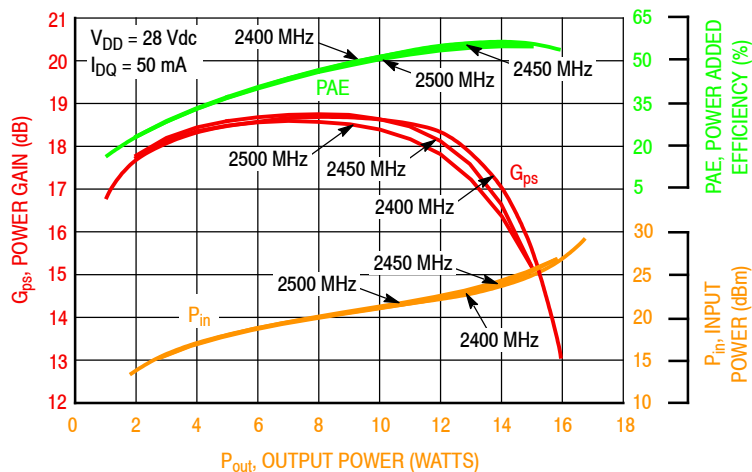


Figure 9. Power Gain, Power Added Efficiency and Input Power versus Output Power and Frequency

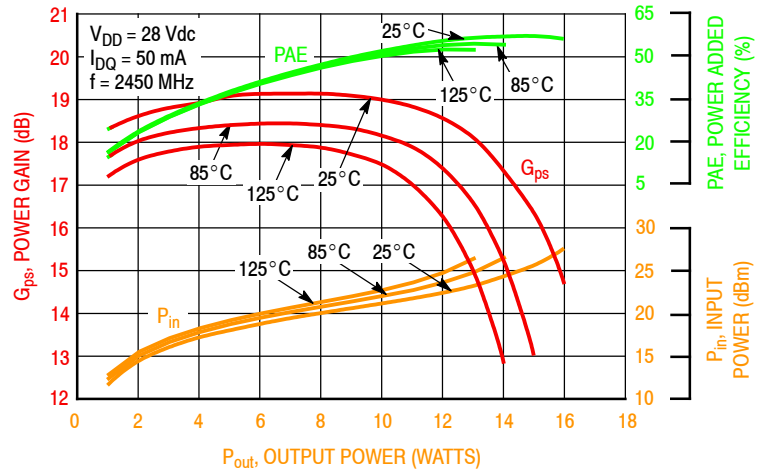

## TYPICAL CHARACTERISTICS — 2450 MHz REFERENCE CIRCUIT



**Figure 10. Power Gain, Power Added Efficiency and Input Power versus Output Power and Temperature**


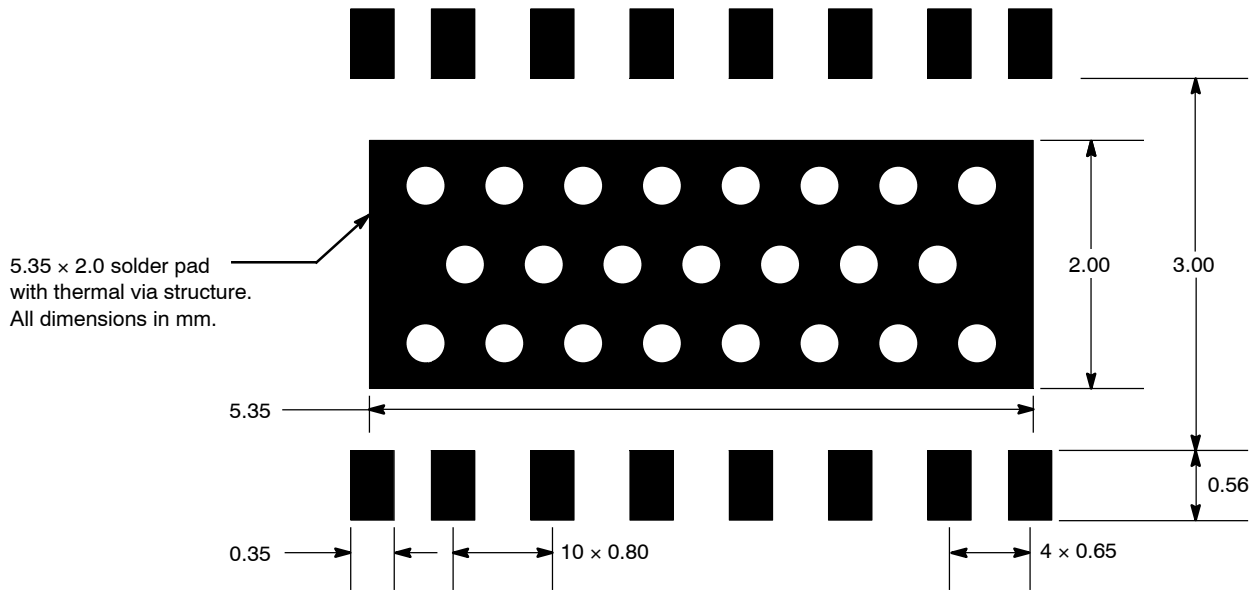


Figure 11. PCB Pad Layout for 16-Lead DFN 4 × 6




Figure 12. Product Marking

### PACKAGE DIMENSIONS

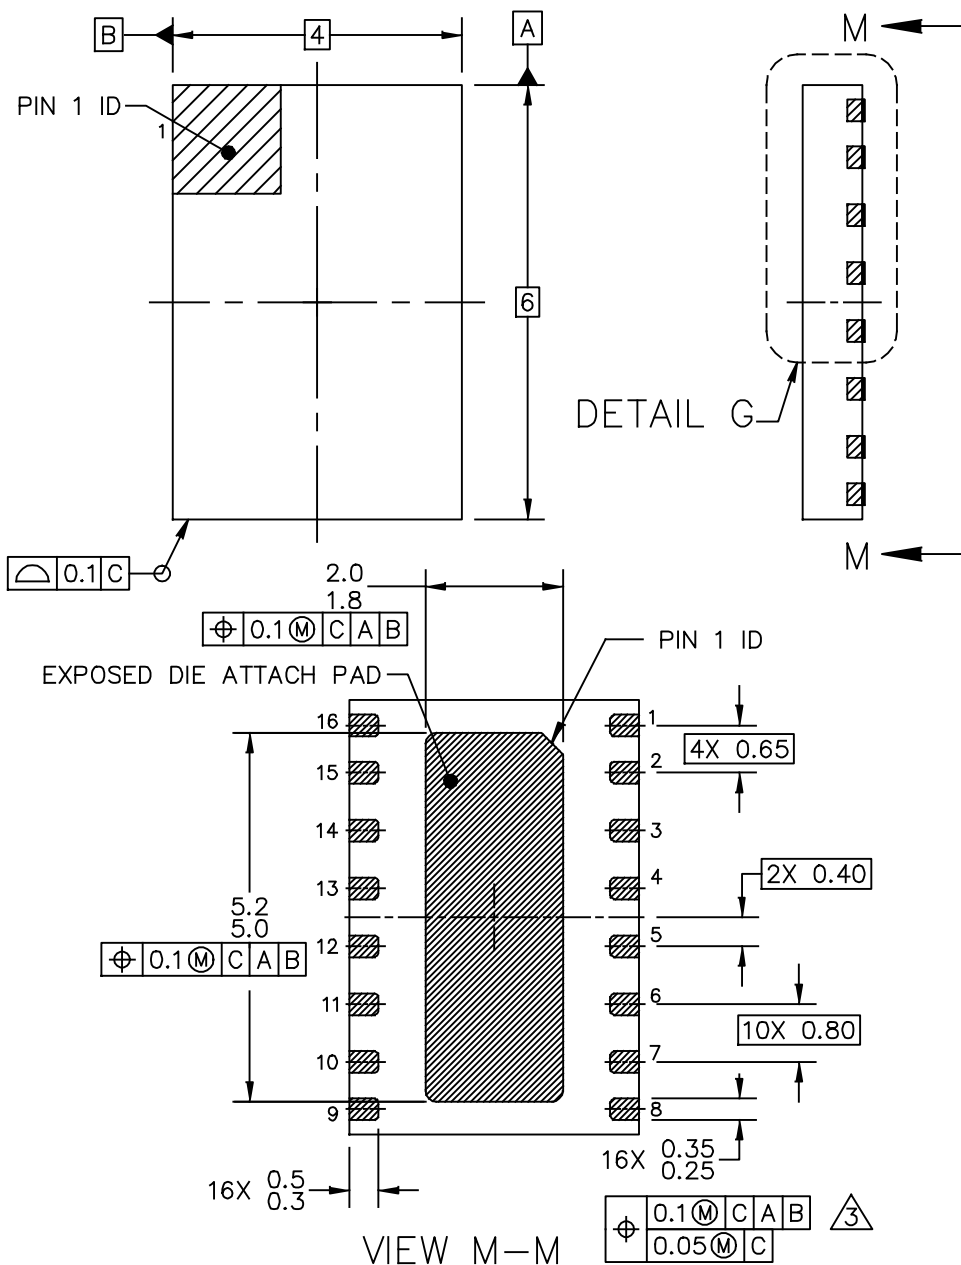

© NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED	MECHANICAL OUTLINE	PRINT VERSION NOT TO SCALE
TITLE: DFN, THERMALLY ENHANCED 4 X 6 X 0.9, 0.8 & 0.65 PITCH, 16 TERMINAL	DOCUMENT NO: 98ASA00868D	REV: B
	STANDARD: NON-JEDEC	
	SOT1862-1	27 JUL 2016

MHT1108N

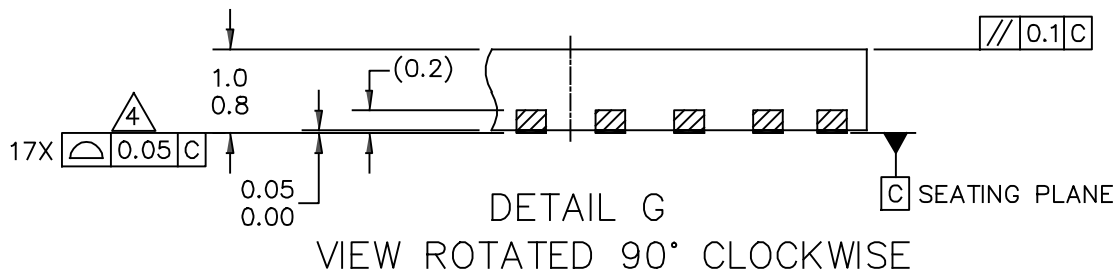

© NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED	MECHANICAL OUTLINE	PRINT VERSION NOT TO SCALE
TITLE: DFN, THERMALLY ENHANCED 4 X 6 X 0.9, 0.8 & 0.65 PITCH, 16 TERMINAL	DOCUMENT NO: 98ASA00868D	REV: B
	STANDARD: NON-JEDEC	
	SOT1862-1	27 JUL 2016

NOTES:

1. DIMENSIONING & TOLERANCING CONFIRM TO ASME Y14.5M–1994.

2. ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.

3. THIS DIMENSION APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.25 MM AND 0.30 MM FROM TERMINAL TIP.

4. COPLANARITY APPLIES TO THE EXPOSED HEAT SLUG AS WELL AS THE TERMINALS.

© NXP SEMICONDUCTORS N.V. ALL RIGHTS RESERVED	MECHANICAL OUTLINE	PRINT VERSION NOT TO SCALE	
TITLE: DFN, THERMALLY ENHANCED 4 X 6 X 0.9, 0.8 & 0.65 PITCH, 16 TERMINAL		DOCUMENT NO: 98ASA00868D	REV: B
		STANDARD: NON-JEDEC	
		SOT1862-1	27 JUL 2016

## PRODUCT DOCUMENTATION, SOFTWARE AND TOOLS

Refer to the resources to aid your design process.

### Application Notes

- AN1907: Solder Reflow Attach Method for High Power RF Devices in Over-Molded Plastic Packages
- AN1955: Thermal Measurement Methodology of RF Power Amplifiers

### Engineering Bulletins

- EB212: Using Data Sheet Impedances for RF LDMOS Devices

### Software

- Electromigration MTTF Calculator
- RF High Power Model

### Development Tools

- Printed Circuit Boards

### To Download Resources Specific to a Given Part Number:

1. Go to <http://www.nxp.com/RF>
2. Search by part number
3. Click part number link
4. Choose the desired resource from the drop down menu

## REVISION HISTORY

The following table summarizes revisions to this document.

Revision	Date	Description
0	Mar. 2017	• Initial Release of Data Sheet

---

## ***How to Reach Us:***

**Home Page:**  
nxp.com

**Web Support:**  
nxp.com/support

Information in this document is provided solely to enable system and software implementers to use NXP products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits based on the information in this document. NXP reserves the right to make changes without further notice to any products herein.

NXP makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does NXP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in NXP data sheets and/or specifications can and do vary in different applications, and actual performance may vary over time. All operating parameters, including "typicals," must be validated for each customer application by customer's technical experts. NXP does not convey any license under its patent rights nor the rights of others. NXP sells products pursuant to standard terms and conditions of sale, which can be found at the following address: [nxp.com/SalesTermsandConditions](http://nxp.com/SalesTermsandConditions).

NXP, the NXP logo, Freescale, and the Freescale logo are trademarks of NXP B.V. All other product or service names are the property of their respective owners.  
© 2017 NXP B.V.



Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)