

## OVERVIEW

The D1U54P-12-CONC (4407001-1) interface connector card is a dual card that is intended to interconnect the output voltages and signals of two D1U54x Series power modules for laboratory/bench level evaluation of the product.

The outputs are capable of being parallel connected and a common ISHARE bus is provided to ensure that both power modules share current within specified limits.

The Interface Card is capable of operation from standby voltages of 3.3V, 5V and 12V (provided by the D1U54x variant under test) without any reconfiguration.

It is designed and intended to be used for the members within the following series (both AC and DC input source variants and both airflow options):

MODEL VARIANTS	3.3VSTANDBY Output	5VSTANDBY Output	12VSTANDBY Output
D1U54x-x-650-12-HBxxC-xxx	N/A	N/A	HB3xC HB4xC
D1U54x-x-1200-12-HxxxxC	HC3PC HC4PC	HA3PxC HA4PxC	N/A
D1U54x-x-1500-12-HxxxC	HC3C HC4C	HA3C HA4C	HB4xC


End Users can also use this card in their applications as an alternative to a host system power/mid or interposer plane (consult Murata Sales for details).

## SAFETY PRECAUTION


The D1U54P-12-CONC output connector card is intended to facilitate the connection of the output supply rails of the power module. As such there a high energy source exposed on the output connector card; please take the necessary safety precautions during the use of this connector card for product evaluation.

## IMAGES – D1U54P-12-CONC

Component Side (Top) View

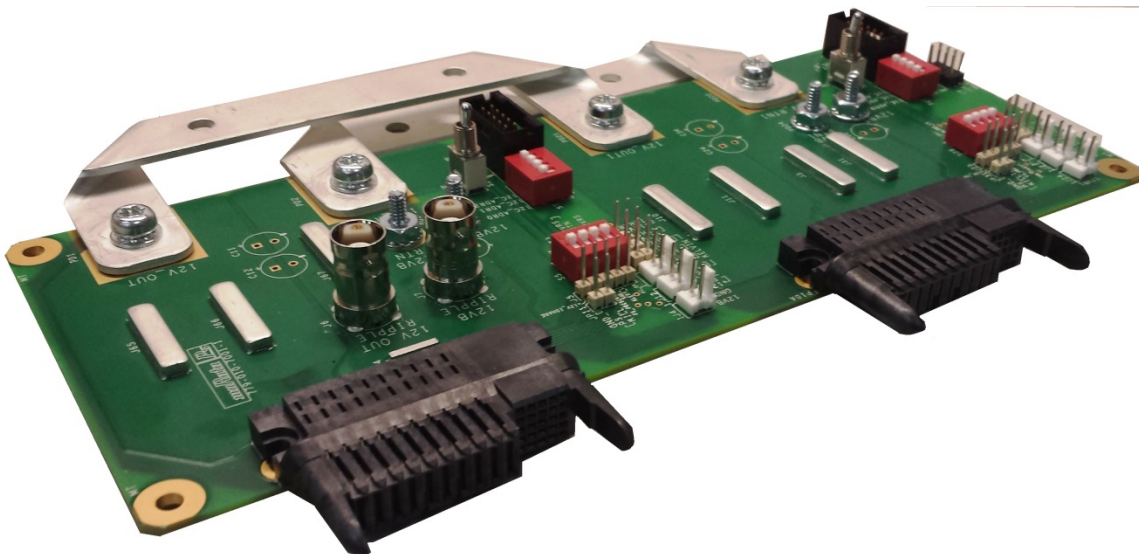

## SCHEMATIC – D1U54P-12-CONC

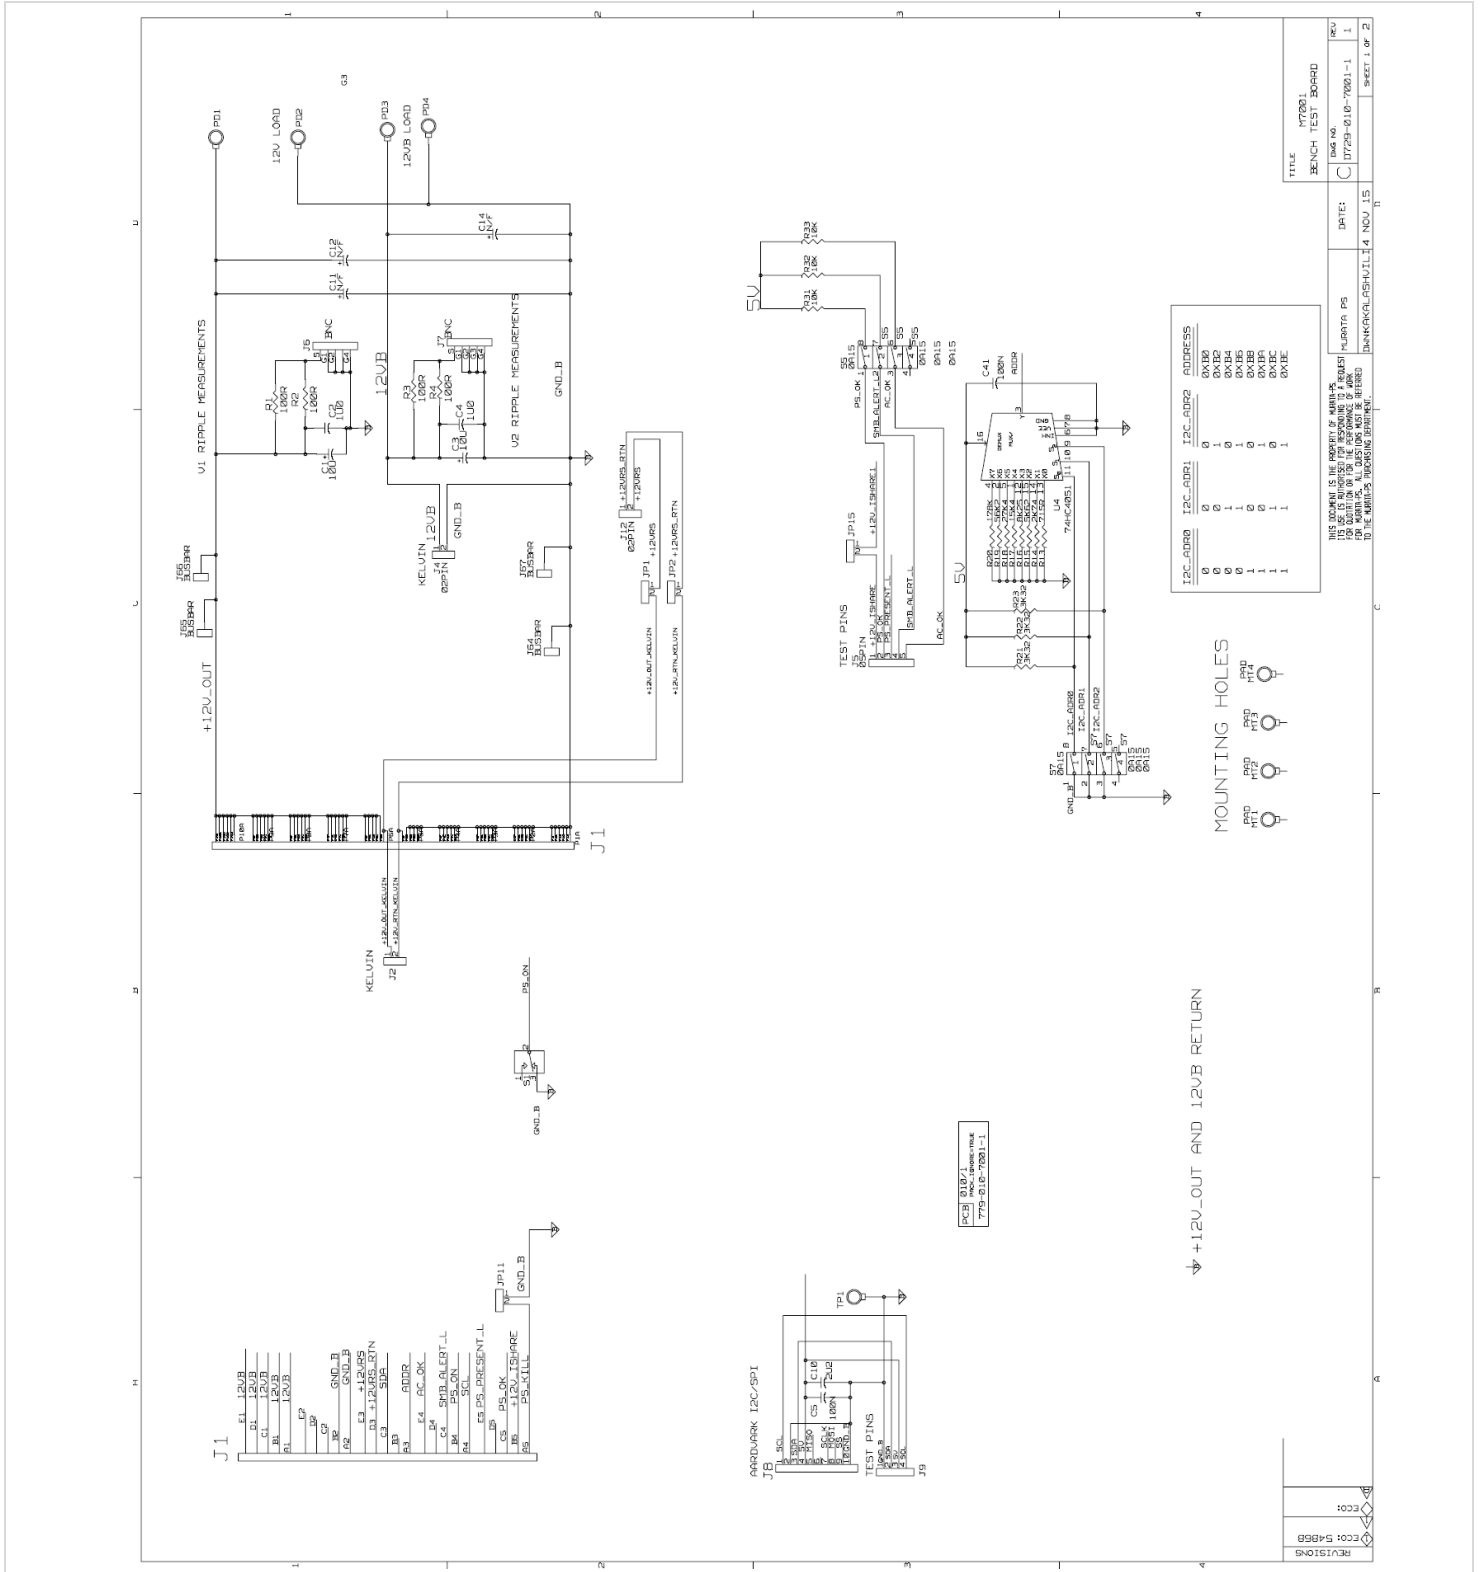

TEST PINS	TEST PINS	TEST PINS	TEST PINS
TP1	TP2	TP3	TP4
TP5	TP6	TP7	TP8
TP9	TP10	TP11	TP12
TP13	TP14	TP15	TP16
TP17	TP18	TP19	TP20
TP21	TP22	TP23	TP24
TP25	TP26	TP27	TP28
TP29	TP30	TP31	TP32
TP33	TP34	TP35	TP36
TP37	TP38	TP39	TP40
TP41	TP42	TP43	TP44
TP45	TP46	TP47	TP48
TP49	TP50	TP51	TP52
TP53	TP54	TP55	TP56
TP57	TP58	TP59	TP60
TP61	TP62	TP63	TP64

TEST PINS	TEST PINS	TEST PINS	TEST PINS
TP1	TP2	TP3	TP4
TP5	TP6	TP7	TP8
TP9	TP10	TP11	TP12
TP13	TP14	TP15	TP16
TP17	TP18	TP19	TP20
TP21	TP22	TP23	TP24
TP25	TP26	TP27	TP28
TP29	TP30	TP31	TP32
TP33	TP34	TP35	TP36
TP37	TP38	TP39	TP40
TP41	TP42	TP43	TP44
TP45	TP46	TP47	TP48
TP49	TP50	TP51	TP52
TP53	TP54	TP55	TP56
TP57	TP58	TP59	TP60
TP61	TP62	TP63	TP64

TEST PINS	TEST PINS	TEST PINS	TEST PINS
TP1	TP2	TP3	TP4
TP5	TP6	TP7	TP8
TP9	TP10	TP11	TP12
TP13	TP14	TP15	TP16
TP17	TP18	TP19	TP20
TP21	TP22	TP23	TP24
TP25	TP26	TP27	TP28
TP29	TP30	TP31	TP32
TP33	TP34	TP35	TP36
TP37	TP38	TP39	TP40
TP41	TP42	TP43	TP44
TP45	TP46	TP47	TP48
TP49	TP50	TP51	TP52
TP53	TP54	TP55	TP56
TP57	TP58	TP59	TP60
TP61	TP62	TP63	TP64

TEST PINS	TEST PINS	TEST PINS	TEST PINS
TP1	TP2	TP3	TP4
TP5	TP6	TP7	TP8
TP9	TP10	TP11	TP12
TP13	TP14	TP15	TP16
TP17	TP18	TP19	TP20
TP21	TP22	TP23	TP24
TP25	TP26	TP27	TP28
TP29	TP30	TP31	TP32
TP33	TP34	TP35	TP36
TP37	TP38	TP39	TP40
TP41	TP42	TP43	TP44
TP45	TP46	TP47	TP48
TP49	TP50	TP51	TP52
TP53	TP54	TP55	TP56
TP57	TP58	TP59	TP60
TP61	TP62	TP63	TP64

TEST PINS	TEST PINS	TEST PINS	TEST PINS
TP1	TP2	TP3	TP4
TP5	TP6	TP7	TP8
TP9	TP10	TP11	TP12
TP13	TP14	TP15	TP16
TP17	TP18	TP19	TP20
TP21	TP22	TP23	TP24
TP25	TP26	TP27	TP28
TP29	TP30	TP31	TP32
TP33	TP34	TP35	TP36
TP37	TP38	TP39	TP40
TP41	TP42	TP43	TP44
TP45	TP46	TP47	TP48
TP49	TP50	TP51	TP52
TP53	TP54	TP55	TP56
TP57	TP58	TP59	TP60
TP61	TP62	TP63	TP64

TEST PINS	TEST PINS	TEST PINS	TEST PINS
TP1	TP2	TP3	TP4
TP5	TP6	TP7	TP8
TP9	TP10	TP11	TP12
TP13	TP14	TP15	TP16
TP17	TP18	TP19	TP20
TP21	TP22	TP23	TP24
TP25	TP26	TP27	TP28
TP29	TP30	TP31	TP32
TP33	TP34	TP35	TP36
TP37	TP38	TP39	TP40
TP41	TP42	TP43	TP44
TP45	TP46	TP47	TP48
TP49	TP50	TP51	TP52
TP53	TP54	TP55	TP56
TP57	TP58	TP59	TP60
TP61	TP62	TP63	TP64

REV	DATE	DESCRIPTION
1	07/23/01	INITIAL PS
2	01/15/01	INITIAL PS

REV	DATE	DESCRIPTION
1	07/23/01	INITIAL PS
2	01/15/01	INITIAL PS

REV	DATE	DESCRIPTION
1	07/23/01	INITIAL PS
2	01/15/01	INITIAL PS

REV	DATE	DESCRIPTION
1	07/23/01	INITIAL PS
2	01/15/01	INITIAL PS

REV	DATE	DESCRIPTION
1	07/23/01	INITIAL PS
2	01/15/01	INITIAL PS


REV	DATE	DESCRIPTION
1	07/23/01	INITIAL PS
2	01/15/01	INITIAL PS

REV	DATE	DESCRIPTION
1	07/23/01	INITIAL PS
2	01/15/01	INITIAL PS

REV	DATE	DESCRIPTION
1	07/23/01	INITIAL PS
2	01/15/01	INITIAL PS

REV	DATE	DESCRIPTION
1	07/23/01	INITIAL PS
2	01/15/01	INITIAL PS

### SCHEMATIC – D1U54P-12-CONC

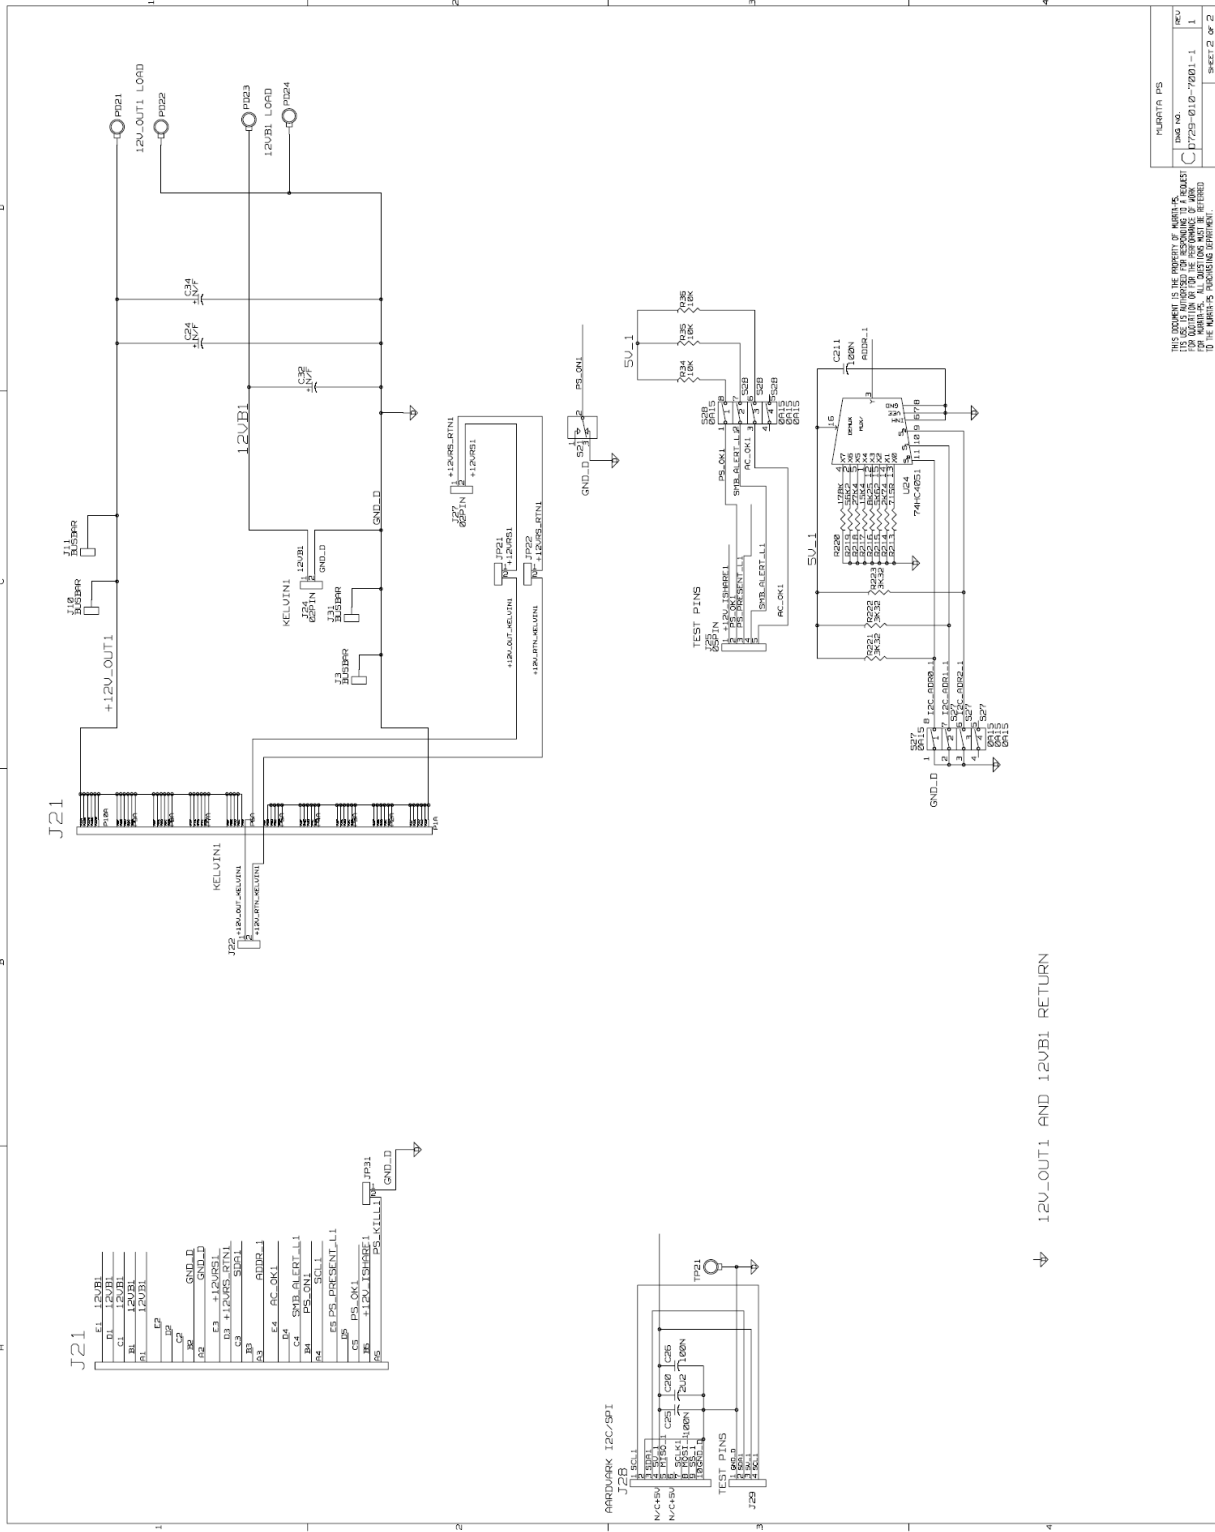


MURATA PS
DATE NO.
REV
C D1723-0110-7001-1
1
SHEET 2 OF 2

THIS DRAWING IS THE PROPERTY OF MURATA PS. IT IS TO BE USED ONLY FOR THE PURPOSES SPECIFIED IN THE REQUEST FOR QUOTE. NO PARTS OR MATERIALS ARE TO BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF MURATA PS. MURATA PS ASSUMES NO LIABILITY FOR THE USER'S NEGLIGENCE OR MISUSE.


↘ 12V\_OUT1 AND 12VUB1 RETURN

**MECHANICAL OUTLINE**

Top View

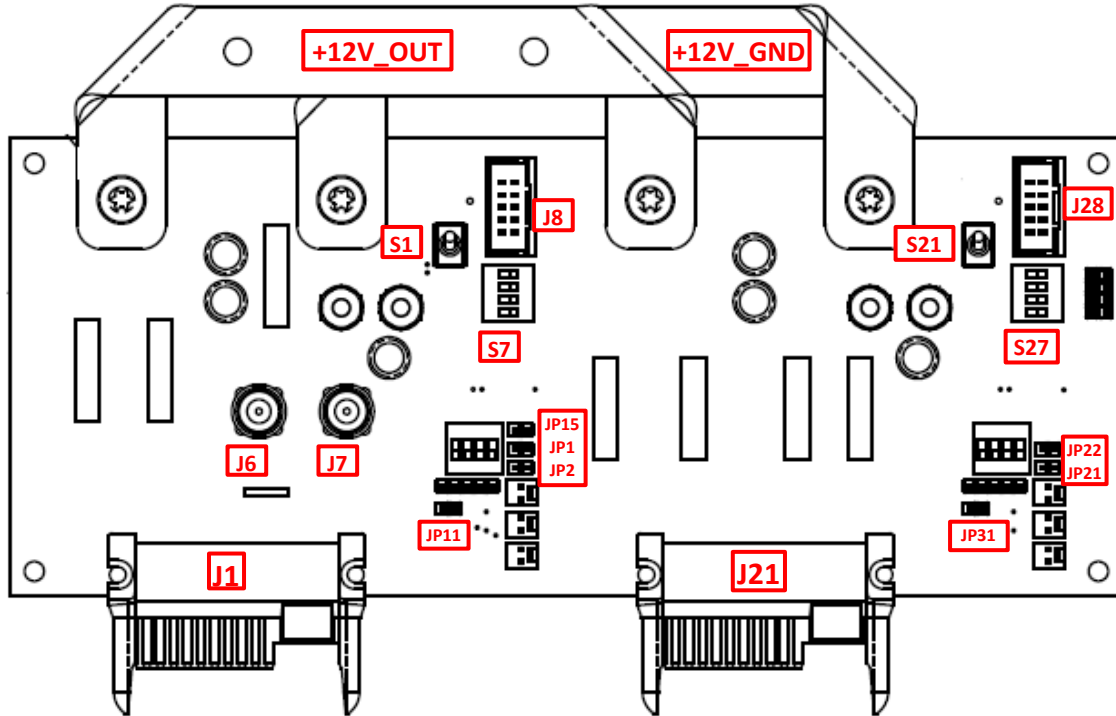

3D View

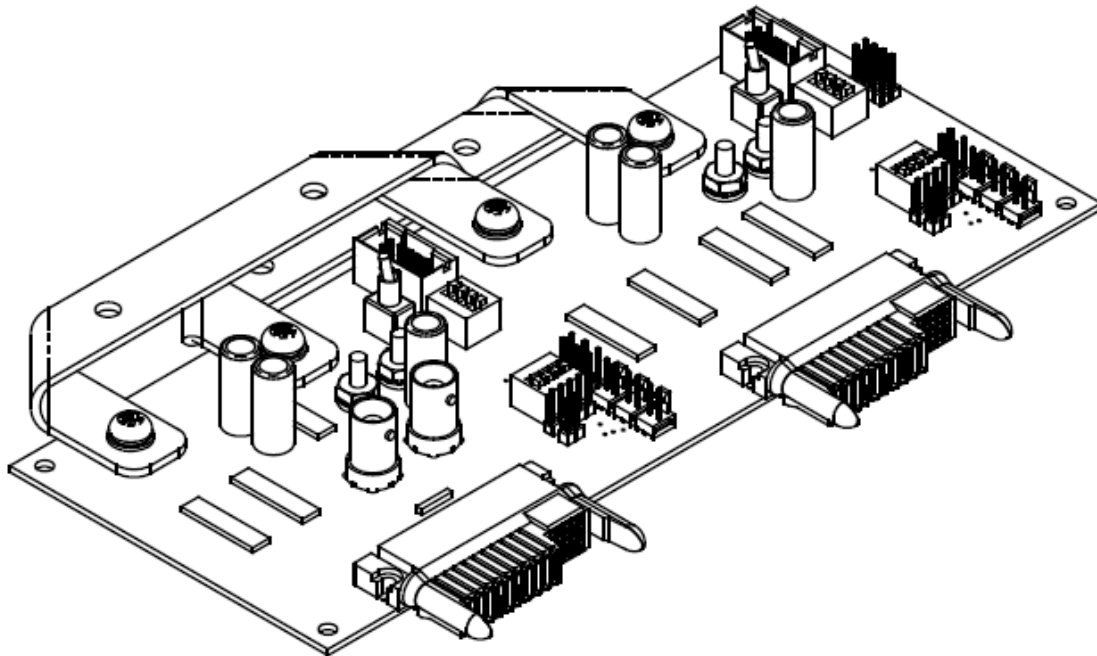

### CONFIGURATION NOTES:

1. The Interface Connector card is basically two identical circuits provided on a single card (PCB). Each “half” has all the necessary configuration links duplicated to enable each “half” to operate individually if required.

Common connections exist these being as follows:

- a. Power bus bars that are intended to interconnect the main 12VDC outputs of each “half”; these can be removed as required, and substituted with separate cables to the required load.
- b. ISHARE signal bus between each “half”. This interconnection is provided by a single jumper JP15 and can be removed if operation as two independent (no parallel connection) is required.

Note that no physical parallel connection is provided to interconnect the VSTANDBY output of each “half”. If required cable connections can be provided by the End User (note: parallel connection of the VSTANDBY is subject to the limitations as described in the respective product datasheets).

2. To configure each “half” for independent or parallel operation, ensure that the following configurable jumpers (headers) have shorting links (shunts Dual Beam; TE Connectivity Pt# 390088-2) fitted across their respective Pins 1 & 2 (refer to schematic & photograph):
  - a. JP1/JP21; +12VSENSE local voltage sense selection; deselect if remote sense connection is provided to the load.
  - b. JP2/JP22; +12VSENSE\_RTN local voltage sense selection;deselect if remote sense connection is provided to the load.
  - c. JP11 & JP31 (PS\_KILL connection to GNDB/GNDD return ; enables output.
  - d. JP15; this jumper interconects the ISHARE signals between the two power modules. Fit the shorting link across Pins 1 & 2 if the units are to be operated in parallel to share a common load.  
Remove the shorting link if the units are to be operated “independently” as separate power modules.
3. The two DC Main 12V DC outputs are interconnected with bus bars.
4. The BNC connectors for ripple & noise measurements of 12VSTBY (J7 bias/standby) and 12VOUT (J6 Main output) are intended for direct (BNC to BNC) connection (or via a 10X probe if required) to an oscilloscope. Note also that the measurement node is filtered with a parallel connected 10 $\mu$ F tantalum and 1 $\mu$ F ceramic capacitor (across tip to ground) A short 50ohm coaxial cable connection shall be provided between the relevant BNC measurement connector and the input to the measuring ‘scope (the ‘scope bandwidth shall be limited to 20MHz).
5. Connector J8 is a PMBob I<sup>2</sup>C/SPI interface connector. The PMBob USB to I2C Interface external device allows communications via a USB port of a laptop or PC that can be used with the provided MPS software GUI. As such this is the recommended communication interface for use with this interface card for initial bench evaluation.
6. S1/S21 enables/disables (turns “on”/“off”) the main output by connecting PS\_ON\_L to the respective 12VSTBY Return. Close S1/S21 to enable (turn “on”) the respective power module 12VDC Main Output.


### CONFIGURATION NOTES:

7. S7/S27 are a four (4) position DIL/DIP switches that is intended to select the User configurable bits that assign the variable address for I<sup>2</sup>C communications with the power module.
- The D1U54x products series' employs an analogue input that is used to set the address of the internal slave devices (EEPROM and microprocessor) used for digital communications.
- Connection of a suitable resistor to +VSB\_Return, in conjunction with a resistor divider chain (internal to the power module), will configure the required address.
- However since the purpose of this connector card is to provide a convenient means to evaluate the D1U54x products, this method has been replaced by an analogue multiplexer device that allows selection of the slave address via a "pin strap" method using three address bits (configured via S7/S27).

S7/S27 Position #3 (A2) (Serial Address BIT 2)	S7/S27 Position #2 (A1) (Serial Address BIT 1)	S7/S27 Position #1 (A0) (Serial Address BIT 0)	Power Module Main Controller (Serial Comm Slave Address)	Power Module Main EEPROM (Serial Comm Slave Address)
LOW	LOW	LOW	0xB0	0xA0
LOW	LOW	HIGH	0xB2	0xA2
LOW	HIGH	LOW	0xB4	0xA4
LOW	HIGH	HIGH	0xB6	0xA6
HIGH	LOW	LOW	0xB8	0xA8
HIGH	LOW	HIGH	0xBA	0xAA
HIGH	HIGH	LOW	0xBC	0xAC
HIGH	HIGH	HIGH	0xBE	0xAE

The address convention uses 7-bit left shifted Slave Device addressing with the Read/Write bit either a "0" (Write) or a "1" (Read). The addresses above assume the Read/Write bit is a "0".

S7/S27 is shown in the diagram opposite (also refer to the schematic).  
 With any of the DIL switches (1, 2, & 3) set to the "off" (open) position, the corresponding address line (A0/A1/A2 respectively) shall be set to a logic level high (by action of the 3K32K ohm pull up resistor upon the Interface Connector Card).  
 Operating the appropriate switch to the "on" (closed) position will connect the appropriate line to a logic level low.  
 Note: The switch position DIL Position #4 is unused and has no connection (NC) on the interface connector card.

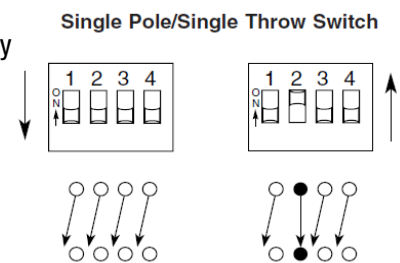

NB: The D1U54x Series employs "left shifted" 7-Bit addressing; where Bit "0" of the device address is the Read/Write bit. The addresses, as shown above, assume that the Read/Write bit is a logic level "0".

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)  
Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)