

# E2C/E2C-H

CSM\_E2C\_E2C-H\_DS\_E\_8\_1

## Separate Amplifier Sensor with Sensitivity Adjustment

- Compact design with smaller Sensor Head.
- Heat-resistance model available for application between -10 and 200°C.



Be sure to read *Safety Precautions* on page 15.

## Ordering Information

**Sensors** [Refer to *Dimensions* on page 18.]

**Standard Models**

| Sensor                                                                                            |                       |              |  |              | Combination | Amplifier Units |                      |                |                        |
|---------------------------------------------------------------------------------------------------|-----------------------|--------------|--|--------------|-------------|-----------------|----------------------|----------------|------------------------|
| Appearance                                                                                        | Stable sensing area * |              |  | Model        |             | Model           | Power supply/ Output | Timer function | Self-diagnostic output |
| Shielded<br>   | 3.5 dia.              | 0.8 (1.8) mm |  | E2C-CR8A 3M  | →           | E2C-GE4A        | DC/ (NPN)            | ---            | ---                    |
|                                                                                                   | 3.8 dia.              | 0.8 (1.8) mm |  | E2C-CR8B 3M  |             | E2C-GF4A        | DC/ (PNP)            | ---            | ---                    |
|                                                                                                   | M5                    | 1 (2) mm     |  | E2C-X1A 3M   |             | E2C-JC4AP 2M *  | DC/ (NPN)            | Yes            | Yes                    |
|                                                                                                   | 5.4 dia.              | 1 (2) mm     |  | E2C-C1A 3M   |             | E2C-JC4A 2M     | DC/ (NPN)            | Yes            | ---                    |
|                                                                                                   | M8                    | 1.5 (3) mm   |  | E2C-X1R5A 3M |             | E2C-AM4A        | DC/ (NPN) (PNP)      | ---            | ---                    |
|                                                                                                   | M12                   | 2 (5) mm     |  | E2C-X2A 3M   |             | E2C-AK4A        | AC                   | ---            | ---                    |
|                                                                                                   | M18                   | 5 (10) mm    |  | E2C-X5A 3M   |             |                 |                      |                |                        |
|                                                                                                   | M30                   | 10 (18) mm   |  | E2C-X10A 3M  |             |                 |                      |                |                        |
| Unshielded<br> | 40 dia.               | 20 (50) mm   |  | E2C-C20MA 3M | →           |                 |                      |                |                        |

\*1. Values in parentheses are for the maximum sensing distances at 23°C.

\* Self-diagnostic output, timer, and DIN Track mounting.

## Heat-resistant Model

| Sensor                                                                                          |                     |        |  |               | Combination | Amplifier Unit |
|-------------------------------------------------------------------------------------------------|---------------------|--------|--|---------------|-------------|----------------|
| Appearance                                                                                      | Stable sensing area |        |  | Model         |             | Model          |
| Shielded<br> | M8                  | 1.5 mm |  | E2C-X1R5AH 3M | →           | E2C-JC4CH 2M   |
|                                                                                                 | M12                 | 2 mm   |  | E2C-X2AH 3M   | →           | E2C-JC4DH 2M   |
|                                                                                                 | M18                 | 5 mm   |  | E2C-X5AH 3M   | →           | E2C-JC4EH 2M   |

Note: Characteristics will change if the cable length changes. Do not cut or extend the cable.

## Accessories (Order Separately)

**Mounting Brackets** A Mounting Bracket is not provided with the Sensor. Order a Mounting Bracket separately if required.

[Refer to Dimension on page 21.]

| Name              | Model     | Applicable Sensors     | Remarks |
|-------------------|-----------|------------------------|---------|
| Mounting Brackets | Y92E-F3R5 | E2C-CR8A, for 3.5 dia. | ---     |
|                   | Y92E-F5R4 | E2C-C1A, for 5.4 dia.  |         |

**Connection Sockets** A Socket is not provided with the Amplifier Unit. Order a Socket separately if required.

[Refer to Dimension on page 21.]

| Name                     | Model   | Applicable Amplifier Unit | Remarks                                                                   |
|--------------------------|---------|---------------------------|---------------------------------------------------------------------------|
| Front Connection Sockets | PYF08A  | E2C-GE4A<br>E2C-GF4A      | Hold-down Clips (Order Separately)<br>PYC-A1<br>Sold as a set.<br><br>--- |
|                          | P2CF-08 | E2C-AM4A                  |                                                                           |
|                          | P2CF-11 | E2C-AK4A                  |                                                                           |
| Back Connection Sockets  | P3G-08  | E2C-AM4A                  | ---                                                                       |
|                          | P3GA-11 | E2C-AK4A                  |                                                                           |
|                          | PY08    | E2C-GE4A<br>E2C-GF4A      |                                                                           |

**Adapters** An Adapter is not provided with the Amplifier Unit. Order an Adapter separately if required.

[Refer to Dimension on page 21.]

| Name              | Model   | Applicable Amplifier Unit | Remarks |
|-------------------|---------|---------------------------|---------|
| Embedded Adapters | Y92F-30 | E2C-AM4A/-AK4A            | ---     |
|                   | Y92F-70 |                           |         |
|                   | Y92F-71 |                           |         |

For details on [Mounting Brackets](#), [Protective Covers](#), and [Sputter Protective Covers](#), refer to *Accessories* on Y92□.

## Ratings and Specifications

### Standard Models

#### Sensors

| Model                         |                        | E2C-CR8A/<br>-CR8B                                                                                                 | E2C-X1A/<br>-C1A                      | E2C-X1R5A          | E2C-X2A              | E2C-X5A              | E2C-X10A             | E2C-C20MA            |
|-------------------------------|------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------------------------|--------------------|----------------------|----------------------|----------------------|----------------------|
| Item                          |                        |                                                                                                                    |                                       |                    |                      |                      |                      |                      |
| Sensing distance<br>(at 23°C) |                        | 1.8 mm                                                                                                             | 2 mm                                  | 3 mm               | 5 mm                 | 10 mm                | 18 mm                | 50 mm                |
| Stable<br>sensing<br>area     | Ambient<br>temperature | 0 to 0.8 mm                                                                                                        | 0 to 1 mm                             | 0 to 1.5 mm        | 0 to 2 mm            | 0 to 5 mm            | 0 to 10 mm           | 0 to 20 mm           |
|                               | At 0 to 40°C           | 0 to 1.2 mm                                                                                                        | 0 to 1.5 mm                           | 0 to 2 mm          | 0 to 2.5 mm          | 0 to 7 mm            | 0 to 15 mm           | 0 to 28 mm           |
| Differential travel           |                        | Refer to <i>Ratings and Specifications</i> on page 4 for Amplifier Unit specifications.                            |                                       |                    |                      |                      |                      |                      |
| Detectable object             |                        | Ferrous metal (The sensing distance decreases with non-ferrous metal. Refer to <i>Engineering Data</i> on page 7.) |                                       |                    |                      |                      |                      |                      |
| Standard sensing object       |                        | Iron, 5 × 5 × 1 mm                                                                                                 |                                       | Iron, 8 × 8 × 1 mm | Iron, 12 × 12 × 1 mm | Iron, 18 × 18 × 1 mm | Iron, 30 × 30 × 1 mm | Iron, 50 × 50 × 1 mm |
| Response frequency *1         |                        | 1 kHz                                                                                                              |                                       | 800 Hz             |                      | 350 Hz               | 100 Hz               | 50 Hz                |
| Ambient temperature range     |                        | Operating/Storage: –25 to 70°C (with no icing or condensation)                                                     |                                       |                    |                      |                      |                      |                      |
| Ambient humidity range        |                        | Operating/Storage: 35% to 95% (with no condensation)                                                               |                                       |                    |                      |                      |                      |                      |
| Temperature influence         |                        | 15% max. of sensing distance at 23°C in the temperature range of –25 to 70°C                                       |                                       |                    |                      |                      |                      |                      |
| Vibration resistance          |                        | Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X and Y directions                           |                                       |                    |                      |                      |                      |                      |
| Shock resistance              |                        | Destruction: 500 m/s <sup>2</sup> 3 times each in X and Y directions                                               |                                       |                    |                      |                      |                      |                      |
| Degree of protection          |                        | IEC 60529 IP67, in-house standards: oil-resistant                                                                  |                                       |                    |                      |                      |                      |                      |
| Connection method *2          |                        | Pre-wired Models<br>High-frequency coaxial cable (Standard cable length: 3 m)                                      |                                       |                    |                      |                      |                      |                      |
| Weight (packed state)         |                        | Approx. 40 g                                                                                                       | Approx. 45 g                          | Approx. 50 g       | Approx. 60 g         | Approx. 140 g        | Approx. 270 g        | Approx. 300 g        |
| Materials                     | Case                   | Stainless steel                                                                                                    | Brass                                 |                    |                      |                      |                      |                      |
|                               | Sensing surface        | ABS resin                                                                                                          |                                       |                    |                      |                      |                      |                      |
|                               | Cable                  | Polyethylene                                                                                                       |                                       |                    |                      |                      |                      |                      |
|                               | Clamping nut           | ---                                                                                                                | Brass, nickel-plated (except E2C-C1A) |                    |                      |                      |                      |                      |
|                               | Toothed washer         | ---                                                                                                                | Brass, zinc-plated (except E2C-C1A)   |                    |                      |                      |                      |                      |
| Accessories                   |                        | ---                                                                                                                |                                       |                    |                      |                      |                      |                      |

\*1. The minimum value when using the solid-state control output on the Amplifier Unit.

Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

\*2. Refer to 6 for cable lengths when combining Amplifier Units and Sensors.

The characteristic impedance of the high-frequency coaxial cable is 50 Ω.

## Amplifier Units

| Model                                                       |             | E2C-GE4A                                                                                                                                                                             | E2C-GF4A                                                                                       | E2C-JC4A<br>E2C-JC4AP                                                                                                                                                                                  | E2C-AM4A                                                                                                  | E2C-AK4A                                                                               |
|-------------------------------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| Item                                                        |             |                                                                                                                                                                                      |                                                                                                |                                                                                                                                                                                                        |                                                                                                           |                                                                                        |
| Power supply voltage (operating voltage range)              |             | 12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max. *1                                                                                                                               |                                                                                                |                                                                                                                                                                                                        |                                                                                                           | 100 to 240 VAC<br>(90 to 264 VAC)<br>50/60 Hz                                          |
| Current consumption                                         |             | 25 mA max.                                                                                                                                                                           |                                                                                                | 45 mA max.                                                                                                                                                                                             | 50 mA max.                                                                                                | 55 mA max.                                                                             |
| Sensing distance adjustment range *2                        |             | 20% min. of rated sensing distance with 4-turn potentiometer                                                                                                                         |                                                                                                | 20% to 100% of rated sensing distance with 4-turn potentiometer                                                                                                                                        |                                                                                                           |                                                                                        |
| Differential travel adjustment range                        |             | Differential travel fixed (10% max. of sensing distance)                                                                                                                             |                                                                                                |                                                                                                                                                                                                        | 1% to 5% of rated sensing distance                                                                        |                                                                                        |
| Re-sponse time                                              | Solid-state | (Refer to the response frequency of the Proximity Sensor.)                                                                                                                           |                                                                                                |                                                                                                                                                                                                        |                                                                                                           |                                                                                        |
|                                                             | Relay       | ---                                                                                                                                                                                  |                                                                                                |                                                                                                                                                                                                        |                                                                                                           | 20 ms max.                                                                             |
| Control outputs                                             | Solid-state | NPN<br>Load resistance: 4.7 kΩ, 100 mA max.<br>(40 VDC max.)<br>(Residual voltage: 1.5 V max.)                                                                                       | PNP<br>Load resistance: 4.7 kΩ, 100 mA max.<br>(40 VDC max.)<br>(Residual voltage: 1.5 V max.) | NPN<br>Open-collector output<br>100 mA max.<br>(40 VDC max.)<br>(Residual voltage: 0.7 V max.)<br>(E2C-JC4AP: 1 V max.)                                                                                | NPN/PNP output<br>Open-collector output<br>200 mA max.<br>(40 VDC max.)<br>(Residual voltage: 1.5 V max.) | Transistor/photocoupler<br>50 mA max.<br>(40 VDC max.)<br>(Residual voltage: 2 V max.) |
|                                                             | Relay       | ---                                                                                                                                                                                  |                                                                                                |                                                                                                                                                                                                        |                                                                                                           | Relay output, SPDT<br>2 A at 250 VAC, cosφ = 1<br>(resistive load) *3                  |
| Indicators                                                  |             | Detection indicator (red)<br>(OPERATION)                                                                                                                                             |                                                                                                | Detection indicator (red)<br>(OPERATION)<br>Stability indicator (green)<br>(STABILITY)                                                                                                                 | Detection indicator (red) (OPERATION)<br>Stability indicator (green) (STABILITY)                          |                                                                                        |
| Operation mode                                              |             | Changed with NO/NC switch.                                                                                                                                                           |                                                                                                |                                                                                                                                                                                                        |                                                                                                           |                                                                                        |
| Self-diagnostic output                                      |             | ---                                                                                                                                                                                  |                                                                                                | (E2C-JC4AP only)<br>Output transistor turns ON when Sensor open circuit or unstable sensing is detected; solid-state NPN open-collector<br>50 mA max.<br>(40 VDC max.)<br>(Residual voltage: 1 V max.) | ---                                                                                                       |                                                                                        |
| Timer function                                              |             | ---                                                                                                                                                                                  |                                                                                                | OFF-delay: 40 ±10 ms                                                                                                                                                                                   | ---                                                                                                       |                                                                                        |
| Cable length compensation between Sensor and Amplifier Unit |             | ---                                                                                                                                                                                  |                                                                                                | (E2C-JC4AP only)<br>3 m/5 m, terminals<br>Short-plate switching<br>Shorted: 1 to 3 m<br>Open: 3 to 5 m                                                                                                 | Mode switched with 4-position switch.                                                                     |                                                                                        |
| Ambient temperature range                                   |             | Operating/storage: −10 to 55°C (with no icing or condensation)                                                                                                                       |                                                                                                |                                                                                                                                                                                                        |                                                                                                           |                                                                                        |
| Ambient humidity range                                      |             | Operating/Storage: 35% to 85% (E2C-JC4AP: 35% to 95%) (with no condensation)                                                                                                         |                                                                                                |                                                                                                                                                                                                        |                                                                                                           |                                                                                        |
| Temperature influence                                       |             | 10% max. of sensing distance at 23°C in the temperature range of −10 to 55°C                                                                                                         |                                                                                                |                                                                                                                                                                                                        |                                                                                                           |                                                                                        |
| Voltage influence                                           |             | DC Models: ±1% max. of sensing distance at rated voltage in the rated voltage ±20% range<br>AC Models: ±1% max. of sensing distance at rated voltage in the rated voltage ±10% range |                                                                                                |                                                                                                                                                                                                        |                                                                                                           |                                                                                        |
| Insulation resistance                                       |             | 50 MΩ min. (at 500 VDC) between current-carrying parts and case                                                                                                                      |                                                                                                |                                                                                                                                                                                                        |                                                                                                           |                                                                                        |
| Dielectric strength                                         |             | DC Models: 1,000 VAC, 50/60 Hz for 1 min between current-carrying parts and case<br>AC Models: 1,500 VAC, 50/60 Hz for 1 min between current-carrying parts and case                 |                                                                                                |                                                                                                                                                                                                        |                                                                                                           |                                                                                        |
| Vibration resistance                                        |             | Destruction: 10 to 25 Hz, 2-mm double amplitude for 2 hours each in X, Y, and Z directions                                                                                           |                                                                                                | Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions                                                                                                           | Destruction: 10 to 25 Hz, 2-mm double amplitude for 2 hours each in X, Y, and Z directions                |                                                                                        |

\*1. A full-wave rectification power supply of 24 VDC  $\pm$ 10% (average value) can be used (except for the E2C-GE4□).

\*2. The sensing distance range required to maintain performed is given for using the Amplifier Unit in combination with the Sensor.

\*3. Internal relay: G2R-14 DC 12V

| Item                     | Model                                                                    | E2C-GE4A | E2C-GF4A | E2C-JC4A<br>E2C-JC4AP                                                                            | E2C-AM4A           | E2C-AK4A                                                                      |
|--------------------------|--------------------------------------------------------------------------|----------|----------|--------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------------------|
| Shock resistance         | Destruction: 100 m/s <sup>2</sup> 3 times each in X, Y, and Z directions |          |          |                                                                                                  |                    |                                                                               |
| Life expectancy          | ---                                                                      |          |          |                                                                                                  |                    | Mechanical: 10,000,000 operations min.<br>Electrical: 100,000 operations min. |
| Connection method        | Terminal block                                                           |          |          | Pre-wired Models<br>(Standard cable length: 2 m)                                                 | Terminal block     |                                                                               |
| Weight (packed state) *4 | Approx. 20 g                                                             |          |          | E2C-JC4A: Approx. 50 g<br>E2C-JC4AP: Approx 80 g                                                 | Approx. 140 g      | Approx. 250 g                                                                 |
| Accessories              | Instruction manual                                                       |          |          | Caution labels, Mounting Bracket (E2C-JC4A: M3 × 15 Phillips mounting screw), instruction manual | Instruction manual |                                                                               |

\*4. The weight of the Connection Socket is not included.

## Heat-resistant Models

### Sensors

| Item                      | Model                                                                                                              | E2C-X1R5AH                    | E2C-X2AH             | E2C-X5AH    |
|---------------------------|--------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------|-------------|
| Detectable object         | Ferrous metal (The sensing distance decreases with non-ferrous metal, refer to <i>Engineering Data</i> on page 7.) |                               |                      |             |
| Standard sensing object   | Iron, 8 × 8 × 1 mm                                                                                                 | Iron, 12 × 12 × 1 mm          | Iron, 18 × 18 × 1 mm |             |
| Stable sensing area       | 0 to 1.5 mm                                                                                                        | 0 to 2 mm                     | 0 to 5 mm            |             |
| Differential travel       | 0.04 mm max.                                                                                                       |                               |                      | 0.1 mm max. |
| Response frequency *1     | 300 Hz                                                                                                             |                               |                      |             |
| Ambient temperature range | Operating/Storage: −10 to 200°C (with no icing or condensation)                                                    |                               |                      |             |
| Ambient humidity range    | Operating/Storage: 35% to 95% (with no condensation)                                                               |                               |                      |             |
| Temperature influence     | ±0.2%/°C                                                                                                           |                               |                      |             |
| Vibration resistance      | Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions                       |                               |                      |             |
| Shock resistance          | Destruction: 500 m/s <sup>2</sup> 3 times each in X, Y, and Z directions                                           |                               |                      |             |
| Degree of protection      | IEC 60529 IP60 *2                                                                                                  |                               |                      |             |
| Connection method         | Pre-wired Models (Cable length: 3 m)<br>Heat-resistant, high-frequency coaxial cable                               |                               |                      |             |
| Weight (packed state)     | Approx. 50 g                                                                                                       | Approx. 60 g                  | Approx. 140 g        |             |
| Materials                 | Case                                                                                                               | Brass                         |                      |             |
|                           | Sensing surface                                                                                                    | PEEK (polyether ether ketone) |                      |             |
|                           | Cable                                                                                                              | Fluorine resin                |                      |             |
|                           | Clamping nut                                                                                                       | Brass, nickel-plated          |                      |             |
|                           | Toothed washer                                                                                                     | Iron, zinc-plated             |                      |             |

Note: Ratings and characteristic are given for 50% of the stable sensing area.  
 \*1. Measurement conditions are as follows: standard sensing object, a distance of twice the standard sensing object, and a set distance of half the sensing distance.

\*2. Do not operate the Sensor in areas exposed to water vapor because the enclosure is not waterproof.

### Amplifier Units

| Item                                                 | Model            | E2C-JC4CH                                                                                    | E2C-JC4DH | E2C-JC4EH |
|------------------------------------------------------|------------------|----------------------------------------------------------------------------------------------|-----------|-----------|
| Power supply voltage *1<br>(operating voltage range) |                  | 12 to 24 VDC (10 to 30 VDC), ripple (p-p): 10% max.                                          |           |           |
| Current consumption                                  |                  | 45 mA max.                                                                                   |           |           |
| Sensing distance adjustment range *2                 |                  | 20% to 100% of rated sensing distance<br>4-turn potentiometer                                |           |           |
| Control outputs                                      | Load current     | NPN open collector, 100 mA max. (40 VDC max.)                                                |           |           |
|                                                      | Residual voltage | 0.8 V max.                                                                                   |           |           |
| Indicators                                           |                  | Detection indicator (red)                                                                    |           |           |
| Operation mode                                       |                  | Changed with NO/NC switch.                                                                   |           |           |
| Cable length compensation                            |                  | Switched between 3 and 5 m.                                                                  |           |           |
| Ambient temperature range                            |                  | Operating/storage: -10 to 55°C (with no icing or condensation)                               |           |           |
| Ambient humidity range                               |                  | Operating/storage: 35% to 85% (with no condensation)                                         |           |           |
| Temperature influence                                |                  | ±0.08%/°C                                                                                    |           |           |
| Voltage influence                                    |                  | ±2% max. of sensing distance at rated voltage in the rated voltage ±20% range                |           |           |
| Insulation resistance                                |                  | 50 MΩ min. (at 500 VDC) between current-carrying parts and case                              |           |           |
| Dielectric strength                                  |                  | 1,000 VAC, 50/60 Hz for 1 min between current-carrying parts and case                        |           |           |
| Vibration resistance                                 |                  | Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions |           |           |
| Shock resistance                                     |                  | Destruction: 100 m/s² 3 times each in X, Y, and Z directions                                 |           |           |
| Degree of protection                                 |                  | IEC 60529 IP20                                                                               |           |           |
| Connection method                                    |                  | Pre-wired Models (Cable length: 2 m)                                                         |           |           |
| Weight (packed state)                                |                  | Approx. 80 g                                                                                 |           |           |
| Accessories                                          |                  | Caution labels, Mounting Bracket, instruction manual                                         |           |           |

\*1. A full-wave rectification power supply of 24 VDC ±10% (average value) can be used.

\*2. The sensing distance range required to maintain performed is given for using the Amplifier Unit in combination with the Sensor.

## Cable Lengths for Sensor-Amplifier Unit Combinations

### Standard Models

| Sensor Amplifier Units | E2C-CR8A                                                   | E2C-CR8B | E2C-X1A | E2C-C1A | E2C-X1R5A | E2C-X2A                                                     | E2C-X5A | E2C-X10A | E2C-C20MA |
|------------------------|------------------------------------------------------------|----------|---------|---------|-----------|-------------------------------------------------------------|---------|----------|-----------|
| E2C-GE4A               | Restricted to 3 m.                                         |          |         |         |           | ---                                                         | ---     | ---      | ---       |
| E2C-GF4A               |                                                            |          |         |         |           | ---                                                         | ---     | ---      | ---       |
| E2C-JC4AP              | 1 to 3 m: Short cable length terminals *                   |          |         |         |           | ---                                                         |         |          |           |
| E2C-JC4A               | 3 to 5 m: Open cable length terminals *                    |          |         |         |           | ---                                                         |         |          |           |
| E2C-AM4A               | 0 to 5 m<br>Set cable length switch to desired position. * |          |         |         |           | 0 to 10 m<br>Set cable length switch to desired position. * |         |          |           |
| E2C-AK4A               |                                                            |          |         |         |           |                                                             |         |          |           |

Note: The standard cable length is 3 m. Models with 5-m or 10-m are manufactured upon order.

\* Refer to page 14 for the operation of cable length switching.

### Heat-resistant Models

| Sensor Amplifier Units | E2C-X1R5AH                                           | E2C-X2AH | E2C-X5AH |
|------------------------|------------------------------------------------------|----------|----------|
| E2C-JC4CH              | Set 3 m/5 m cable length switch to desired position. |          |          |
| E2C-JC4DH              |                                                      |          |          |
| E2C-JC4EH              |                                                      |          |          |


Note: The standard cable length is 3 m. Models with 5-m are manufactured upon order.

## Self-diagnostic Function


The self-diagnostic output transistor will turn ON in the following cases. (The output will turn ON for any of these conditions individually.)

(1) Sensor open circuit: Transistor will turn ON the instance there is an open circuit for the Sensor (including the cable).

### Sensor Open Circuit

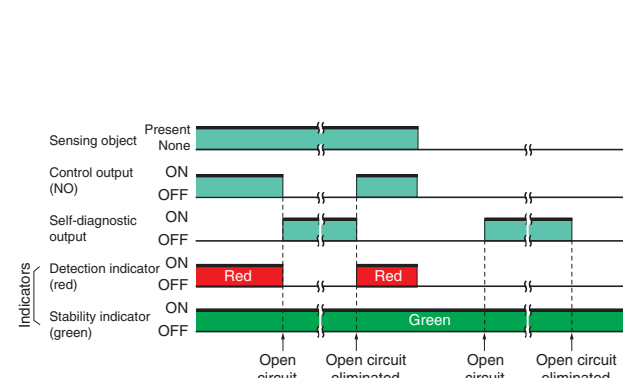

### Sensor Connected

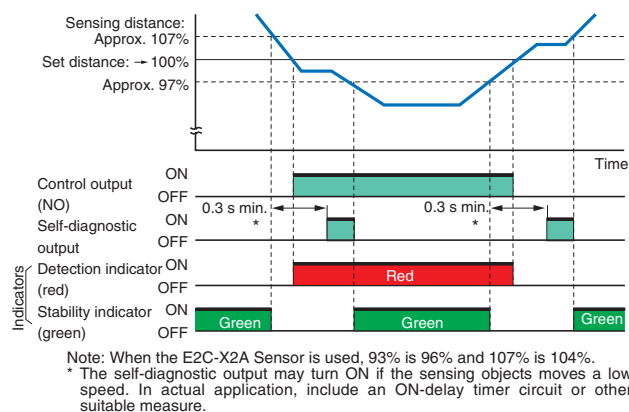


(2) Detection: The output will turn ON if a sensing object is within 93% to 100% of the sensing distance continuously for 0.3 s or longer (e.g., for sensing object position offset).

(3) No detection: The output will turn ON if a sensing object is within 100% to 107% of the sensing distance continuously for 0.3 s or longer (e.g., when background is influencing detection).

## Indicators


- The detection indicator lights when a sensing object approaches the sensing distance to indicate that a sensing object has been detected.
- The stability indicator lights when the sensing object approaches within 93% of the sensing distance or moves away from 107% of the sensing distance to indicate a stable sensing or non-sensing condition.

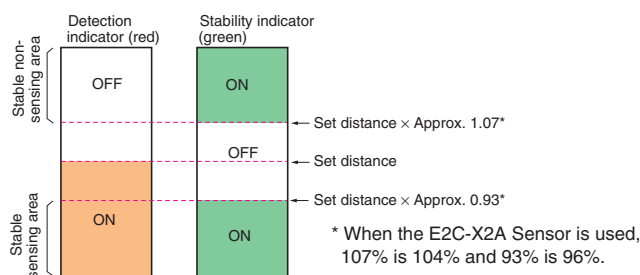


## Engineering Data (Reference Value)

## Sensing Area


## E2C-CR8

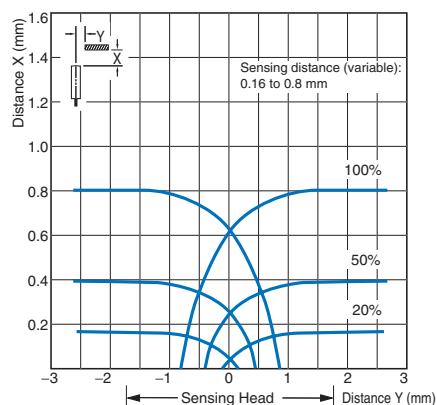


## E2C-X1A/C1A

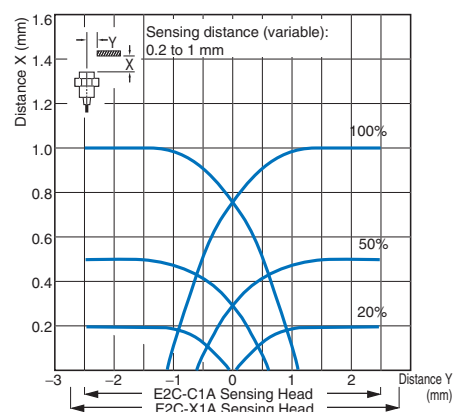


## E2C-X1R5A

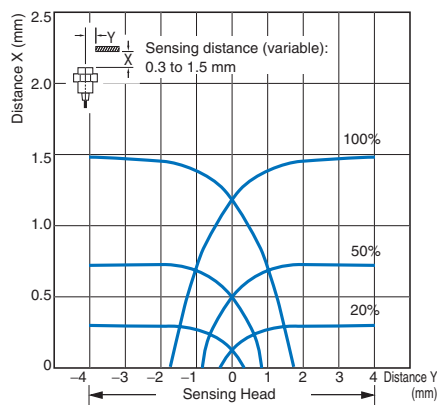


## E2C-X2A

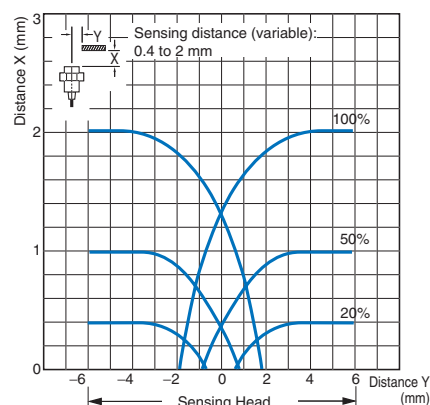


## E2C-X5A

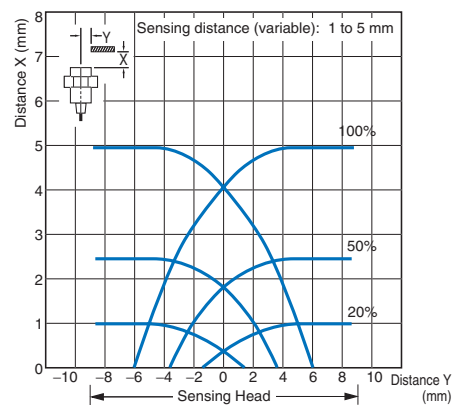


## E2C-X10A

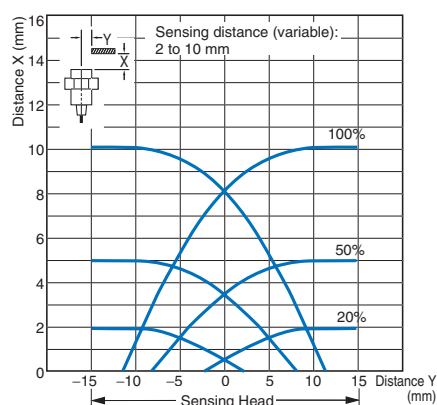


## E2C-C20MA

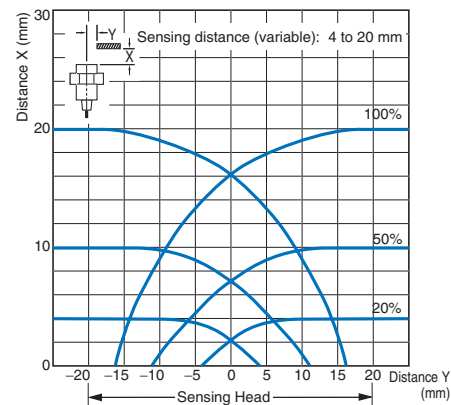


## E2C-X1R5AH + E2C-JC4CH

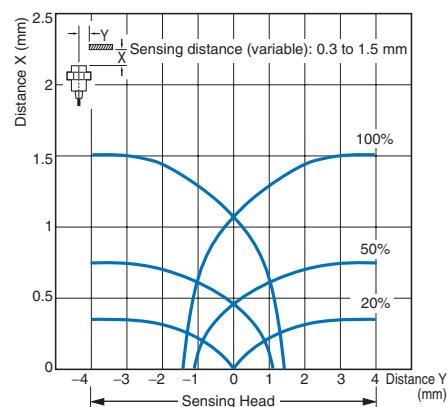

## E2C-X2AH + E2C-JC4DH

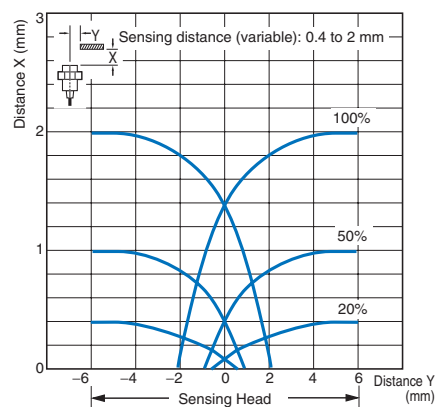


## E2C-X5AH + E2C-JC4EH

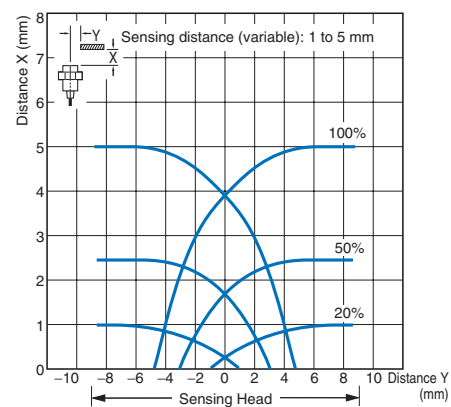


## Influence of Sensing Object Size and Material


### E2C-CR8

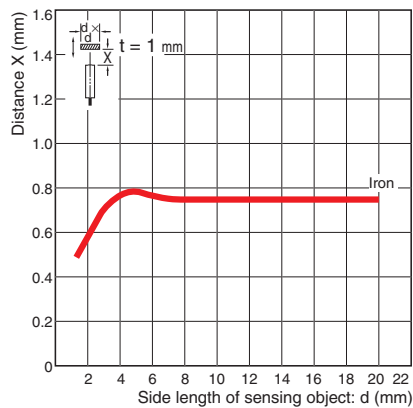


### E2C-X1A/C1A

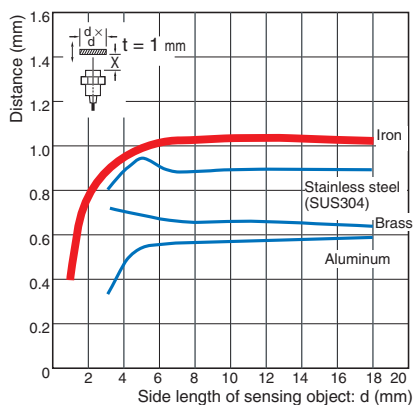


### E2C-X1R5A

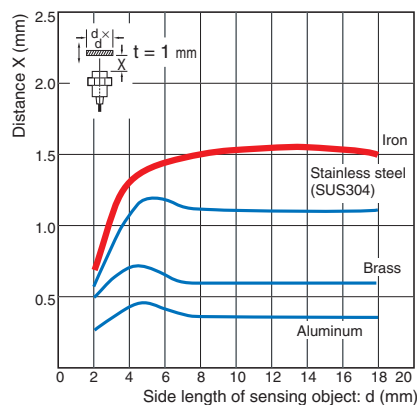


### E2C-X2A

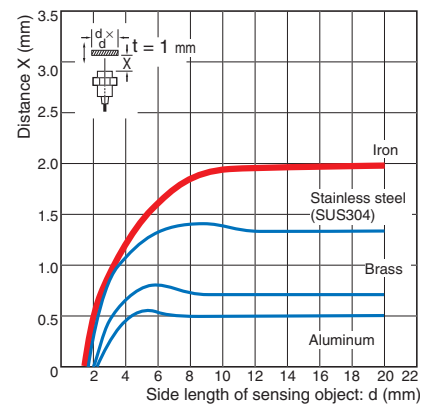


### E2C-X5A

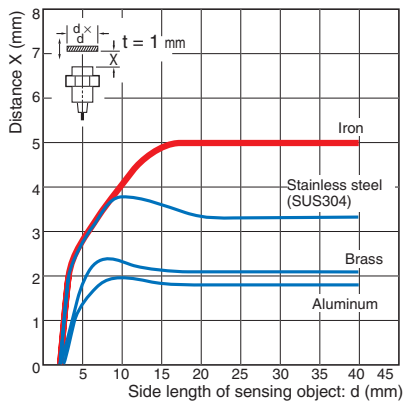


### E2C-X10A

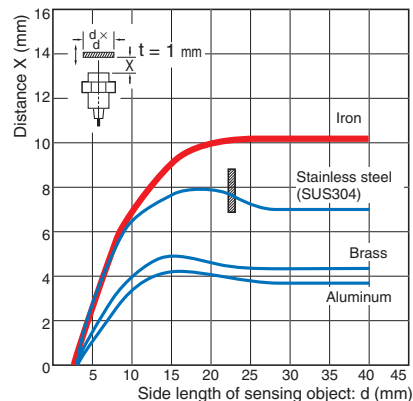


### E2C-C20MA

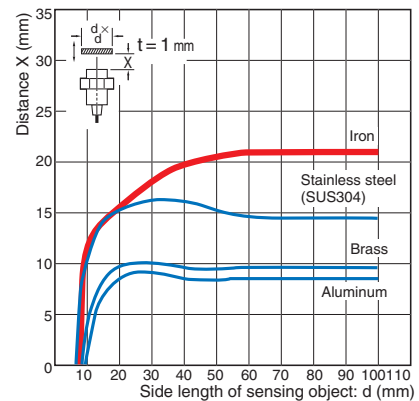


### E2C-X1R5AH + E2C-JC4CH

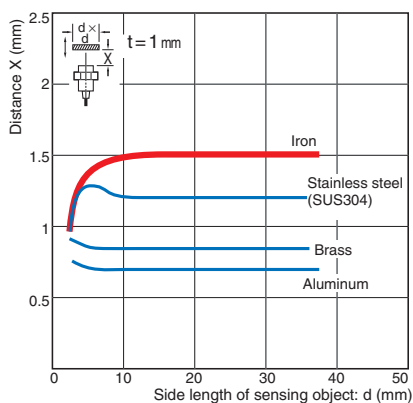







### E2C-X2AH + E2C-JC4DH

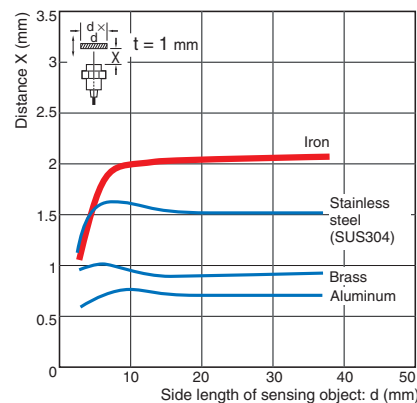

### E2C-X5AH + E2C-JC4EH

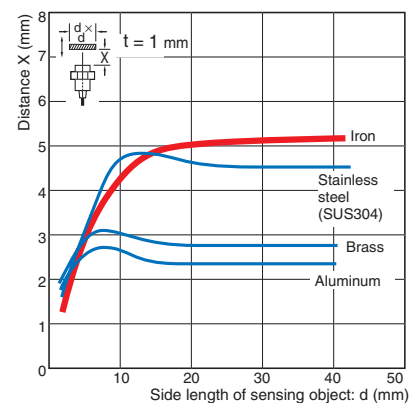





## I/O Circuit Diagrams
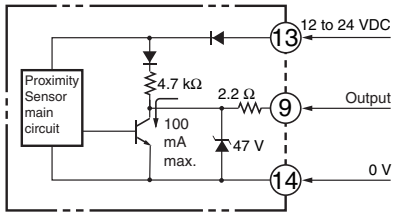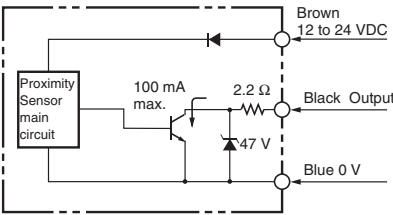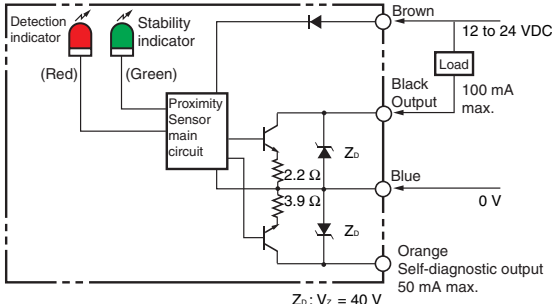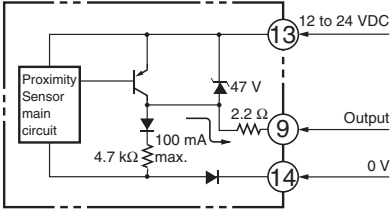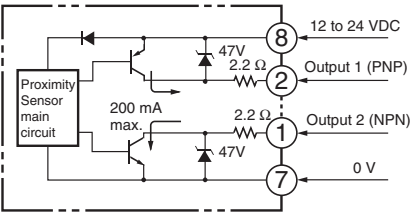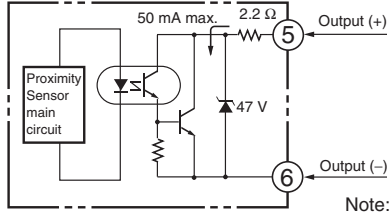
| Output configuration                            | E2C-GE4A *                                                                                                                                                                                                                                                                                                                                                                                     | E2C-JC4A, E2C-JC4CH, E2C-JC4DH, E2C-JC4EH                                          |
|-------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| NPN output                                      |  <p>* A voltage output can be used if the NO/NC switch on the E2C-GE4A is set to NC, but an approximately 60-ms pulse will be generated when the power supply is turned ON. An initial reset will thus be required.<br/>If the E2C-GF4A (model for PNP output) is used, the initial pulse will not occur.</p> |  |
| NPN output<br>Self-diagnosis Function           | <p style="text-align: center;"><b>E2C-JC4AP</b></p>  <p style="text-align: center;"><math>Z_o: V_z = 40\text{ V}</math></p>                                                                                                                                                                                  |                                                                                    |
| PNP Output                                      | <p style="text-align: center;"><b>E2C-GF4A</b></p>                                                                                                                                                                                                                                                         |                                                                                    |
| Both NPN<br>and PNP<br>outputs                  | <p style="text-align: center;"><b>E2C-AM4A</b></p>                                                                                                                                                                                                                                                         |                                                                                    |
| Transistor/<br>photocoupler<br><br>Relay output | <p style="text-align: center;"><b>E2C-AK4A</b></p>  <p>Note: Terminals 1, 2, and 3 are the relay contact output (SPDT).</p>                                                                                                                                                                                |                                                                                    |

Connections between Amplifier Unit and Sensor

| E2C-G□4A                                                                                                                                                                                                       | E2C-JC4A                                                                                                                                                                                                                                                                                         | E2C-JC4AP                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><p>Proximity Sensor</p><p>Line Shield</p><p>1 4<br/>5 8<br/>9 12<br/>13 14</p><p>E2C-GE4A: NPN output<br/>E2C-GF4A: PNP output</p><p>12 to 24 VDC</p><p>Applicable Socket:<br/>PYF08A</p></div>           | <div><p>Proximity Sensor</p><p>Shield Line</p><p>Brown 10 to 30 VDC<br/>Black NPN open-collector output<br/>Blue 0 V</p><p>OFF-delay operation terminal*</p><p>* OFF-delay timer setting<br/>If the OFF-delay operation terminals are shorted,<br/>a 40-ms OFF-delay timer will start.</p></div> | <div><p>Proximity Sensor</p><p>Shield Line</p><p>Brown 10 to 30 VDC<br/>Black NPN open-collector output<br/>Blue 0 V<br/>Orange Self-diagnostic output</p><p>Sensor cable length compensation terminals*</p><p>* Sensor Cable Length Compensation<br/>These terminals can be used to switch the<br/>cable length.<br/>Terminals shorted: 1 to 3 m<br/>Terminals open: 3 to 5 m</p></div> |
| E2C-AK4A                                                                                                                                                                                                       | E2C-AM4A                                                                                                                                                                                                                                                                                         | E2C-JC4□H                                                                                                                                                                                                                                                                                                                                                                                |
| <div><p>Proximity Sensor</p><p>Transistor/photocoupler output (-) (+)</p><p>Shield Line</p><p>8 7 6 5<br/>4 3<br/>9 10 11 1 2</p><p>Applicable Socket:<br/>P2CF-11</p><p>100 to 240 VAC Relay output</p></div> | <div><p>Proximity Sensor</p><p>Shield Line</p><p>6 5 4 3<br/>7 8 1 2</p><p>0 V 12 to 24 VDC NPN Output PNP Output</p><p>Applicable Socket:<br/>P2CF-08</p></div>                                                                                                                                 | <div><p>Sensor</p><p>Shield Line</p><p>Brown 10 to 30 VDC<br/>Black NPN open-collector output<br/>Blue 0 V</p><p>Note: Characteristics will change if the cable length changes. Do not cut or extend the cable.</p></div>                                                                                                                                                                |

## Load Connections
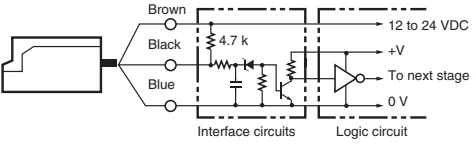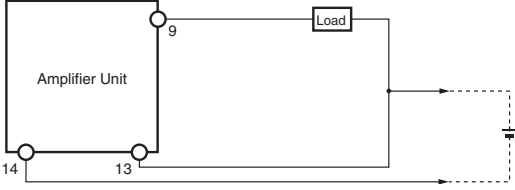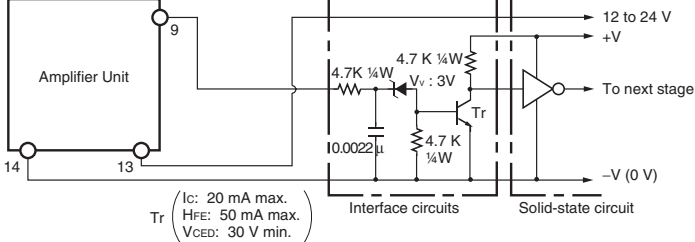
| Model                                                                                                                                | E2C-JC4A, E2C-JC4□H                                                                                                                                                                                                    |  |
|--------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Load                                                                                                                                 |                                                                                                                                                                                                                        |  |
| <b>DC load</b> <ul style="list-style-type: none"> <li>• Relay</li> <li>• Solenoid</li> </ul>                                         |                                                                                                                                       |  |
| <b>Current-sinking load</b> <ul style="list-style-type: none"> <li>• Programmable Controller</li> <li>• Sensor Controller</li> </ul> |                                                                                                                                                                                                                        |  |
| <b>Voltage load (logic circuit)</b>                                                                                                  |                                                                                                                                       |  |
| Model                                                                                                                                | E2C-GE4A                                                                                                                                                                                                               |  |
| Load                                                                                                                                 |                                                                                                                                                                                                                        |  |
| <b>DC load</b> <ul style="list-style-type: none"> <li>• Relay</li> <li>• Solenoid</li> </ul>                                         |                                                                                                                                     |  |
| <b>Solid-state load</b> <ul style="list-style-type: none"> <li>• Programmable Controller</li> <li>• Sensor Controller</li> </ul>     |                                                                                                                                                                                                                        |  |
| <b>Voltage load (logic circuit)</b>                                                                                                  |  <p> <math>T_r</math> ( <math>I_c</math>: 20 mA max.<br/> <math>HFE</math>: 50 mA max.<br/> <math>V_{CED}</math>: 30 V min. ) </p> |  |
| <b>Remarks</b>                                                                                                                       | When connecting to a CMOS IC or TLL, provide an interface circuit as shown above and connect to the solid-state circuit in the next stage.                                                                             |  |

| Model                            |                                                                                         | E2C-AK4A                                                                                                  | E2C-AM4A                                                                       |
|----------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| Load                             |                                                                                         |                                                                                                           |                                                                                |
| DC load<br>• Relay<br>• Solenoid |                                                                                         |                                                                                                           |                                                                                |
|                                  |                                                                                         |                                                                                                           | <p>* Use 40 V maximum when connecting the load to a separate power supply.</p> |
| Solid-state load                 | Current-sinking load (photocoupler)<br>• Programmable Controller<br>• Sensor Controller |                                                                                                           |                                                                                |
|                                  |                                                                                         | <p>* For a current-sourcing load, connect to the negative side of the transistor/photocoupler output.</p> | <p>* For a current-sourcing load, connect the PNP output.</p>                  |
| Voltage loads (logic circuit)    |                                                                                         |                                                                                                           |                                                                                |


The E2C-AK4A supports relay and transistor/photocoupler outputs, and the E2C-AM4A supports both NPN and PNP open-collector output. They can be connected to a wide variety of load types and power polarities.

Nomenclature and Timing Charts


Amplifier Units

| E2C-G□4A |                            |
|----------|----------------------------|
|          | <p><b>Timing Chart</b></p> |
| E2C-JC4A |                            |
|          | <p><b>Timing Chart</b></p> |



E2C-JC4AP

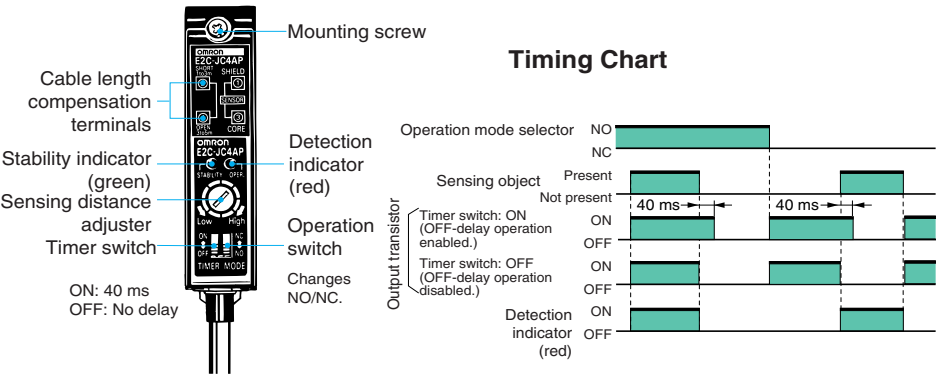

E2C-JC4CH, E2C-JC4DH, E2C-JC4EH

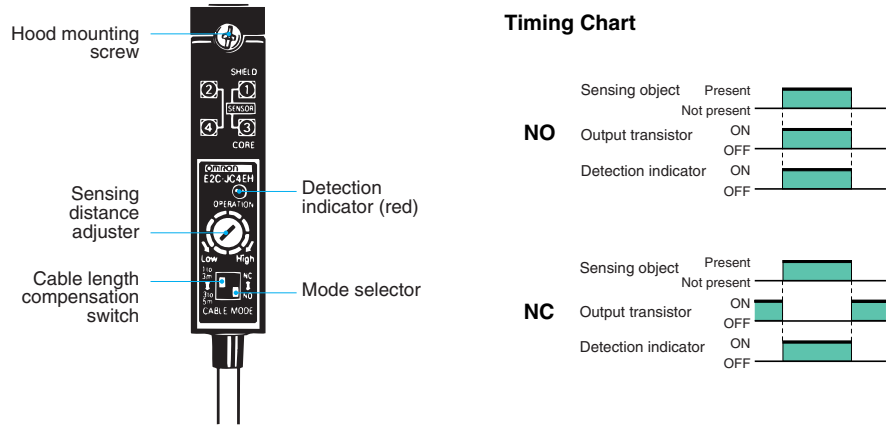

E2C-A□4A

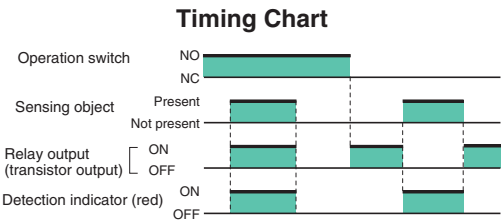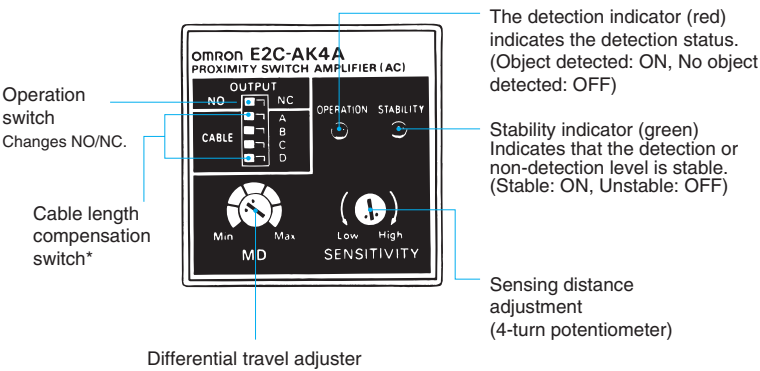

\* Cable Length Compensation Switching  
Set this switch to the proper setting depending on whether the standard cable length is being used or the cable has been cut shorter.

Amplifier Unit Switch Settings

| Applicable Sensors                                      | Cable length | 0 to 1 m | 1 to 2 m | 2 to 3 m | 3 to 4 m | 4 to 5 m | 5 to 6 m | 6 to 7 m | 7 to 8 m | 8 to 9 m | 9 to 10 m |
|---------------------------------------------------------|--------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| E2C-CR8A<br>E2C-CR8B<br>E2C-X1A<br>E2C-C1A<br>E2C-X1R5A |              |          |          |          |          |          | —        | —        | —        | —        | —         |
| E2C-X2A<br>E2C-X5A<br>E2C-X10A<br>E2C-C20MA             |              |          |          |          |          |          |          |          |          |          |           |

Note: 1. Mutual Interference Prevention: When mounting Sensors with the same diameter and cable length in parallel, set the DIP switch to modes that differ by 1 m in cable length. Specifications, however, may not be sufficiently met, so always check operation before actual application. This method cannot be used for the E2C-C20MA.  
2. When using the E2C-CR5B + E2C-AM4A (or AK4A), set all the pins on the Amplifier Unit DIP switch to the left.

## Safety Precautions

Refer to *Warranty and Limitations of Liability*.

### ⚠ WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly.  
Do not use it for such purposes.




### Precautions for Correct Use

Do not use the Encoder under ambient conditions that exceed the ratings.

#### ● Design

##### Influence of Surrounding Metal

When mounting the Sensor within a metal panel, ensure that the clearances given in the following table are maintained. Failure to maintain these distances may cause deterioration in the performance of the Sensor.

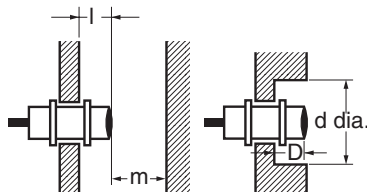


##### Influence of Surrounding Metal (Unit: mm)

| Model        | Distance | l   | d     | D  | m   |
|--------------|----------|-----|-------|----|-----|
| E2C-CR8      |          |     | (3.5) |    | 2.4 |
| E2C-X1A      |          |     | (5)   |    |     |
| E2C-C1A      |          |     | (5.4) |    | 3   |
| E2C-X1R5A(H) |          |     | (8)   |    | 4.5 |
| E2C-X2A(H)   |          |     | (12)  |    | 6   |
| E2C-X5A(H)   |          |     | (18)  |    | 15  |
| E2C-X10A     |          |     | (30)  |    | 30  |
| E2C-C20MA    | 25       | 120 | 40    | 60 |     |

Note: Values in parentheses for diameter d are the outer diameters of Shielded Models.

##### Mutual Interference

When installing Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained. Mutual interference can be prevented by using the cable length compensation switch, but doing so will also change coil characteristics. Specifications such as temperature specifications and sensing distance, may not be sufficiently met, so always check operation before actual application. This method cannot be used for the E2C-G□4A, E2C-JC4A, E2C-C20MA.



##### Mutual Interference (Unit: mm)

| Model        | Distance | A | B |
|--------------|----------|---|---|
| E2C-CR8      |          |   |   |
| E2C-X1A      |          |   |   |
| E2C-C1A      |          |   |   |
| E2C-X1R5A(H) |          |   |   |
| E2C-X2A(H)   |          |   |   |
| E2C-X5A(H)   |          |   |   |
| E2C-X10A     |          |   |   |
| E2C-C20MA    |          |   |   |

Note: The above values are for a differential travel setting of 5%.

##### Mounting

- Do not use excessive force when tightening the nuts on the E2C-X and E2C-C20MA. A washer must be used with the nut.




| Model        | Torque   |
|--------------|----------|
| E2C-X1A      | 0.98 N·m |
| E2C-X1R5A(H) | 2.0 N·m  |
| E2C-X2A(H)   | 5.9 N·m  |
| E2C-X5A(H)   | 15 N·m   |
| E2C-X10A     | 39 N·m   |
| E2C-C20MA    | 15 N·m   |

Note: The above leeways in tighten torque assume that a toothed washer is being used.

##### ● Mounting Unthreaded Cylindrical Models

When using a set screw, tighten it to a torque of 0.2 N·m max.



Y92E-F3R5 Mounting Bracket (for 3.5 dia.) (Order Separately)



The Y92E-F5R4 (for 5.4 dia.) is also sold separately.


## ● Mounting

### Mounting the Amplifier Unit

#### E2C-JC4A


##### Lengthwise Mounting

- (1) Secure the Mounting Bracket with the enclosed M3 screws.
- (2) Loosen the M2.6 cover screw and remove the cover.
- (3) Slide the protrusion on the Amplifier Unit into the hole on the Mounting Bracket.
- (4) Using the M3 mounting screw inside the Amplifier Unit, secure the Amplifier Unit to the mounting base.
- (5) Secure the cover to the case.

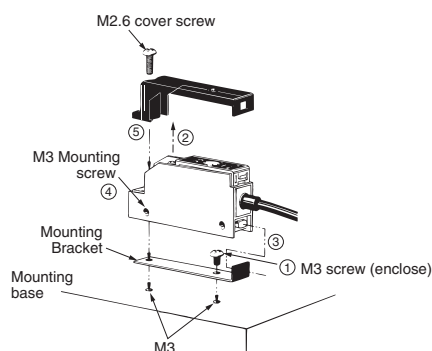

##### Mounting to the Side

- (1) Loosen the M2.6 cover screw and remove the cover. Loosen the M2.6 cover screw and remove the cover, and remove the M3 screw.
- (2) Attached the enclosed M3 screw to the cover and secure the cover to the case.
- (3) Secure the Amplifier Unit with M3 screws from the side. You must provide these screws.

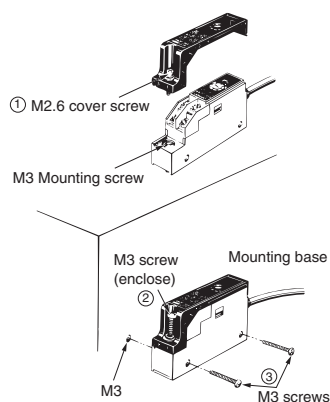


After completing adjustments, attach the enclosed caution label over the adjustment holes to prevent adjustment mistakes.



#### E2C-A□4A


##### Using P2CF-11, P2CF-08

When aligning the Amplifier Unit vertically with the Socket, consider the space required for the hooks and allow a leeway of about 20 mm above and below the Amplifier Unit.




##### Mounting Embedded in a Panel

- (1) When using the Y92F-30 Embedded Mounting Adapter, insert the Amplifier Unit into a square hold in the panel, attach the Adapter from the back and press in to reduce the gap with the panel. Then secure the Adapter with the screws.




- (2) When using the Y92F-70 or Y92F-71 Embedded Mounting Adapter, just press the Amplifier into a square hole in the panel. If the panel coating is too thick and the hooks do not lock in place, spread the hooks from the back by pushing in the directions of the arrows.




### Removing the Amplifier Unit

- When the Amplifier Unit is mounted using the Y92F-30, loosen the screws on the adapter, spread the hooks at the top and bottom, and remove the Adapter.

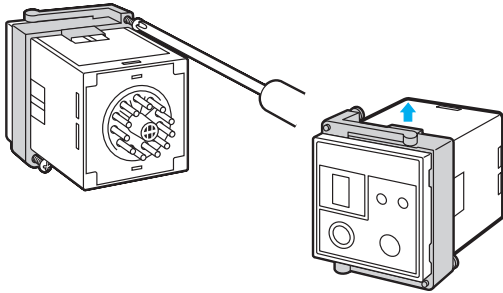

- Using Y92F-70, Y92F-71  
Press in on the hooks with your thumb and forefinger and press forward on the Amplifier Unit.



### ● Wiring

#### Self-diagnostic Output

When not using the self-diagnostic output, connect the orange wire to 0 V or cut it and wrap it with insulation tape so that it does not come into contact with other terminals.

### ● Miscellaneous


The sensor does not have a water-resistant structure. Do not use it where it would be subjected to water or water vapor.

## Dimensions


### Main Units

#### Sensor


#### E2C-CR8A/-CR8B

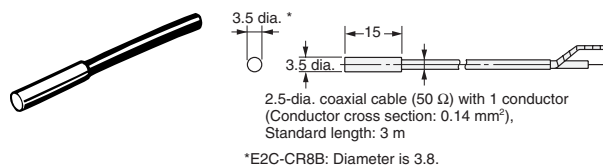

#### E2C-X1A

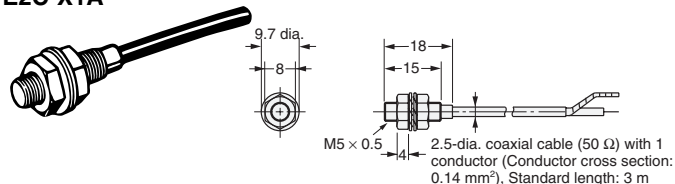


#### E2C-C1A

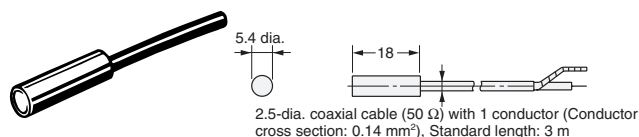


#### E2C-X1R5A

#### E2C-X1R5AH\*

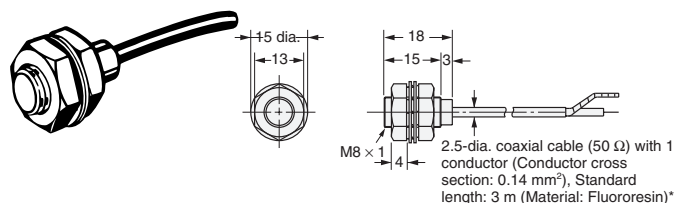


#### E2C-X2A

#### E2C-X2AH\*

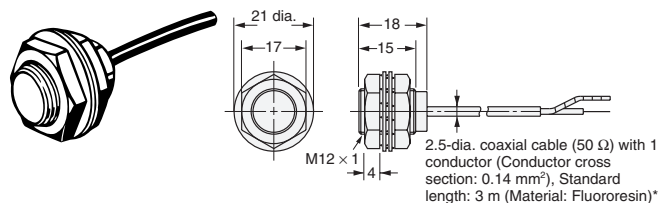


#### E2C-X5A


#### E2C-X5AH\*

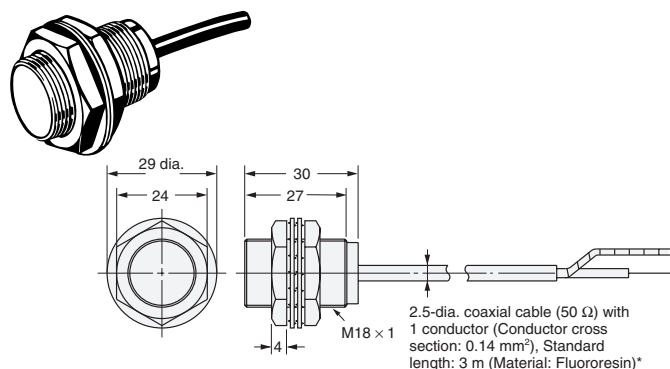


#### E2C-X10A

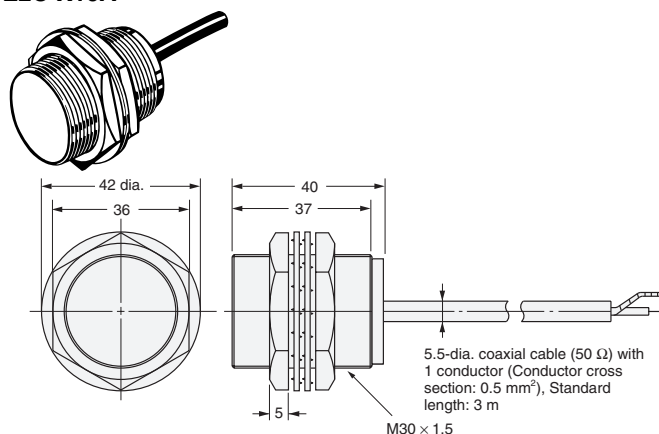

#### E2C-C20MA

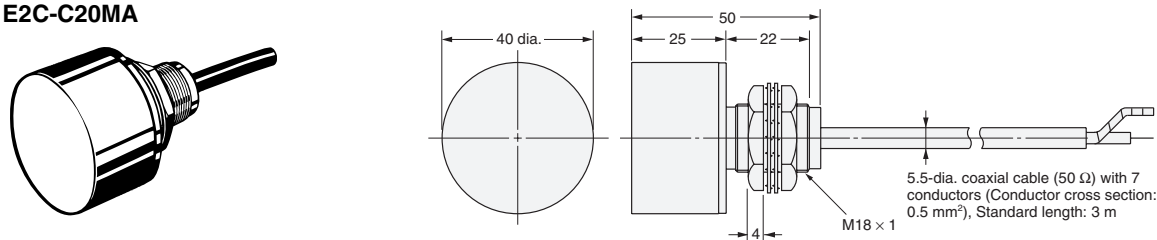



### Mounting Hole Dimensions



| Model    | F (mm)               | Model     | F (mm)                | Model     | F (mm)                |
|----------|----------------------|-----------|-----------------------|-----------|-----------------------|
| E2C-CR8A | 3.7-dia. $^{+0.3}_0$ | E2C-X1A   | 5.4-dia. $^{+0.5}_0$  | E2C-X5A   | 18.5-dia. $^{+0.5}_0$ |
| E2C-CR8B | 4.0-dia. $^{+0.3}_0$ | E2C-X1R5A | 8.5-dia. $^{+0.5}_0$  | E2C-X10A  | 30.5-dia. $^{+0.5}_0$ |
| E2C-C1A  | 5.7-dia. $^{+0.3}_0$ | E2C-X2A   | 12.5-dia. $^{+0.5}_0$ | E2C-C20MA | 18.5-dia. $^{+0.5}_0$ |



## E2C-JC4□H

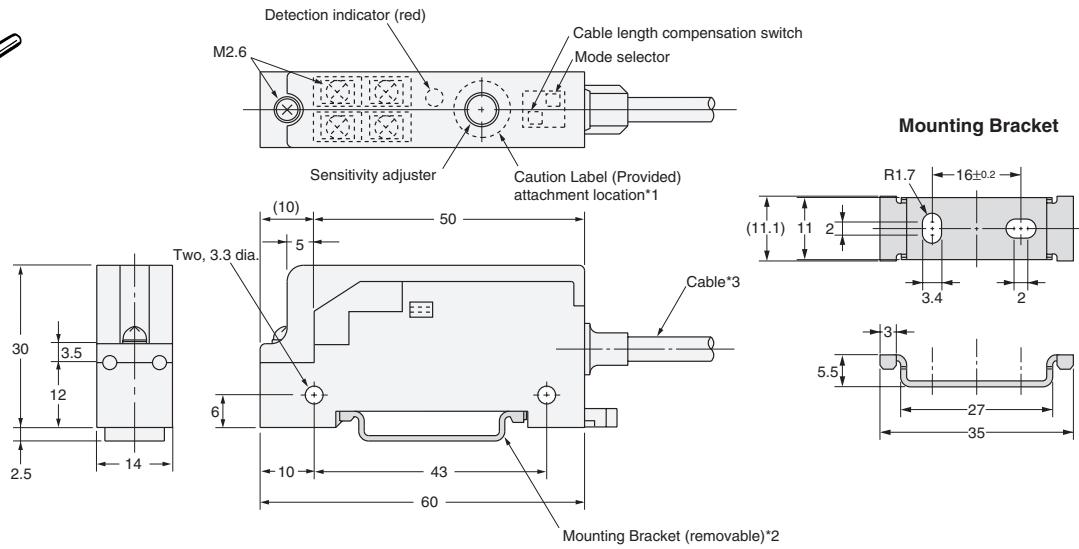

\*1. After completing adjustments, attach the caution label to prevent adjustment mistakes

\*2. Not required when mounting to DIN Track.

\*3. 4-dia. vinyl-insulated round cable with 3 conductors (Conductor cross section:  $0.2 \text{ mm}^2$ , Insulator diameter: 1.2 mm), Standard length: 2 m  
The cable can be extended up to 200 m (separate metal conduit).


## Accessories (Order Separately)

### Mounting Bracket


Mounting Bracket (for Unthreaded Cylindrical Models)

Y92E-F3R5 (for 3.5 dia.)


Y92E--F5R4 (for 5.4 dia.)



Y92E-F3R5





Y92E-F5R4




## Front Connection Sockets


PYF08A

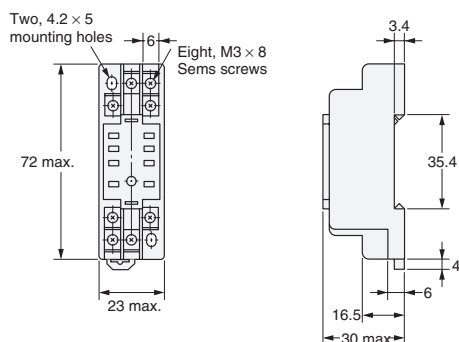

Terminal Arrangement and Internal Connections (Top View)





Mounting Hole Dimensions




Note: Track mounting is also possible.


P2CF-08

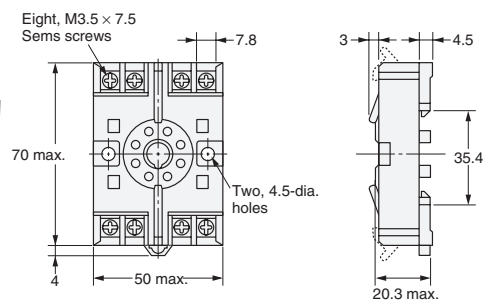

Terminal Arrangement and Internal Connections (Top View)





Mounting Hole Dimensions




Note: Track mounting is also possible.


P2CF-11

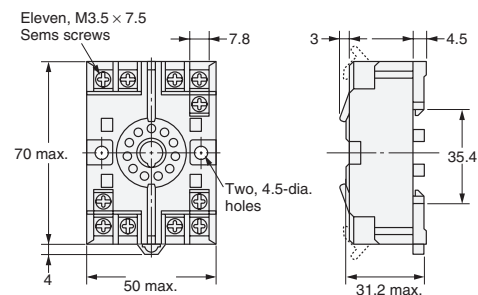

Terminal Arrangement and Internal Connections (Top View)




Mounting Hole Dimensions




Note: Track mounting is also possible.

Back Connection Sockets


P3G-08

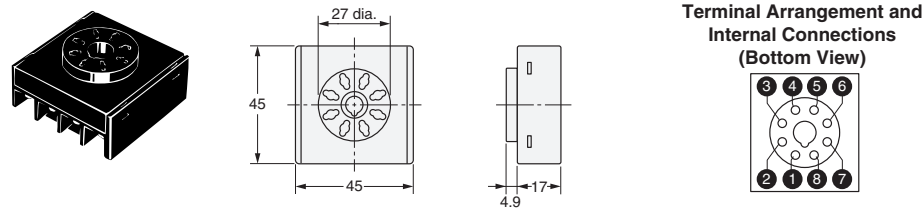

P3GA-11



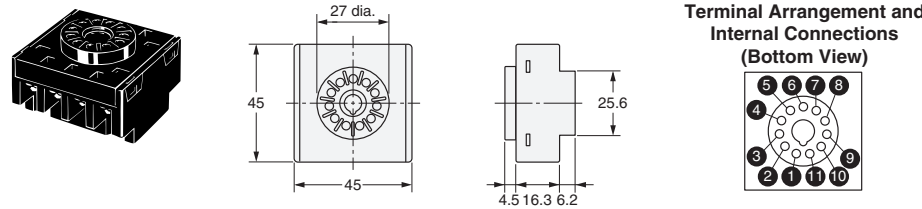


PY08

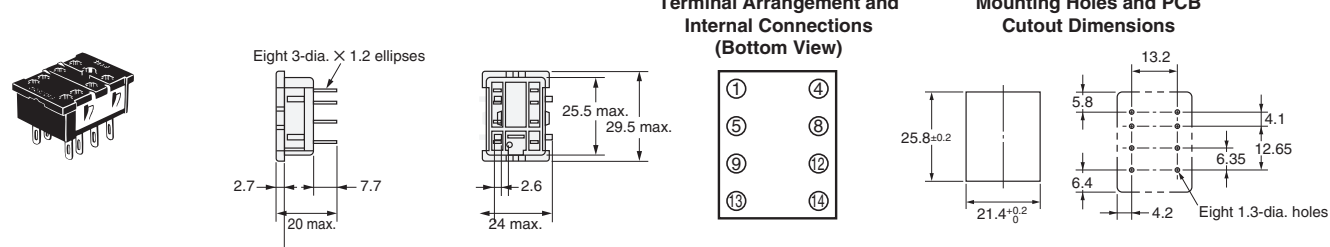


## Embedded Mounting Adapter (for E2C-AK4A/E2C-AM4A Amplifier Unit)

### Y92F-30






#### Mounting Hole Dimensions




Note 1. Suitable mounting panel thickness: 1 to 5 mm

Note 2. Check the direction of the Adapter, which depends on whether Amplifier Units are arranged vertically or horizontally.

### Y92F-70

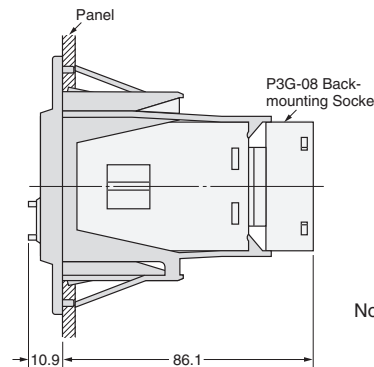




#### Mounting Hole Dimensions

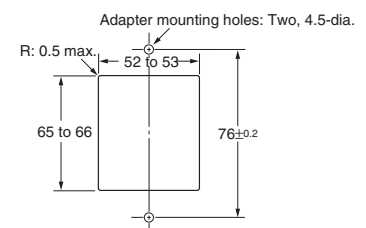


Note: Suitable mounting panel thickness: 1 to 3.2 mm

### Y92F-71

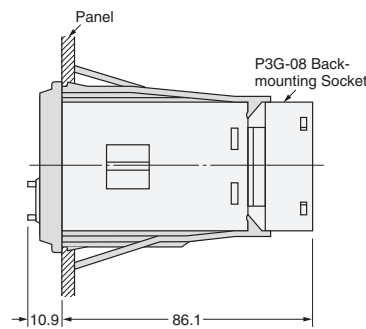

#### Mounting Hole Dimensions



Note: Suitable mounting panel thickness: 1 to 3.2 mm

## Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Warranty and Limitations of Liability

### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## Application Considerations

### SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

## Disclaimers

### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

### DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

### ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2012.12

In the interest of product improvement, specifications are subject to change without notice.

**OMRON Corporation**  
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2012 All Right Reserved.

Компания «Life Electronics» занимается поставками электронных компонентов импортного и отечественного производства от производителей и со складов крупных дистрибьюторов Европы, Америки и Азии.

С конца 2013 года компания активно расширяет линейку поставок компонентов по направлению коаксиальный кабель, кварцевые генераторы и конденсаторы (керамические, пленочные, электролитические), за счёт заключения дистрибьюторских договоров

Мы предлагаем:

- Конкурентоспособные цены и скидки постоянным клиентам.
- Специальные условия для постоянных клиентов.
- Подбор аналогов.
- Поставку компонентов в любых объемах, удовлетворяющих вашим потребностям.
- Приемлемые сроки поставки, возможна ускоренная поставка.
- Доставку товара в любую точку России и стран СНГ.
- Комплексную поставку.
- Работу по проектам и поставку образцов.
- Формирование склада под заказчика.
- Сертификаты соответствия на поставляемую продукцию (по желанию клиента).
- Тестирование поставляемой продукции.
- Поставку компонентов, требующих военную и космическую приемку.
- Входной контроль качества.
- Наличие сертификата ISO.

В составе нашей компании организован Конструкторский отдел, призванный помогать разработчикам, и инженерам.

Конструкторский отдел помогает осуществить:

- Регистрацию проекта у производителя компонентов.
- Техническую поддержку проекта.
- Защиту от снятия компонента с производства.
- Оценку стоимости проекта по компонентам.
- Изготовление тестовой платы монтаж и пусконаладочные работы.



Тел: +7 (812) 336 43 04 (многоканальный)

Email: [org@lifeelectronics.ru](mailto:org@lifeelectronics.ru)

[www.lifeelectronics.ru](http://www.lifeelectronics.ru)